


# Marvell® FastLinQ® 57810S-K Dual KR Blade Mezzanine

Dual-Port 10GbE Converged Network Mezzanine Adapter for Dell® PowerEdge® Blade Servers

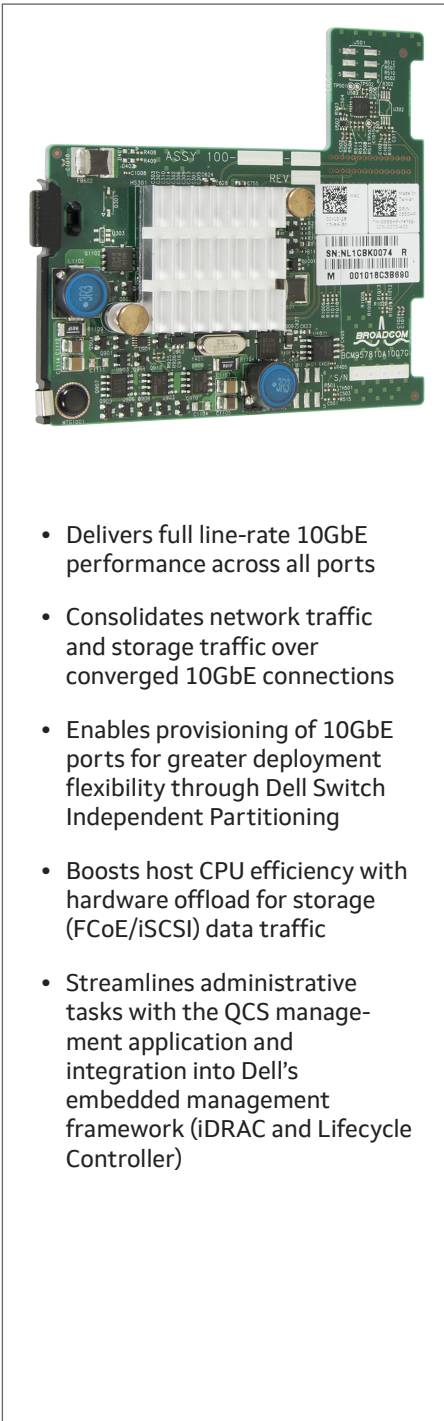

Marvell offers the 57810S-K, a dual-port 10-gigabit Ethernet (10GbE) converged mezzanine adapter for Dell PowerEdge blade servers. The 57810S-K leverages Marvell's long-standing industry leadership in Ethernet, providing the highest levels of performance, efficiency, and scalability for the enterprise data center.

For more effective utilization of the 10GbE bandwidth, the Marvell 57810S-K-based mezzanine adapter offers Dell Switch Independent Partitioning, which enables the segmentation of a single 10GbE port into four virtual ports with flexible allocation of bandwidth to each of the ports. The segmentation allows IT organizations to improve resource utilization while lowering infrastructure and operational costs.

Virtualization, cloud computing, High-Performance Computing (HPC), convergence, and clustering initiatives are increasing workload demands. The Marvell 57810S-K based mezzanine adapter is the solution of choice for workload-intensive computing environments, providing a reliable, high-performance 10GbE connectivity solution.

- Delivers full line-rate 10GbE performance across all ports
- Consolidates network traffic and storage traffic over converged 10GbE connections
- Enables provisioning of 10GbE ports for greater deployment flexibility through Dell Switch Independent Partitioning
- Boosts host CPU efficiency with hardware offload for storage (FCoE/iSCSI) data traffic
- Streamlines administrative tasks with the QCS management application and integration into Dell's embedded management framework (iDRAC and Lifecycle Controller)

## Features

- Dual-port 10GbE connectivity for Dell PowerEdge blade servers
- x8 PCI Express® (PCIe®) V2.0 (5 GT/s) support
- Full line-rate performance across all ports
- Broad OS and hypervisor support
- Full iSCSI and Fibre Channel over Ethernet (FCoE) hardware offload
- Network boot support:
  - iSCSI remote boot
  - Fibre Channel over Ethernet (FCoE) boot from SAN
  - Pre-execution environment (PXE) 2.0
- MSI and MSI-X support
- IPv4 and IPv6 offloads
- PCI-SIG® single root input/output virtualization (SR-IOV) ready
- Comprehensive stateless offloads
- Multi-tenant tunnel offloads
- RX/TX multiqueue
- Receive side scaling (RSS)
- Transmit side scaling (TSS)
- Support for jumbo frames up to 9,600 bytes
- Network teaming, failover, and load balancing:
  - Switch independent NIC teaming/bonding
  - Switch dependent NIC teaming/bonding such as link aggregation control protocol (LACP) and generic trunking
- Data center bridging (DCB)
- FCoE converged mezzanine adapter features provide support for:
  - FCoE initialization protocol (FIP) and FCoE Ethertypes
  - Fabric-provided MAC address (FPMA)
  - Boot from SAN
  - Large, concurrent port logins and exchanges (4,096 each)
  - Native OS storage failover and load balancing
  - N\_Port ID virtualization (NPIV)

## Benefits

### Accelerates Server Performance

- Boosts network performance with full line-rate 10GbE performance across all ports
- Increases server performance with full hardware offload for storage traffic
- Maximizes server processing performance by reducing CPU overhead and lowering interrupt latency through the use of the MSI-X standard
- Boosts performance in Windows® and Linux® environments by directing interrupts to the server's CPU cores, leveraging TSS and RSS

### Includes Robust Virtualization Capabilities

- Enhances server CPU scaling through full support of virtualization technologies such as VMware® NetQueue™ and Microsoft® virtual machine queue (VMQ)
- Enhances network management and efficiency with support for virtual LAN (VLAN) and VLAN tagging

### Streamlines Deployment and Management

- Increases network flexibility, scalability, and capacity with Dell Switch Independent Partitioning, segmenting 10GbE ports, and reallocating their bandwidth and resources to address the application's performance requirements
- Simplifies deployment and management complexity—Marvell Ethernet solutions are available across a wide range of Dell server platforms
- Unifies the NIC and storage management using the integrated Dell Remote Access Controller (iDRAC) and Lifecycle Controller management framework or QConvergeConsole® (QCC) management application

## Host Bus Interface Specifications

### Bus Interface

- PCI Express Gen2 x8.

### Host Interrupts

- MSI-X supports independent queues

### I/O Virtualization

- Single-root input/output virtualization (SR-IOV)
  - Maximum virtual functions per device: 128
- Dell Switch Independent Partitioning (NPAR)
- Network Virtualization using Generic Routing Encapsulation (NVGRE) packet task offloads
- Virtual Extensible LAN (VXLAN) packet task offloads
- Generic network virtualization encapsulation (GENEVE) packet task offloads
- Generic routing encapsulation (GRE) packet task offloads

### Compliance

- *PCI Express Base Specification*, rev. 2.0
- *PCI Bus Power Management Interface Specification*, rev 1.2
- *Advanced Configuration and Power Interface (ACPI)*, v2.0
- *SMBus 2.0*

## Ethernet Specifications

### Throughput

- 10Gbps full-duplex line rate per port

### Ethernet Frame

- 1,500 bytes and larger (jumbo frames)

### Stateless Offload

- TCP segmentation offload (TSO)
- Large send offload (LSO)
- Large receive offload (LRO)
- Giant send offload (GSO)
- TCP and user datagram protocol (UDP) checksum offloads
- Receive segment coalescing (RSC)
- Hardware transparent packet aggregation (TPA)
- Interrupt coalescing

## Ethernet Specifications (continued)

### Stateless Offload (continued)

- RSS and TSS
  - Maximum of 16 queues per physical function (PF) in single function (SF) and Dell Switch Independent Partitioning modes
- VMware NetQueue, Microsoft Hyper-V VMQ (up to 208 dynamic queues)/Virtual Machine Multi-Queue (VMMQ)/Virtual Switch RSS (vRSS), Linux Multiqueue and Virtual Machine Device queues (VMDq)
- Microsoft® TCP chimney (TCP/IP Offload Engine (TOE)) compliant

### Compliance

- *IEEE 802.3ae (10Gb Ethernet)*
- *IEEE 802.1q (VLAN)*
- *IEEE 802.3ad (Link Aggregation)*
- *IEEE 802.3ap (Backplane Ethernet)*
- *IEEE 802.3x (Flow Control)*
- *IPv4 (RFC 791)*
- *IPv6 (RFC 2460)*
- *IEEE 802.1Qbb (Priority-Based Flow Control)*
- *IEEE 802.1Qaz (DCBX and Enhanced Transmission Selection)*

## Tools and Utilities

### Management Tools and Device Utilities

- QLogic® Control Suite (QCS) command line interface (CLI) for Linux and Windows
- QCC integrated network management utility graphical user interface (GUI) for Linux and Windows
- QCC Plug-in for vSphere® (GUI) and ESXCLI plug-ins for VMware
- QCC PowerKit (Windows PowerShell) cmdlets for Linux, VMware, and Windows
- Pre-boot unified extensible firmware interface (UEFI) human interface infrastructure (HII) Device Configuration pages (in system BIOS)
- Pre-boot Marvell Comprehensive Configuration Management (CCM)
- Embedded management framework (iDRAC and Lifecycle Controller)
- Native OS management tools for networking

### Boot Support

- iSCSI remote boot
- FCoE boot from SAN
- PXE 2.0

### Operating System Support

- For the latest applicable operating system information, see [www.support.dell.com](http://www.support.dell.com)

## Physical Specifications

### Ports

- Dual 10Gbps Ethernet

### Form Factor

- Mezzanine adapter 3.13in × 2.85in (79.5mm × 72.4mm)

### Supported Servers

- 13th Generation: M630, M830
- 14th Generation: M640

### Certifications

- RoHS, FCC A, UL, CE, VCCI, BSMI, C-Tick, KCC, TUV, and ICES-003

## Environmental and Equipment Specifications

### Temperature

- Operating: 32°F to 131°F (0°C to 55°C)
- Storage: -40°F to 149°F (-40°C to 65°C)

### Relative Humidity

- 5% to 95% noncondensing

## Ordering Information

### Marvell 57810S-K Dual Port 10GbE KR bMezz CNA

- With server, order SKU# 543-BBCE
- Without server, order SKU# 543-BBCC



To deliver the data infrastructure technology that connects the world, we're building solutions on the most powerful foundation: our partnerships with our customers. Trusted by the world's leading technology companies for 25 years, we move, store, process and secure the world's data with semiconductor solutions designed for our customers' current needs and future ambitions. Through a process of deep collaboration and transparency, we're ultimately changing the way tomorrow's enterprise, cloud, automotive, and carrier architectures transform—for the better.

Copyright © 2021 Marvell. All rights reserved. Marvell and the Marvell logo are trademarks of Marvell or its affiliates. Please visit [www.marvell.com](http://www.marvell.com) for a complete list of Marvell trademarks. Other names and brands may be claimed as the property of others.