

INFOCUS X3 MULTI-USE PERFORMANCE



ULTIMATE PERFORMANCE, ULTIMATE VALUE

The InFocus X3 is a dual-duty digital XGA projector that shines during the workday, and on into an entertaining evening.

X-TRA EASE

Imagine. A projector that works the way you do, whether you're presenting a business case or watching a DVD, InFocus ProjectAbility makes projecting easier than it's ever been—from setup, use, options, storage, and management. Exclusively from InFocus.

LiteShow



wireless



InFocus

FROM WORK TO FUN

X-TRA CONNECTIVITY

The X3 ensures you can hook up no matter where you are. Connect your laptop, PDA, DVD player, cable or satellite TV system, digital camera, or game console. And when you're ready to take advantage of wireless freedom, InFocus LiteShow lets you cut loose.

X-TRA BRILLIANCE

With native XGA resolution, the X3 delivers. A powerful zoom lens fills your screen or wall with 1600 max ANSI lumens of brightness. Impress your business clients with brilliant presentations during the workday. Impress your friends with larger-than-life images in the evening.

X-TRA DIGITAL VIDEO QUALITY

With the InFocus X3, you can enjoy crisp images and full color, whether you're looking at this year's numbers or this year's best picture. The latest digital processing technology (DLP™) from Texas Instruments® provides a stunning 2000:1 contrast ratio and automatic deinterlacing, for smooth, true-to-life images that jump off the screen and pull your audience in. And its wide-screen capability lets you enjoy amazing video performance in a movie-theater format.

X-TRA ORDINARY VALUE

Get high end performance and larger than life images at an affordable low price.


X-TRA DEPENDABILITY

You can count on the X3's superior quality for an exceptionally long time. Its long-life lamp shines for an incredible 4000 hours. So sit back. Relax. Enjoy.

THE INFOCUS COMMITMENT

Experience yourself why InFocus Corporation is the worldwide leader in large format displays. Our dedication to quality and customer satisfaction is reflected in service options that will bring you a greater return on your investment. InFocus projectors come with a standard factory limited warranty, including parts and labor, and lamp replacement warranty. Our customer support offers you premium service and convenience, whatever your needs.

For service program details in your region, please visit www.infocus.com/service_offerings

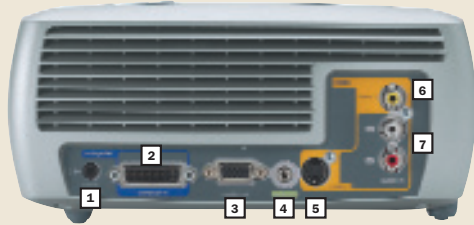

- | | |
|------------------------------------------------------|--------------------------------------------------------------|
| 1 12V Power Output | 4 Audio Output |
| 2 Laptop, PDA, HDTV, InFocus LiteShow wireless input | 5 S-Video Input for DVD, Cable, Digital Camera, Video Camera |
| 3 Active monitor loop-through output | 6 Video Input for DVD, Cable |
| | 7 Stereo Audio Input |

OPTIONAL ACCESSORIES

LP-LITESHOW	Wireless Display Module
SP-LAMP-018	Replacement Lamp
SP-CEIL-011	Universal Ceiling Mount
SP-EXTARM-01	Ceiling Mount Extension Arm: 6-9"
SP-EXTARM-02	Ceiling Mount Extension Arm: 12-18"
CA-SOFTCASE-02	Cable Management Case: Meeting Room
CA-BRIEFCASE-02	Transport Case: Meeting Room
CA-ATA-MTG	ATA Shipping Case: Meeting Room
HW-PRESENTER-FR	InFocus Presenter RF remote control, by Interlink*
SC-FLRWHT-80	Floor Standing Screen: 80" White
SC-MANWHT-100	Manual Pull Down Screen: 100" White
SC-MOTWHT-100	Motorized Screen: 100" White 120 volt US
SP-SVIDEO	Cable: S-Video Cable, 6ft
SP-M1-ADPT	Adapter: M1 to Component Video
SP-DVI-D	Cable: M1 to DVI and USB
SPP-1YEAR/SPP-2YEAR	Extended Parts & Labor Coverage
PX-1YEAR/PX-2YEAR	ProXchange (US, Canada Only)
SA-1YEAR	Spare-in-the-Air (SITA) (US, Canada Only)

SHIPS STANDARD WITH

- Lens cap
- Wireless Navigator Remote Control (including batteries)
- Computer cable
- RCA Video and Audio cable
- Power cord
- SCART adapter (EMEA Only)
- Projector System CD includes: multi-language User Guide, Quick Start Card, URL/service information/accessories after market
- User Guide (printed version)
- Quick Start Card (printed version)



Contact InFocus or your dealer today.

TECHNICAL SPECIFICATIONS†

Native Resolution	• XGA 1024 x 768
Display Technology	• DLP™ by Texas Instruments®: 0.55" XGA DDR DMD
Input Sources	• Computer (M1-DA); Video (S-Video 4-pin mini DIN and Composite RCA); Audio (Stereo RCA)
Output Sources	• Monitor Out (VESA); Audio (3.5mm)
Computer Compatibility	• SVGA, VGA, XGA, SXGA, Macintosh®
Video Compatibility	• SDTV (NTSC, PAL, SECAM), ED/HDTV (Component, RGBHV, and DVI for these signal formats: 480p, 576p, 720p, 1080i)
Brightness	• 1600 max ANSI lumens (standard mode) • 1100 max ANSI lumens (whisper mode)
Contrast Ratio	• 2000:1 full on/full off (data mode)
Number of Colors	• 16.7 million
H-Synch Range	• 31.5 – 80 kHz
V-Synch Range	• 50 – 85 Hz
Dot Clock	• 20 to 95 MHz
Digital Keystone Correction	• +/- 10° vertical correction; data/video
Projection Lens	• Zoom lens with manual focus and manual zoom adjust
Zoom Ratio	• 1.2:1
Throw Ratio	• 1.89 to 2.27:1 (D/W), 1.51 to 1.82:1 (D/D)
Minimum Projection Distance	• 2 m (maximum distance 9.8 m)
Aspect Ratio	• 4:3 and 16:9
Image size (diagonal)	• 3.6' to greater than 22' (1.1 m to greater than 6.7 m)
Projection Methods	• Front, ceiling, rear
Audio	• 2.5-Watt mono
Control	• Projector keypad; IR remote control
Lamp*	• 200W SHP/4000 hours
Dimensions	• 9.8" (W) x 12.9" (L) x 4.2"(H) /24.9cm x 32.7cm x 10.6cm
Weight	• 6.8 lbs/3.1 kg
Power Consumption	• 200 watt typical/250 watt maximum
Power Supply	• 100V – 240V at 50 – 60 Hz
Operating Temperature	• 5° to 40° C at sea level (0 to 10,000'); 41° – 104° F
Menu Languages	• English, Norwegian, Spanish, Italian, Portuguese, German, French, Chinese (simple), Chinese (traditional), Japanese, Korean, Russian
Audible Noise	• 39 dB (standard mode) • 37 dB (whisper mode)
Approvals	• UL, c-UL, TUV GS, CE, GOST, C-Tick, NOM, IRAM, FCC B, CISPR22 /EN55022, EN 55024 / CISPR 24, CB certified according to IEC60950 /EN60950: 1997, P(SE), MIC
Lamp Warranty	• 90 days
Product Warranty	• 1 year standard parts and labor

*Actual lamp life may vary based on the ambient environment. Conditions that may affect lamp life include temperature, altitude or rapidly switching the projector on and off.

†InFocus reserves the right to alter product offerings and specifications at any time without notice.

www.infocus.com

InFocus Corporate Headquarters:

27700B SW Parkway Avenue • Wilsonville, Oregon 97070-9215, USA
Phone: 503-685-8888 • 1-800-294-6400 • Fax: 503-685-8887

In Europe: InFocus International BV

Strawinskylaan 585 • 1077 XX Amsterdam • The Netherlands
Phone: (31) 20 5792000 • Fax: (31) 20 5792999
Freephone: 008000 4636287 (008000 INFOCUS)

In Asia: InFocus Systems Asia Pte Ltd. • 238A Thomson Road • #18-01/04 Novena Square
Singapore 307684 • Phone: (65) 6334-9005 • Fax: (65) 6333-4525

InFocus, In Focus, INFOCUS (stylized), X1a, X2, X3, ProjectorManager, ProjectorNet, LiteShow, LitePort and ScreenPlay are either registered trademarks or trademarks of InFocus Corporation in the United States and other countries. DLP, the DLP logo, and the DLP medallion are trademarks of Texas Instruments. All other trademarks are used for identification purposes only and are the property of their respective owners in this and other countries. © 2005 InFocus Corporation. All rights reserved.
805-1047-01, X3_DS_E_V01.qxd, 05/05.