




# 72644A - 6" NEW CONSTRUCTION DOWNLIGHT

BAFFLE TRIM 15W 4000K

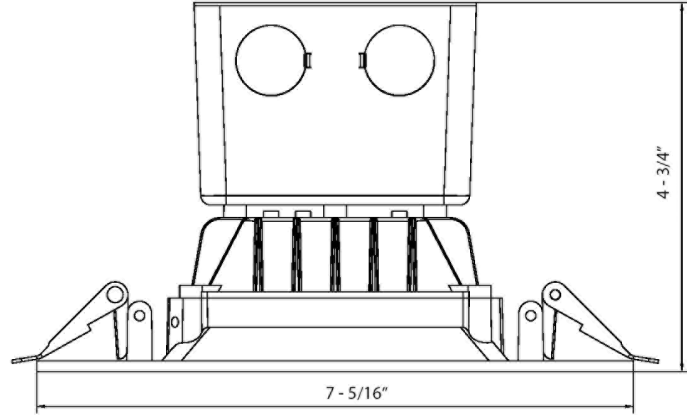



## FEATURES:

- Includes 4" Square Junction Box
- Baffle Trim
- IP44 Damp Location Rated
- IC (Insulation Contact) Rated
- PC Housing & Trim
- Triac Dimming - Dimmable @ 120V Only-Down to 10%
- Torsion Spring Brackets for Mounting to Sheetrock
- Perfect for residential or commercial applications
- 5 Year Warranty
- Operating Temperature: -31°F to 122°F

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Input Current @ 120V	Lumens/Watt	Energy Star
72644A	White	15W	1,120	4000K	120-277V	.128A	74	Yes

## Photometrics:

### 4.1 Spectral Distribution

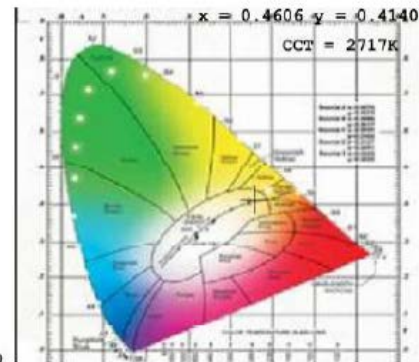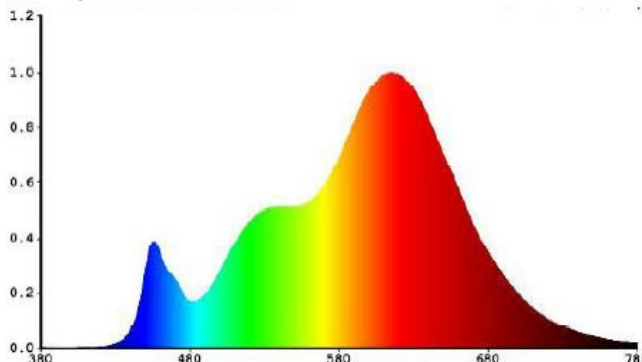



# 72644A - 6" NEW CONSTRUCTION DOWNLIGHT

BAFFLE TRIM 15W 4000K

## Technical Specifications:

### **Electrical:**

Input Voltage: 120-277V

Current: .128A @ 120V

Frequency: 60Hz

Power Factor:  $\geq .9$

### **Product Parameters:**

15 Watts

Efficacy: 74 lumens per watt

50,000+ LED Life Span

CCT: 4000k (Neutral White)

### **Chromaticity Measurements:**

Beam Angle: 97°

BUG Rating: N/A

CRI:  $\geq 94$

R9: 59

DUV: -0.0035

Chromaticity (x,y):  $x=.3741$ ;  $y=.3655$

Chromaticity (u,v):  $u=.2254$ ;  $v=.3304$

### **Component Specifications:**

LED: SMD2835

Driver: 120-277V 50-60HZ

**Dimming:** Triac Dimming

### **Operating Temperature:**

Minimum Starting -31° - 122° F

### **Construction:**

Housing: Aluminum Housing/Trim

White Finish

IP Rating: IP44 Wet Indoor Location Rated

Lens Material: Frosted Polycarbonate Lens

Mounting: Ceiling Mount

(Drywall / Sheetrock)

Listings: ETL, ES

Carton Qty: 12

Weight: 1.7 lb

### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).