




72682A - 6" FLUSH LENS DOWNLIGHT

WITH REMOTE DRIVER

120V 27K/3K/35K/4K/5K 15W

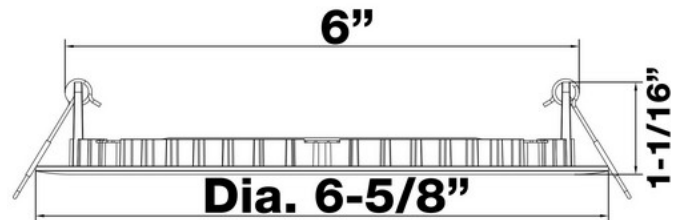

FEATURES:

- Perfect for Residential or Commercial Applications
- Aluminum Housing/Trim - Paintable
- Color Tunable - 2700K, 3000K, 3500K, 4000K, 5000K Selectable
- Torsion Spring Brackets for Mounting to Sheetrock
- Junction Box Included
- Operating Temperature: -31°F to 122°F
- 50,000+ Hour LED Life Expectancy
- Wet Location Rated
- IC (Insulation Contact) Rated
- cETLus & Energy Star Listed
- 5 Year Warranty

Part #	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Diameter	Replaces Incandescent
72682A	White	15	1,000	27K/4K/5K	120VAC	112°	6"	100W



72682A - 6" FLUSH LENS DOWNLIGHT

WITH REMOTE DRIVER

120V 27K/3K/35K/4K/5K 15W

Technical Specifications

Electrical:

Input Voltage: 120V
Current: 0.13A @ 120V
Frequency: 50-60Hz
Power Factor: >0.85

Product Parameters:

Wattage: 15W
Efficacy: 67 lm/ watt
50,000+ LED Life Span CCT:
2.7K-5K

Chromaticity Measurements:

Beam Angle: 112°
CRI: 93
R9: 17

Component Specifications:

LED: SMD2835
Driver: 120V
50-60HZ

Dimming:

TRIAC Dimming

Operating Temperature:

Minimum Starting -31° - 122° F

Construction:

Housing: Aluminum Housing/ Smooth Trim -
White Finish

IP Rating: IP43 Indoor Damp Location Rated

Lens Material: Frosted Polycarbonate Lens

Mounting: Ceiling Mount

(Drywall / Sheetrock)


Listings: cULus, Energy Star



Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

Photometry:

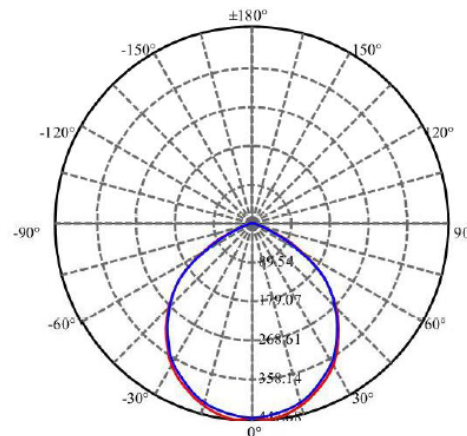Light Distribution Curve:



C0(Max): 
C0/C180: 
C90/C270: 