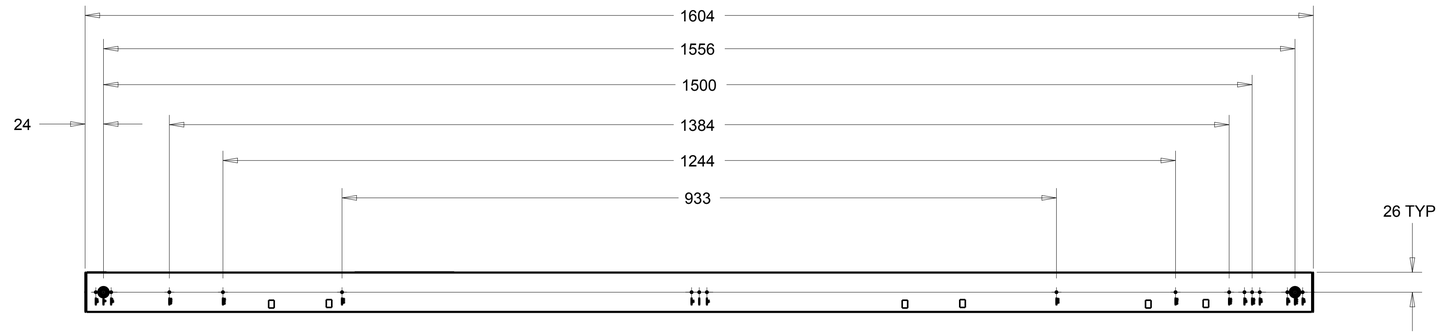

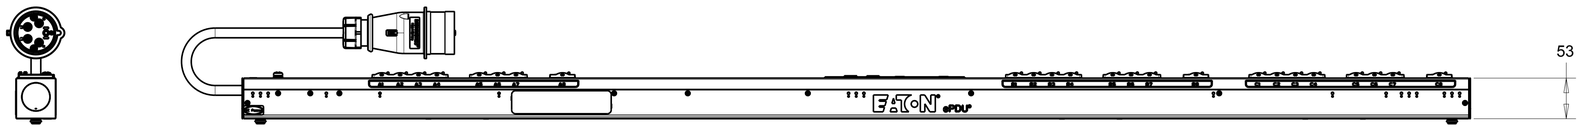

CABLE LENGTH SHOWN NOT TO SCALE

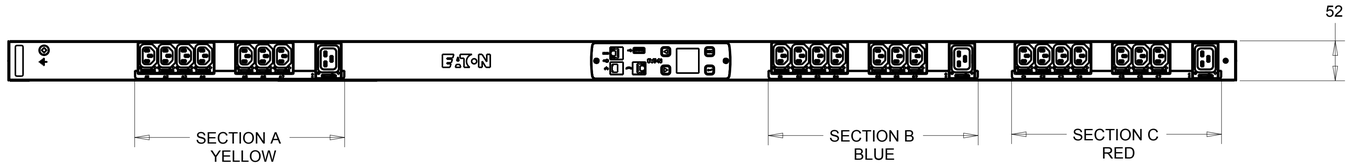

CIRCUIT SCHEMATIC

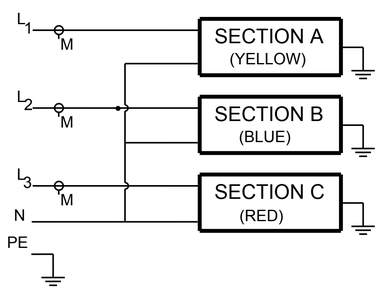

EMOB20	G3 METERED OUTLETS		
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING FOR INPUT, BRANCH AND OUTLETS.	IEC 60309-2 16A 230/400V 3P+N+E 1.5MM HO7 POWER CORD CABLE LENGTH: 3.0M	(21) IEC 60320 C13 GRIP (3) IEC 60320 C19 GRIP	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 1604MM WIDTH: 52 MM DEPTH: 53MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	3Ø;346-415V~; WYE, 3W+N+PE 50/60HZ 16A	200-240V~;50/60HZ 10A PER C13;16A PER C19 16A MAX PER SECTION 16A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	STANDARD KSP015 - VERT INSTALLATION AND NETWORK PACK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EMO6DA8FAGE77CM

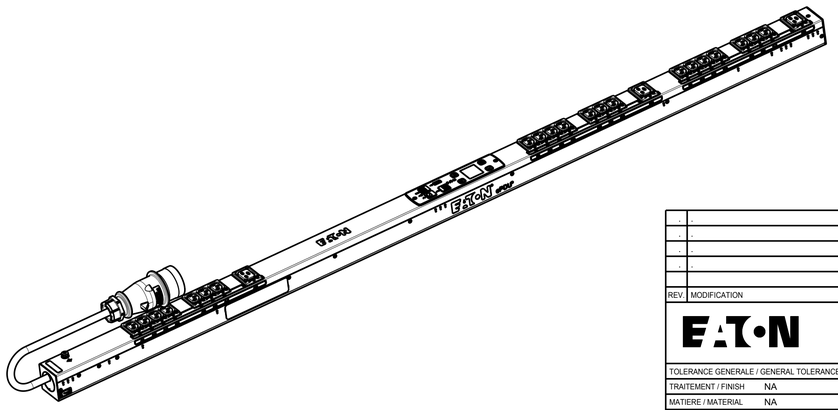

SCALE 0.188

REV.	MODIFICATION	DATE	DESS/DRAW	VERIF.
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

EATON

HEINEMANN PRODUCTS
CH-1345 LE LIEU SWITZERLAND

VUE/VIEW EUROPE. | ECHELLE / SCALE 4/10 | N° MAG EMOB20

DESSINE LE / DRAWED THE 01.12.2014
PAR / BY G.McD.
VERIFIE PAR / VERIFIED BY M.B.

TOLERANCE GENERALE / GENERAL TOLERANCE
TRAITEMENT / FINISH NA
MATIERE / MATERIAL NA
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT X
DIMENSIONS AND TOLERANCES IN MILLIMETERS

DESIGNATION EPDU MO 0U (309 16A 3P)21XC13:3XC19
SK-49219-Y1 — NUMERO DU PLAN / PLAN NUMBER
00 — REV.

COTES A CONTROLER / INSPECTION DIMENSIONS XX.XX
COTES FONCTIONNELLES / FUNCTIONAL DIMENSIONS # XX.XX

Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation.
This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.