

LED Linear-E II Office

## Features

- Excellent Performance
- Reliable
- Healthy Light

## Benefits

- Excellent Performance: Higher Brightness, High Efficiency and High PF
- Reliable: "Butterfly" Robust Structure, Never Fading and 10yrs Care Free
- Healthy Light: Uniform Light, No Blue Light and Flicker Free.

## Application



Library



Shopping Mall



Office



Hospital



Conference Room



School

## Specification

Item Code	Item Description	Power (W)	Power Factor	CCT (K)	Lumen (lm)	Efficacy (lm/W)	Input Current (mA)	Lifetime (L70B50)	MOQ (pcs)
529000064310	LEDLinear-EII-L1200W60-30W-4000-SP	30	0.9	4000	2700	90	140	30000	500
529000065010	LEDLinear-EII-L1200W60-30W-4000-SP-CONN2	30	0.9	4000	2700	90	140	30000	500
529000064810	LEDLinear-EII-L1200W60-30W-5700-SP	30	0.9	5700	2700	90	140	30000	500
529000064910	LEDLinear-EII-L1200W60-30W-5700-SP-CONN2	30	0.9	5700	2700	90	140	30000	500
529002022810	LEDLinear-EII-L1200W60-30W-4000-RE	30	0.9	4000	2700	90	140	30000	500
529002022710	LEDLinear-EII-L1200W60-30W-4000-RE-CONN2	30	0.9	4000	2700	90	140	30000	500
529002022610	LEDLinear-EII-L1200W60-30W-5700-RE	30	0.9	5700	2700	90	140	30000	500
529002022510	LEDLinear-EII-L1200W60-30W-5700-RE-CONN2	30	0.9	5700	2700	90	140	30000	500
529002022410	LEDLinear-EII-L1200W90-30W-4000-RE	30	0.9	4000	3000	100	140	30000	500
529002022310	LEDLinear-EII-L1200W90-30W-4000-RE-CONN2	30	0.9	4000	3000	100	140	30000	500
529002022210	LEDLinear-EII-L1200W90-30W-5700-RE	30	0.9	5700	3000	100	140	30000	500
529002022110	LEDLinear-EII-L1200W90-30W-5700-RE-CONN2	30	0.9	5700	3000	100	140	30000	500
529000064710	LEDLinear-EII-L1200W90-30W-4000-SP	30	0.9	4000	3000	100	140	30000	500
529000064610	LEDLinear-EII-L1200W90-30W-4000-SP-CONN2	30	0.9	4000	3000	100	140	30000	500
529000064510	LEDLinear-EII-L1200W90-30W-5700-SP	30	0.9	5700	3000	100	140	30000	500
529000064410	LEDLinear-EII-L1200W90-30W-5700-SP-CONN2	30	0.9	5700	3000	100	140	30000	500



Technical Specifications	
On/Off Cycles	100000
Colour Consistency(SDCM)	≤5
Dimmable	No
Housing Colour	White
IP	IP20
Driver integrated(Yes/No)	Yes
Glow wire test	650 C

Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	220-240
AC / DC	AC

Mechanical and Finishing Properties	
Housing Material	Aluminum
Optical Material	PS

Application Conditions	
Operating Temperature	-10~40 C
Storage Environment	-25~50 C


## Packaging Information

Item		Outer box		
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)
529000064310	LEDLinear-EII-L1200W60-30W-4000-SP	1270*270*192	9.5	6
529000065010	LEDLinear-EII-L1200W60-30W-4000-SP-CONN2	1270*360*198	9.5	6
529000064810	LEDLinear-EII-L1200W60-30W-5700-SP	1270*270*192	9.5	6
529000064910	LEDLinear-EII-L1200W60-30W-5700-SP-CONN2	1270*360*198	9.5	6
529002022810	LEDLinear-EII-L1200W60-30W-4000-RE	1280*322*163	9.7	6
529002022710	LEDLinear-EII-L1200W60-30W-4000-RE-CONN2	1280*412*212	9.7	6
529002022610	LEDLinear-EII-L1200W60-30W-5700-RE	1280*322*163	9.7	6
529002022510	LEDLinear-EII-L1200W60-30W-5700-RE-CONN2	1280*412*212	9.7	6
529002022410	LEDLinear-EII-L1200W90-30W-4000-RE	1280*322*163	11.2	6
529002022310	LEDLinear-EII-L1200W90-30W-4000-RE-CONN2	1280*412*212	11.2	6
529002022210	LEDLinear-EII-L1200W90-30W-5700-RE	1280*322*163	11.2	6
529002022110	LEDLinear-EII-L1200W90-30W-5700-RE-CONN2	1280*412*212	11.2	6
529000064710	LEDLinear-EII-L1200W90-30W-4000-SP	1270*270*192	10.5	6
529000064610	LEDLinear-EII-L1200W90-30W-4000-SP-CONN2	1270*360*198	10.5	6
529000064510	LEDLinear-EII-L1200W90-30W-5700-SP	1270*270*192	10.5	6
529000064410	LEDLinear-EII-L1200W90-30W-5700-SP-CONN2	1270*360*198	10.5	6


## Accessory

Accessories		Outer box		MOQ
Item Code	Item Description	Dimensions(mm) (LxWxH)	Note	
529098019110	LEDLinear-EII-W60-End Cap-SP	610*248*228	200pcs/carton	300
529098019010	LEDLinear-EII-W90-End Cap-SP	610*248*228	160pcs/carton	300
529098018910	LEDLinear-EII-W60-End Cap-RE	610*248*228	200pcs/carton	300
529098018810	LEDLinear-EII-W90-End Cap-RE	610*248*228	160pcs/carton	300
529098018710	LEDLinear-EII-Middle Connector-SP	610*248*228	300pcs/carton	300
529098018610	LEDLinear-EII-W90-Middle Connector-RE	610*248*228	300pcs/carton	300
529098018510	LEDLinear-EII-W60-Middle Connector-RE	610*248*228	300pcs/carton	300
529098018410	LEDLinear-EII-L1800W60-Cover	600*600*140	2pcs/carton	100
529098018310	LEDLinear-EII-L2400W60-Cover	600*600*140	2pcs/carton	100
529098018210	LEDLinear-EII-L3000W60-Cover	600*600*140	2pcs/carton	100
529098017710	LEDLinear-EII-L3600W60-Cover	600*600*200	2pcs/carton	100
529098018010	LEDLinear-EII-L1800W90-Cover	600*600*200	2pcs/carton	100
529098017910	LEDLinear-EII-L2400W90-Cover	600*600*200	2pcs/carton	100
529098017810	LEDLinear-EII-L3000W90-Cover	600*600*200	2pcs/carton	100
529098018110	LEDLinear-EII-L3600W90-Cover	600*600*140	2pcs/carton	100
529098017610	LEDLinear-EII-Suspended Rope	500*348*200	64pcs/carton	300
529098017510	LEDLinear-EII-Surface mounted	218*193*260	120pcs/carton	300

## Dimensional Drawing

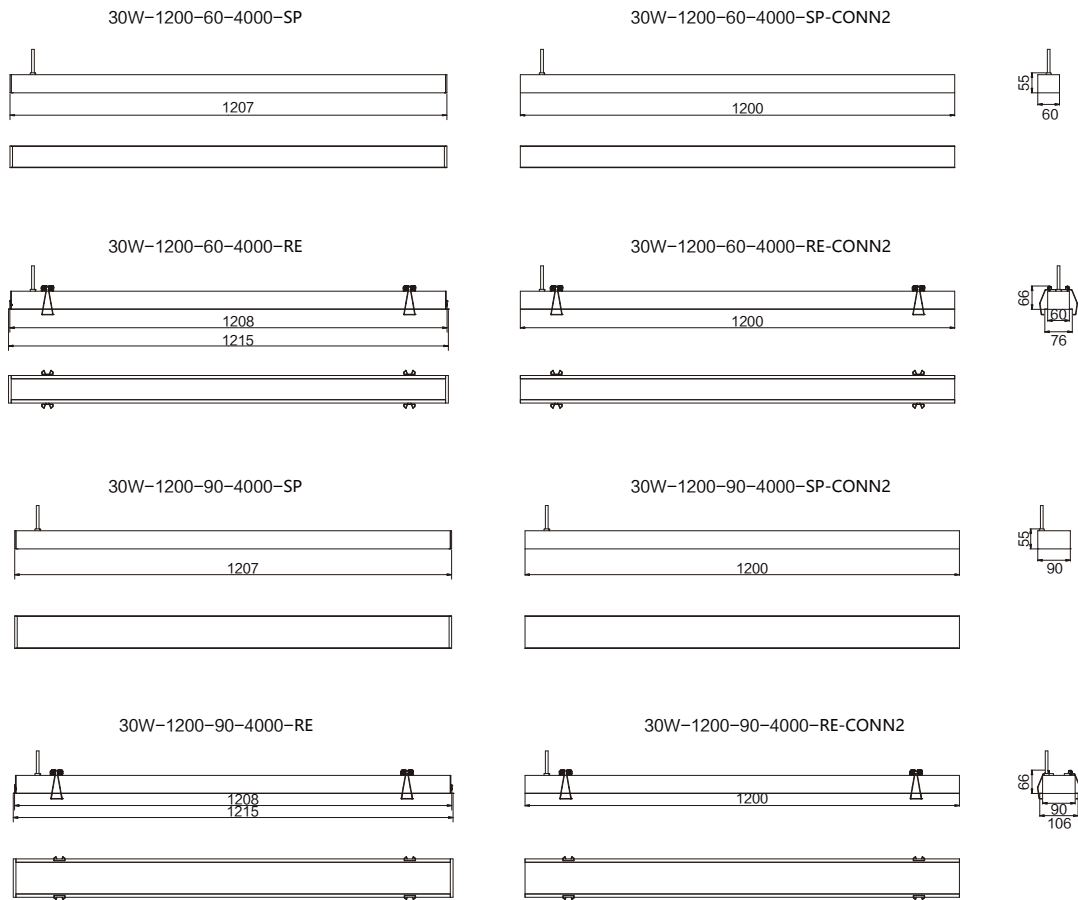

## Photometric Data

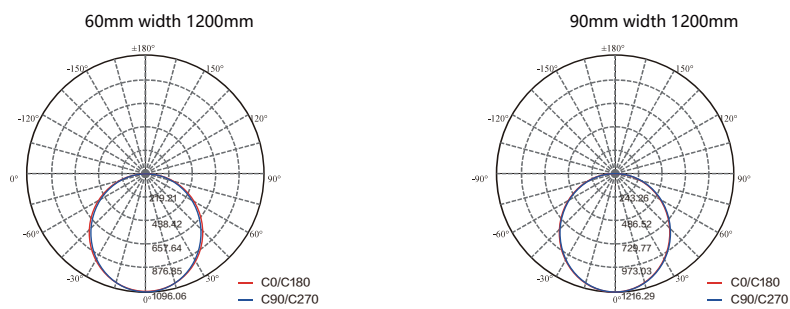

**OPPLE SHANGHAI OFFICE**  
 Building V3, The Mixc, 1799 Wuzhong Road,  
 Minhang District, Shanghai, China  
 ZIP: 201103  
**T** + 86 21 3855 0000  
**E** intersales@opple.com

**WWW.OPPLE.COM/EN**