



MCX Jack Right Angle Connector Solder Attachment Thru Hole PCB, .200 inch x .052 inch Hole Spacing

RF Connectors Technical Data Sheet

PE4556

Configuration

- MCX Jack Connector
- CECC 22220
- 50 Ohms
- Right Angle Body Geometry
- Thru Hole Interface Type
- Solder Attachment

Features

- Max. Operating Frequency 6 GHz
- Gold Plated Beryllium Copper Contact
- 30 μ m minimum contact plating

Applications

- General Purpose Test
- PCB Applications

Description

Pasternack's PE4556 MCX jack right angle connector with solder attachment for thru hole PCB (.200 inch x .052 inch hole spacing) is part of our full line of RF components available for same-day shipping. Our MCX jack connector operates up to a maximum frequency of 6 GHz. Its right angle body geometry allows for easier connections in tight spaces.

Our MCX jack right angle connector PE4556 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
Operating Voltage (AC)			335	Vrms
Dielectric Withstanding Voltage (AC)			1,000	Vrms

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 1	1 to 3				GHz
VSWR, Max	1.5:1	1.63:1				

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Jack Right Angle Connector Solder Attachment Thru Hole PCB, .200 inch x .052 inch Hole Spacing PE4556](#)



MCX Jack Right Angle Connector Solder Attachment
Thru Hole PCB, .200 inch x .052 inch Hole Spacing

RF Connectors Technical Data Sheet

PE4556

Mechanical Specifications

Size

Length	0.368 in [9.35 mm]
Width/Dia.	0.235 in [5.97 mm]
Height	0.375 in [9.53 mm]
Weight	0.005 lbs [2.27 g]

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold 30 µin minimum
Insulation	PTFE	
Body	Brass	Gold 1 µin minimum

Environmental Specifications

Temperature

Operating Range	-55 to +155 deg C
-----------------	-------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Jack Right Angle Connector Solder Attachment Thru Hole PCB, .200 inch x .052 inch Hole Spacing PE4556](#)



MCX Jack Right Angle Connector Solder Attachment
Thru Hole PCB, .200 inch x .052 inch Hole Spacing

RF Connectors Technical Data Sheet

PE4556

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

MCX Jack Right Angle Connector Solder Attachment Thru Hole PCB, .200 inch x .052 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Jack Right Angle Connector Solder Attachment Thru Hole PCB, .200 inch x .052 inch Hole Spacing PE4556](#)

URL: <https://www.pasternack.com/mcx-jack-standard-thru-hole-pcb-connector-pe4556-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE4556 CAD Drawing

MCX Jack Right Angle Connector Solder Attachment Thru Hole PCB, .200 inch x .052 inch Hole Spacing

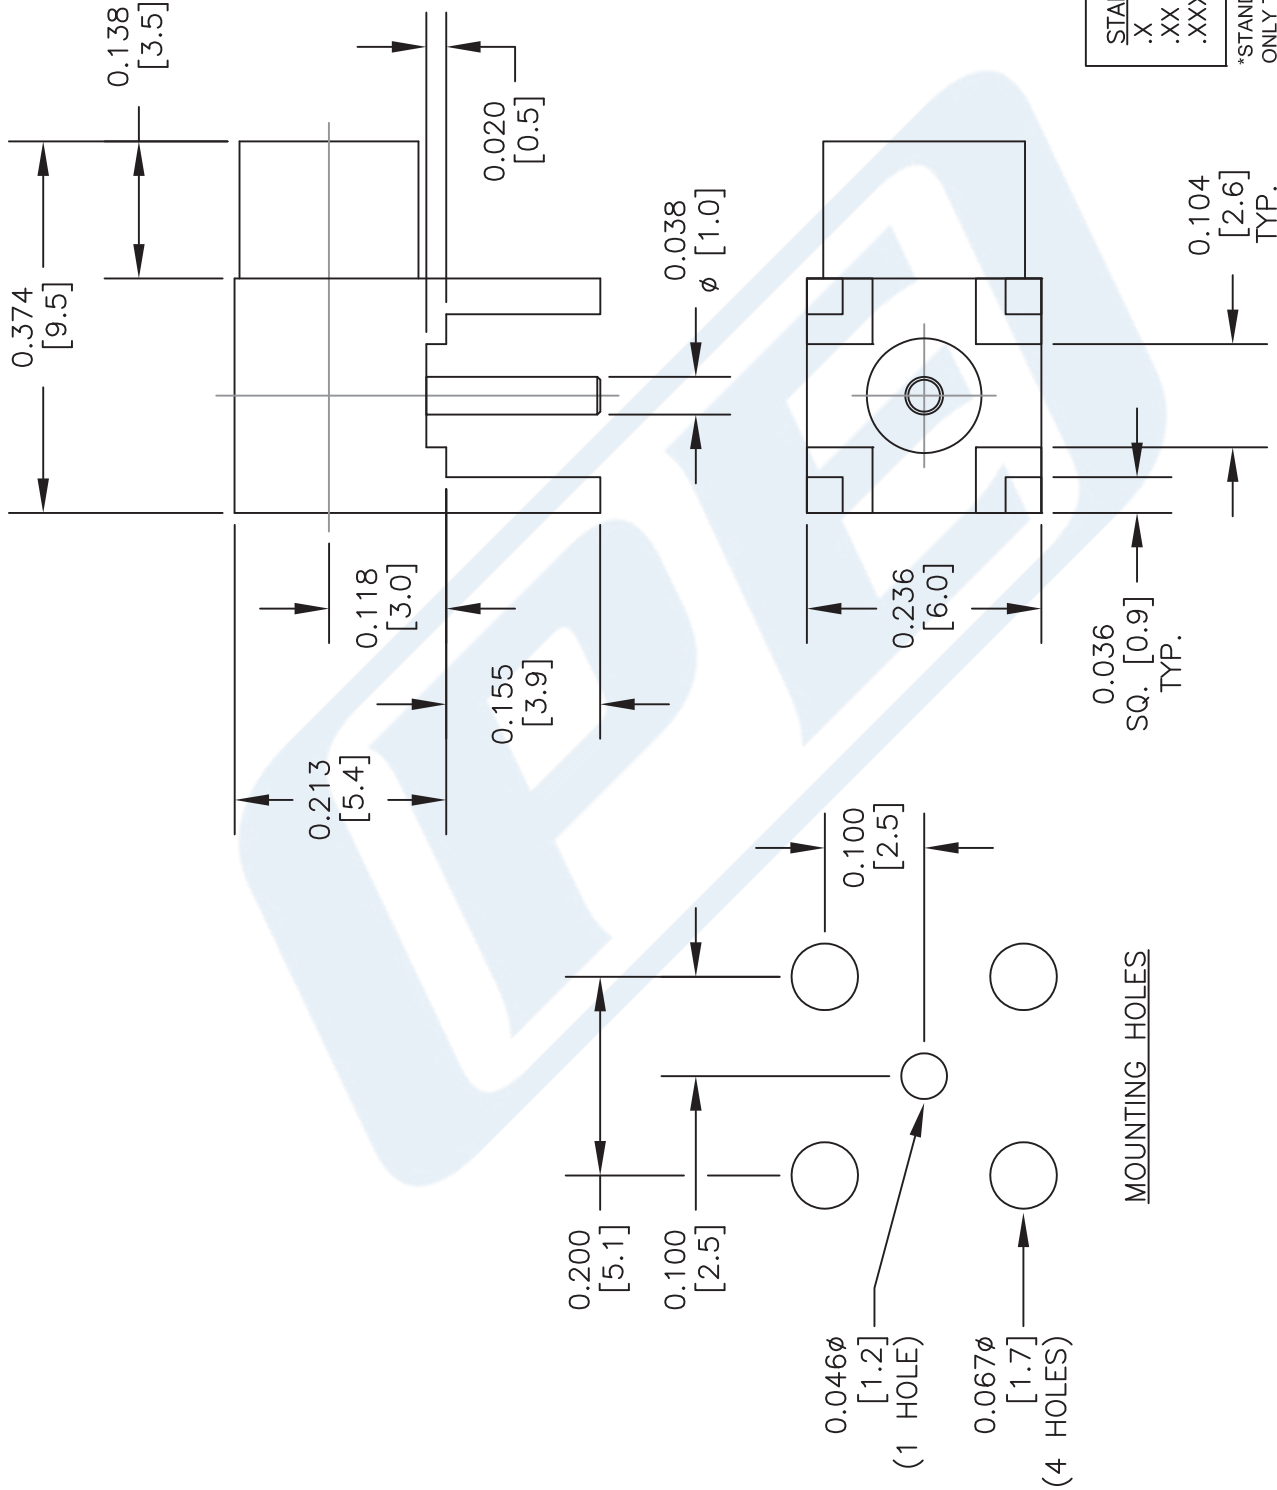

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE4556

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

CAGE CODE	53919	CAD FILE	051217	SCALE	N/A	SIZE	A	2233
-----------	-------	----------	--------	-------	-----	------	---	------