



## LC Male Connector Clamp/Solder Attachment for RG218, RG219, RG17

### RF Connectors Technical Data Sheet

**PE4323**

#### Configuration

- LC Male Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry
- RG218, RG219, RG17 Interface Type
- Clamp/Solder Attachment
- 1 1/2 inch Hex

#### Features

- Max. Operating Frequency 1,000 MHz
- Silver Plated Beryllium Copper Contact
- Contact plating according to ASTM-B700

#### Applications

- General Purpose Test
- Custom Cable Assemblies

#### Description

Pasternack's PE4323 LC male connector with clamp/solder attachment for RG218, RG219 and RG17 is part of our full line of RF components available for same-day shipping. Our LC male connector operates up to a maximum frequency of 1,000 MHz.

Our LC male connector PE4323 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
Operating Voltage (AC)			5,000	Vrms
Dielectric Withstanding Voltage (AC)			5,000	Vrms

#### Mechanical Specifications

##### Size

Length	3.95 in [100.33 mm]
Width/Dia.	1.5 in [38.10 mm]
Weight	0.84 lbs [381.02 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [LC Male Connector Clamp/Solder Attachment for RG218, RG219, RG17 PE4323](#)



## LC Male Connector Clamp/Solder Attachment for RG218, RG219, RG17

### RF Connectors Technical Data Sheet

PE4323

#### Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Silver ASTM-B700
Body	Phosphor Bronze	Nickel ASTM-B689
Coupling Nut	Brass	Nickel ASTM-B689

#### Environmental Specifications

##### Temperature

Operating Range -65 to +165 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

LC Male Connector Clamp/Solder Attachment for RG218, RG219, RG17 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [LC Male Connector Clamp/Solder Attachment for RG218, RG219, RG17 PE4323](#)

URL: <https://www.pasternack.com/lc-male-standard-rg218-rg219-connector-pe4323-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

ASSEMBLY PROCEDURES

1. SLIDE CLAMP NUT (1), EXTENSION (2), WASHER (3) & GASKET (4) OVER CABLE. STRIP CABLE AS SHOWN IN A. DO NOT NICK BRAID. WHILE CUTTING JACKET COMB OUT BRAID. TAPER END OF BRAID TO PERMIT ASSEMBLY OF BRAID CLAMP (5). SLIDE BRAID CLAMP (5) OVER BRAID & SEAT AGAINST CABLE.

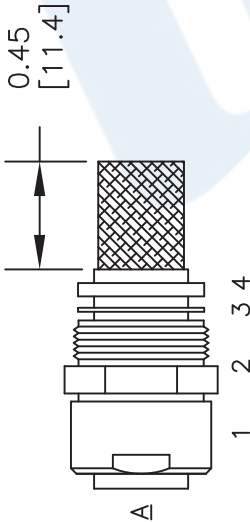


2. FORM BRAID OVER BRAID CLAMP NUT (5). TRIM BRAID BACK TO SHOULDER. CUT DIELECTRIC & CENTER CONDUCTOR TO DIMENSION SHOWN IN B. DO NOT NICK CENTER CONDUCTOR. INSERT #12 ALLEN WRENCH INTO SELF-TAPPING CONTACT. THREAD THE SELF-TAPPING CONTACT ONTO CENTER CONDUCTOR UNTIL IT SEATS AGAINST DIELECTRIC. SCREW CONTACT & CABLE ASSEMBLY INTO INSULATOR IN BODY. TIGHTEN BODY & EXTENSION (2) TOGETHER SECURELY. \* THEN TIGHTEN CLAMP NUT (1) TO EXTENSION (2).

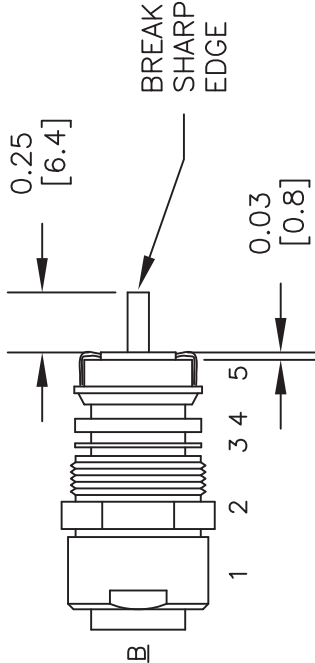

NOTE

RG219 STRAIGHTEN BULGE IN CLAMP NUT (1) & CUT IT SO THAT IT CAN BE CLAMPED TOGETHER TO EXTENSION (2).

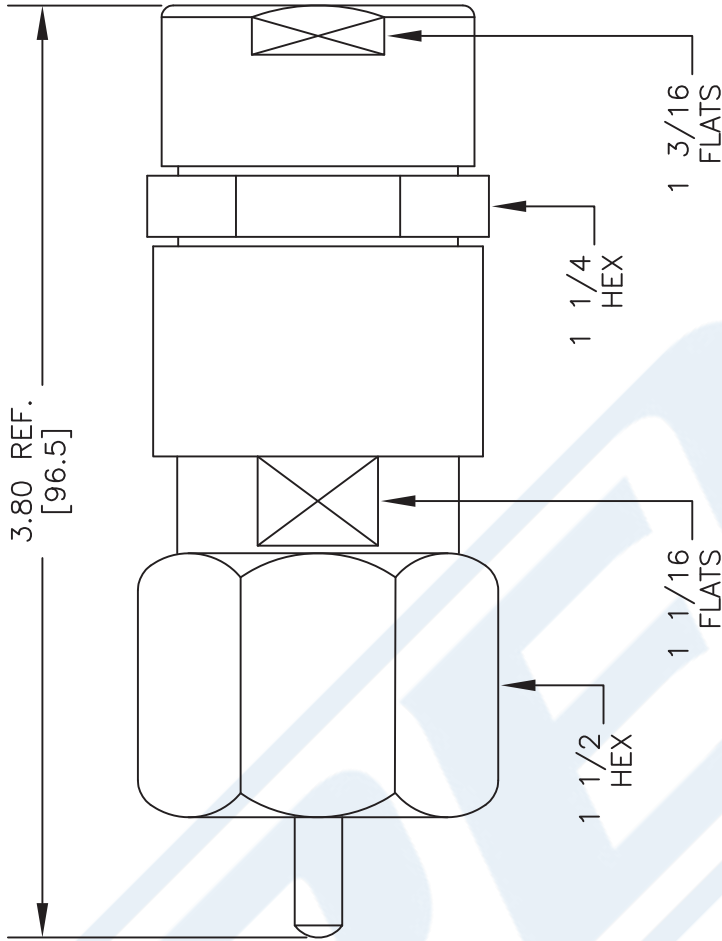

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE  
**PE4323**

**Pasternack Enterprises, Inc.**  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 092812-A

SCALE N/A

SIZE A

2233



## 7/16 DIN Male Connector Clamp/Solder Attachment for RG17, RG218, RG219

### RF Connectors Technical Data Sheet

PE44277

#### Configuration

- 7/16 DIN Male Connector
- MIL-C-39012
- 50 Ohms
- Straight Body Geometry
- RG17, RG218, RG219 Interface Type
- Clamp/Solder Attachment
- 1 1/4 inch Hex

#### Features

- Silver Plated Contact
- Contact plating according to QQ-S-365

#### Applications

- General Purpose Test
- Custom Cable Assemblies

#### Description

Pasternack's PE44277 7/16 DIN male connector with clamp/solder attachment for RG17, RG218 and RG219 is part of our full line of RF components available for same-day shipping.

Our 7/16 DIN male connector PE44277 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

#### Mechanical Specifications

<b>Size</b>	
Length	2.675 in [67.95 mm]
Width/Dia.	1.312 in [33.32 mm]
Weight	0.523 lbs [237.23 g]

#### Material Specifications

Description	Material	Plating
Contact		Silver QQ-S-365
Insulation	PTFE	
Body	Brass	Nickel QQ-N-290
Coupling Nut	Brass	Nickel QQ-N-290

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male Connector Clamp/Solder Attachment for RG17, RG218, RG219 PE44277](#)



7/16 DIN Male Connector Clamp/Solder  
Attachment for RG17, RG218, RG219

RF Connectors Technical Data Sheet

PE44277

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

7/16 DIN Male Connector Clamp/Solder Attachment for RG17, RG218, RG219 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male Connector Clamp/Solder Attachment for RG17, RG218, RG219 PE44277](#)

URL: <https://www.pasternack.com/7-16-male-standard-rg218-connector-pe44277-p.aspx>



The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

ASSEMBLY PROCEDURES

1. SLIDE CLAMP NUT (1) & GASKET (2) OVER CABLE. STRIP CABLE AS SHOWN. DO NOT NICK BRAID WHILE CUTTING JACKET. COMB OUT BRAID. TAPER END OF BRAID TO PERMIT ASSEMBLY OF THE BRAID CLAMP (3). SLIDE BRAID CLAMP (3) OVER BRAID & AGAINST CABLE

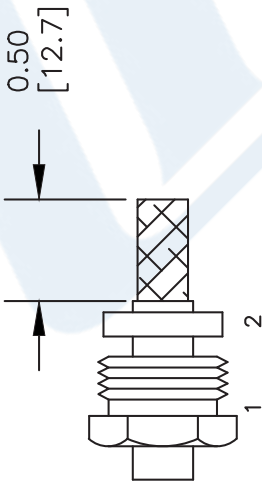

2. FORM BRAID OVER CLAMP NUT (3). CUT DIELECTRIC & CENTER CONDUCTOR TO DIMENSION SHOWN. SLIDE WASHER (4) & REAR INSULATOR (5) OVER. DIELECTRIC. SOLDER CONTACT (6) TO CENTER CONDUCTOR. SLIDE FRONT INSULATOR (7) OVER CONTACT. INSERT CABLE ASSEMBLY INTO BODY & TIGHTEN.

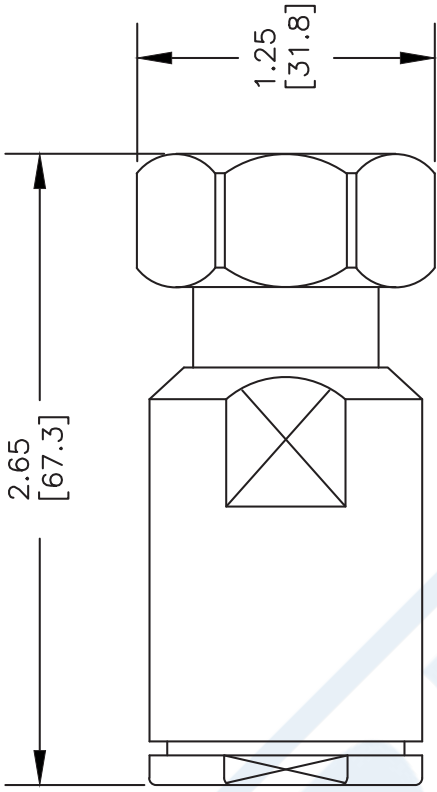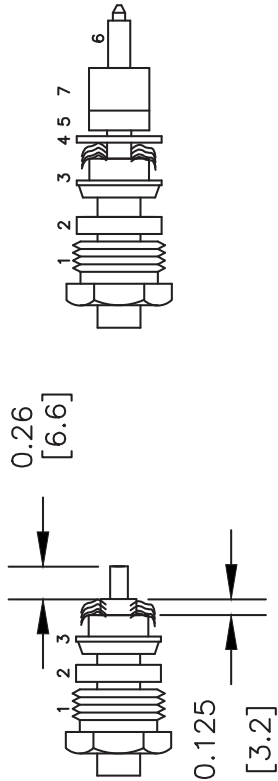

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE

PE44277

FSCM NO. 53919

CAD FILE

070202

SCALE N/A

SIZE A

2233

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. FITS MIL-C-17 AND EQUIVALENT CABLES.





## Flexible RG219 Coax Cable Single Shielded with PVC With Aluminum Armor Jacket

### TECHNICAL DATA SHEET

**RG219/79D**

#### Flexible RG219 Coax Cable Single Shielded with PVC With Aluminum Armor Jacket

##### Configuration

Inner Conductor Material and Plating	Copper
Dielectric Type	PE
Shield Materials	Beryllium Copper
Jacket Material and Color	PVC With Armor

##### Electrical Specifications

Impedance, Ohms	50
Maximum Operating Frequency, GHz	5
Capacitance, pF/ft [pF/m]	30.8 [101.05]
Maximum Operating Voltage, Volts	11,000

##### Electrical Specifications by Frequency

###### Frequency 1

Frequency, MHz	10
Attenuation, dB/100ft [dB/100m]	0.23 [0.75]
Power Handling, KWatts	18

###### Frequency 2

Frequency, MHz	100
Attenuation, dB/100ft [dB/100m]	0.81 [2.66]
Power Handling, KWatts	3.2

###### Frequency 3

Frequency, MHz	1000
Attenuation, dB/100ft [dB/100m]	3.8 [12.47]
Power Handling, Watts	560

###### Frequency 4

Frequency, GHz	5
Attenuation, dB/100ft [dB/100m]	13.5 [44.29]
Power Handling, Watts	160

##### Mechanical Specifications

###### Temperature

Operating Range, deg C	-40 to +80
------------------------	------------

###### Inner Conductor

Number of Strands	1
Material	Copper
Diameter, in [mm]	0.195 [4.95]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Flexible RG219 Coax Cable Single Shielded with PVC With Aluminum Armor Jacket RG219/79D](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



## Flexible RG219 Coax Cable Single Shielded with PVC With Aluminum Armor Jacket

### TECHNICAL DATA SHEET

**RG219/79D**

#### Dielectric:

Type	PE
Diameter, in [mm]	0.68 [17.27]

#### Shield:

Number of	1
Material 1	Beryllium Copper
Diameter, in [mm]	0.726 [18.44]

#### Jacket:

Material	PVC With Armor
Diameter, in [mm]	0.87 [22.1]
Weight, lbs/ft [Kg/m]	0.585 [0.87]

#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

#### Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------


Flexible RG219 Coax Cable Single Shielded with PVC With Aluminum Armor Jacket from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Flexible RG219 Coax Cable Single Shielded with PVC With Aluminum Armor Jacket RG219/79D](http://www.pasternack.com/50-ohm-flexible-rg219-pvc-with-armor-jacket-copper-braid-outer-conductor-single-shielded-rg219-79d-p.aspx)

URL: <http://www.pasternack.com/50-ohm-flexible-rg219-pvc-with-armor-jacket-copper-braid-outer-conductor-single-shielded-rg219-79d-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



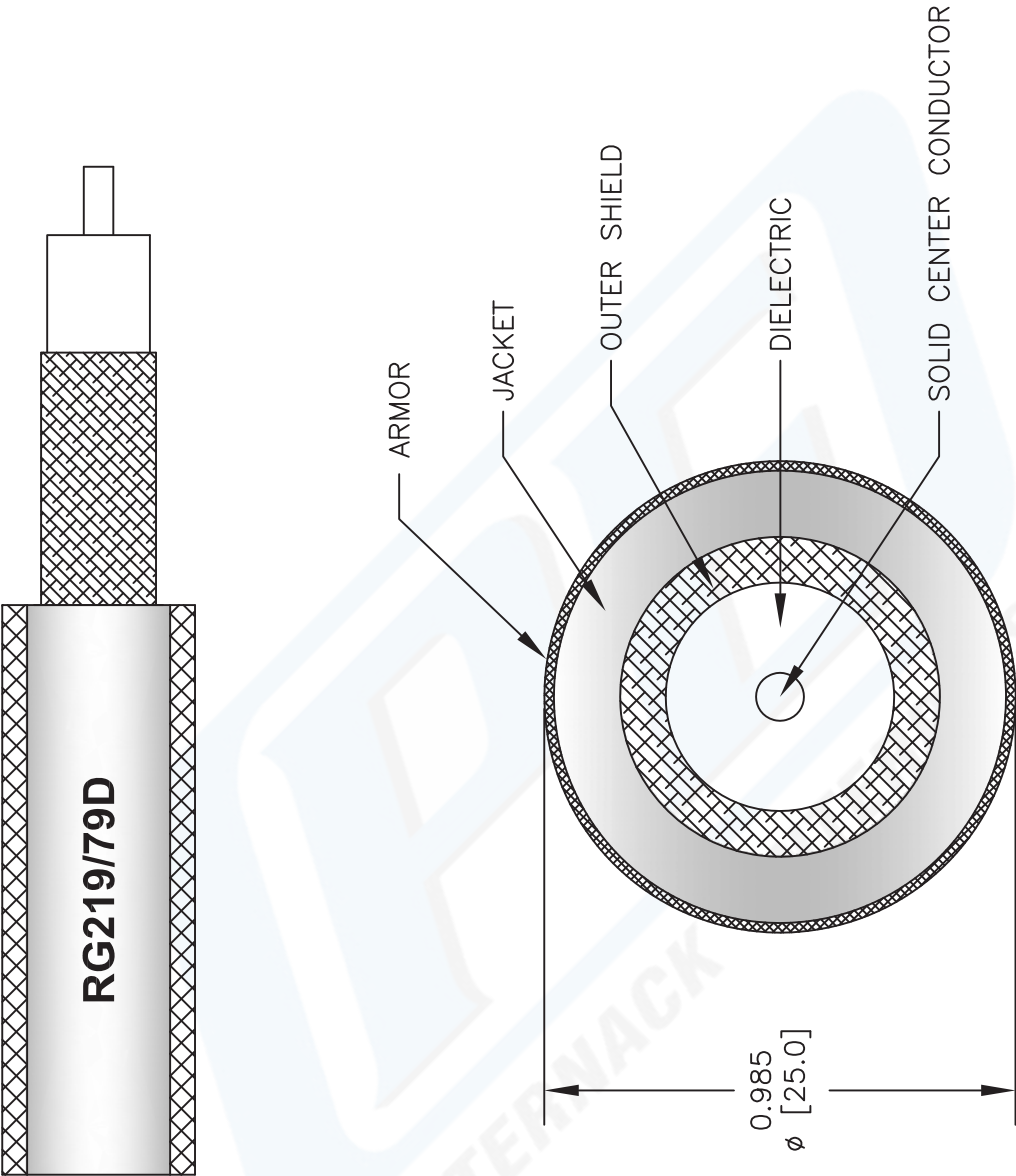

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE		FSCM NO. 53919		CAD FILE 102313		SCALE N/A	SIZE A	2233
RG219/79D								

**PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)