

**Features:**

- 4-channel bi-directional AOC with aggregate bandwidth of 100Gbps (25Gbps x 4ch)
- Compliant with SFF 8636 Rev 2.7
- Supports 100-Gbps aggregate data-rate links up to 100m by using OM4 MMF.
- Low power consumption of max 2W
- Full Digital Diagnostics Monitor Interface
- Hot pluggable electrical interface
- 0 to 70°C case temperature operating range
- RoHS Compliance and Lead Free



- Datacom/Telecom switch & router connections
- Data Aggregation and Backplane Application
- Infiniband transmission at 4ch QDR,FDR and EDR

**Applications:**

- 100GBASE SR4 Ethernet

**1. Absolute Maximum Ratings**

Not necessarily applied together. Exceeding these values may cause permanent damage. Functional operation under these conditions is not implied.

Parameter	Min	Max	Unit
Storage Temperature	-40	85	°C
3.3V Power Supply Voltage	-0.5	3.6	V
Data Input Voltage- Single Ended	-0.5		Vcc+0.5
Control Input Voltage	-0.5	3.6	V
Relative Humidity	5	85	%

**2. Recommended Operating Conditions**


Parameter	Min	Typical	Max	Unit
Case Operating Temperature	0	40	85	°C
Power Supply Voltage	3.135	3.3	3.465	V
			600	mA

Data Rate		103.125		Gbps
Bit Error Ratio (BER)		10 <sup>-12</sup>		
Standard Cable Lengths	1, 3, 5, 10, 20, 30, 50,60, 70, 80, 100			m

### 3. Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit
<b>Transmitter (per Lane)</b>					
Input Voltage Peak to Peak Swing	V <sub>in,pp</sub>			900	mV
Differential Input Impedance	Z <sub>ind</sub>	90	100	110	ohm
Common Mode Noise RMS				17.5	mV
Differential input return loss	SDD22	Per OIF CEI-28G-VSR and CAUI-4 requirements			dB
Mode to Differential conversion and Differential to Common Mode Conversion	SDC22, SCD22				dB
Common Mode Return Loss	SCC22				dB
Transition Time, 20 to 80%	T <sub>r</sub> , T <sub>f</sub>	10			ps
Common Mode Voltage	V <sub>cm</sub>	-0.3		2.8	V
Eye Width at 1E-15 probability	EW15	0.46			UI
Eye Height at 1E-15 probability	EH15	94			mv
<b>Receiver (per Lane)</b>					
Output Voltage Peak to Peak Swing	V <sub>opp</sub>	300		900	mV
Differential output Impedance	Z <sub>os</sub>	90	100	110	ohms
Common Mode Voltage	V <sub>cm</sub>	-0.35		2.85	V
Common Mode Noise RMS				17.5	mv
Differential output return loss	SDD22	Per OIF CEI-28G VSR and CAUI-4 requirements			dB
Common Mode to Differential conversion and Differential to Common Mode Conversion	SDC22, SCD22				dB
Common Mode Return Loss	SCC22				-2
Transition Time, 20 to 80%	T <sub>r</sub> , T <sub>f</sub>	10			ps
Vertical Eye Closure	VEC			5.5	dB
Eye Width at 1E-15 probability	EW15	0.57			UI

## 4. Mechanical Diagram

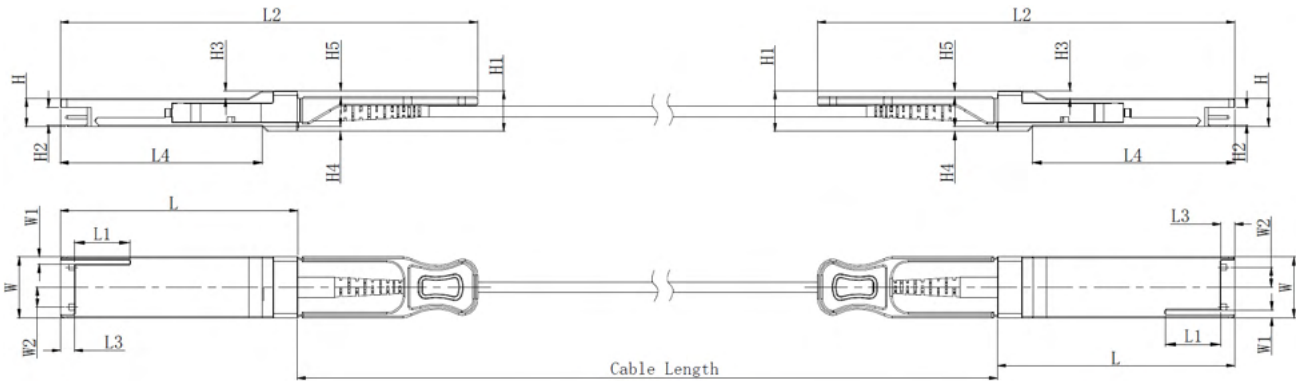

**Note:** External physical characteristics are subject to variation. This may include, but is not limited to, external case designs, pull tab colors and/or shapes, removal latch styles or colors, and label sizes and placement. These variations do not affect the function or characteristics of the transceivers.

Parameter	Specification	Notes
Minimum Cable Bending Radius	30mm	
Cable Cross-Section Dimension	Round Cable with 3 mm in Diameter	
Cable Cover Type	LSZH or OFNR	1
Standard Cable Length	1, 3, 5, 10, 20, 30, 50, 60, 70, 80, 100m	2
Cable Length Tolerance	+100/-0	cm

### Notes:

1. Cable jacket type standard is LSZH. Other types can be available upon request.
2. Different cable length may be recommended to adopt different multi-mode fiber (MMF) grades of OM3, or OM4.

## 5. Ordering Information

PNY P/N	Mellanox Legacy P/N	Nvidia P/N	Product Description
PFA1A00-E001	MFA1A00-E001	980-9113D-00E001	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 1m 5 Year Warranty
PFA1A00-E002	MFA1A00-E002	#N/A	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 2m 5 Year Warranty
PFA1A00-E003	MFA1A00-E003	980-91632-00A02A	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 3m 5 Year Warranty
PFA1A00-E004	MFA1A00-E004	#N/A	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 4m 5 Year Warranty



PFA1A00-E005	MFA1A00-E005	980-9I55A-00N003	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 5m 5 Year Warranty
PFA1A00-E007	MFA1A00-E007	980-9I13M-00E007	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 7m 5 Year Warranty
PFA1A00-E010	MFA1A00-E010	980-9I13O-00E010	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 10m 5 Year Warranty
PFA1A00-E015	MFA1A00-E015	980-9I63S-00A003	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 15m 5 Year Warranty
PFA1A00-E01A	MFA1A00-E01A	#N/A	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 1.5m 5 Year Warranty
PFA1A00-E020	MFA1A00-E020	980-9I13V-00E020	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 20m 5 Year Warranty
PFA1A00-E030	MFA1A00-E030	980-9I13Y-00E030	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 30m 5 Year Warranty
PFA1A00-E03A	MFA1A00-E03A	#N/A	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 3.5m 5 Year Warranty
PFA1A00-E04A	MFA1A00-E04A	#N/A	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 4.5m 5 Year Warranty
PFA1A00-E050	MFA1A00-E050	980-9I133-00E050	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 50m 5 Year Warranty
PFA1A00-E100	MFA1A00-E100	980-9I135-00E100	100% Mellanox Compatible active fiber cable, IB EDR, up to 100Gb/s, QSFP, LSZH, 100m 5 Year Warranty

## 6. Contact Information

[gopny@pny.com](mailto:gopny@pny.com)