



## Front view

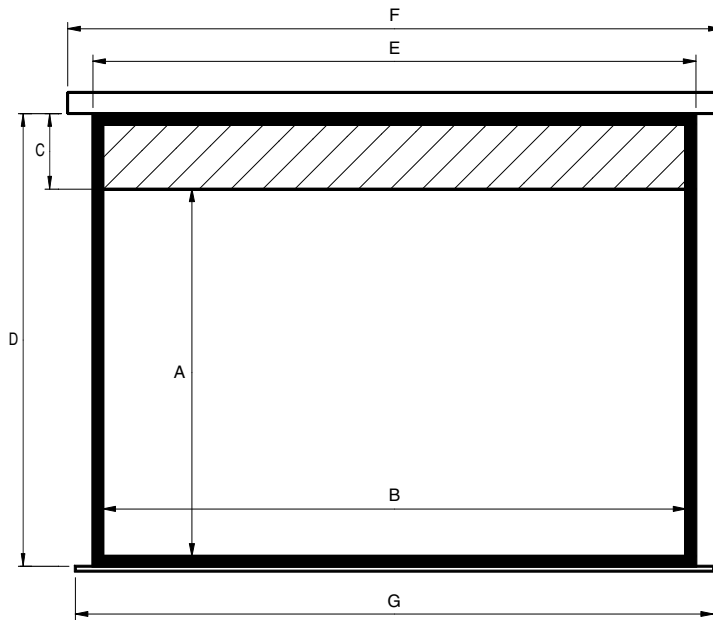

- A Image height
- B Image base
- C Extradrop
- D Fabric total height
- E Fabric total base
- F Casing length
- G Weighing bar length

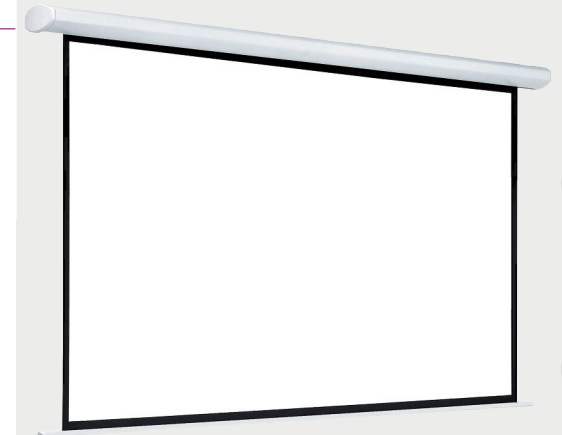

A pretty design and silent screen.  
Its installation is easier and faster thanks  
to the Speed solo system.

## Technical data

Infrared remote control	Wired switch	A cm	B cm	C cm	D cm	E cm	F cm	G cm	Wattage w	Net weight kg
<b>4:3 format</b>	<b>Black borders</b>									
HCM4RB1135180	HCM4SB1135180	129	172	4	137	180	200	194	121	13
HCM4RB1150200	HCM4SB1150200	144	192	4	152	200	220	214	121	14
HCM4RB1180240	HCM4SB1180240	174	232	4	182	240	260	254	121	18
<b>16:9 format</b>	<b>Black borders + extra drop</b>									
HCM4RB1101180	HCM4SB1101180	97	172	30	131	180	200	194	121	13
HCM4RB1112200	HCM4SB1112200	108	192	30	142	200	220	214	121	14
HCM4RB1135240	HCM4SB1135240	131	232	30	165	240	260	254	121	18
<b>16:10 format</b>	<b>Black borders + extra drop</b>									
HCM4RB1125200	HCM4SB1125200	120	192	20	144	200	220	214	121	14
HCM4RB1150240	HCM4SB1150240	145	232	20	169	240	260	254	121	18

Aluminum profile casing with white epoxy finish and black borders on the projection surface.  
Black out projection surface.  
Wall or ceiling mounting.


Available in two models:

- HCM4S with wired control (see the options for this model - page 23).
- HCM4R with infrared remote control and wired switch integrated in the receiver:



Side view

Casing side view

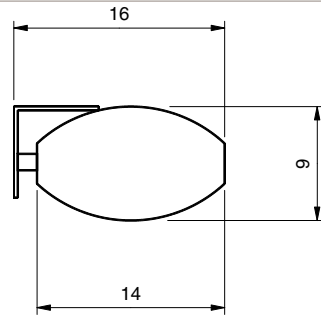

Casing



Wiring

Receiver



Infrared remote control




Wired switch



In case of automation control, the power must be cut off between rolling up and unrolling order.

Extending brackets

Extending brackets 10 to 20 cm

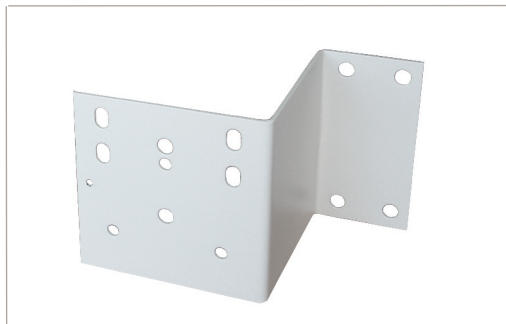

Extending brackets 30 to 40 cm



EXTENDING BRACKETS

Reference	Dimension
OPTECAR10	10 cm
OPTECAR20	20 cm
OPTECAR30HCM4	30 cm
OPTECAR40HCM4	40 cm



Chemin de Beaurepaire - CS42005  
91410 DOURDAN - FRANCE  
Tel +33 1 64 59 94 54