

Get a Quote

Overview

C3925-CME-SRST/K9 is a Cisco 3925 router bundled with Voice Bundle w/ PVDM3-64, FL-CME-SRST-25, UC License PAK.

When Unified CME is used in SRST mode, it provides more call processing features for the IP phones than those are available with the SRST feature on a router. In addition, to the SRST features such as call preservation, auto-provisioning, and failover, Unified CME in SRST mode also provides most of the Unified CME telephony features for the SCCP phones, including:

- Paging
- Conferencing
- Hunt groups
- Basic automatic call distribution (B-ACD)
- Call park, call pickup, call pickup groups
- Overlay-DN, softkey templates
- Cisco IP Communicator
- Cisco Unified Video Advantage
- Integration with Cisco Unity with MWI support at remote sites, with distributed Microsoft Exchange or IBM Lotus Domino server

Quick Specs

Table 1 shows the Quick Specs of the C3925-CME-SRST/K9.

Product Code	C3925-CME-SRST/K9
Bundle	3925 Voice Bundle w/ PVDM3-64, FL-CME-SRST-25, UC License PAK
Services Performance Engine module	w/SPE 100
Rack Units	3U
Interfaces	3 integrated 10/100/1000 Ethernet ports with 2 ports capable of RJ-45 or SFP connectivity
Expansion Slot(s)	2 service module slots 1 Internal Services Module slot 4 onboard digital signal processor (DSP) slots 4 Enhanced High-Speed WAN Interface Card (EHWIC) slots
RAM	1 GB (installed) / 2 GB (max)
Flash Memory	256 MB (installed) / 8 GB (max)
Dimensions	47.6 cm x 43.8 cm x 8.9 cm

Product Details


Figure 1 shows the front panel of the Cisco 3925 router. C3925-CME-SRST/K9 is similar with it.



Note:

(1)	(2)	(3)
On/Off switch	Power connector	LEDs area

Figure 2 shows the back panel of the Cisco 3925 router with slots and ports. C3925-CME-SRST/K9 is similar with it.

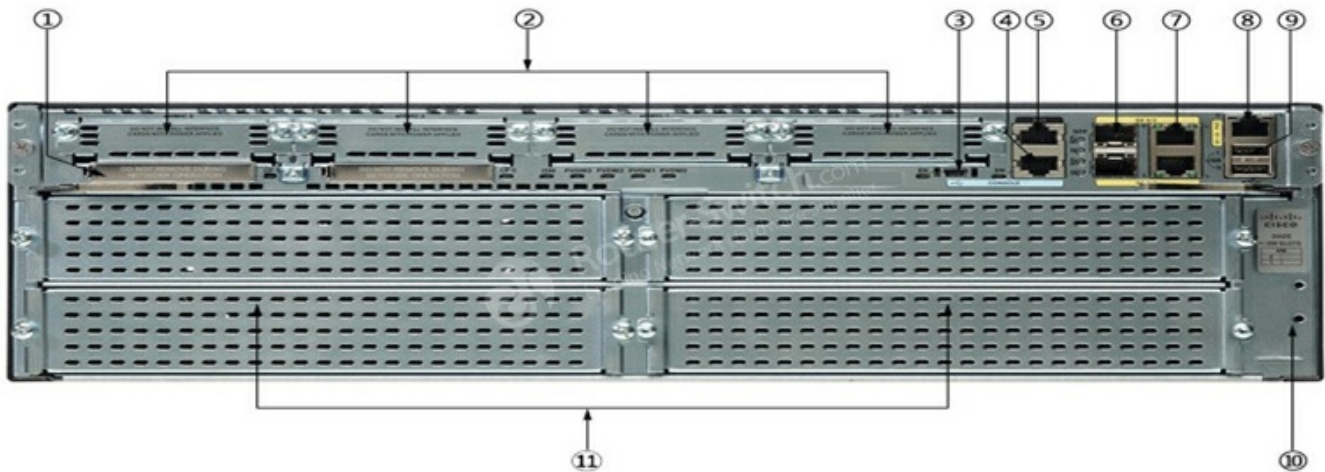

Note:

(1)	Compact flash 0 and 1 (0, right)	(7)	10/100/1000 Ethernet port GE 0/1 and GE 0/2 (GE 0/1, down)
(2)	EHWIC 0,1,2 and 3 (0, far right)	(8)	10/100/1000 Ethernet port GE 0/0
(3)	USB serial port	(9)	USB 0 and USB 1 (1,top)
(4)	RJ-45 serial console port	(10)	Ground
(5)	AUX port	(11)	Service module slots
(6)	SFP 1 and SFP 2 (2, top)		

Modularity Features

Table 2 shows modules for this router.

Models	Description
C3900-SPE100/K9	Cisco Services Performance Engine 100 for Cisco 3925 ISR. (It's a configured item in the CISCO3925/K9.)
SM-ES3G-16-P	Enhanced EtherSwitch Service Module, L2/L3 switching, 16* 10/100/1000 GE ports, Enhanced POE, Cisco EnergyWise technology
SM-ES3G-24-P	Enhanced EtherSwitch Service Module, L2/L3 switching, 24 * 10/100/1000 GE ports, Enhanced POE, Cisco EnergyWise technology

VVIC3-2MFT-G703	Cisco Voice/WAN Card VVIC3-2MFT-G703
HWIC-2T	2-Port Serial WAN Interface Card Cisco Router High-Speed WAN Interface card
EHWIC-1GE-SFP-CU	Cisco 1900, 2900, 3900 Router EHWIC WAN Card EHWIC-1GE-SFP-CU
EHWIC-4ESG	Four port 10/100/1000 Base-TX Gigabit Ethernet switch interface card for Cisco 1900 2900 3900 Routers
ISM-SRE-300-K9	Internal Services Module (ISM) with Services Ready Engine
MEM-CF-256U1GB	256MB to 1GB Compact Flash Upgrade for Cisco 1900,2900,3900
MEM-CF-256U2GB	256MB to 2GB Compact Flash Upgrade for Cisco 1900,2900,3900
MEM-CF-256U512MB	256MB to 512MB CF Upgrade for Cisco 1900,2900,3900 ISR
MEM-CF-256U4GB	256MB to 4GB Compact Flash Upgrade for Cisco 1900,2900,3900
MEMUSB-1024FT	1GB USB Flash Token

Compare to Similar Routers

Table 3 shows the comparison of [CISCO3925/k9](#) and [C3925-CME-SRST/K9](#).

Model	CISCO3925/k9	C3925-CME-SRST/K9
Bundle	N/A	3925 Voice Bundle w/ PVDM3-64,FL-CME-SRST-25, UC License PAK
SPE	w/SPE 100	w/SPE 100
Interface	3GE	3GE
EHWIC slots	4	4
SM slots	2	2
ISM slots	1	1
DSP	4	4
SFP	2	2
Rack Unit	3U	3U

Get more information

Do you have any question about the [C3925-CME-SRST/K9](#) router?

Contact us now via [Live Chat](#) or sales@router-switch.com.

Specification

C3925-CME-SRST/K9 Specifications	
Device Type	Router
Form Factor	Desktop - modular - 3U
Bundle	3925 Voice Bundle w/ PVDM3-64,FL-CME-SRST-25, UC License PAK
Connectivity Technology	Wired
Data Link Protocol	Ethernet, Fast Ethernet, Gigabit Ethernet

Routing Protocol	OSPF, IS-IS, BGP, EIGRP, DVMRP, PIM-SM, IGMPv3, GRE, PIM-SSM, static IPv4 routing, static IPv6 routing
Remote Management Protocol	SNMP, RMON
Features	Firewall protection, VPN support, MPLS support, Syslog support, IPv6 support, Class-Based Weighted Fair Queuing (CBWFQ), Weighted Random Early Detection (WRED)
Compliant Standards	IEEE 802.1Q, IEEE 802.1ah, IEEE 802.1ag
DRAM Memory	1 GB (installed) / 2 GB (max)
Flash Memory	256 MB (installed) / 8 GB (max)
LED Status Lights Indicators	Link activity, power
Communications	
Type	Voice / fax module
Digital Ports Qty	64
IP Telephony	
Voice Codecs	G.711, G.722, G.723.1, G.728, G.729, G.729a, G.729ab, G.726
Connectivity Slots	
Router Interfaces	3 x 10Base-T/100Base-TX/1000Base-T - RJ-45 Management : 1 x console - RJ-45 Management : 1 x console - mini-USB Type B Serial : 1 x auxiliary - RJ-45 USB : 2 x 4 PIN USB Type A 2 x SFP (mini-GBIC)
Expansion Slots Total (Free)	4 (4) x HWIC 3 (2) x PVDM 2 (1) x CompactFlash Card 1 (1) x Expansion Slot
Power Supply	
Power Device	Power supply - internal
Voltage Required	AC 120/230 V (50/60 Hz)
Dimensions / Weight / Miscellaneous	
Width	47.6 cm
Depth	43.8 cm
Height	8.9 cm
Weight	17.7 kg
Compliant Standards	CISPR 22 Class A, CISPR 24, EN55024, EN55022 Class A, EN50082-1, CAN/CSA-E60065-00, ICES-003 Class A, CS-03, AS/NZS 3548, FCC CFR47 Part 15, EN300-386, UL 60950-1, IEC 60950-1, EN 60950-1, CSA C22.2 No. 60065, BSMI CNS 13438
System Software	
Software Included	Cisco IOS Unified Communications, Cisco Unified Communications Manager Express / Cisco Unified Survivable Remote Site Telephony (25 phones)

Want to Buy

Order Now

Get a Quote

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

Contact Us

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: sales@router-switch.com