

Get a Quote

## Overview

---

Cisco Intergrated Service Router ISR4331-V/K9 Voice bundle is ideally designed for the small to mid-size enterprise branch environment, delivers advanced VOIP services and unprecent level of WAN intelligence. Cisco ISR4331 combines 2 dual mode Gigabit Ethernet ports and PVD4 DSP for voice and video services, two network modules, one integrated services card slot and one service module slots which you can add a Gigabit Ethernet switch or maybe a Cisco UCS e-series single blade server module to run virtualized applications. Fully support for the OnePK software development kits means mutual awareness between both network and applications. Application visibility and control are natively available on the router, so you can measure user experience without external probes.

Performance is the key to enabling advanced branch services or scaling across the enterprise. With IOS XE and dedicate control, data, and service CPUs, these platform is unmatched in the industry. ISR 4331 delivering 100Mbps-300Mbps performance on demand, with pay-as-you-grow performance, you can increase forwarding capacity when needed, so the platform performance growth with your business, you only pay for the performance you need. Secure communications are expected in ISR and you will have access to the most advanced encryption platform in the market, IPsec, SSL VPN and flex VPN with support for next-generation encryption standards as well. The Cisco 4331 is the ultimate application delivery platform to mid-size branch offices. This is literally routing redefined.

### Quick Specs

Figure 1 shows the appearance of Cisco ISR4331/K9 for reference. ISR4331-V/K9 is similar with it.




Table 1 shows the Quick Specs.

Product Code	ISR4331-V/K9
--------------	--------------

Aggregate Throughput	100 Mbps to 300 Mbps
Total onboard WAN or LAN 10/100/1000 ports	3
RJ-45-based ports	2
SFP-based ports	2
Enhanced service-module (SM-X) slot	1
NIM (Network Interface Modules) slots	2
Onboard ISC slot	1
Memory	4 GB (default) / 16 GB (maximum)
Flash Memory	4 GB (default) / 16 GB (maximum)
Power-supply options	Internal: AC and PoE
Rack height	1 RU
Dimensions (H x W x D)	44.45 x 438.15 x 438.15 mm
Package Weight	12.96 Kg

## Product Details

Figure 2 shows the front panel of Cisco ISR4331/K9for reference. ISR4331-V/K9 is similar with it..

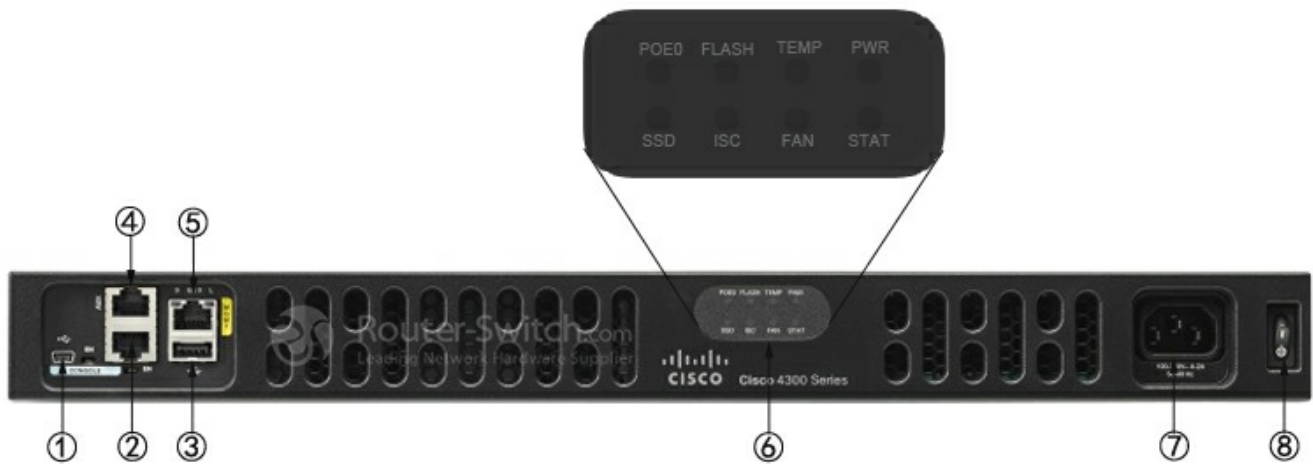

Note:

(1)	USB Type B mini port	(5)	Management port
(2)	Serial console port	(6)	LEDs
(3)	USB Type A port	(7)	AC Power
(4)	AUX Port	(8)	Power switch

The LEDs include eight indicators.

Table 2 shows the LED descriptions.

LEDs	Represents	Color	Description
POE0	POE PSU	Green	PoE is on and providing power.
		Amber	PoE is in a failed condition.
		Off	PoE supply is not present.

<b>FLASH</b>	System Flash Status	Blinking Green	Compact flash/eUSB flash is present and currently being accessed.
<b>TEMP</b>	Temperature Status	Solid green	All temperature sensors in the system are within acceptable range.
		Amber	One or more temperature sensors in the system are outside the acceptable range.
		Off	Temperature is not being monitored.
<b>PWR</b>	System Power	Green	System power is on and functioning correctly.
		Green blinking	System power is in the process of shutting down.
		Amber	System power is up, but low level initialization failed.
		Amber blinking	System power is up, but the system failed to come out of reset.
		Off	System power is off.
<b>SSD</b>	mSATA Slot Status	Green	SSD mSATA is present and enabled.
		Amber	Initialized with error.
		Off	Not present.
<b>ISC</b>	ISC Slot Status	Green	PVDM4 is present and enabled.
		Amber	Initialized with error.
		Off	Not present.
<b>FAN</b>	Fan Status	Green	All fans are operating.
		Amber	One fan has stopped working.
		Blinking Amber	Two or more fans have stopped working, or the fan tray has been removed.
		Off	Fans are not being monitored.
<b>STAT</b>	System Status	Solid green	System operating normally.
		Blinking amber	BIOS/Rommon is booting.
		Amber	BIOS/Rommon has completed booting, and system is at Rommon prompt or booting platform software.
		Off	System is not out of reset or BIOS image is not loadable.

Figure 3 shows the back panel of Cisco ISR4331/K9for reference. ISR4331-V/K9 is similar with it..



Note:

(1)	RJ45 Ports	(3)	NIM Slots
-----	------------	-----	-----------

(2)	SFP Ports	(4)	SM-X Slot
-----	-----------	-----	-----------

·(1) & (2) : These four ports include one combo port, one RJ45 port and one SFP port. **It means the RJ45 and SFP in the combo port can't be used at the same time.**

·NIM slots support one double-wide or two signal-wide modules.

·An SM-X slot can be converted into a Network Interface Module (NIM) slot using an optional carrier card.

## The Modules, Cards, Licenses & Accessories

Table 3 shows some recommended modules, cards, licenses and accessories of Cisco ISR4331-V/K9.

Items	Models	Descriptions
Console and Auxillary Cables	<a href="#">CAB-AUX-RJ45</a>	Cisco CAB-AUX-RJ45 Auxiliary Cable 8ft with RJ45 and DB25M
	<a href="#">CAB-ETH-S-RJ45</a>	Cisco Router Cable CAB-ETH-S-RJ45
	<a href="#">CAB-CONSOLE-RJ45</a>	Cisco CAB-CONSOLE-RJ45 Console Cable 6ft with RJ45 and DB9F
	<a href="#">CAB-CONSOLE-USB</a>	Cisco CAB-CONSOLE-USB Console Cable 6 ft with USB Type A and mini-B
Licenses	<a href="#">L-SL-4330-APP-K9=</a>	Cisco AppX license L-SL-4330-APP-K9= with 750 conns/ISRWAAS or 1300 conns/vWAAS for ISR4331
Network Interface Modules	<a href="#">NIM-1MFT-T1/E1</a>	Cisco Fourth-Generation Multiflex Trunk Voice and WAN network interface module
	<a href="#">NIM-2CE1T1-PRI</a>	Cisco Multiflex Trunk Voice and WAN network interface module
	<a href="#">NIM-4E/M</a>	Analog voice network interface card (ear and mouth)
	<a href="#">NIM-2FXS</a>	Cisco Analog voice network interface card NIM-2FXS
	<a href="#">NIM-2FXS/4FXO</a>	Cisco Analog voice network interface card NIM-2FXS/4FXO
	<a href="#">NIM-8MFT-T1/E1</a>	Cisco Fourth-Generation Multiflex Trunk Voice and WAN network interface module
SFPs for On-Board GE Ports	<a href="#">GLC-SX-MMD</a>	Cisco GLC-SX-MMD 1000BASE-SX SFP transceiver module, MMF, 850nm, DOM
	<a href="#">GLC-LH-SMD</a>	Cisco GLC-LH-SMD 1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM
	<a href="#">GLC-ZX-SMD</a>	Cisco GLC-ZX-SMD 1000BASE-ZX SFP transceiver module, SMF, 1550nm, DOM

## Compare to Similar Items

Table 4 shows the comparison chart.

Models	ISR4331-V/K9	<a href="#">ISR4331/K9</a>
Description	Cisco ISR4331-V/K9 (2GE,2NIM,1SM,4G FLASH,4G DRAM, Voice Bundle)	Cisco ISR 4331 (2GE,2NIM,1SM,4G FLASH,4G DRAM,IP Base)
Aggregate Throughput	100 Mbps to 300 Mbps	100 Mbps to 300 Mbps
Total onboard WAN or LAN 10/100/1000 ports	3	3
RJ-45-based ports	2	2
SFP-based ports	2	2
Enhanced service-module slots	1	1
NIM slots	2	2
Onboard ISC slot	1	1
Rack height	1	1

## Get more information

Do you have any question about the Cisco ISR4331-V/K9?

Contact us now via [Live Chat](#) or [sales@router-switch.com](mailto:sales@router-switch.com).

## Specification

---

ISR4331-V/K9 Specification	
Description	Cisco ISR4331-V/K9 (2GE,2NIM,1SM,4G FLASH,4G DRAM, Voice Bundle)
Aggregate Throughput	100 Mbps to 300 Mbps
Total onboard WAN or LAN 10/100/1000 ports	3
RJ-45-based ports	2
SFP-based ports	2
Enhanced service-module slots	1
Doublewide service-module slots	0
NIM slots	2
OIR (all I/O modules)	Yes
Onboard ISC slot	1
Default memory double-data-rate 3 (DDR3) error-correction-code (ECC) DRAM (Combined control/services/data planes)	4 GB
Maximum memory DDR3 ECC DRAM (Combined control/services/data planes)	16 GB
Default memory DDR3 ECC DRAM (data plane)	NA
Maximum memory DDR3 ECC DRAM (data plane)	NA
Default memory DDR3 ECC DRAM (control/services plane)	NA
Maximum memory DDR3 ECC DRAM (control/services plane)	NA
Default flash memory	4 GB
Maximum flash memory	16 GB
External USB 2.0 slots (type A)	1
USB console port -type B mini (up to 115.2 kbps)	1
Serial console port - RJ45 (up to 115.2 kbps)	1
Serial auxiliary port - RJ45 (up to 115.2 kbps)	1
Power-supply options	Internal: AC and PoE
Redundant power supply	N/A
AC input voltage	100 to 240 VAC autoranging
AC input frequency	47 to 63 Hz
AC input current range, AC power supply (maximum)	3 to 1.3A

AC input surge current	60 A peak and less than 5 Arms per half cycle
Typical power (no modules) (watts)	42
Maximum power with AC power supply (watts)	250
Maximum power with PoE power supply (platform only) (watts)	530
Maximum endpoint PoE power available from PoE power supply (watts)	250

## Want to Buy

---

Order Now

Get a Quote

## Why Router-switch.com

---

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

## Contact Us

---

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: [sales@router-switch.com](mailto:sales@router-switch.com)