

Overview

HPE FlexNetwork 5120 SI Series switches support stacking, static Layer 3 routing, ACLs and IPv6. This model has 48x 10/100/1000 ports and 4 x GbE SFP ports. The JE072B is part of the HPE FlexNetwork portfolio of campus switches. They are campus switches ideal for medium and large enterprise networks.

Quick Spec

Figure 1 shows the appearance of HPE JE072B.

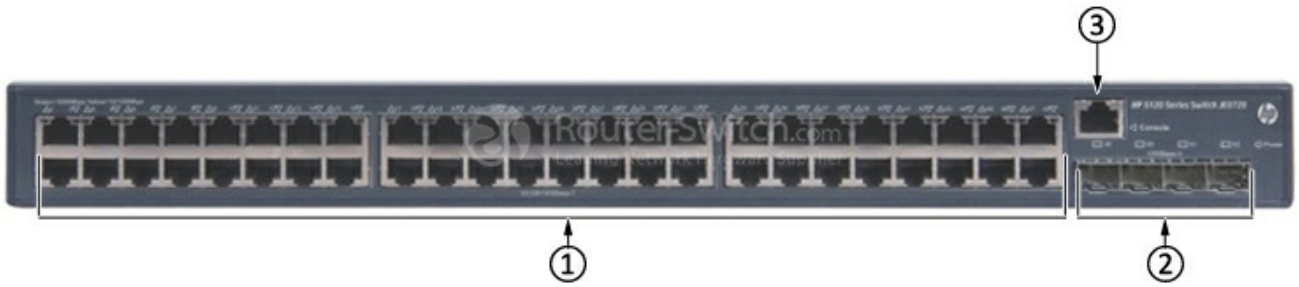


Table 1 shows the quick spec.

Product Code	JE072B
Type	HPE FlexNetwork 5120 48G SI Switch
Ports	48 x RJ-45 autosensing 10/100/1000 ports 4 x fixed Gigabit Ethernet SFP ports
Throughput	up to 77.4 Mpps
Routing/switching capacity	104 Gbps
Memory and processor	128 MB SDRAM Packet buffer size: 1 MB 128 MB flash
Dimensions	17.3 x 10.24 x 1.72 in (43.9 x 26 x 4.37 cm)
Weight	11.02 lb (5 Kg)

Product Details

Figure 2 shows the front panel of HPE JE072B.



Note:

(1)	48 × 10/100/1000Base-T autosensing Ethernet port
(2)	4 × 1000Base-X SFP port
(3)	Console port

Figure 3 shows the back panel of HPE JE072B.



Note:

(1)	AC-input power receptacle
(2)	Grounding screw

Compare to Similar Items

Table 2 shows the comparison.

Product Code	JE072B	JE073B	JE074B
Type	HPE FlexNetwork 5120 48G SI Switch	HPE FlexNetwork 5120 16G SI Switch	HPE FlexNetwork 5120 24G SI Switch
Ports	48 x RJ-45 autosensing 10/100/1000 ports 4 x fixed Gigabit Ethernet SFP ports	16 x RJ-45 autosensing 10/100/1000 ports 4 x fixed Gigabit Ethernet SFP ports	24 x RJ-45 autosensing 10/100/1000 ports 4 x fixed Gigabit Ethernet SFP ports
Throughput	up to 77.4 Mpps	up to 29.8 Mpps	up to 41.7 Mpps

Memory	128 MB SDRAM Packet buffer size: 1 MB 128 MB flash	128 MB SDRAM Packet buffer size: 0.5 MB 128 MB flash	128 MB SDRAM Packet buffer size: 0.5 MB 128 MB flash
---------------	--	--	--

Get more information

Do you have any question about the JE072B?

Contact us now via [Live Chat](#) or sales@router-switch.com.

Specification

JE072B Specification	
Type	HPE FlexNetwork 5120 48G SI Switch
Differentiator	48 x 10/100/1000BASE-T and 4 GbE SFP ports
Ports	<ul style="list-style-type: none"> · 48 x RJ-45 autosensing 10/100/1000 ports · 4 x fixed Gigabit Ethernet SFP ports
Memory and processor	<ul style="list-style-type: none"> · 128 MB SDRAM · Packet buffer size: 1 MB · 128 MB flash
Latency	1000 Mb Latency: < 3 µs
Throughput	up to 77.4 Mpps
Routing/switching capacity	104 Gbps
Stacking capabilities	IRF 4 switches
Management features	IMC - Intelligent Management Center Command-line interface Web browser SNMP manager
Input voltage	100 - 240 VAC, rated (depending on power supply chosen)
Operating temperature range	0 to 45°C
Operating humidity range	10 to 90% (noncondensing)
Power consumption	59.8 W (maximum)
Heat dissipation	204 BTU/hr (215.22 kJ/hr)
Minimum dimensions (W x D x H)	17.3 x 10.24 x 1.72 in (43.9 x 26 x 4.37 cm)
Weight	11.02 lb (5 Kg)

Want to Buy

[Order Now](#)
[Get a Quote](#)

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#),

Dell, Hikvision, Juniper, Fortinet, etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

Contact Us

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: sales@router-switch.com