

[Get a Quote](#)

## Overview

N9K-C93180YC-EX is one of the Cisco Nexus 9300-EX switches. Cisco Nexus 9300-EX platforms are the next generation of fixed Cisco Nexus 9000 Series Switches. The new platforms support cost-effective cloud-scale deployments, an increased number of endpoints, and cloud services with wire-rate security and telemetry. The platforms are built on modern system architecture designed to provide high performance and meet the evolving needs of highly scalable data centers and growing enterprises.

## Quick Spec

Figure 1 shows the appearance.

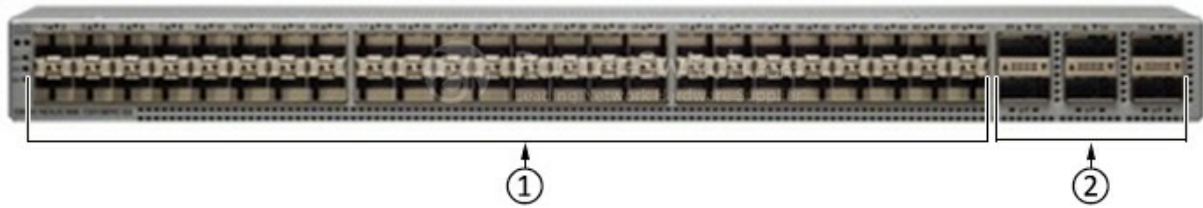


Table 1 shows the quick spec.

Part Number	N9K-C93180YC-EX
Ports	48 x 10/25-Gbps and 6 x 40/100-Gbps QSFP28 ports
Downlink supported speeds	1/10/25-Gbps speeds
CPU	4 cores
System memory	24 GB
SSD drive	64 GB
System buffer	40 MB
Management ports	2 ports: 1 RJ-45 and 1 SFP
USB ports	1
RS-232 serial ports	1
Power supplies (up to 2)	650W AC, 930W DC, or 1200W HVAC/HVDC
Typical power (AC/DC)	210W
Maximum power (AC/DC)	470W
Physical dimensions (H x W x D)	1.72 x 17.3 x 22.5 in. (4.4 x 43.9 x 57.1 cm)
Weight (without power supplies or fans)	17.2 lb (7.8 kg)

## Product Details


Figure 2 shows the front panel of N9K-C93180YC-EX.



Note:

(1)	48 x 10/25-Gigabit SFP+ ports to other devices
(2)	6 x 40/100-Gigabit QSFP28 optical ports for uplink connections to aggregation switches

Figure 3 shows the back panel of N9K-C93180YC-EX.

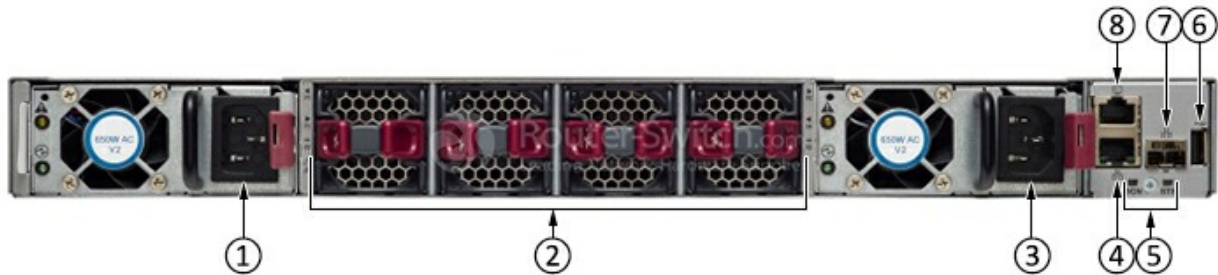

Note:

(1)	Power Supply	(5)	Chassis LEDs (Beacon [BCN] and Status [STS])
(2)	4 x Fan Module	(6)	USB port used for saving or copying functions
(3)	Power Supply	(7)	Out-of-band management port (SFP port)
(4)	Out-of-band management port (RJ-45 port)	(8)	Console port (RS232 port)

## Compare to Similar Item

Table 2 shows the comparison.

Part Number	N9K-C93180YC-EX	<a href="#">N9K-C93108TC-EX</a>
Ports	48 x 10/25-Gbps and 6 x 40/100-Gbps QSFP28 ports	48 x 10GBASE-T and 6 x 40/100-Gbps QSFP28 ports
Downlink supported speeds	1/10/25-Gbps speeds	100-Mbps and 1/10-Gbps speeds
CPU	4 cores	4 cores

System memory	24 GB	24 GB
SSD drive	64 GB	64 GB

## Get more information

Do you have any question about the N9K-C93180YC-EX?

Contact us now via [Live Chat](#) or [sales@router-switch.com](mailto:sales@router-switch.com).

## Specification

N9K-C93180YC-EX Specification	
Ports	48 x 10/25-Gbps and 6 x 40/100-Gbps QSFP28 ports
Downlink supported speeds	1/10/25-Gbps speeds
CPU	4 cores
System memory	24 GB
SSD drive	64 GB
System buffer	40 MB
Management ports	2 ports: 1 RJ-45 and 1 SFP
USB ports	1
RS-232 serial ports	1
Power supplies (up to 2)	650W AC, 930W DC, or 1200W HVAC/HVDC
Typical power (AC/DC)	210W
Maximum power (AC/DC)	470W
Input voltage (AC)	100 to 240V
Input voltage (high-voltage AC [HVAC])	200 to 277V
Input voltage (DC)	-48 to -60V
Input voltage (high-voltage DC [HVDC])	-240 to -380V
Frequency (AC)	50 to 60 Hz
Fans	4
Airflow	Port-side intake and exhaust
Physical dimensions (H x W x D)	1.72 x 17.3 x 22.5 in. (4.4 x 43.9 x 57.1 cm)
Acoustics	48.5 dBA at 40% fan speed, 64.9 dBA at 70% fan speed, and 77.8 dBA at 100% fan speed
RoHS compliance	Yes
MTBF	390,330 hours
Maximum number of Longest Prefix Match (LPM) routes	896,000

Maximum number of IP host entries	896,000
Maximum number of MAC address entries	256,000
Maximum number of multicast routes	32,000
Number of Interior Gateway Management Protocol (IGMP) snooping groups	Shipping: 8,000 Maximum: 32,000
Maximum number of Cisco Nexus 2000 Series Fabric Extenders per switch	16
Maximum number of Access Control List (ACL) entries	Per slice of the forwarding engine: 4000 ingress 2000 egress Total (2 forwarding slices): 8000 ingress 4000 egress
Maximum number of VLANs	3,967
Number of Virtual Routing and Forwarding (VRF) instances	Shipping: 1,000 Maximum: 16,000
Maximum number of ECMP paths	64
Maximum number of port channels	512
Maximum number of links in a port channel	32
Number of active SPAN sessions	4
Maximum number of VLAN's in Rapid per-VLAN Spanning Tree (RPVST) instances	3,967
Maximum number of Hot-Standby Router Protocol (HSRP) groups	490
Number of Network Address Translation (NAT) entries	1,023
Maximum number of Multiple Spanning Tree (MST) instances	64
Flow-table size used for Cisco Tetration Analytics platform	64,000
Operating temperature	32 to 104°F (0 to 40°C)
Nonoperating (storage) temperature	-40 to 158°F (-40 to 70°C)
Humidity	5 to 95% (noncondensing)
Altitude	0 to 13,123 ft (0 to 4000m)
Weight (without power supplies or fans)	17.2 lb (7.8 kg)

## Want to Buy

[Order Now](#)
[Get a Quote](#)

## Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold

18,000+

Customers Trusted

\$20,000,000

Inventory Available

50%-98%

Off Global List Price

100%

Safe Online Shopping

## Contact Us

---

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: [sales@router-switch.com](mailto:sales@router-switch.com)