

WS-C4500X-32SFP+ Datasheet

[Get a Quote](#)

Overview

WS-C4500X-32SFP+ is a Cisco Catalyst 4500-X Series Switch. It is a fixed aggregation switch that delivers best-in-class scalability, simplified network virtualization, and integrated network services for space-constrained environments in campus networks.

Quick Specs

Figure 1 shows the appearance of WS-C4500X-32SFP+.

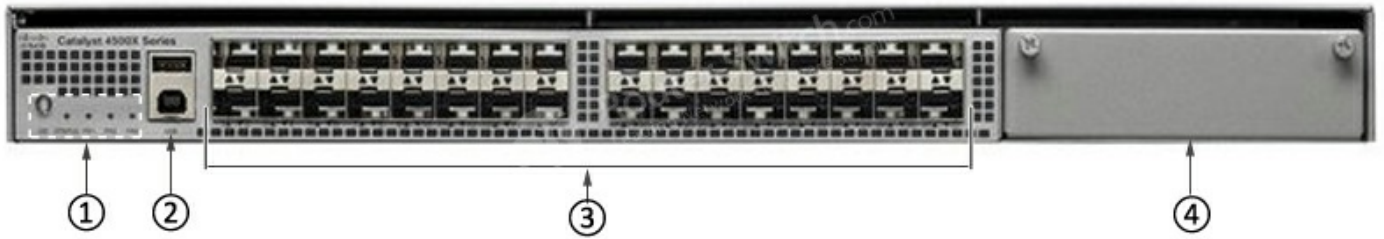


Table 1 shows the Quick Specs.

Product Code	WS-C4500X-32SFP+
Ports	32 × 1G or 10G Ethernet ports (requires either SFP or SFP+ transceivers)
Feature Set	IP Base
Uplink Module Slot	1 (8 × 10 GE SFP+/SFP - C4KX-NM-8SFP+)
Switching Capacity	Up to 800-Gbps
Onboard Memory (SRAM DDR-II)	4 GB
Port Buffers	32-MB Shared Memory
CPU	Dual Core 1.5 GHz
NVRAM	2 GB
Optional External Memory (SD Card)	2 GB
Airflow	Front-to-back cooling
Chassis dimensions (H x W x D)	4.4 x 43.8 x 53.3 cm
Package Weight	19.84 Kg

Product Details

Figure 2 shows the front panel of WS-C4500X-32SFP+.



Note:

(1) LEDs Area


(2) USB ports (2 ports) Top port is a Type A connector; bottom port is a Type B connector

(3) 32 × Ethernet ports

(4) 8-port uplink module slot (Purchased alone)

· There are five LEDs in the LEDs Area: UID LED, STATUS LED, PS1 LED, PS2 LED and FAN LED.

Figure 3 shows the back panel of WS-C4500X-32SFP+ with installed AC-input power supply. No power supply is included in this product. Need to order a power supply in addition.

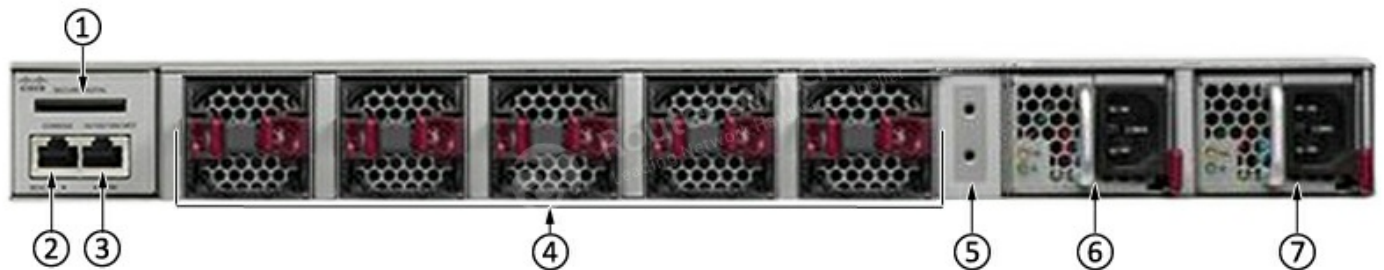

Note:

(1)SECURE DIGITAL port

(2)CONSOLE port

(3)10/100/1000 MGT port

(4)Fan assemblies (5 assemblies)

(5)Chassis ground pad

(6)Power supply bay (AC-input power supply shown installed)

(7)Power supply bay (AC-input power supply shown installed)

The Accessories

Table 2 shows the recommended elements for the WS-C4500X-32SFP+.

Category	Model	Description
Uplink Module	C4KX-NM-8SFP+	Cisco Catalyst 4500-X 8 Port 10GE Ethernet port uplink Module C4KX-NM-8SFP+

Power Supply	C4KX-PWR-750AC-R=	Catalyst 4500X 750W AC front to back cooling power supply
	C4KX-PWR-750AC-R/2	Catalyst 4500X 750W AC front to back cooling 2nd PWR supply
License	L-C4500X-IP-ES=	Cisco Catalyst 4500-X IP BASE to Enterprise Services upgrade license (electronic delivery) for 32-port and 40-port models
Console Cable	CAB-CONSOLE-RJ45	Console Cable 6ft with RJ45 and DB9F
1G SFP	GLC-SX-MMD	1000BASE-SX SFP transceiver module, MMF, 850nm, DOM
	GLC-LH-SMD	1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM
10G SFP	SFP-10G-SR	10GBASE-SR SFP Module
	SFP-10G-ZR	Cisco 10GBASE-ZR SFP10G Module for SMF

Get more information

Do you have any question about the WS-C4500X-32SFP+?

Contact us now via [Live Chat](#) or sales@router-switch.com.

Specification

WS-C4500X-32SFP+ Specification	
Expansion Module (Optional)	8x10 GE SFP+/SFP - C4KX-NM-8SFP+
Management Port	10/100/1000 Base-T
USB Port	Type A (storage and boot) up-to 4 GB
Dual Power Supply	Yes
Field Replaceable Fans	Yes (5 fans)
Fan Redundancy	No performance impact with single fan failure
System Throughput	Up to 800 Gbps
IPv4 Routing in Hardware	Up to 250 Mpps
IPv6 Routing in Hardware	Up to 125 Mpps
L2 Bridging in Hardware	Up to 250 Mpps
Media Access Control (MAC) Entries	55K
Forwarding Entries	32x10 GE Port Base SKU: IPv4: 256K, IPv6: 128K
Flexible Netflow Entries	128K
Switched Port Analyzer (SPAN), Remote Switched Port Analyzer (RSPAN)	8 line rate bidirectional sessions (ingress and egress)
Total VLANs	4094
Total Switched Virtual Interfaces (SVIs)	4094
IGMP groups	32K
Multicast routes	32x10 GE Port Base SKU: IPv4: 32K, IPv6: 32K

Dynamic Host Configuration Protocol (DHCP) Snooping Entries	12K (DHCP snooping bindings)
ARP Entries	47K
Spanning Tree Protocol Instances	10K
Jumbo Frame Support for Bridged and Routed Packets	Up to 9216 bytes
High Availability Solution	Virtual Switching System (VSS)
Number of stackable switches in VSS	Up to 2
VSS Throughput	Up to 1.6 Tbps
Virtual Switch Link	1GE or 10GE
Max number of Virtual Switch Links	8
In-Service Software Upgrade	Across the switches
Nonstop Forwarding with Stateful Switchover	Across the switches
Onboard Memory (SRAM DDR-II)	4 GB
Port Buffers	32-MB Shared Memory
CPU	Dual Core 1.5 GHz
NVRAM	2 GB
Optional External Memory (SD Card)	2 GB
Port Queues	8 Queues/Port
CPU Queues	64
QoS Entries	128K (64K ingress and 64K in egress) Shared with ACL
Aggregate Rate-Limiting	Ingress port or VLAN and egress VLAN or Layer 3 port
Rate-Limiting Level Types	Committed Information Rate (CIR), Peak Information Rate (PIR)
Aggregate Traffic Rate-Limiting Policers (1K=1024)	16K
Flow-Based Rate-Limiting Method; Number of Rates	Supported using flow-records in the classification criteria and policing action
QoS Policy Enforcement	Per Port or Per Vlan or Per Port, Per VLAN Granularity
Class of Service (CoS)	Yes
Differentiated Services Code Point (DSCP)	Yes
Port Security	Yes
IEEE 802.1x and 802.1x Extensions	Yes
VLAN, Router, and Port ACLs	Yes
Security ACL Entries (1K=1024)	128K (64K ingress and 64K in egress) Shared with QoS
Unicast Reverse Path Forwarding (uRPF) Check in Hardware	Yes
CPU Rate Limiters (DoS Protection) Includes Control Plane Policing	Yes
Private VLANs	Yes
Micro Flow Policer	Yes. Supported using flow records in the class-map

CPU HW Rate Limiters by Packet Per Second (pps) and Bit Rate Policers (bps)	Supported in hardware control-plane policing (CoPP)
Control Plane Policing (CoPP) for Multicast	Yes
ACL Labels	Yes

Download Resource

Selection Decision

 [Cisco's New Switch Selection Decision 2018](#)

Support and Resources

 [Cisco Catalyst 4500-x Series Fixed 10 Gigabit Ethernet Aggregation Switch Data Sheet](#)

Transition Guide

 [Migrating from Catalyst 3850, Catalyst 4500E/4500X, Catalyst 6800 to Catalyst 9000](#)

Want to Buy

[Order Now](#)

[Get a Quote](#)

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

Contact Us

- Tel: +1-626-239-8066 (USA) 852-30691898/ 852-30691868 (Hong Kong)
- Fax: 852-30691898 (Hong Kong)
- Email: sales@router-switch.com