

Product Highlights

Full Resolution Video

HDMI video up to 4K @ 30 Hz Ultra HD resolution for stunning videos and images with no lag

Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology allows you to transfer files up to 10 times faster than with USB 2.0

Dual-Slot SD Card Reader

Dual-slot SD card reader is compatible with both SD and microSD cards



DUB-M610

6-in-1 USB-C Hub with HDMI/Card Reader/Power Delivery

Features

High Fidelity Video Compatibility

- Ultra HD video resolution up to 4K @ 30 Hz
- Supports HDMI 1.4 and DisplayPort Alternate Mode over USB-C
- HDCP 2.2 compatible

SD Card Compatibility

- SD card & microSD card
- SD, SDHC, SDXC (UHS-I mode)

Versatile and Convenient

- Two USB 3.0 SuperSpeed 5 Gbps ports
- One USB 3.0 Type-C port with data sync and power delivery of up to 100 W (20 V @ 5 A)
- One USB 3.0 port supports Quick Charge BC1.2
- Simply plug-and-play, no software required

Intelligent Design

- Strong aluminum alloy casing
- Dark grey color matches aesthetically with many portable devices

The DUB-M610 6-in-1 USB-C Hub with HDMI/Card Reader/Power Delivery allows you to instantly add a second display, a SD card reader, and two additional USB 3.0 ports to your ultra-portable computer. Just plug the DUB-M610 into an available USB Type-C port and you're ready to send content to your TV or monitor in full resolution with the reliability of a wired video connection. You can also connect up to 2 more USB devices, as well as insert a microSD or regular SD card, giving you direct access to your full resolution photos stored on memory cards from your cameras. You can also sync and charge one USB Type-C device, meaning that you don't have to give up that USB Type-C port this hub is connected to.

Fully-Featured HDMI Video Connectivity

The DUB-M610 6-in-1 USB-C Hub with HDMI/Card Reader/Power Delivery plugs into any available USB Type-C or Thunderbolt 3 port on your computer and enables you to connect to a HDMI display with a resolution of up to 4K at 30 frames per second.

Easy to Use


The DUB-M610 connects to your computer's USB Type-C port and is ready to run as soon as it's plugged in. The plug-and-play design ensures that there is no need to change any configuration settings or install any additional software for your computer. For extra convenience, the adapter's compact design means that you can easily slip the DUB-M610 into your pocket or laptop bag and take it with you.

Dual-Slot Card Reader for SD and microSD Cards

The Dual-slot SD card reader is compatible with SD / MicroSD cards. Transfer images from your digital cameras fast with SDXC card readers supporting UHS-1 mode with a maximum speed of up to 100 Mbps. This makes the DUB-M610 A great companion for photographer or videographer on the go.

6-in-1 USB-C Hub with HDMI/Card Reader/Power Delivery

Hardware Overview

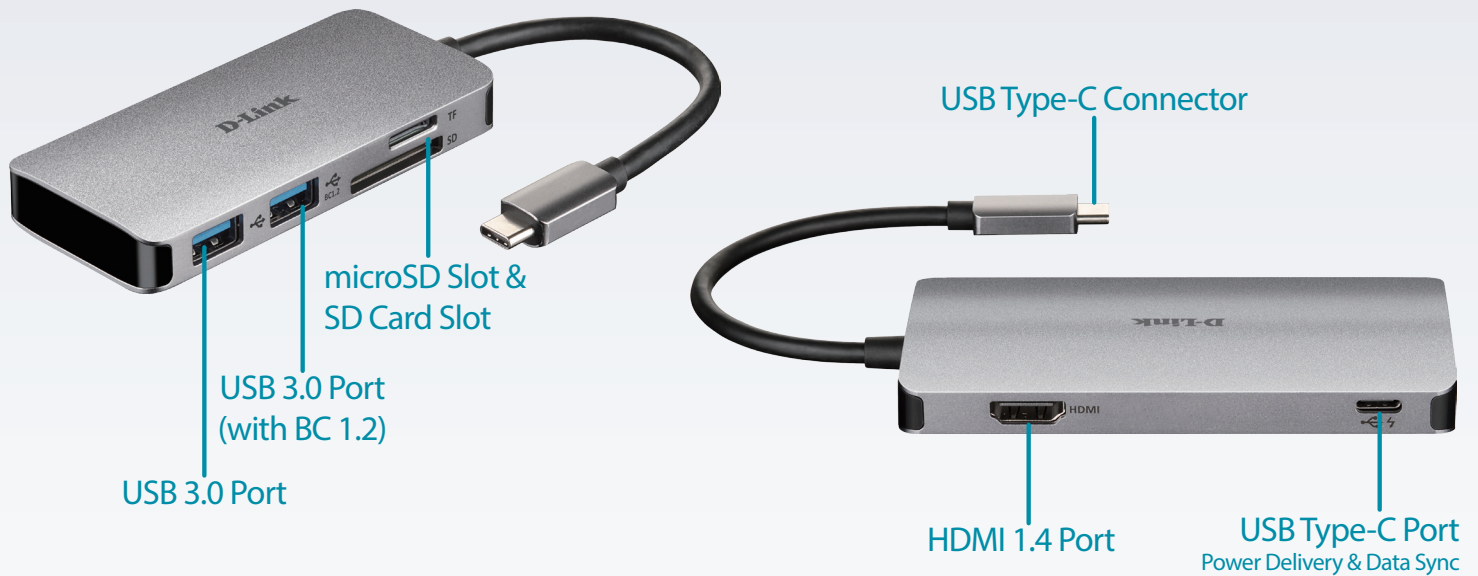

Technical Specifications

Connectivity

Device Interfaces	<ul style="list-style-type: none"> • HDMI Port (3840 x 2160 or 4096 x 2160 pixels @ 30 Hz) • MicroSD card slot • SD card slot 	<ul style="list-style-type: none"> • Two USB 3.0 Type-A ports (One port supports BC 1.2) • USB Type-C connector (Thunderbolt 3 compliant)
Standards	<ul style="list-style-type: none"> • USB Specification Version 3.0 • USB Specification Version 2.0 • USB Specification Version 1.1 • Quick Charge BC 1.2 	<ul style="list-style-type: none"> • SD, SDHC, SDXC (UHS-I mode) • HDMI 1.4 • HDCP 2.2 • DisplayPort Alternate Mode

General

Minimum System Requirements	<ul style="list-style-type: none"> • Computer running Microsoft Windows® OS, Mac OS®, or Chrome OS™ 	<ul style="list-style-type: none"> • A USB Type-C Port with DisplayPort Alternate Mode support
-----------------------------	--	---

Physical

Dimensions (W x H x D)	<ul style="list-style-type: none"> • 95 x 45 x 11 mm (3.74 x 1.77 x 0.35 in) 	<ul style="list-style-type: none"> • Cable length: 15 cm (5.91 in)
Weight	<ul style="list-style-type: none"> • 68.0 g (2.40 oz) 	
Power	<ul style="list-style-type: none"> • Input: Bus-powered 	<ul style="list-style-type: none"> • Consumption: 80 mA, 5 V DC
Temperature	<ul style="list-style-type: none"> • Operating: 0 to 45 °C (32 to 113 °F) 	<ul style="list-style-type: none"> • Storage: -10 to 70 °C (14 to 158 °F)
Humidity	<ul style="list-style-type: none"> • Operating: 10% to 85% RH, non-condensing 	<ul style="list-style-type: none"> • Storage: 5% to 90% RH, non-condensing
Certifications	<ul style="list-style-type: none"> • CE • IC 	<ul style="list-style-type: none"> • FCC • RCM

Order Information

Part Number	Description
DUB-M610	6-in-1 USB-C Hub with HDMI/Card Reader/Power Delivery

Updated July 29, 2019