


UHZ45

Bright 4K UHD laser projector for business and home







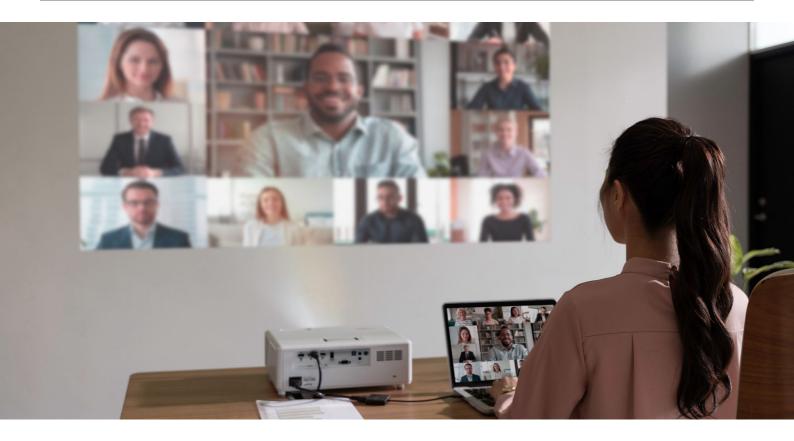

- True 4K UHD resolution and laser technology -HDR and HLG compatible
- Lights on viewing Bright 3800 lumens
- Optimised for fast-moving smooth action 16.7ms response time in 4K at 60Hz and 4ms in 1080P at 240Hz
- Flexible and easy setup Four corner correction and 1.1x zoom





Specifications

Display/image Display technology DIPTM

Resolution UHD (3840x2160) Brightness 3,800 lumens Contrast ratio 2,000,000:1 16:9 Native aspect ratio Aspect ratio - compatible 4:3 Keystone correction -+/-30° horizontal Keystone correction - vertical +/-30° Has vertical auto keystone Yes

correction

Displayable colours (millions) 1073.4

Horizontal scan rate 15.375 ~ 91.146 Khz Vertical scan rate 50 ~ 120HzHz 75%

Uniformity

0.84m ~ 7.62m (33" ~ 300") diagonal Screen size

Lamp info Light source type LASER life 30,000 hours

Optical 1.5:1 ~ 1.66:1 Throw ratio Projection distance (m) 1.2m - 9.9m Zoom 1.1

Manual Zoom type 15.84mm~17.44mm Focal length (mm) Lens shift Vertical: +/-0% Native offset 105%

Connectivity

Connections Inputs 3 x HDMI 2.0, 1 x USB-A

Outputs 1 x Audio 3.5mm, 1 x S/PDIF Control 1 x RS232, 1 x 12V trigger, 1 x 3D sync

General Noise level (typical) 27dB Noise level (max) 29dB

PC compatibility UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac 2D compatibility

NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p,

720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz)

3D compatibility TBC 3D 3D ready

Security bar, Kensington Lock, Password protected interface Security

25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, OSD / display languages Japanese, Norwegian, Polish, Portuguese, Romanian, Russian,

Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese

24/7 operation

Operating conditions 0°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80%

Remote control Backlit home remote Heat dissipation 785BTU/hour

Speaker count Watts per speaker 10W In the box

AC power cord Remote control 2x AAA batteries

Basic user manual Input lag 4.00ms

Optional wireless models UHDCast Pro, QuickCast Bundle, QuickCast starter kit

Power 100V ~ 240V, 50-60Hz Power supply

Power consumption (standby) <0.5W Power consumption (min) 175W Power consumption (max) 230W

Weight and dimensions

Dimensions (W x D x H) mm 337 x 265 x 119.3 Gross weight 6.5 kg Net weight 4.8 kg





