https://www.viewsonic.com/global/products/sheet/IFP6562

ViewBoard 6562


Key Features

- Superb 4K UHD display panel with UFT+ technology, and 20points multi-touch
- One-stop premium conference solution with compatible ViewSonic conference speakerphone and camera
- Comprehensive I/O ports, vCastSender, and myViewBoard display
- Built-in USB Type-C for simultaneous 65W fast charge and visual display
- Centralized IT management and content display by myViewBoard Manager



Product **Description**

ViewSonic ViewBoard 62 is an unparalleled large-format interactive display that propels collaborators to achieve effective and robust results. The bezel-less 4K UHD display panel is a gateway to a new visual quality and immersive meeting space. Indulge in the maximized precision of true-to-life handwriting strokes thanks to the UFT+ Technology, 20-points multi-touch with multi-grade pen pressure.Compatible with ViewSonic conference speakerphone (VB-AUD-201) and all-in-one video conference camera (VB-CAM-201) systems, The ViewBoard 62 boasts pristine audio and a pixel-perfect image, making it a powerful one-stop meeting station. Furthermore, it allows multiple connections, including comprehensive I/O ports, vCastSender, and myViewBoard Display, as well as built-in USB type-C ports supporting 65W fast charge and top-notch display at the same time.As an undoubted enhancement, the built-in myViewBoard Manager is an intuitive and effortless tool for IT and MIS systems that enables centralized IT control and multi-media presentation.

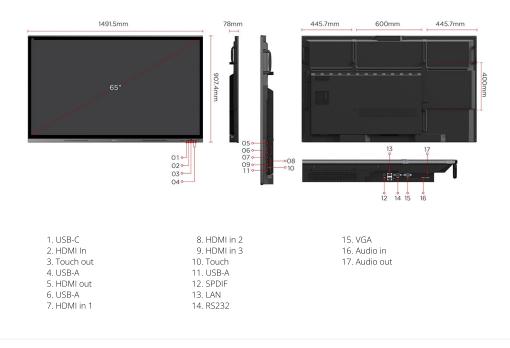



https://www.viewsonic.com/global/products/sheet/IFP6562

| 13:53 | https://www.vie | ewsonic.com/global/products/shee | t/IFP6562 |
|------------------------|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| DISPLAY | | SPEAKERS | |
| Panel Size: | 65" | 12W x 2 + 15W x 1 Subwoofer | |
| Panel Type: | TFT LCD Module with | EMBEDDED OS | |
| | DLED Backlight | Android | |
| Display Area (mm): | 1428.48 (H) x 803.52 (V) | BUNDLE SOFTWARE | |
| Aspect Ratio: | 16:9 | Basic Annotation Software: | myViewBoard WhiteBoard for Android |
| Resolution: | UHD 3840x2160(Pixels) | | myViewBoard |
| Colors: Brightness: | 1.07G (8bits + FRC) 350 nits (typ.) 300 nits (min.) | Pro Annotation Software: | WhiteBoard for Windows (Embedded in Windows Slot-in PC) |
| Contrast Ratio: | 1200:1 Typ. / 5000:1 Max.(DCR enable) | Wireless Presentation: | ViewBoard Cast & myViewBoard Display & |
| Response Time: | 6.5ms | | AirServer |
| Viewing Angles: | H = 178, V = 178 typ. | SPECIAL FEATURES | ED |
| Surface Treatment: | Hardness: 9H pencil | Simple LAN sharing between II and slot-in device: | rr Yes |
| | Top: 38 mm | POWER | |
| Bezel: | Bottom: 63.9 mm Left: 30.5 mm Right:30.5 mm | Voltage: | 100-240VAC +/- 10% Wide Range |
| PLATFORM | | Consumption: | 115W(Energy Star) / 390W(Max.) Off: <0.5W |
| Processor: | Dual core A73+Dual core A53 | OPERATING CONDITIONS | |
| RAM: | 3GB DDR4 | Temperature (° C): | 0°C to 40°C |
| Storage: | 32GB eMMC | Humidity: | 20% ~ 80% RH non- |
| тоисн | | DIMENSIONS (W X H X D) | condensing |
| | Ultra Fine Touch Plus | | 58.7 x 35.7 x 3.1 in / |
| Type/ Tech: | Technology(Projected Capacitive) | Physical (inch / mm): | 1492 x 907 x 78 mm |
| Touch Resolution: | 32767 x 32767 | Packaging (inch / mm): | 63.3 x 39.8 x 8.5 in / 1607 x 1010 x 215 mm |
| Touch Point: | 20 | WEIGHT | |
| INPUT | | Net (lb / kg): | 82.45 lb / 37.4 kg |
| HDMI: | x4 | Gross (lb / kg): | 107.8 lb / 48.9 kg |
| RGB / VGA: | x1 | REGULATIONS | |
| Audio: | 1x PC-Audio IN | cTUVus, FCC/ICES003, Energy star 8.0, EPEAT, Mexico NOM, Mexico Energy, EMC/CE, CB/LVD, GOST-R / EAC, UkrSEPRO, UKCA, LBL, Green BOM, RoHS, ErP, REACH, SCIP, WEEE, TPCH, CA65, PAIA | |
| MIC(Microphone): | Full band 6-element MEMS microphone array | | |
| RS232: | x1 | PACKAGE CONTENTS | |
| OPS: | x1 | Power cable Remote control AAA battery X2 USB cable Type C Passive stylus x 2 Quick Start Guide Compliance statement RS232 adapter Plate Clamp x 5 Screw x 8 HDMI cable | |
| WiFi: | x1 | | |
| OUTPUT | | | |
| HDMI: | x1 | | |
| Audio: | x1 | | |
| SPDIF: | x1 | | |
| LAN | | | |
| RJ45: | x2 | 13. Touch USB cable | |
| USB | | COMPATIBLE SLOT-IN PC | |
| Туре А: | x6 | VPC12-WPO, VPC2C-O, VPC25-O, VPC27-O series | |
| Туре В: | x2 | | |
| Туре С: | x1 | | |
| •• | | | |

Copyright © ViewSonic Corporation 2000-2022. All rights reserved.