



FEATURES

- All carabiners are proof-loaded 100% at 3,600 lbs. (16 kN)
- All carabiners meet ANSI Z359.12-2009 and CSA Z259.12-11


PM11Z	Designated in Tractel® codes by the letters C1
DESCRIPTION	¾ in. (10 mm) oval autolocking carabiner
GATE OPENING	¾ in. (16 mm)
MATERIAL	Alloy steel
MINIMUM TENSILE STRENGTH	5,000 lbs. (22.2 kN)
GATE STRENGTH	3,600 lbs. (16 kN)
LENGTH	4¼ in. (106 mm)
WIDTH	2¾ in. (59 mm)
WEIGHT	0.47 lbs. (215 g)
STANDARDS	ANSI/ASSE Z359.12-2009 ANSI/ASSE A10.32-2012 CSA Z259.12-11




P2854Z	Carabiner
DESCRIPTION	Carabiner
GATE OPENING	1 ⁵ / ₁₆ in. (24 mm)
MATERIAL	Anodized aluminum
MINIMUM TENSILE STRENGTH	5,620 lbs. (25 kN)
GATE STRENGTH	Side and face: 3,600 lbs. (16 kN)
LENGTH	4 ¹³ / ₁₆ in. (122 mm)
WIDTH	3 ³ / ₈ in. (85 mm)
WEIGHT	0.21 lb. (93 g)
STANDARDS	ANSI Z359.12-2009 ANSI A10.32-2012 CSA Z259.12-11




P202Z	Designated in Tractel® codes by the letters T1
DESCRIPTION	½ in. (12 mm) offset-D autolocking carabiner with captive pin
GATE OPENING	1 in. (26 mm)
MATERIAL	Alloy steel
MINIMUM TENSILE STRENGTH	10,000 lbs. (45 kN)
GATE STRENGTH	3,600 lbs. (16 kN)
LENGTH	5 in. (126 mm)
WIDTH	3 ¹ / ₁₆ in. (78 mm)
WEIGHT	0.56 lbs. (255 g)
STANDARDS	ANSI/ASSE Z359.12-2009 ANSI/ASSE A10.32-2012 CSA Z259.12-11




P307Z	Designated in Tractel [®] codes by the letter T
DESCRIPTION	½ in. (12 mm) offset-D fireman's carabiner with captive pin
GATE OPENING	2 in. (50 mm)
MATERIAL	Carbon, zinc-plated steel
MINIMUM TENSILE STRENGTH	9,000 lbs. (40 kN)
GATE STRENGTH	3,600 lbs. (16 kN)
LENGTH	6¾ in. (170 mm)
WIDTH	3⅞ in. (97 mm)
WEIGHT	0.96 lbs. (435 g)
STANDARDS	ANSI/ASSE Z359.12-2009 ANSI/ASSE A10.32-2012 CSA Z259.12-11

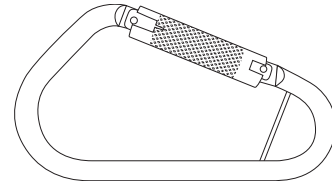

P2868Z	Designated in Tractel [®] codes by the letters C6
DESCRIPTION	¾ in. (16 mm) aluminum autolocking carabiner with captive pin
GATE OPENING	2 in. (51 mm)
MATERIAL	Anodized aluminum
MINIMUM TENSILE STRENGTH	5,620 lbs. (25 kN)
GATE STRENGTH	3,600 lbs. (16 kN)
LENGTH	9⅞ in. (237 mm)
WIDTH	5⅞ in. (132 mm)
WEIGHT	0.99 lbs. (450 g)
STANDARDS	ANSI/ASSE Z359.12-2009 ANSI/ASSE A10.32-2012 CSA Z259.12-11

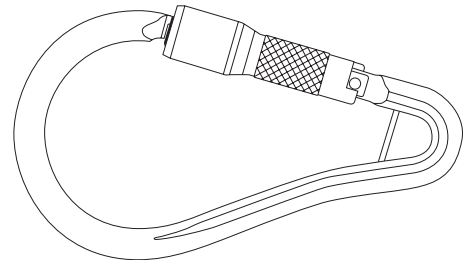

P407Z	Designated in Tractel [®] codes by the letters TT
DESCRIPTION	½ in. (14 mm) autolocking carabiner with captive pin
GATE OPENING	2 in. (53 mm)
MATERIAL	Zinc-plated steel
MIN. TENSILE STRENGTH	7,200 lbs. (32 kN)
GATE STRENGTH	3,600 lbs. (16 kN)
LENGTH	8½ in. (215 mm)
WIDTH	5⅞ in. (129 mm)
WEIGHT	1.77 lbs. (805 g)
STANDARDS	ANSI/ASSE Z359.12-2009 ANSI/ASSE A10.32-2012 CSA Z259.12-11

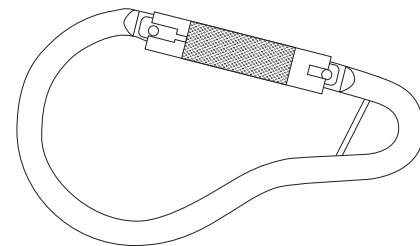

Specifications are subject to change without notice. Images are for illustrative purposes only.