

# CUTTERS & CUTTER WHEELS

SECTION

1

Cutter Wheels

Quick Release™ Tubing Cutters

Tubing Cutters

Tubing Cutters for Stainless Steel

Telescoping Tubing Cutters

Mini Tubing Cutters

C Cutters

Repair Kits

2" Pipe Cutters

Deburring Tools

Soil Pipe Cutters

Saw It® Pneumatic Saw

Power Hack Saw Blades

Universal Pipe Cutters

Filter-Regulator-Lubricator

Hinged Cutters™

Hinged Cutters™ with Helper Handle **NEW**

Low Clearance Rotary™ Cutters **NEW**

Rotary™ Cutters

Pipe Descalers

Pipe Reamer

**Hinged Cutters™ are a Reed invention and remain an excellent tool for manual cuts on steel, stainless steel, ductile and cast iron. Handle swing is 90° to 110° with just 4 inch clearance on the back side of the pipe.**



PIPE TOOLS & VISES  
SINCE 1896

## QUICK RELEASE™ TUBING CUTTERS

### FEATURES

- Quick Release™ is a **Reed invention** and still the industry standard.
- Features include quick release, quick advance and manual advance, along with the **ball detent wheel pin**.
- **Built-in reamer** and spare cutter wheel in the knob on TC1Q, TC1.6Q and TC2Q.
- Simple cutter wheel change permits use on a wide variety of pipe/tubing types.

Quick Release™ Tubing Cutters are the best tracking, easiest cutting tubing cutters available. Cut copper, aluminum, light wall steel and stainless steel tubing. With alternate wheels they will cut a wide variety of plastic pipe and tubing. Reed also offers the R2558 wheel for muffler systems tubing. **TC1Q, TC1.6Q and TC2Q** sliding bars are die-cast zinc aluminum for great strength. These three sizes also feature a built-in reamer and spare cutter wheel in the knob. Long-proven **TC3Q** and larger models with steel sliding bars withstand professional workloads over the long haul.

| Catalog No. | Item Code | O.D. Capacity  |                | Length |     | Weight |     | Wheel |
|-------------|-----------|----------------|----------------|--------|-----|--------|-----|-------|
|             |           | actual O.D. in | actual O.D. mm | in     | mm  | lbs    | kg  |       |
| TC1Q*       | 03410     | 1/8 - 1 5/16   | 3 - 33         | 6      | 152 | 0.6    | 0.3 | 0     |
| TC1.6Q*     | 03416     | 1/4 - 1 5/8    | 6 - 42         | 6.5    | 165 | 0.8    | 0.4 | 0     |
| TC2Q*       | 03420     | 1/4 - 2 5/8    | 6 - 63         | 8      | 203 | 1.2    | 0.5 | 0     |
| TC3Q        | 03430     | 3/8 - 3 1/2    | 10 - 90        | 11     | 279 | 2.5    | 1.1 | 30-40 |
| TC3Q2558    | 03439     | 3/8 - 3 1/2    | 10 - 90        | 11     | 279 | 2.5    | 1.1 | R2558 |
| TC4Q        | 03440     | 1 7/8 - 4 1/2  | 48 - 114       | 12     | 305 | 2.8    | 1.3 | 30-40 |
| TC5Q2558    | 03459     | 2 1/2 - 5      | 63 - 125       | 13     | 330 | 3.0    | 1.4 | R2558 |
| TC6Q        | 03460     | 4 - 6 5/8      | 102 - 168      | 15     | 381 | 3.9    | 1.8 | 30-40 |
| TC6Q2558    | 03469     | 4 - 6 5/8      | 102 - 168      | 15     | 381 | 3.9    | 1.8 | R2558 |
| TC8Q        | 04158     | 6 1/4 - 10     | 159 - 254      | 26     | 660 | 8.0    | 3.6 | 30-40 |

\*Spare "O" Cutter Wheel in knob.

CUTTER WHEELS ON P. 7 - 9

QUICK RELEASE™ CUTTERS FOR PLASTIC ON P. 25



### WHY REED?

Quick Release™ cutter is a Reed invention and still the industry standard! First used by Reed, the ball detent wheel pin makes cutter wheel change easy. No other cutter on the market tracks or cuts as fast.

## TUBING CUTTERS

### FEATURES

- **Large, ergonomic grip knob** for hand comfort during use.
- **Internal reamer** in T10 and T15 grip knob for operator convenience.
- For lighter weight, T20 features aluminum construction.


Tubing cutters are a simple, durable design. Each has a screw feed with a large grip knob to make it easier to tighten the cutter. **T10** and **T15** are zinc alloy construction with a built-in reamer for convenient cutting then deburring. **T20** is larger but light due to its aluminum construction. It features a fold-out reamer. Wide rollers on all three models yield a square cut while thin cutter wheel profile ensures a quick, clean cut.

| Catalog No. | Item Code | O.D. Capacity  |                | Weight |     | Cutter Wheel** |     |          |
|-------------|-----------|----------------|----------------|--------|-----|----------------|-----|----------|
|             |           | actual O.D. in | actual O.D. mm | lbs    | kg  | Copper         | PE  | PVC      |
| T10         | 03483     | 1/8 - 1        | 3 - 25         | 0.9    | 0.4 | 0              | OP2 | 1 - 2PVC |
| T15         | 03485     | 3/16 - 1 1/4   | 4 - 32         | 1.3    | 0.6 | 0              | OP2 | 1 - 2PVC |
| T20*        | 03487     | 5/8 - 2 1/8    | 15 - 54        | 1.5    | 0.7 | 0              | OP2 | 1 - 2PVC |

\*\*Ships with wheel for copper. To cut PE or PVC pipe, order recommended cutter wheel separately.

\*AWWA Approved for Tapping Contest.

CUTTER WHEELS ON P. 7 - 9

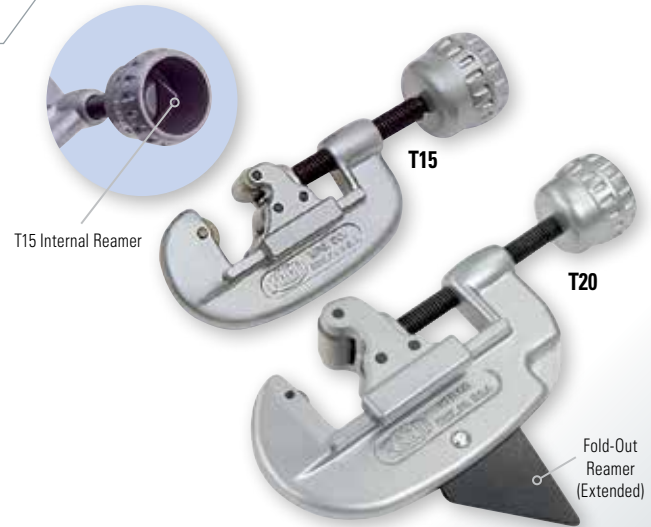

## TUBING CUTTERS FOR STAINLESS STEEL

### FEATURES


- **Specialized** steel cutter wheels are **designed** for toughness and heat dissipation.
- **Ergonomic** grip knob on T10SS, T15SS and T20SS cutters.
- Telescoping TC11SS is a great choice for **tight spaces**.

Reed "SS" tubing cutters are equipped with special cutter wheels for stainless steel to yield optimal cutting and long service life. **T10SS, T15SS and T20SS** feature a large knob for firm grip and easy turning and tightening. The T10SS and T15SS have a reamer built into the grip knob while the **TC11SS** and the T20SS include a fold-out reamer.

| Catalog No. | Item Code | O.D. Capacity  |                | Cutter Wheel | Weight |     |
|-------------|-----------|----------------|----------------|--------------|--------|-----|
|             |           | actual O.D. in | actual O.D. mm |              | lbs    | kg  |
| T10SS       | 03476     | 1/8 - 1        | 3 - 25         | OSS          | 0.9    | 0.4 |
| T15SS       | 03477     | 3/16 - 1 1/4   | 4 - 32         | OSS          | 1.4    | 0.6 |
| T20SS       | 03479     | 5/8 - 2 1/8    | 15 - 54        | OSS          | 1.5    | 0.7 |
| TC11SS*     | 03481     | 1/8 - 1 1/8    | 3 - 28         | 75046*       | 0.7    | 0.3 |

\*Includes spare cutter wheel.

CUTTER WHEELS ON P. 7 - 9

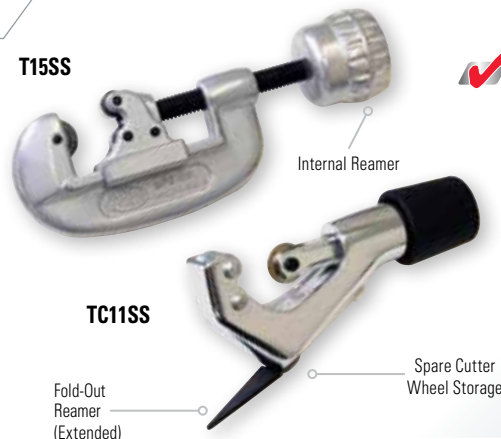

### WHY REED?

Only Reed offers such a wide variety of professional-quality cutters with wheels for stainless installed. No more extra cost and hassle of early replacement of the first wheel!

## TELESCOPING TUBING CUTTERS

### FEATURES

- Great choice for **tight spaces**, where more than a mini cutter is needed.
- Grooved roller permits close-to-flare cuts.
- **Easily cut** copper, brass, aluminum or steel tubing.

Telescoping Tubing Cutters are a good choice for tight spaces as their feed screw telescopes to advance the cutter wheel to the pipe. This means the cutters remain a consistent size throughout the cut and do not require extra space. **TC11** with strong, aluminum alloy body and nickel-chrome finish, makes a clean, square cut. Cutter has telescoping feed screw, fold-out reamer, grooved rollers and a spare cutting wheel. **TC14** and **TC166** telescoping tubing cutters move smoothly and offer a pencil reamer. TC14 features a spare cutter wheel.

| Catalog No. | Item Code | O.D. Capacity  |                | Weight |     | Cutter Wheel** | Heavy-Duty Wheel |
|-------------|-----------|----------------|----------------|--------|-----|----------------|------------------|
|             |           | actual O.D. in | actual O.D. mm | lbs    | kg  |                |                  |
| TC11        | 03480     | 1/8 - 1 1/8    | 3 - 28         | 0.7    | 0.3 | 75015          | 75046            |
| TC14*       | 03475     | 1/4 - 1 3/8    | 6 - 35         | 1.1    | 0.5 | 73505          | 73515            |
| TC166*      | 03465     | 1/4 - 1 5/8    | 6 - 42         | 1.2    | 0.5 | 73505          | 73515            |

\*Reamer replacement blade #94437 (10 pk) or #03473 (single).

\*\*Ships with regular wheel. Order heavy-duty wheels separately.

CUTTER WHEELS ON P. 7 - 9

## MINI TUBING CUTTERS

### FEATURES

- For use in **extremely tight places** due to minimal swing needed.
- Smooth, rounded body contour for **comfortable grip**.

Mini cutters can be used on copper, steel, stainless steel and aluminum tubing in confined spaces. **MC2**, **MC2GRIP** and **MC3** have zinc die castings for long service life and are painted with durable silver epoxy for corrosion protection. Large high-torque knobs on the MC2GRIP and MC3 provide easy feeding. **MC1** needs only 1 1/4" radial clearance, features smallest cutting diameter in the industry and uses a fine screw thread for easy tightening.

| Catalog No. | Item Code | O.D. Capacity  |                | Weight |     | Cutter Wheel | Cutter Swing Inches |
|-------------|-----------|----------------|----------------|--------|-----|--------------|---------------------|
|             |           | actual O.D. in | actual O.D. mm | lbs    | kg  |              |                     |
| MC1         | 03470     | 1/8 - 5/8      | 3 - 15         | 0.2    | 0.1 | 32633        | 1 1/4               |
| MC2         | 03490     | 1/8 - 15/16    | 3 - 24         | 0.3    | 0.1 | 345T         | 1 11/16             |
| MC2GRIP     | 03493     | 1/8 - 15/16    | 3 - 24         | 0.4    | 0.2 | 345T         | 1 11/16             |
| MC3         | 03495     | 1/8 - 1 1/8    | 3 - 28         | 0.4    | 0.2 | 73505        | 1 7/8               |

CUTTER WHEELS ON P. 7 - 9

## C CUTTERS

### FEATURES

- Compact c-shape means **no handle swing** space is required.
- The **spring-loaded cutter** self-feeds on copper and CTS CPVC.

Everyone needs a handy cutter (or two) like Reed's C Cutter. This easy-to-grip cutter easily snaps on to copper tubing for a quick, clean cut. Just turn the cutter in the direction of the arrow and the cut will be complete in seconds. Consistent pressure is maintained as the tool is turned around the tubing. Each cutter fits just one popular size of copper tubing.

| Catalog No. | Item Code | Pipe Diameter |                | Weight |     | Application               |
|-------------|-----------|---------------|----------------|--------|-----|---------------------------|
|             |           | in-nom.       | actual O.D. mm | lbs    | kg  |                           |
| TC50SLR*    | 03404     | 1/2           | 15.9           | 0.5    | 0.2 | Copper K, L & M; CTS CPVC |
| TC50SL      | 03405     | 1/2           | 15.9           | 0.5    | 0.2 | Copper L & M; CTS CPVC    |
| TC75SLR*    | 03406     | 3/4           | 22.2           | 0.5    | 0.2 | Copper K, L & M; CTS CPVC |
| TC75SL      | 03407     | 3/4           | 22.2           | 0.5    | 0.2 | Copper L & M; CTS CPVC    |
| TC1SLR*     | 03408     | 1             | 28.6           | 0.6    | 0.3 | Copper K, L & M; CTS CPVC |
| TC1SL       | 03409     | 1             | 28.6           | 0.6    | 0.3 | Copper L & M; CTS CPVC    |

\*EXCLUSIVE FEATURE

NOTE: SLRCW is the only replacement cutter wheel for C Cutters. Installed in the SLR models and suited for all C Cutters, it is Reed cutter wheel quality for Copper K, L & M and CTS CPVC.



### WHY REED?

MC2 is heavy-duty – the strongest mini cutter available. MC2GRIP includes a larger, high-torque feed. Larger, deeply knurled knob allows easier tightening.





PIPE TOOLS & VISES  
SINCE 1896

## REPAIR KITS

### FEATURES

- Great choice for distributor repair counters or contractor maintenance departments.

Simple field repairs can be handled with **1-2 PARTS** and **3-4-6 PARTS** kits which are plastic bags containing the most popular parts for Quick Release™ Cutters. Common spare parts for T10, T15 and T20 cutters are contained in **T10-T15-T20 PARTS** kit. **RPR KIT** in sectioned toolbox includes a wide variety of Quick Release™ and other tubing cutter parts, along with blades for shears for plastic.

| Catalog No.       | Item Code | Weight  |     |
|-------------------|-----------|---------|-----|
|                   |           | lbs     | kg  |
| 1-2 PARTS         | 03009     | 2.2 oz  | 0.1 |
| 3-4-6 PARTS       | 03010     | 3.3 oz  | 0.1 |
| RPR KIT           | 03011     | 5.5 lbs | 2.5 |
| T10-T15-T20 PARTS | 03014     | 3.0 oz  | 0.1 |



## 2" PIPE CUTTERS

### FEATURES

- **Short handle** allows for work in close quarters.
- The wide rollers help **create square cuts**.
- **Clean, easy cuts** on steel, stainless steel or cast iron pipe.
- Leaves **no burr**, which is great for threading jobs.

Reed offers a variety of pipe cutters, both with and without guides. Standard cutters without guides feature strong malleable iron frames. These cutters work on steel, stainless steel or cast iron pipe, depending on the installed cutter wheels. The thin profile, sharp cutter wheels allow shorter handles for work in smaller spaces. The **2-3** pipe cutter with three wheels (and no rollers) means more cutting surface and less handle swing. Exclusive guide bars on **2-4WG** are the best way to get a square cut on pipe since the bars hold the cutter square to the pipe during the cutting process. Guide bars also help secure the cutter to smooth stainless steel and corroded pipe.

| Catalog No. | Item Code | Pipe Capacity |         | Style               | Length |     | Weight |     | Cutter Wheel* |
|-------------|-----------|---------------|---------|---------------------|--------|-----|--------|-----|---------------|
|             |           | in-nom.       | O.D. mm |                     | in     | mm  | lbs    | kg  |               |
| 2-3         | 03305     | 1/8 - 2       | 10 - 63 | 3 Wheel             | 15.8   | 400 | 6.8    | 3.1 | 2RBS          |
| 2-1         | 03320     | 1/8 - 2       | 10 - 63 | 1 Wheel             | 15.8   | 400 | 6.9    | 3.1 | 2RBS          |
| 2-4         | 03335     | 1/2 - 2       | 21 - 63 | 4 Wheel             | 14.3   | 362 | 6.8    | 3.1 | 2RBS          |
| 2-4WG*      | 03338     | 1/2 - 2       | 21 - 63 | 4 Wheel with Guides | 14.3   | 362 | 7.2    | 3.3 | 2RBS          |

### \*EXCLUSIVE

\*2RBC1 wheels available for cast iron. 2RBHD heavy-duty wheels available for steel and stainless steel. CUTTER WHEELS ON P. 7 - 9

Replacement Wheel Pins available for RIDGID® cutters: 1-A, 2-A, 42-A, 202, 2000A. Order Reed pin R34780 #93320 5/pk. to replace RIDGID® pin No. 34780 (Old #F-9).

NOTE: To cut easy and fast, Pipe Cutters use Reed's thin profile, high quality tool steel cutter wheels.

### ✓ WHY REED?

Guide bars on 2-4WG are exclusive to Reed and the best way to get a square cut on stainless steel and corroded pipe. The guides make the cutter more stable on the pipe, thus reducing motion wear on the wheels.



EXCLUSIVE FEATURE

### ✓ WHY REED?

With rollers on the side away from the operator and the cutter wheel closer, Reed Pipe Cutters are easy to line up with the cut-off mark. Wheel change is quick as the ring on the top of the wheel pin makes it convenient to find and center the pin through the second hole.

## DEBURRING TOOLS

### FEATURES

- Long-lasting, hardened tool steel deburring blade.

Eliminate internal burrs in copper, steel and aluminum tubing. **DEBO** has an aluminum handle and handy pocket slip. **DEB3** has a plastic body and two spare blades store in its handle, giving this tool extra value. Both have unlimited pipe capacity.

| Catalog No. | Item Code | Pipe Capacity | Weight |      |
|-------------|-----------|---------------|--------|------|
|             |           |               | lbs    | kg   |
| DEBO        | 04434     | unlimited     | 0.05   | 0.02 |
| DEB3*       | 04437     | unlimited     | 0.1    | 0.05 |

\*Reamer replacement blade #94437 (10 pk) or #03473 (single).

DEBURRING TOOLS FOR PLASTIC ON P. 29





## SOIL PIPE CUTTERS

### FEATURES

- Great for gray water applications.
- Reed **innovations** have improved upon the original cutter.
- Soil Pipe Cutters apply chain pressure to snap the pipe.
- **Captured screw** in SC49 assures proper alignment.

The fastest way to cut cast iron soil pipe, clay pipe and small diameter concrete pipe is with a chain pipe cutter. Reed's design provides stronger jaws and more durable adjusting screws compared to the competition. Some parts are even interchangeable.† Reed soil pipe cutters are available in a single stroke **SC59** model and a ratcheting **SC49** model for close quarter work. Multiple use 1/2" male ratchet wrench ships with SC49 models. No-Hub® Roller Kit is standard on all models.

For cutting ductile iron pipe, Reed recommends **HINGED CUTTERS™ ON P. 18** and **LOW CLEARANCE ROTARY™ CUTTERS ON P. 19**.

### RATCHET

| Catalog No. | Item Code | Pipe Capacity** |                | Length |     | Weight |      |
|-------------|-----------|-----------------|----------------|--------|-----|--------|------|
|             |           | in-nom.         | actual O.D. mm | in     | mm  | lbs    | kg   |
| SC49-6*     | 08049     | 1 1/2 - 6       | 160            | 26     | 660 | 17.6   | 8.0  |
| SC49-8*     | 08050     | 1 1/2 - 8       | 212            | 26     | 660 | 19.4   | 8.8  |
| SC49-10*    | 08051     | 1 1/2 - 10      | 268            | 26     | 660 | 21.2   | 9.6  |
| SC49-12*    | 08052     | 1 1/2 - 12      | 317            | 26     | 660 | 23.0   | 10.5 |
| SC49-15*    | 08053     | 1 1/2 - 15      | 403            | 26     | 660 | 24.8   | 11.3 |

### SINGLE STROKE

|         |       |            |     |    |       |      |      |
|---------|-------|------------|-----|----|-------|------|------|
| SC59-6  | 08059 | 1 1/2 - 6  | 160 | 43 | 1,092 | 23.8 | 10.8 |
| SC59-8  | 08060 | 1 1/2 - 8  | 212 | 43 | 1,092 | 25.6 | 11.6 |
| SC59-10 | 08061 | 1 1/2 - 10 | 268 | 43 | 1,092 | 27.4 | 12.5 |
| SC59-12 | 08062 | 1 1/2 - 12 | 317 | 43 | 1,092 | 29.2 | 13.3 |
| SC59-15 | 08063 | 1 1/2 - 15 | 403 | 43 | 1,092 | 31.0 | 14.1 |

\*Male Ratchet Wrench (#40208) **included** with all SC49 cutters.

#### \*\*Maximum Pipe Capacities (determined by maximum pressure applied):

- Extra heavy cast iron soil pipe ..... 2-4" (62-125 mm)
- Service weight cast iron soil pipe ..... 2-8" (62-212 mm)
- Concrete pipe ..... 4-6" (125-160 mm)
- No-Hub® cast iron soil pipe ..... 1 1/2"-8" (38-212 mm)
- Clay pipe ..... 2-15" (62-403 mm)

Extension chains available to increase capacity of smaller cutters.


† NOTE: Jaw sets and cutter chains are interchangeable with Wheeler-Rex® models. Pressure Screw Assembly available offering heavy-duty replacement parts for current and prior Reed models, along with Wheeler-Rex® 490. Order #98046 for Reed SC49 models and Wheeler-Rex® 490 series; use #98047 for Reed SC59 models.

### ACCESSORIES

| Catalog No. | Item Code | Description   |
|-------------|-----------|---|
| SCEXT       | 40336     | 10" Chain Extension with 8 Pitches at 1.25" per Pitch |
| TW516       | 02298     | 5/16" Torque Wrench                                   |
| TW38        | 02300     | 3/8" Torque Wrench                                    |

### ✓ WHY REED?

First introduced by Reed, the captured screw makes the SC49 close-quarter soil pipe cutters both easy to use and less costly. The screw does not have to be manipulated into place which reduces screw and cutter breakage.

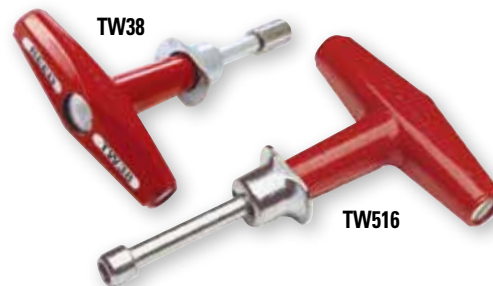

TORQUE WRENCHES are featured in full ON P. 71  
SCFR WRENCH ON P. 73





PIPE TOOLS & VISES  
SINCE 1896

## SAW IT® PNEUMATIC SAW

### FEATURES

- Saw It® pneumatic saw is a good choice for plastic and steel cuts and a great cutting tool for **hard-to-reach places**.
- **Immediate shut down** when throttle is released.
- Saw It Vise and Saw It Blade Guides should be added for **extra stability**.

Saw It is a pneumatic powered reciprocating saw. Used with Power Hack Saw Blades (sold separately), Saw It cuts steel, stainless steel, PVC (including C900), PE and PP. As a safety feature, a trigger lock prevents accidental "on" if the trigger is bumped or pressed unintentionally. Saw It needs 6" clearance beyond the pipe to accommodate blade movement. The Saw It must have a means to hold it in place and the recommended **Saw It Vise** (sold separately) provides stability and safety for the cut. Optional **Blade Guides** provide directional guidance for the saw and greatly reduce blade wobble.

Maximum capacity is blade and blade guide dependent. Saw It cuts up to 24" diameter pipe when used with the Saw It Vise and a 12" chain extension. Saw It cuts up to 20" (500 mm) diameter pipe when used with recommended SAWITBG30 blade guide. Pneumatic saws are less likely to ignite materials than gas-powered saws and even some electrical-powered saws. However, the Saw It is **not recommended** for gas lines.

Saw It Vise fits 4" - 12" diameter pipe. When a 6" or 12" chain extension is added, the vise capacity increases to 18" or 24" respectively.

| Catalog No. | Item Code | Description                        | Capacity       |                | Maximum Power      | Air Consumption                             | Weight |     |
|-------------|-----------|------------------------------------|----------------|----------------|--------------------|---|--------|-----|
|             |           |                                    | in-nom.        | mm-nom.        |                    |   | lbs    | kg  |
| SAWITSD     | 07615     | Saw It® with Safety Deadman Switch | up to 24" max. | up to 610 max. | 1.5 HP, 1100 watts | 50 cfm @ 90 psi<br>1.4 cu. m/min. @ 6.2 BAR | 19.1   | 8.7 |

**NOTE: Always use a filter-regulator-lubricator (FRL) with Reed pneumatic tools. Reed offers FRL #97591. FILTER-REGULATOR-LUBRICATOR ON P. 17. POWER HACK SAW BLADES sold separately.**

### ACCESSORIES

#### SAW IT® BLADE GUIDES

| Catalog No. | Item Code | Fits            | Capacity       |
|-------------|-----------|-----------------|----------------|
| SAWITBG21   | 04602     | 21" Long Blades | Up to 12" Pipe |
| SAWITBG30   | 04603     | 30" Long Blades | Up to 20" Pipe |

#### SAW IT® VISE

| Catalog No. | Item Code | Description         | Capacity |                | Weight |     |
|-------------|-----------|---------------------|----------|----------------|--------|-----|
|             |           |                     | in-nom.  | actual O.D. mm | lbs    | kg  |
| SAWITVISE   | 04600     | Vise with 42" Chain | 4" - 12" | 114 - 324      | 14.0   | 6.4 |

#### CHAIN EXTENSIONS FOR SAW IT® VISE

| Item Code | Description                  |
|-----------|------------------------------|
| 40628     | 6" Chain Extension Plus Pin  |
| 40629     | 12" Chain Extension Plus Pin |

## POWER HACK SAW BLADES

### FEATURES

- Greater blade height for reduced deflection.
- Bi-metal construction for safety.
- Fit Saw It® Pneumatic Saws, along with saws by Widder®, Fein® and Spitznas®.

For speed, straightness of cut, long life and safety, these bi-metal blades are the best choice for the Reed Saw It® and heavy-duty power hack saws made by Widder®, Fein® and Spitznas®. The extra blade depth (1 3/8") and the Matrix® high-speed steel (HSS) cutting edge allow a straighter cut. Bi-metal blade construction reduces the tendency of solid HSS blades to shatter. Wavy set and high tooth hardness for longer life. Blades cut steel, stainless steel, copper, aluminum and harder plastics like PVC and ABS.

| Catalog No. | Item Code | Teeth Per Inch | Length/Width/Thickness |                | Std. Pkg. |
|-------------|-----------|----------------|------------------------|----------------|-----------|
|             |           |                | in-nom.                | mm             |           |
| Z814        | 04478     | 14             | 8 x 1 3/8 x .062       | 200 x 35 x 1.6 | 10        |
| Z1014       | 04479     | 14             | 10 x 1 3/8 x .062      | 250 x 35 x 1.6 | 10        |
| Z1214       | 04494     | 14             | 12 x 1 3/8 x .062      | 300 x 35 x 1.6 | 10        |
| Z1614       | 04495     | 14             | 16 x 1 3/8 x .062      | 400 x 35 x 1.6 | 10        |
| Z2114       | 04496     | 14             | 21 x 1 3/8 x .062      | 533 x 35 x 1.6 | 10        |
| Z2414       | 04497     | 14             | 24 x 1 3/8 x .062      | 600 x 35 x 1.6 | 10        |
| Z3014       | 04498     | 14             | 30 x 1 3/8 x .062      | 760 x 35 x 1.6 | 10        |
| Z1608       | 04499     | 8              | 16 x 1 3/8 x .062      | 400 x 35 x 1.6 | 10        |
| Z2108       | 04597     | 8              | 21 x 1 3/8 x .062      | 533 x 35 x 1.6 | 10        |

**NOTE: Blade length should be at least 6" more than the O.D. of the pipe.**

**BEST EVER!**

SAWITSD and SAWITVISE with SAWITBG21 and Z2114



**ONLINE VIDEO TRAINING**



**Great for work on process piping with little clearance!**



**SAWITSD on steel with Z2114**

14 TPI (teeth per inch) work best on at least 1/8" wall thickness. 8 TPI work best on walls at least 3/16" thick. Choose 8 teeth per inch for softer materials like plastic.



UPC cutting PE



UPC636A on ductile iron

## UNIVERSAL PIPE CUTTERS

### FEATURES

- Cut **large diameter** ductile or cast iron, clay, concrete, steel, PVC or PE pipe.
- Basic unit can be adapted to a **variety** of uses, depending on blade selected.
- **UPC836APE** and **UPC848APE** are designed specifically for PE.

These lightweight, easy-to-use Universal Pipe Cutters (UPC) are available to cut 6" - 48" (150-1300 mm) ductile iron, cast iron, clay, concrete, steel, PVC or PE pipe. The cutters are pneumatic. The lower cost **UPC616A** uses the same motor as the others, but does not include connecting frames for larger capacities. The **UPC616A** is shipped in a steel toolbox with a three-gallon, formed-steel water tank. The **UPC636A** and **UPC648A** come in a steel toolbox with a six-gallon, stainless steel water tank and cart. Every UPC ships with an FRL Filter-Regulator-Lubricator.

### PNEUMATIC

| Catalog No. | Item Code | Pipe Diameter |                | Gross Weight* |      |
|-------------|-----------|---------------|----------------|---------------|------|
|             |           | in-nom.       | actual O.D. mm | lbs           | kg   |
| UPC616A     | 07512     | 6 - 16        | 150 - 450      | 98            | 44.5 |
| UPC636A     | 07510     | 6 - 36        | 150 - 1000     | 128           | 58.2 |
| UPC648A     | 07511     | 6 - 48        | 150 - 1300     | 133           | 60.5 |
| UPC836APE*  | 07517     | 8 - 36        | 200 - 1000     | 101           | 45.9 |
| UPC848APE*  | 07518     | 8 - 48        | 200 - 1300     | 106           | 48.2 |

\***EXCLUSIVE** - Complete details about **UPC836APE** AND **UPC848APE** ON P. 31

\***GROSS WEIGHT** includes all components plus packaging. **UPC Cutting Frame** weighs just 28 lbs (12.7 kg).

### MUST ORDER REQUIRED BLADES SEPARATELY.

### UPC PNEUMATIC POWER REQUIREMENTS

Horsepower = 1.7 H.P. generated by UPC  
 Maximum R.P.M. = 3675  
 Air Consumption = 50 cu. ft./min. (1.4 cu. m/min.)  
 Pressure = 90 P.S.I. Maximum (6 BAR)  
 Shut-Off = 3/4" Ball Valve  
 Air Supply Fittings = 3/4" Dixon "Air King" Coupling

### ACCESSORIES

| Accessory                      | Item Code |
|--------------------------------|-----------|
| Air-Line Oil                   | 97583     |
| Arbor Locknut                  | 97543     |
| Arbor Wrench                   | 97590     |
| Blade Guard 8" Assembly        | 07509     |
| Chain Hooks                    | 97546     |
| Diamond Blade Sharpening Stone | 97595     |
| Filter for the FRL             | 47506     |
| Hex Key Set                    | 40156     |
| Motor Grease, 2 oz.            | 97588     |
| Release Pins                   | 97545     |
| Water Tank Hose System         | 97581     |
| Wedges                         | 97589     |

### SERVICE

UPC motor reconditioning/refurbishing is available. Complete UPC cutters can also be reconditioned/refurbished.

**BEFORE shipping items, contact Reed by phone, fax or email for a return authorization number.**

All items should arrive freight prepaid at the Reed factory. Quotes, including any labor charges, will be issued upon inspection of the unit.

### ✓ WHY REED?

The Reed UPC is lightweight; cuts fast; requires only 12" (300 mm) clearance around the pipe; provides a square cut virtually every time; and can be operated underwater. It is by far the safest, easiest and fastest power cutter to setup, operate and maintain, which nets a low operating cost.



UPC636A

Cutting Frame



UPC616A



PIPE TOOLS & VISES  
SINCE 1896

### UNIVERSAL PIPE CUTTER BLADE SELECTION CHART

Reed provides a complete line of UPC saw blades for efficient cutting of PVC, PE, steel, cast and ductile iron, clay or concrete pipe. See chart below for the various blades to match job requirements. Blades sold separately from UPC units.

**CAUTION:** When cutting steel, ductile iron or cast iron, the UPC can produce sparks. When cutting steel pipe with the steel "DIA" blades, sparks are expected. Because of the sparks, the UPC cannot be used for cold cuts. When cutting PE, the UPC may cause a build-up of static electricity. Do not use the UPC saw in-line on potentially explosive or otherwise dangerous situations. The line must be verified as completely purged of any flammable vapor or liquid.

| Catalog No. | Item Code | Description   | Pipe Diameter           | Pipe Material                                       |
|-------------|-----------|---|-------------------------|---|
| UPCARB4     | 97510     | 4" BLADES cut up to 2 <sup>3</sup> / <sub>8</sub> " (18.3 mm) wall thickness                  | 6" (150 mm)             | PVC   |
| UPCBPVC     | 97511     | PVC Bevel Cutter 1 1/4" blade thickness, 15° bevel  | 6" - 48" (150-1300 mm)  | PVC   |
| UPCARB6     | 97514     | 6" BLADES cut up to 1 2 <sup>3</sup> / <sub>8</sub> " (43.7 mm) wall thickness                | 8" - 48" (200-1300 mm)  | PVC   |
| UPCSTEEL4   | 97519     | 4" carbide-tipped BLADES cut up to 1/2" (12.7 mm) wall thickness                              | 6" - 8" (150-200 mm)    | Steel   |
|             |           | 4" carbide-tipped BLADES cut up to 2 <sup>3</sup> / <sub>8</sub> " (18.3 mm) wall thickness   | 6" - 8" (150-200 mm)    | PE  |
| UPCSTEEL6   | 97520     | 6" carbide-tipped BLADES cut up to 1/2" (12.7 mm) wall thickness                              | 8" - 48" (200-1300 mm)  | Steel   |
|             |           | 6" carbide-tipped BLADES cut up to 1 2 <sup>3</sup> / <sub>8</sub> " (43.7 mm) wall thickness | 8" - 48" (200-1300 mm)  | PE  |
| UPCPE8      | 97521     | 8" BLADES cut up to 2 2 <sup>3</sup> / <sub>8</sub> " (69 mm) wall thickness                  | 26" - 48" (660-1300 mm) | PE  |
| UPDIA4C     | 97528     | 4" BLADES cut up to 2 <sup>3</sup> / <sub>8</sub> " (18.3 mm) wall thickness                  | 6" (150 mm)             | Cast Iron, Pit Cast, Ductile Iron<br>Clay, Concrete |
| UPDIA6C     | 97524     | 6" BLADES cut up to 1 2 <sup>3</sup> / <sub>8</sub> " (43.7 mm) wall thickness                | 8" - 48" (200-1300 mm)  | Cast Iron, Pit Cast, Ductile Iron<br>Clay, Concrete |

PIPE DESCALERS ON P. 20



### FILTER-REGULATOR-LUBRICATOR

#### FEATURES

- **Maximize** tool efficiency by using clean air.

An FRL (filter-regulator-lubricator) appliance is key to preparing clean air for use in pneumatic system tools. Use of prepared air allows tools and equipment to operate with maximum effectiveness and efficiency. Always use an FRL with Reed pneumatic tools such as the Saw It®, Rapid Cut & Bevel™ Machines and Universal Pipe Cutters. **Failure to use an FRL may result in premature motor failure and will negate warranty.**

| Catalog No. | Item Code | Description                      | Weight |     |
|-------------|-----------|----------------------------------|--------|-----|
|             |           |                                  | lbs    | kg  |
| FRL         | 97591     | Filter-Regulator-Lubricator Unit | 12.5   | 5.7 |



TAKE A LOOK...

CUTTERS FOR LARGER DIAMETER PLASTIC PIPE P. 31 - 33




ONLINE VIDEO TRAINING



EXCLUSIVE SIZES

90° - 110° SWING



4" CLEARANCE

## HINGED CUTTERS™

### FEATURES

- A **Reed invention** that needs only 4" (102 mm) of clearance around pipe.
- Can be **used anywhere** - in the ditch, underwater, overhead, in racks of pipe!
- **Efficient** handle swing of only 90° to 110°.

Four wheels cut steel, stainless steel, cast and ductile iron with only 90° to 110° handle swing. Only 4" (102 mm) clearance required around pipe. Strong guide fingers ensure perfect wheel alignment for square cuts. A closed 360° frame forces all energy into cutting the pipe for maximum efficiency and productivity. There is no shower of sparks in this cold cut. This is the only hinged cutter that tracks every time and the only one recommended for ductile iron, steel and stainless steel to Schedule 100. This tool is a Reed invention.

| Catalog No. | Item Code | Pipe Capacity |                | Length |     | Weight |      |
|-------------|-----------|---------------|----------------|--------|-----|--------|------|
|             |           | in-nom.       | actual O.D. mm | in     | mm  | lbs    | kg   |
| H21/2S*     | 03110     | 1 - 2 1/2     | 32 - 76        | 17     | 419 | 7.2    | 3.3  |
| H21/2I*     | 03112     | 1 - 2 1/2     | 32 - 76        | 17     | 419 | 7.2    | 3.3  |
| H21/2X*     | 03114     | 1 - 2 1/2     | 32 - 76        | 17     | 419 | 7.2    | 3.3  |
| H4S         | 03120     | 2 - 4         | 60 - 125       | 22     | 559 | 12.8   | 5.8  |
| H4I         | 03122     | 2 - 4         | 60 - 125       | 22     | 559 | 12.8   | 5.8  |
| H4X         | 03124     | 2 - 4         | 60 - 125       | 22     | 559 | 12.8   | 5.8  |
| H6S         | 03130     | 4 - 6         | 114 - 182      | 28     | 711 | 19.4   | 8.8  |
| H6I         | 03132     | 4 - 6         | 114 - 182      | 28     | 711 | 19.4   | 8.8  |
| H6X         | 03134     | 4 - 6         | 114 - 182      | 28     | 711 | 19.4   | 8.8  |
| H8S         | 03140     | 6 - 8         | 168 - 240      | 32     | 813 | 24.4   | 11.1 |
| H8I         | 03142     | 6 - 8         | 168 - 240      | 32     | 813 | 24.4   | 11.1 |
| H8X         | 03144     | 6 - 8         | 168 - 240      | 32     | 813 | 24.4   | 11.1 |
| H8XX        | 03146     | 6 - 8         | 168 - 240      | 32     | 813 | 24.4   | 11.1 |
| H12S        | 03150     | 8 - 12        | 219 - 356      | 34     | 864 | 34.9   | 15.9 |
| H12I        | 03152     | 8 - 12        | 219 - 356      | 34     | 864 | 34.9   | 15.9 |
| H12X        | 03154     | 8 - 12        | 219 - 356      | 34     | 864 | 34.9   | 15.9 |
| H12XX       | 03156     | 8 - 12        | 219 - 356      | 34     | 864 | 34.9   | 15.9 |

### \*EXCLUSIVE SIZES

NOTE: S= for steel; I= for cast and ductile iron; X= for schedule 80 steel; XX= for schedule 100 steel. Wheels for same size cutters are interchangeable. Reed cutter wheels are recommended for Hinged Cutters™. Reed wheels are made from high shock-resistant tool steel on computerized (CNC) machines and then precisely heat-treated. This allows for a thinner profile yet stronger blade, so they:

- Cut easier and faster, especially stainless steel and ductile pipe
- Last much longer
- Allow for shorter cutter handle for work in tight spaces
- Provide the best value

CUTTER WHEELS ON P. 7 - 9  
PIPE DESCALERS ON P. 20

Replacement Wheel Pins for RIDGID® cutters: 3S, 4S, 6S, 44S, 466, 468, 472. Order Reed pin R34790 #93322 5/pk. to replace RIDGID® pin No. 34790 (Old #F-14).

### ✓ WHY REED?

Hinged Cutters™ are a Reed invention! They are lighter, track better for square cuts, and require less clearance, yet provide better torque so the cut is made faster and with less effort. Can be used anywhere - in the ditch, underwater, in noise-free zones, overhead, in racks of pipes, etc.

## HINGED CUTTERS™ WITH HELPER HANDLE

### FEATURES

- Helper handle allows two people to make a **team effort** for fast, tough cuts.
- Great choice for **cutting well casing and other vertical pipe**.
- **Efficient** handle swing of only 90° to 110°.

Special Hinged Cutters™ with an extra helper handle save time as two operators use team effort for fast work on tough applications or harsh conditions. Helper handle "HH" models are ideal for cuts on vertical pipe such as well casing or process piping. Hinged Cutters™ feature four wheels to cold cut steel, stainless steel, cast and ductile iron with only 90° to 110° handle swing. Strong guide fingers ensure perfect wheel alignment for square cuts. A closed 360° frame on the hinged cutter forces all energy into cutting the pipe for maximum efficiency and productivity.

| Catalog No. | Item Code | Pipe Capacity |                | Assembled Length |      | Weight |      |
|-------------|-----------|---------------|----------------|------------------|------|--------|------|
|             |           | in-nom.       | actual O.D. mm | in               | mm   | lbs    | kg   |
| ★ H6SHH     | 03138     | 4 - 6         | 114 - 182      | 51               | 1295 | 21.8   | 9.9  |
| ★ H8SHH     | 03148     | 6 - 8         | 168 - 240      | 58               | 1473 | 23.6   | 10.7 |
| ★ H12SHH    | 03158     | 8 - 12        | 219 - 356      | 63               | 1600 | 36.5   | 16.6 |

- ★ H6SHH
- ★ H8SHH
- ★ H12SHH
- ★ NEW

CUTTER WHEELS ON P. 7 - 9





PIPE TOOLS & VISES  
SINCE 1896

## LOW CLEARANCE ROTARY™ CUTTERS

### FEATURES

- The low profile design of these cutters requires only **5" (127 mm) clearance**.
- Pipe **snaps off squarely** once the operator completes the cut.

Cold cut large diameter steel, most stainless steel, ductile and cast iron pipe in close quarters. The low profile design of the LCRC models needs only 5" clearance for up to 18" pipe diameter. Yoke design improvements make cutters more durable in high stress conditions. Each cutter is supplied with a slip-on handle that is used to turn the cutter around the pipe in one direction. The handle is also used to tighten the cutter every half revolution.

| Catalog No. | Item Code | Pipe Capacity                        |                     |                | Length |      | Weight |      |
|-------------|-----------|--------------------------------------|---------------------|----------------|--------|------|--------|------|
|             |           | Steel                                | Cast Iron & Ductile | actual O.D. mm | in     | mm   | lbs    | kg   |
|             |           | in-nom.                              | in-nom.             |                |        |      |        |      |
| ★ LCRC4I*   | 03306     |                                      | 2 - 4               | 60 - 125       | 19     | 483  | 12     | 5.5  |
| ★ LCRC4S*   | 03307     | 2 - 4                                |                     | 60 - 125       | 19     | 483  | 12     | 5.5  |
| LCRC8S*     | 03309     | 6 - 8                                |                     | 159 - 246      | 58     | 1473 | 41     | 18.6 |
| LCRC8I*     | 03308     |                                      | 6 - 8               | 159 - 246      | 58     | 1473 | 41     | 18.6 |
| LCRC8X*     | 03311     | 6 - 8 Heavy Wall & Stainless Steel   |                     | 159 - 246      | 58     | 1473 | 41     | 18.6 |
| LCRC12S*    | 03313     | 10 - 14                              |                     | 266 - 358      | 61     | 1549 | 50     | 22.7 |
| LCRC12I*    | 03312     |                                      | 10 - 12             | 266 - 358      | 61     | 1549 | 50     | 22.7 |
| LCRC12X*    | 03314     | 10 - 14 Heavy Wall & Stainless Steel |                     | 266 - 358      | 61     | 1549 | 50     | 22.7 |
| LCRC16S*    | 03317     | 16 - 18                              |                     | 368 - 462      | 66     | 1664 | 60     | 27.3 |
| LCRC16I*    | 03316     |                                      | 14 - 16             | 368 - 462      | 66     | 1664 | 60     | 27.3 |
| LCRC16X*    | 03318     | 16 - 18 Heavy Wall & Stainless Steel |                     | 368 - 462      | 66     | 1664 | 60     | 27.3 |

★ **NEW**  
★ **EXCLUSIVE**

## ROTARY™ CUTTERS

### FEATURES

- Pipe **snaps off squarely** once the operator completes the cut.
- Excellent for **cold cuts**.

Cold cut large diameter steel, most stainless steel, ductile and cast iron pipe in close quarters. Modest clearance needed for all models (see chart at right). Each cutter is supplied with a slip-on handle that is used to turn the cutter around the pipe in one direction. The handle is also used to tighten the cutter every half revolution.

Best manual cutters for ductile iron. With good leverage from long handle, pipe snaps off squarely before wheel penetrates halfway through pipe. Cutters have heavy-duty frames.

All sizes use the same cutter wheels: either RCS8-36 for steel/stainless steel and RC18-30 for ductile and cast iron. RCX wheels cut up to <sup>25</sup>/<sub>32</sub>" wall thickness for steel pipe.

| Catalog No. | Item Code | Pipe Capacity |                     |                | Length |      | Weight |       |
|-------------|-----------|---------------|---------------------|----------------|--------|------|--------|-------|
|             |           | Steel**       | Cast Iron & Ductile | actual O.D. mm | in     | mm   | lbs    | kg    |
|             |           | in-nom.       | in-nom.             |                |        |      |        |       |
| RC20S*      | 03240     | 20 - 22       |                     | 476 - 572      | 106    | 2680 | 89     | 40.5  |
| RC20I*      | 03242     |               | 18 - 20             | 476 - 572      | 106    | 2680 | 89     | 40.5  |
| RC24S*      | 03250     | 24 - 26       |                     | 584 - 660      | 111    | 2807 | 107    | 48.6  |
| RC24I*      | 03252     |               | 22 - 24             | 584 - 660      | 111    | 2807 | 107    | 48.6  |
| RC30S*†     | 03260     | 28 - 34       |                     | 698 - 864      | 96     | 2438 | 283    | 128.6 |
| RC30I*†     | 03262     |               | 30                  | 698 - 864      | 96     | 2438 | 283    | 128.6 |
| RC36S*†     | 03264     | 32 - 36       |                     | 813 - 915      | 96     | 2438 | 295    | 134.1 |
| RC36I*      | 03263     |               | 30                  | 813 - 915      | 96     | 2438 | 295    | 134.1 |
| RC42S*      | 03265     | 40 - 42       |                     | 1016 - 1067    | 108    | 2743 | 325    | 147   |

★ **EXCLUSIVE**

\*\*For heavy wall steel and stainless steel, order four RCX cutter wheels (#03550) and also order eight RC8-30XR rollers (#93222).

NOTE: S= for steel; I= for cast and ductile iron. Wheels for same size cutters are interchangeable. Reed cutter wheels are recommended for Rotary™ Cutters and Low Clearance Rotary™ Cutters. Reed wheels are made from high shock-resistant tool steel on computerized (CNC) machines and then precisely heat-treated. This allows for a thinner profile yet stronger blade, so they:

- Cut easier and faster, especially stainless steel and ductile pipe
- Last much longer
- Provide the best value

CUTTER WHEELS ON P. 7 - 9

PIPE DESCALERS ON P. 20

### † CONVERSION KITS

| Catalog No. | Item Code | Converts     |
|-------------|-----------|--------------|
| RC30CONV    | 03267     | RC36 to RC30 |
| RC36CONV    | 03268     | RC30 to RC36 |

**BEST EVER!**

**EXCLUSIVE TOOL**


**ONLINE VIDEO TRAINING**



LCRC4S in use

**NEW**

LCRC4



LCRC12


5" CLEARANCE

45° between handle slots

Two Turnbuckles to Tighten Cutter

### ✓ WHY REED?

Rotary™ cutters are a Reed invention! Reed Rotary™ cutters cut pipe safely, easily, quickly and at a low cost. Provide a square cut and can be used in close quarters anywhere – in the ditch, underwater, in noise-free zones, overhead, in racks of pipes, etc. Reed Rotary™ cutters last for decades.



45° or 60° between handle lugs

**Handle Extension**  
Affix to main handle for additional leverage. Included with RC20/RC24 models.

**EXCLUSIVE TOOL**

### CLEARANCES

| Cat. No. | in   | mm  |
|----------|------|-----|
| RC20     | 8.0  | 204 |
| RC24     | 8.0  | 204 |
| RC30     | 11.8 | 300 |
| RC36     | 11.8 | 300 |
| RC42     | 10.5 | 267 |




RC24

**ONLINE VIDEO TRAINING**



RC42S in use

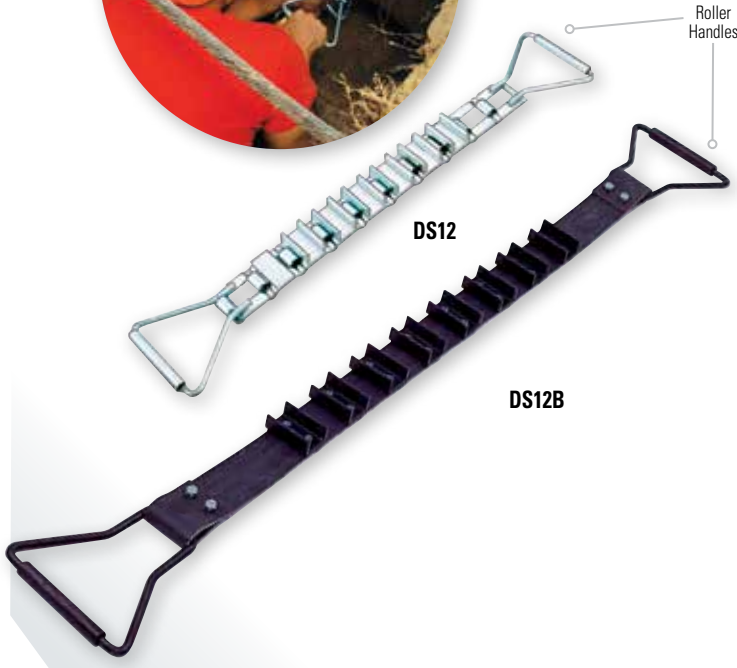

## PIPE DESCALERS

### FEATURES

- **Much faster** and **far more effective** than chisels, chains or files.
- Needs only 2" of clearance around the pipe.
- For removing tough dirt and debris quickly, choose the **sharp scrapers** of the DS12 and DS36 chain descalers.

Wide, tough scrapers remove scale, dirt and corrosion quickly from the pipe surface to allow more effective cutting, joining, gasket/valve seating or other operations. Pipe descalers are faster and more effective than chisels, chains or files and need only 2" of clearance around the pipe. Use them to clean pipe before cutting or water tapping or drilling. Roller handles allow smooth movement in use. **DS12** and **DS36** chain descalers are made entirely of steel that is zinc-plated for corrosion resistance and toughness. The sharp metal scrapers dig in fast to remove dirt and debris. They are welded on for long life and can be sharpened. Also, Reed produces a heavy-duty power transmission belting pipe descender, **DS12B**. Its handles and scrapers are blackened for good rust protection. Belt descaler benefits include lower cost and lighter weight than all-metal descalers, longer length to ease back strain during use and high-profile scrapers to reduce dirt clogs. Reed offers a replacement belt (for DS12B only) with scrapers attached; simply bolt the new belt onto the handles.


| Catalog No. | Item Code | Type        | Pipe Capacity |          | Length |      | Weight |     |
|-------------|-----------|-------------|---------------|----------|--------|------|--------|-----|
|             |           |             | in-nom.       | mm       | in     | mm   | lbs    | kg  |
| DS12        | 08000     | Steel Chain | 3 - 12        | 70 - 300 | 32     | 810  | 5.7    | 2.6 |
| DS36        | 08006     | Steel Chain | 3 - 36        | 70 - 910 | 44     | 1110 | 8.2    | 3.7 |
| DS12B       | 08008     | Belt        | 3 - 12        | 70 - 300 | 50     | 1257 | 4.2    | 1.9 |

### REPLACEMENT BELT

| Catalog No. | Item Code | Description   | Length |      | Weight |     |
|-------------|-----------|---|--------|------|--------|-----|
|             |           |   | in     | mm   | lbs    | kg  |
| DS12BRB     | 98008     | Replacement belt fits REED DS12B or Wheeler-Rex® 1300 | 45     | 1143 | 3.0    | 1.4 |

### ✓ WHY REED?

This Reed invention has two pawls for faster action and for work in tight places – requires half the handle swing space of competitive reamers.

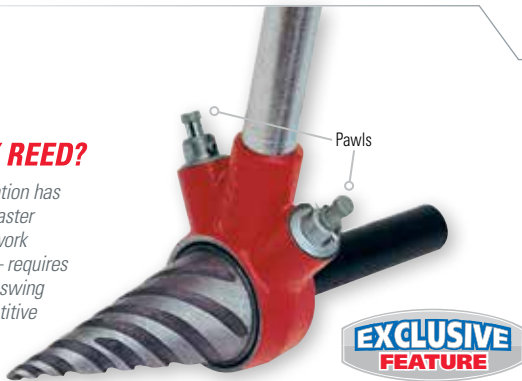

2-71

## PIPE REAMER

### FEATURES


- Self-feeding, spiral reamer **starts easily** into pipe.

Pipe Reamer is used to deburr steel pipe before threading. Cone is made from tool steel and hardened for maximum life. Unique cutting edge makes this spiral reamer self-feeding and easy to start and operate.

| Catalog No. | Item Code | Pipe Capacity |                | Weight |     |
|-------------|-----------|---------------|----------------|--------|-----|
|             |           | in-nom.       | actual I.D. mm | lbs    | kg  |
| 2-71        | 06060     | 1/8 - 2       | 7 - 53         | 6.7    | 3.0 |

# REED

## ENVIRONMENTAL STEWARDSHIP



Reed is always mindful of using practical and environmentally-friendly options for literature and packaging.

The paper used for this catalog is sourced from managed forests. A web press, powered by wind power, is used. The ink is heat-set and 99.9% of all VOC's (volatile organic compounds) are destroyed in a dryer sequence used by Reed's printing partner, Knepper Press. For more information, visit [www.knepperpress.com/environmentally-green-printer](http://www.knepperpress.com/environmentally-green-printer).



PIPE TOOLS & VISES  
SINCE 1896



CNC Lathe



CNC Surface Grinder



*CNC technology is widely used for milling and machining components in Reed's product line.*



CNC Vertical Mill

# REED

## MANUFACTURING TECHNOLOGY

Leading-edge processes and state-of-the-art equipment infused with old world craftsmanship have been and remain the standard at Reed Manufacturing for over 100 years. The results of this century of commitment are unparalleled professional trade products offering quite possibly the world's best quality, service and value. Products made to exacting specifications, products made to last for a lifetime, and products with a full lifetime warranty.

