

## SPECIFICATIONS

OUTDOOR

**HOUSING**

- Heavy duty die cast aluminum housing and hinged front frame
- Bronze powdercoat bronze finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- 1/2" coin plugs with O-rings for conduit and photocell

**ELECTRICAL**

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard
- 347-480V also available
- Operating Temperature: -40°C (-40°C) - 40°C (104°F)

**OPTICAL SYSTEM**

- Prismatic borosilicate glass lens, or diffused lens available
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 138,000 hours @ L<sub>70</sub>
- Type IV
- CRI: 80
- 4000K or 5000K

**ILLUMINATION**

- 57.8W LED
- 67.3 System Watts
- ~ 350W HID

**MOUNTING**

- Cast-In template for mounting directly over a 4" recessed outlet box, or use 1/2" surface conduit

**CODE COMPLIANCE**

- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP65 Rated
- Assembled in USA available
- Meets DLC Requirements\*

**WARRANTY**

- 5 Year
- 10 Year Available

**ORDERING INFORMATION**

CATALOG #	LUMENS	COLOR	LENS
WP4-Q-58L-QT-40K-PL	7,820	4000K	Prismatic
WP4-Q-58L-QT-40K-DL	7,664	4000K	Diffused
WP4-Q-58L-QT-50K-PL*	8,146	5000K	Prismatic
WP4-Q-58L-QT-50K-DL*	7,983	5000K	Diffused

**OPTIONS (Factory Installed)**


SGF	-	Single Fusing
DBF	-	Double Fusing
PC3	-	120-277V Photocell
EBLED	-	LED Emergency Ballast
OCS	-	Occupancy Sensor
* Dimming for Mounting of 8 - 40'		
480V	-	347-480V
CC	-	Custom Color
10YR	-	Ten Year Warranty
USA	-	Assembled in USA

**ACCESSORIES (Order Separately)**


WP4-Q-FC	-	Full Cutoff
WP4-Q-LG	-	Vandal Guard
WP4-Q-WG	-	Wire Guard



**WP4-Q**  
Large Shallow  
LED Wall Pack

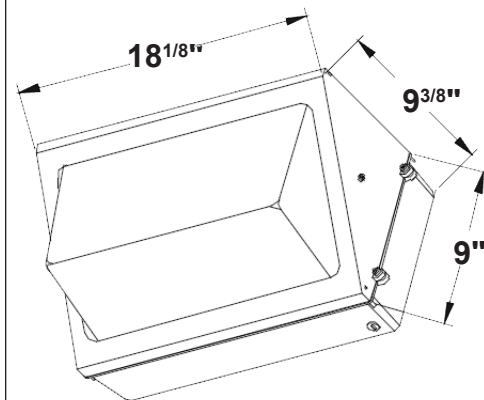

## PHOTOMETRICS

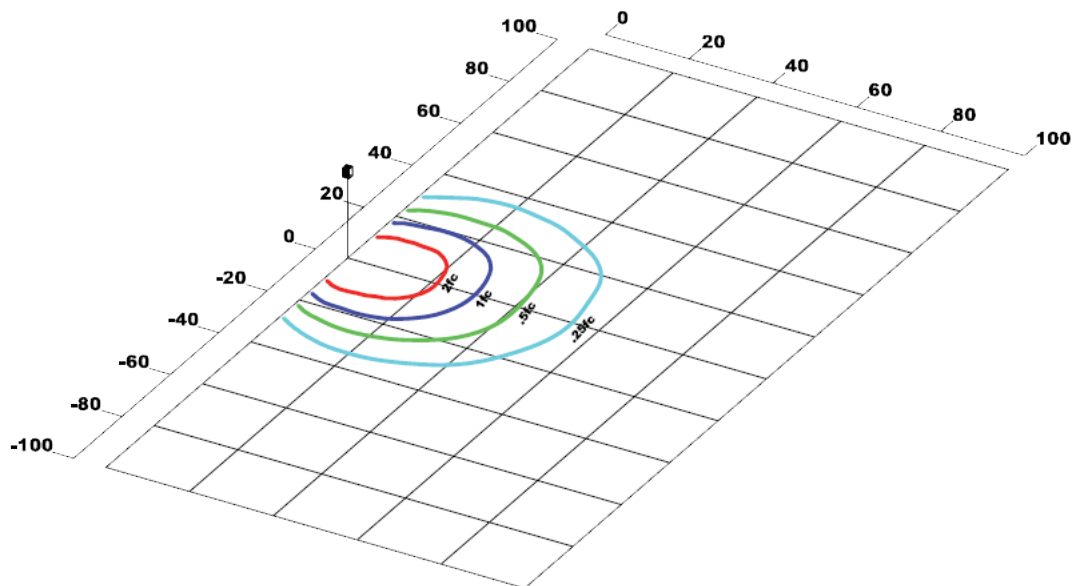

**WP4-Q-58L-QT-50K**  
Mounting Height = 20ft