



Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.

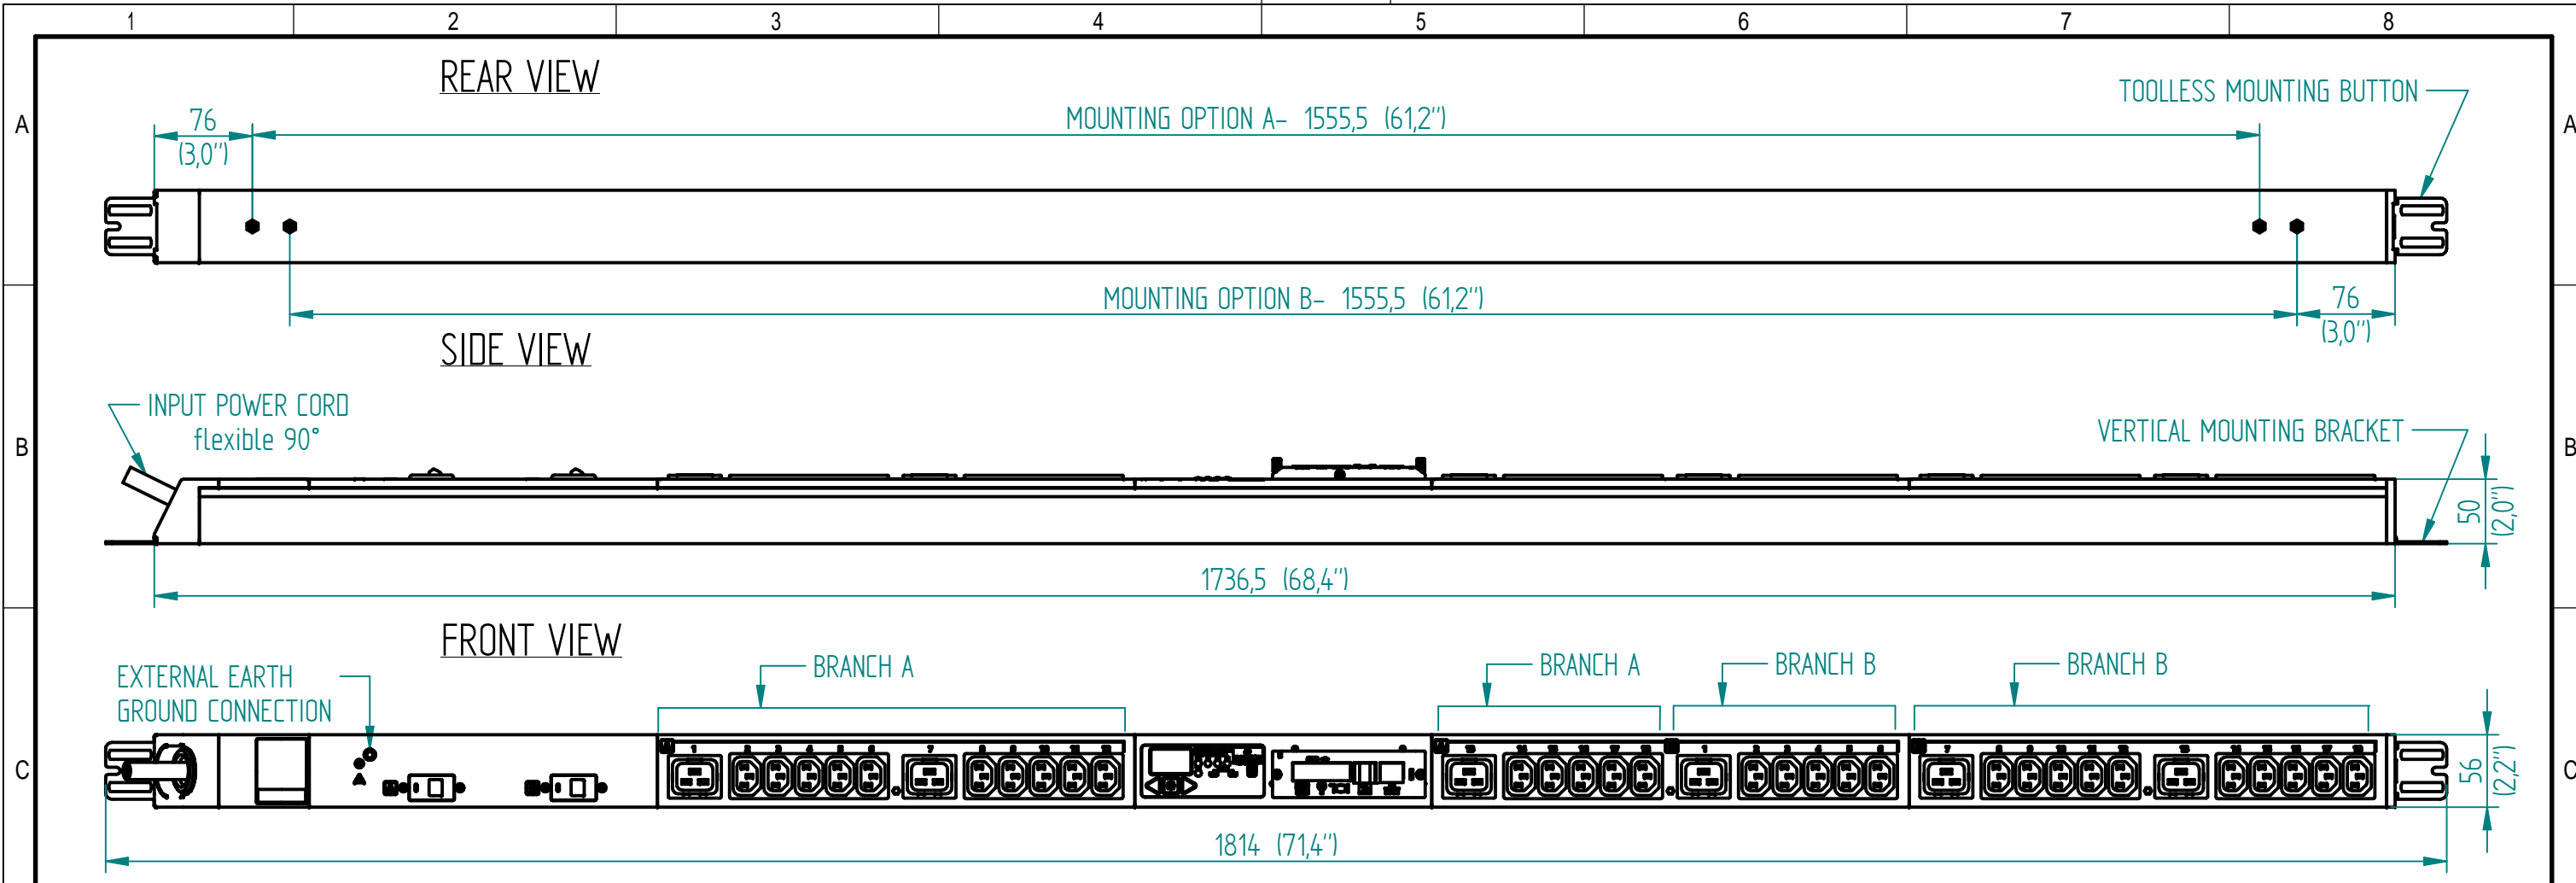

IEC 60309  
(32 A, 1/N/PE, 200-240 V, BLUE 6H)

AGENCY COMPLIANCE:  
 - CE-mark: LVD, EMC, RoHS (incl. harmonized standards hereunder)  
 - CB certification: IEC 60950-1 (2nd)  
 - BG certification: BV-BG (factory inspected)

ENVIRONMENTAL RATING:  
 OPERATING TEMPERATURE: 5 °C - 60 °C (41 °F - 140 °F) NON-CONDENSING, NON-CORROSIVE, 10 % - 90 % RH  
 STORAGE TEMPERATURE: -20 °C - 85 °C (-4 °F - 185 °F)  
 MAX. OPERATING ALTITUDE: 2000 m

- NOTES:  
 1. UNIT DIMENSIONS: 1736.5 mm (68.4") H x 50 mm (2.0") D x 56 mm (2.2") W  
 2. UNIT WEIGHT: 4 kg / 8.8 lbs  
 3. SHIPPING DIMENSIONS: 2017.0 mm (79.4") H x 297 mm (11.7") D x 176 mm (7.0") W  
 4. SHIPPING WEIGHT: 6.81 kg / 15 lbs  
 5. (2) MOUNTING BUTTONS AND (2) MOUNTING BRACKETS SUPPLIED WITH EACH UNIT. EITHER OPTION CAN BE USED TO MOUNT THE PDU.

OUTPUT POWER

BRANCH	PHASE	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER BRANCH
A	L1	15xC13, 3xC19	200-240	10/16	20
B	L1	15xC13, 3xC19	200-240	10/16	20

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10 ft / 3 m	IEC 60309	1/N/PE	50/60	200-240	32	32

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1 % + 0.1 VAC
CURRENT	±1.5 % + 0.01 A FROM 1 % TO 10 % OF UNIT RATING; ±1 % FROM >10 % TO 125 % OF UNIT RATING

RoHS COMPLIANT

<p>Dimensions in mm</p>	Allgemeintoleranzen General tolerances		Oberfläche Finish	Werkstoff / Material	Gewicht: Weight: -
	-		-	-	-
Rev.	Change	Date	Name	Bezeichnung / Description	
				MPH2-EBV_2P3W-32A_30N-60 Input and Branch Metered	
				Zeichnungs-Nr. / Drawing no.	Maßstab Scale
				MPHB1243	1:5
				Verwendet in / Used in	Blatt/Sheet
				-	1/1

