

UC-SB1-AV

UC Video Conference Smart Soundbar & Camera



- *A complete conferencing speakerphone and camera solution*
- *Sleek and stylish soundbar design with multicolor status bar installs cleanly beneath the room display(s) – mounts on the wall or sits on a credenza*
- *Logitech C930e HD camera*
- *Plug & Play – compatible with major computer OS platforms running web conferencing software*

The Crestron® UC-SB1-AV provides a video conference room solution for use with the Microsoft Teams™ and Skype® for Business intelligent communications platforms. It features the UC Video Conference Smart Soundbar (UC-SB1) and Logitech® C930e camera (CCS-CAM-USB-F-100). Control is provided by a conference room computer such as a laptop.

The smart soundbar and camera solution facilitates effortless conferencing. Mounted on the wall or placed on a credenza beneath the main room display, the smart soundbar looks great and sounds even better in a small to medium-sized meeting space. The included camera can be mounted in a variety of ways to capture your conference setup.

Crestron Smart Soundbar

An all-in-one front-of-room device, the UC-SB1 eliminates the need to install additional microphones or speakers. High-powered stereo speakers, adaptive beamforming microphone, and advanced digital signal processing deliver exceptional full-duplex speakerphone performance with highly intelligible, echo-free voice clarity. Its all-in-one wall-mountable design reduces clutter on the conference table, and even accommodates rooms with no table at all. Additional audio connectivity is provided through unbalanced stereo analog input and output jacks on the rear panel. The input accommodates any line-level audio source with no signal processing. An output is provided to feed an assistive listening system, and carries the same audio signal as the soundbar speakers.

The smart soundbar features an alluring multicolor LED status bar, which displays the volume setting and changes color to indicate operation and mute status. The computer detects the soundbar connection automatically, and in turn, the soundbar responds when an online meeting is started, speaker volume is adjusted, or the speaker or mic is muted.

Installation is a breeze using the integral hinged mounting bracket, which attaches easily to a wall and allows the soundbar to be tipped forward for full access to the rear panel connections. The bracket allows for attachment to any wall surface using two screws.

Logitech C930e Camera

A perfect view of the room is achieved through the included conferencing camera, which features HD 1080p video resolution with a wide 90° field of view and 4X HD digital zoom. The premium glass lens and autofocus ensure remarkably clear video at all times – even when bandwidth is limited. The camera intelligently adjusts using RightLight™ 2 technology to improve visual quality in low light at multiple distances. The attached clip and tripod embedded thread give the freedom to mount the camera wherever it works best – LCD screen or tabletop.

Specifications

Included Components

Soundbar: UC-SB1

Camera: CCS-CAM-USB-F-100

Smart Soundbar

Woofers: (2) 3 in. (76 mm) polypropylene cone w/rubber surround

Passive Radiators: (2) 3 x 4-3/8 in. (76 x 112 mm) polypropylene cone w/rubber surround

Tweeters: (2) 1 in. (25 mm) polyester dome

Amplifier Power: 20 W RMS per channel, stereo

Frequency Response: 80 Hz to 20 kHz (±3 dB)

Effective Output Level: 91 dB SPL @ 1 m, both channels driven at full power

Microphone: Linear quad-element far-field adaptive beamforming microphone array

Pickup Range: 23 ft (7 m) typical

Pickup Angle: ±90° horizontal

Frequency Response: 20 Hz to 8 kHz

DSP: Acoustic echo cancellation, dereverberation, automatic gain control, dynamic noise suppression, adaptive beamforming, speaker volume control, speaker EQ and limiting (fixed); full-duplex IEEE 1329 Type 1 compliant;

NOTE: DSP affects USB audio in/out only unless noted otherwise

Rev 04/11/19

UC Video Conference Smart Soundbar & Camera

USB Audio In/Out: USB 3.0, UAC 1.0 and HID, AEC-enabled USB speakerphone compliant with Microsoft Teams and Skype for Business specifications, 2-channel stereo far-end/content signal input, 2-channel mono microphone signal output; plug and play compatible with Crestron **UC-ENGINE**, **UC-ENGINE-SD**

Analog Input: 2-channel stereo, fixed level (bypasses DSP), for in-room amplification of an external audio source

Analog Input Sensitivity: 1 Vrms per channel for full rated output

Analog Output: 2-channel stereo, fixed level, feeds amplified audio content to an assistive listening system;

NOTE: Output level varies for USB input signal only according to the speaker volume control setting; analog input signal passes through without volume control or DSP

Status Bar: (1) Multi-segment RGBY LED zero-center mutually-diverging linear bargraph; Indicates the speaker volume, microphone mute, and speaker mute in red and green LEDs

Audio In: (1) 3.5 mm TRS mini-phone jack; Unbalanced stereo line-level audio input; Input Level: 1 Vrms maximum; Input Impedance: 10k Ohms

Audio Out: (1) 3.5 mm TRS mini-phone jack; Unbalanced stereo line-level audio output; Output Level: 1 Vrms maximum; Output Impedance: 100 Ohms

PC: (1) USB 3.0 Type-B connector, female; USB 3.0 device port; Connects to UC Engine; 6 ft (1.83 m) USB 3.0 Type B to Type A cable included

Camera: (1) USB 3.0 Type-A connector, female; USB 3.0 host port; Allows connection of the included camera

100-240V~ 0.5A 50/60Hz: (1) IEC 60320 C14 main power inlet; Mates with included removable power cord

Main Power: 500 mA maximum @ 100-240 VAC, 50/60 Hz

Power Consumption: 19.3 W

Temperature: 41° to 104° F (5° to 40° C)

Humidity: 10% to 90% RH (non-condensing)

Heat Dissipation: 66 BTU/hr

Enclosure: Lightly textured gunmetal black finish, plastic housing, perforated stainless steel grilles, die-cast aluminum rear cover, integral steel hinged mounting bracket

Mounting: Freestanding or surface wall mount at ear/face level (adhesive feet included, mounting bracket attached)

Height: 4.57 in. (117 mm), 4.64 in. (118 mm) with feet

Width: 43.60 in. (1108 mm)

Depth: 3.90 in. (100 mm)

Weight: Approximately 15 lb (6.8 kg)

Compliance: CE, IC, UL 62368-1, CSA C22.2 62368-1, EN 62368-1, IEC 62368-1, FCC Part 15 Class B, ICES-003 Issue 5 Class B, EN55022:2010 Class B, AS/NZS CISPR22:2010 Class B, AS/NZS CISPR 22:2010 Class B, EN55024:2010, EN61000-3-2:2014, EN61000-3-3:2013, RoHS compliant

Refer to the **UC-SB1** spec sheet for additional specifications and compliances.

Camera

Model: Logitech® Webcam C930e

Field of View: 90-degree diagonal

Connectivity: Plug-and-play USB 2.0

Resolution/FPS: Full HD 1080p/30, HD 720p/30

HD Digital Zoom: 4x, 1080p

Auto-Light Correction: RightLight™ 2

Height: 1.14 in. (29 mm), 1.7 in (43.3 mm) with clip

Width: 3.70 in. (94 mm)

Depth: 0.95 in. (24 mm), 2.8 in (71 mm) with clip

Weight: 5.7 oz (162 g), 5.7 oz (162 g) with clip and cable

Refer to the **CCS-CAM-USB-F-100** spec sheet for additional specifications and compliances.

Models & Accessories

Available Models

UC-SB1-AV: UC Video Conference Smart Soundbar and Camera

Available Accessories

CBL-AUDIO-6: Crestron® Certified Mini-TRS Stereo Audio Interface Cable, 6 ft

Notes:

1. Room control capability (lighting, shades, thermostats, etc.) requires additional equipment and commissioning to be provided by a Crestron authorized integrator and/or programmer. Additional costs may apply.
2. Complimentary XiO Cloud subscriptions are subject to the terms of the Crestron Cloudware License Agreement at <https://www.crestron.com/cloudwarelicensepdf>, as well as additional terms of the Crestron Cloudware License Agreement Addendum at <https://www.crestron.com/cloudwarelicenseaddendumpdf>, which control in any conflict with the Agreement. Complimentary subscriptions may be applied to new accounts only. New UC-P110-T phones may be added to existing XiO Cloud subscription accounts at a discounted rate. An additional purchase toward the existing subscription account term may be required. For more information, please contact license@crestron.com.

UC-SB1-AV

UC Video Conference Smart Soundbar & Camera

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/How-To-Buy/Find-a-Representative or by calling 855-263-8754.

The specific patents that cover Crestron products are listed online at www.crestron.com/legal/patents.

This product is covered under the Crestron standard limited warranty for 3 years, except for the touch screen display which is covered for 90 days. Refer to <https://www.crestron.com/warranty> for full details. The specific patents that cover Crestron products are listed online at <https://www.crestron.com/legal/patents>.

Certain Crestron products contain open source software. For specific information, visit www.crestron.com/opensource.

Crestron and the Crestron logo are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Microsoft Teams and Skype are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. Logitech and RightLight are either trademarks or registered trademarks of Logitech International S.A. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.


Specifications are subject to change without notice.

©2019 Crestron Electronics, Inc.

Rev 04/11/19

UC-SB1-AV

UC Video Conference Smart Soundbar & Camera

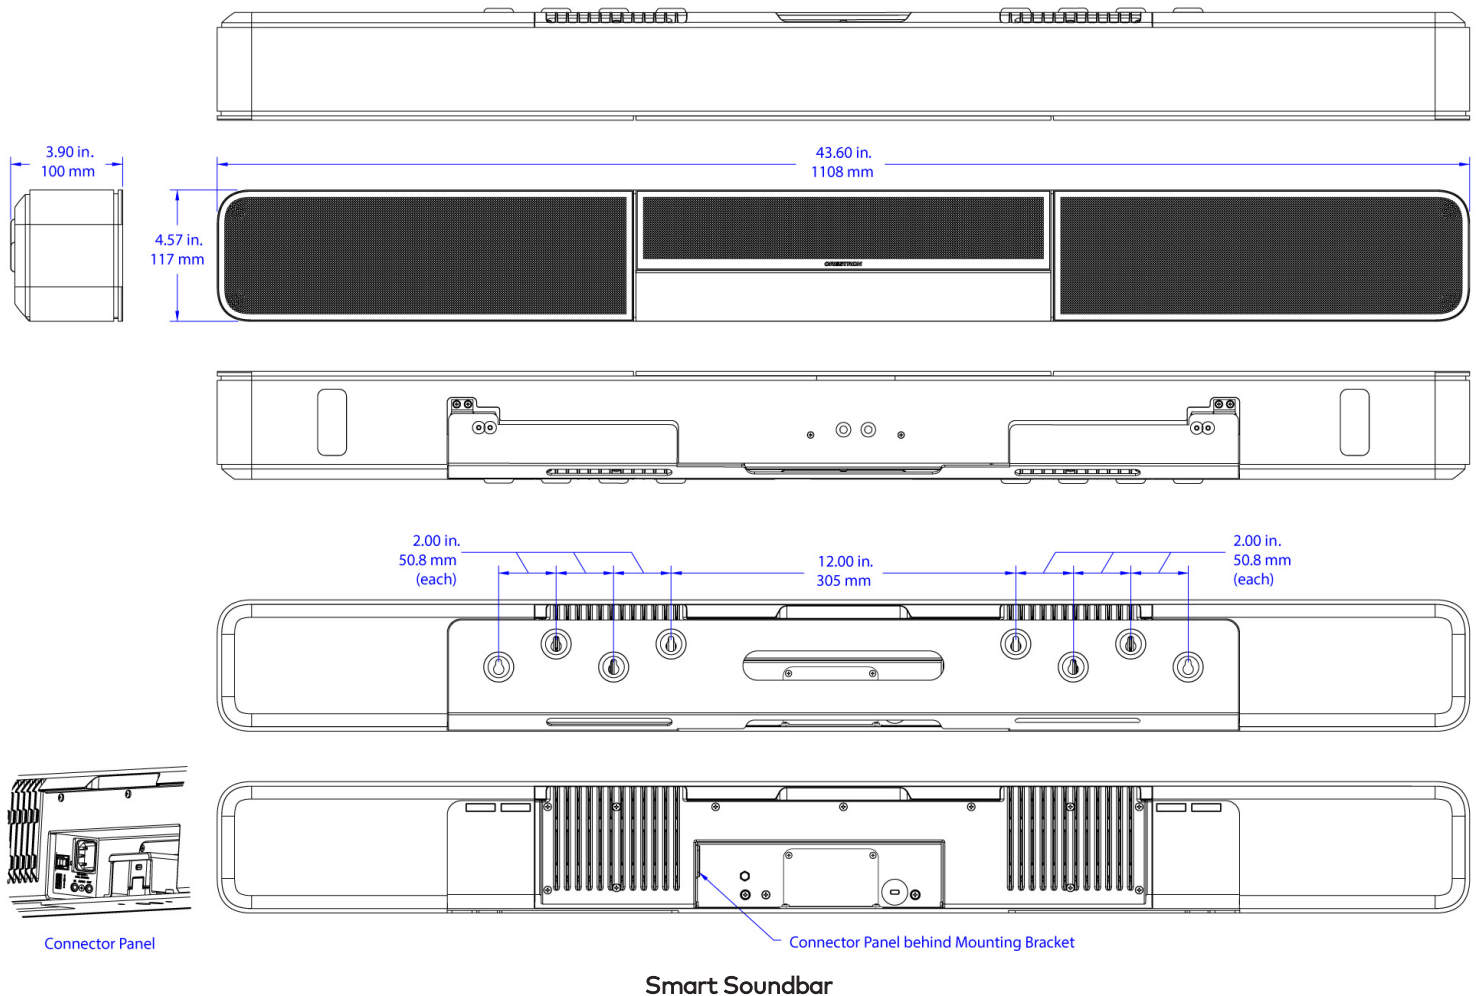

Rev 04/11/19