

PTX10000 MODULAR PACKET TRANSPORT ROUTERS

Product Overview

Core networks must be able to handle exponential data growth and changing traffic patterns as applications move to clouds and data centers. Internet exchange providers, collocation facilities, and service providers of all types seek platforms that can evolve quickly to meet these changes while lowering operational costs. The PTX10008 and PTX10016 are next-generation, cloud-optimized modular routers that redefine per-slot economics, enabling customers to do more with less while simplifying network design and reducing OpEx. The chassis family shares a common set of components, while various line cards are available to satisfy specific core, edge routing, and switching applications.

Product Description

Network traffic today is predominately cloud access, mobile, and video applications. Data center and network operators must provide connectivity services that are low latency, low delay, and with video, provide consistent packet delay variation. The pace of application change, and the speed at which devices can process data, mean operators must be able to upgrade quickly as needs arise. Operators must have the flexibility to offer new services, adjust performance, or explore new opportunities quickly, with confidence that the new services will have sufficient capacity to sustain exponential growth.

Competing with the ability to rapidly expand capacity is the need to reduce operational costs. Providers are under enormous pressure to lower margins and compete with new entrants and disruptors that do not have legacy networks to maintain. Among the challenges they face:

- **Scale:** Providers may offer backbone connectivity that requires a large number of label-switched paths (LSPs). If they are using SPRING or RSVP to take advantage of the traffic engineering (RSVP-TE) functionality, the control plane signaling path must be able to scale in step with the growth of LSPs. This ability to scale is needed for both the primary and backup paths to support redundancy mechanisms like fast re-route (FRR). Today, the total number needed for backbone connectivity is a few million. This type of scaling challenge will be felt by operators who are trying to diversify their portfolios by adding a broader scope of connectivity options; for example, a data center operator who wants to provide cloud connectivity or VPN services to enterprise customers, or an operator of private line service who wants to add a collocation service to its offering.
- **Operational Flexibility:** Virtualized services and the explosion of cloud-based applications are creating increasingly erratic traffic patterns. To handle this unpredictability, service providers need architectures that are flexible and dynamic across all layers. A rigid architecture prevents programmable, predictable, and traffic-optimized networks from supporting any service, anywhere.
- **Power Consumption:** Power consumption is a variable cost. Hyper-scale cloud and service providers have done much to improve the power efficiency of their applications and server operations. Multitenant data centers, collocation facilities, and service providers do not necessarily have the same ability to control all aspects of IT infrastructure and application design to dictate power utilization. Providers need systems designed to take advantage of advances in power usage improvements made in data center computing. Power efficiency is a key factor in reducing TCO.

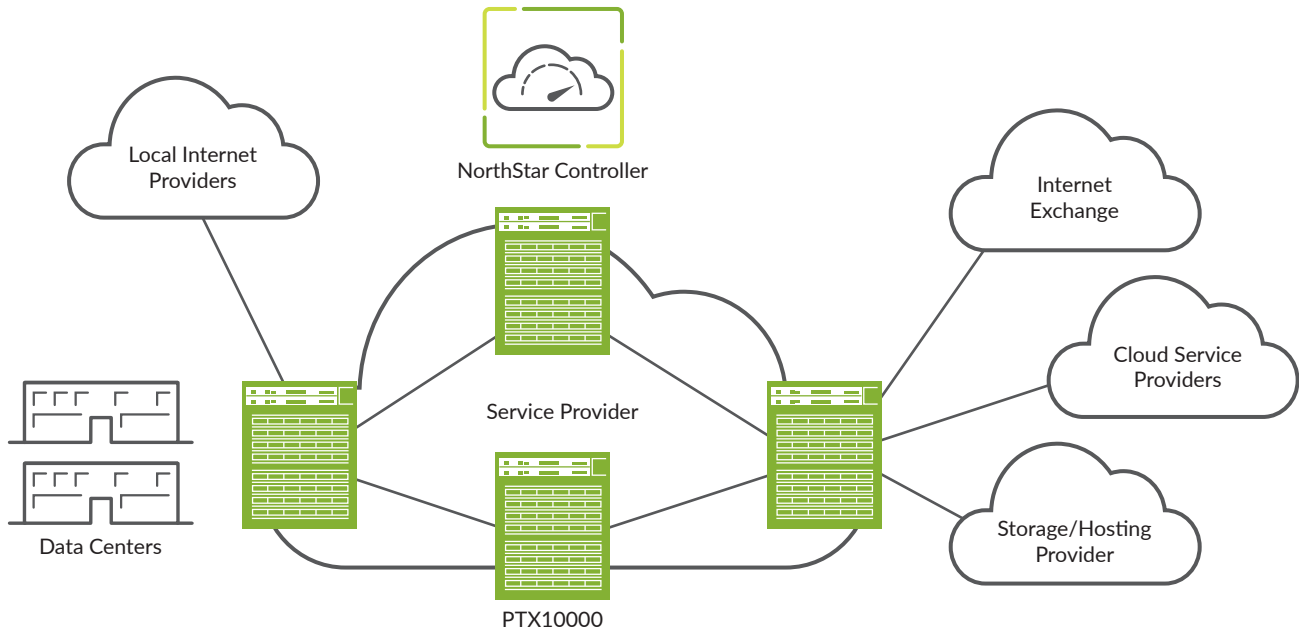


Figure 1: PTX10000 router deployment

- Space Constraints:** Service providers can't grow their physical plants forever. They need innovations like a low-touch deployment model optimized around space availability, facility power requirements, and floor weight thresholds. Efficiently scaling capacity in a small footprint is critical.

In order to address these challenges, service providers need a core router that delivers scale, operational efficiency, and SDN programmability. Juniper Networks® PTX Series Packet Transport Routers offer the industry's only core router that exceeds these requirements while easily fitting into both cloud- and service-provider networks, providing support for full peering, MPLS, and IP core routing (see Figure 1).

PTX10000 Modular Packet Transport Routers

The Juniper Networks PTX10000 line of modular Packet Transport Routers brings physical and virtual innovations to the service provider core network. These next-generation routers help network operators achieve their business goals while effectively handling current and future traffic demands.

Innovations in the core silicon enable the PTX10000 modular routers to lower operational expenses. The PTX10000 line is powered by the highly scalable custom Juniper Triton silicon, providing consistently low latency, 256 AES Media Access Control Security (MACsec) encryption, and wire-rate packet performance for both IP traffic and MPLS transport without sacrificing the optimized system power profile.

These concepts, along with full IP routing functionality, are at the center of the PTX10000 modular chassis design, preserving the spirit of the original Junos Express and ExpressPlus

silicon. Juniper Triton silicon is the first purpose-built telecommunications silicon to build a 3D memory architecture into the base design, supporting 256 AES MACsec encryption on all ports, performing more than 1.6 billion filter operations per second, and providing dynamic table memory allocation for massive IP routing scale while at the same time providing tremendous power efficiency gains. The ability to address a provider's core networking requirements—scale, operational flexibility, and SDN control—begins with the silicon. With the PTX10000 line, operators can now deploy a core architecture with SDN control. Combining Juniper Networks NorthStar Controller, with a robust full-featured Internet backbone router, and a regional IP/MPLS core router with integrated 100GbE coherent transport for superior performance, operators can tune their network infrastructure through proactive monitoring and what-if planning capabilities. The NorthStar Controller dynamically creates explicit routing paths using a global view based on user-defined constraints.

Scale is one of the guiding design principles for the PTX10000 modular routers, empowering service providers with the ability to handle increased traffic demands smoothly. The PTX10000 line simplifies network engineering challenges with predictable system latency, improving the overall service experience by delivering best-in-class resiliency to ensure service providers meet strict customer service-level agreements (SLAs).

Operational efficiency is another design attribute for the PTX10000 modular routers, focusing on power, space, and weight—fundamental concerns that affect service providers' operational budgets. Juniper has designed the PTX10000 to fit the requirements of today's data center facilities.

SDN programmability brings virtual innovations to the service provider core, while the NorthStar Controller offers an open, standards-based solution that optimizes both the IP layer and the transport layer with precise SDN control, allowing service providers to automate and scale their operations.

PTX10008 and PTX10016 Packet Transport Routers

Juniper Networks PTX10000 line of modular Packet Transport Routers features two models: the PTX10008 and the PTX10016. The PTX10008 is the perfect core router for today's space-constrained facilities. It offers unprecedented system capacity in a 13 U platform that supports 115.2 Tbps per chassis or 345.6 Tbps per standard 19-inch telecommunications rack—all at wire speed. The PTX10016 is designed for higher capacity operations, offering ultra-high system capacity in a 21 U platform that supports 230.4 Tbps (460.8 Tbps half-duplex) per chassis or 460.8 Tbps (921.6 Tbps half-duplex) per standard 19-inch telecommunications rack.

Powered by Juniper's custom Triton silicon, the PTX10008 delivers predictable IP/MPLS packet performance and functionality, eliminating the complex packet profiles found in elaborate, over engineered network processing units (NPUs) deployed in other core routers.

The PTX10008 has eight slots, each supporting 14.4 Tbps. A fully equipped PTX10008 can support 1,152 10GbE, 288 25GbE, 288 40GbE, 288 50GbE, 1152 100GbE, 576 200GbE, and 288 400GbE interfaces in a single chassis. The PTX10016 has 16 slots, each supporting 14.4 Tbps (28.8 Tbps half-duplex). A fully equipped PTX10016 can support 2,304 10GbE, 576 25GbE, 576 40GbE, 576 50GbE, 2304 100GbE, 1152 200GbE, and 576 400GbE interfaces in a single chassis. This enables service providers to build a core architecture that optimizes label-switching router (LSR), Internet backbone, peering, and optical convergence applications for small regional deployments. As a result, service providers can—for the first time—match traffic demand with optimized core router performance and flexible deployments. With its ultra-optimized and compact form factor, the PTX10008 is ideal for peering, collocation, and central office locations where space and power are at a premium.

Architecture and Key Components

The PTX10000 line of modular routers features a number of architectural elements. Dual redundant Routing Engines (REs) on the PTX10008 and PTX10016 run the Junos OS, where they manage all routing protocol processes, router interface control, and control plane functions such as chassis component, system management, and user access to the router. These processes run on top of a kernel that interacts with the Packet Forwarding Engine (PFE) on the line cards via dedicated high-bandwidth management channels, providing a clean separation of the control and forwarding planes.

The PTX10000 line cards currently support 10GbE, 25GbE, 40GbE, 50GbE, 100GbE, 200GbE, and 400GbE interfaces, as well as 100 Gbps, 150 Gbps, and 200 Gbps DWDM interfaces. The horizontal line cards in the front of the chassis connect directly to the vertical switch fabric cards in the rear of the chassis via orthogonal interconnects without requiring a midplane. This provides unparalleled investment protection by ensuring a smooth upgrade path to higher speed switch fabric cards as they become available. The midplane-less design also improves airflow with a front-to-back design.

To maintain uninterrupted operation, the PTX10000 modular chassis fan trays cool the line cards and REs with redundant, variable-speed fans. In addition, the PTX10000 power supplies convert building power to the internal voltage required by the system. All PTX10000 components are hot-swappable, and all central functions are available in redundant configurations, providing high operational availability by allowing continuous system operation during maintenance or repairs. The chassis also uses a universal design, allowing it to be used independently for core, edge, or switching configurations.

PTX10000 Hardware Components

The key hardware components of PTX10000 line of modular Packet Transport Routers are the line cards and REs.

Line Cards

The line cards for the PTX10000 modular platforms are based on the highly scalable custom Juniper Triton silicon, making it the industry's leading core router for MPLS, Internet backbone, peering, and transport integration applications. Each slot on the PTX10000 routers supports 14.4 Tbps (28.8 Tbps half-duplex), while the line cards support multirate 10GbE, 25GbE, 40GbE, 50GbE, 100GbE, 200GbE, and 400GbE interfaces, and 100 Gbps, 150 Gbps, and 200 Gbps DWDM interfaces. The line cards also support MACsec, which provides point-to-point security on Ethernet links between directly connected nodes. MACsec blocks security threats such as denial of service (DoS), intrusion, man-in-the-middle, masquerading, passive wiretapping, and playback attacks while securing links for most traffic frames from the Link Layer Discovery Protocol (LLDP), Link Aggregation Control Protocol (LACP), Dynamic Host Configuration Protocol (DHCP), Address Resolution Protocol (ARP), and others.

The modular design of the PTX10000 line of routers provides investment protection by allowing future upgrades. The Packet Forwarding Engines (PFEs) offer 3.6 Tbps of WAN and fabric bandwidth. To achieve 14.4 Tbps forwarding performance, a total of six PFEs are implemented on each interface card. The PFEs provide ingress queuing with loopback stream optimization to avoid reading and writing packet tails when packets are sent to and received back from a loopback stream. The line cards also

provide Operation, Administration, and Maintenance (OAM) support with per-port Ethernet OAM counters, as well as packet memory, which uses Hybrid Memory Cube DRAM technology to reduce power usage, increase speed, and improve system density.

Routing Engine/Control Board Complex

The RE and Control Board are combined on a single card. The RE is based on the Intel X86 architecture. Up to two REs can be installed in a PTX10000 modular chassis to provide 1+1 redundancy. The RE features a quad-core 2.5 GHz Intel processor with 32 GB memory and 2x50 GB solid-state drive (SSD) storage.

Power

The PTX10000 modular routers contain six power supply slots to provide complete flexibility for provisioning and redundancy. Each power supply has its own internal fan for cooling. The PTX10000 line supports both AC and DC power supplies; however, AC and DC supplies cannot be mixed in the same chassis.

The AC supplies on the PTX10000 modular routers accept 200 to 240 volts alternating current (VAC) input, and they deliver 2700 watts of power to the chassis. The DC power supplies accept -40 to -72 volts direct current (VDC) input and deliver 2500 watts of power to the chassis. Each AC and DC power supply has two inputs for feed redundancy.

Cooling

The PTX10000 line of modular routers supports front-to-back cooling with air drawn in through the perforations on the REs and the line cards in the front of the platform. The fan trays are in front of the fabric cards and are accessible from the rear of the chassis. Hot air exhausts through the rear of the chassis.

Chassis Management

The PTX10000 line delivers powerful Junos OS chassis management that allows environmental monitoring and field-replaceable unit (FRU) control. Chassis management provides a faster primary switchover, enhanced power budgeting with a modular power management, reduced power consumption for partially populated systems, granular control over FRU power-on, multizone cooling with better fan speed control for reduced noise, and CPU leveling during monitoring intervals.

Simplified Management


The PTX10000 line of modular routers simplifies management based on the elegance and simplicity of the Junos OS. Management applications can receive streaming telemetry data to provide robust protocol analytics for an SDN environment. Junos OS also supports OpenConfig, which today is a YANG-based data model that supports a variety of operator use cases.

Features and Benefits

Table 1 summarizes the features available on the PTX10008 Packet Transport Router.

Table 1: PTX10008 Features and Benefits

Feature	Feature Description	Benefits
System capacity	The PTX10008 scales to 115.2 Tbps in a single chassis, breaking out into 1152 10GbE, 288 25GbE, 288 40GbE, 288 50GbE, 1152 100GbE, 576 200GbE, and 288 400GbE interfaces. The PTX10016 scales to 230.4 Tbps (460.8 Tbps half-duplex) in a single chassis, breaking out into 2304 10GbE, 576 25GbE, 576 40GbE, 576 50GbE, 2304 100GbE, 1152 200GbE, and 576 400GbE interfaces.	The PTX10000 line of modular chassis gives service providers the performance and scalability needed to outpace increased traffic demands.
Packet performance	The groundbreaking Juniper Triton silicon innovation empowers the PTX Series routers with unparalleled packet processing for both full IP and MPLS functionality, thereby leveraging revolutionary 3D memory architecture.	Exceptional packet processing capabilities help alleviate the challenge of scaling the network as traffic continues to increase, while optimizing IP/MPLS transit functionality around superior performance and elegant deployability.
Full-scale IP and MPLS routing	The PTX10000 line of modular routers features a rich set of IP/MPLS services, consistent low latency, and wire-rate forwarding at scale, while providing the reliability needed to meet strict SLAs.	This delivers the distributed peering scale of 4 million forwarding information base (FIB) and 30 million routing information base (RIB) (also known as forwarding and routing tables, respectively), 3000 OSPF adjacencies, and 4000 BGP sessions required to match expanding traffic demands.
Source Packet Routing in Networking (SPRING)	Junos OS supports SPRING, which provides the ability for a trusted source node to specify a forwarding path, other than the normal shortest path, that a particular packet will traverse.	This provides additional flexibility per packet source. It also adds features such as network path and node protection to support FRR mechanisms, enhanced network programmability, OAM functionality, simplified network signaling, load balancing, and traffic engineering functions.
High availability hardware	The PTX10000 line of modular routers is engineered with full hardware redundancy for cooling, power supply, Routing Engines, and switch fabric.	High availability (HA) is a critical requirement for service providers to maintain an always-on infrastructure base to meet stringent SLAs across the core.
High availability software	The PTX10000 line of modular routers features a resilient operating system that supports HA features such as graceful RE switchover (GRES) and nonstop active routing (NSR) for high availability. PTX Series routers support 48 ms redundancy switchover under load.	Junos OS supports HA features that allow software upgrades and changes without disrupting network traffic.

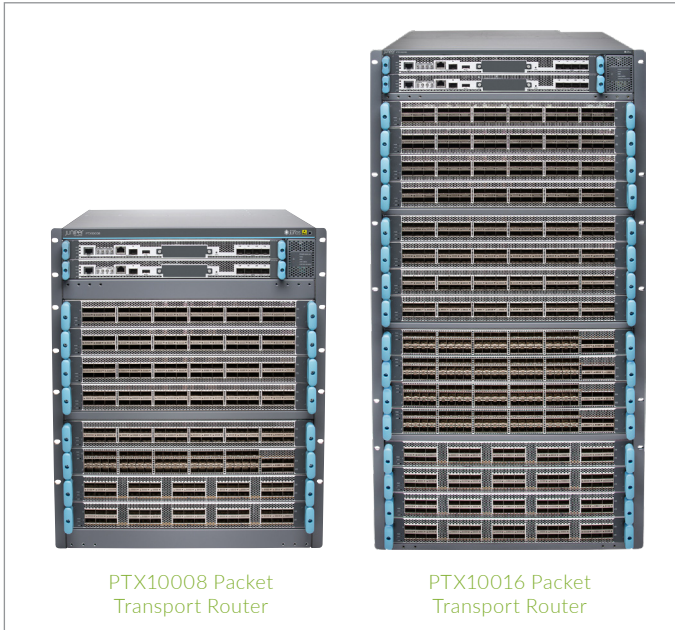

PTX10008 Packet Transport Router

PTX10016 Packet Transport Router

Specifications

Table 2: PTX10000 Modular Chassis Specifications

PTX10008	
Physical dimensions (W x H x D)	17.4 x 22.55 x 32 in. (44.2 x 57.76 x 81.28 cm); 39.37 in. (100 cm) depth with EMI door
Maximum weight	493 lb (223.62 kg)
Mounting	Front rack mount
Power system rating*	200-240 VAC / 50-60 Hz -48 VDC @ 60 A
Typical power consumption	17.3 kW, fully loaded
Operating temperature	32° to 115° F (0° to 46° C) at sea level
PTX10016	
Physical dimensions (W x H x D)	17.4 x 36.65 x 35 in (44.2 x 93.09 x 88.90 cm); 42.40 in (107.7 cm) depth with EMI door
Maximum weight	596 lb (270 kg)
Mounting	Front rack mount
Power system rating*	200-240 VAC / 50-60 Hz -48 VDC @ 60 A
Typical power consumption	34.6 kW, fully loaded
Operating temperature	32° to 115° F (0° to 46° C) at sea level

*These numbers are power supply ratings. Actual power usage is much lower.

Juniper Networks Services and Support

Juniper Networks is the leader in performance-enabling services that are designed to accelerate, extend, and optimize your high-performance network. Our services allow you to maximize operational efficiency while reducing costs and minimizing risk, achieving a faster time to value for your network. Juniper Networks ensures operational excellence by optimizing the network to maintain required levels of performance, reliability, and availability. For more details, please visit www.juniper.net/us/en/products-services.

PTX10000 Modular Chassis Ordering Information

For more information, please contact your Juniper Networks representative.

Product Number	Description
PTX10008 Premium and Base Units	
PTX10008-BASE	PTX10008 8-slot chassis [JNP10008]. Includes 1 RE, 3 power supplies, 2 fan trays, 2 fan tray controllers, and 5 Switch Fabric cards.
PTX10008-PREMIUM	PTX10008 redundant 8-slot chassis [JNP10008]. Includes 2 REs, 6 power supplies, 2 fan trays, 2 fan tray controllers, and 6 Switch Fabric cards.
PTX10016 Premium and Base Units	
PTX10016-BASE	PTX10016 16-slot chassis [JNP10016]. Includes 1 RE, 5 power supplies, 2 fan trays, 2 fan tray controllers, and 5 switch fabric cards.
PTX10016-PREMIUM	PTX10016 redundant 16-slot chassis [JNP10016]. Includes 2 REs, 10 power supplies, 2 fan trays, 2 fan tray controllers, and 6 switch fabric cards.
PTX10000 Routing Engines and Control Boards	
JNP10K-RE0-BB	PTX10K/JNP10K RE X4, base bundle
JNP10K-RE0-R	PTX10K/JNP10K RE X4, redundant
JNP10K-RE0	PTX10K/JNP10K RE X4
PTX10008 Switch Fabric	
JNP10008-SF-BB	PTX10008/JNP10008 Switch Fabric card, base bundle
JNP10008-SF-R	PTX10008/JNP10008 Switch Fabric card, redundant
JNP10008-SF	PTX10008/JNP10008 Switch Fabric card
PTX10016 Switch Fabric	
JNP10016-SF-BB	PTX10016/JNP10016 Switch Fabric card, base bundle
JNP10016-SF-R	PTX10016/JNP10016 Switch Fabric card, redundant
JNP10016-SF	PTX10016/JNP10016 Switch Fabric card, base bundle
PTX10000 Line Cards	
PTX10K-LC1101	30x100GbE/30x40GbE line card [JNP10K-LC1101]
PTX10K-LC1101-IR	30x100GbE/30x40GbE line card [JNP10K-LC1101], IR mode
PTX10K-LC1101-R	30x100GbE/30x40GbE line card [JNP10K-LC1101], R mode
PTX10K-LC1102	36X40GbE/12X100GbE line card [JNP10K-LC1102]
PTX10K-LC1102-IR	36X40GbE/12X100GbE line card [JNP10K-LC1102], IR mode
PTX10K-LC1102-R	36X40GbE/12X100GbE line card [JNP10K-LC1102], R mode
PTX10K-LC1104	6x100G/150G/200G DWDM line card with MACsec [JNP10K-LC1104]
PTX10K-LC1105	30x100GbE/30x40GbE line card with MACsec [JNP10K-LC1105]
PTX10K-LC1105-IR	30x100GbE/30x40GbE line card with MACsec [JNP10K-LC1105], IR mode
PTX10K-LC1105-R	30x100GbE/30x40GbE line card with MACsec [JNP10K-LC1105], R mode

Product Number	Description
PTX10008 Fan Tray and Controller	
JNP10008-FAN-BB	PTX10008/JNP10008 fan, base bundle
JNP10008-FAN	PTX10008/JNP10008 fan
JNP10008FAN CTRL-BB	PTX10008/JNP10008 fan tray controller, base bundle
JNP10008-FAN-CTRL	PTX10008/JNP10008 fan tray controller
PTX10016 Fan Tray and Controller	
JNP10016-FAN-BB	PTX10016/JNP10016 fan, base bundle
JNP10016-FAN	PTX10016/JNP10016 fan
JNP10016FANCTRL-BB	PTX10016/JNP10016 fan tray controller, base bundle
JNP10016-FAN-CTRL	PTX10016/JNP10016 fan tray controller
PTX10000 Power Modules	
JNP10K-PWR-AC-BB	PTX10K/JNP10K 2700 W AC power supply, base bundle
JNP10K-PWR-AC-R	PTX10K/JNP10K 2700 W AC power supply, redundant
JNP10K-PWR-AC	PTX10K/JNP10K 2700 W AC power supply
JNP10K-PWR-DC-BB	PTX10K/JNP10K 2500 W DC power supply, base bundle
JNP10K-PWR-DC-R	PTX10K/JNP10K 2500 W DC power supply, redundant
JNP10K-PWR-DC	PTX10K/JNP10K 2500 W DC power supply

Product Number	Description
PTX10008 Front Panels	
JNP10008-FRPNL-BB	PTX10008/JNP10008 front panel, base bundle
JNP10008-FRNT-PNL	PTX10008/JNP10008 front panel
JNP10008-FRPNL1-BB	PTX10008/JNP10008 front panel with filter, base bundle
JNP10008-FRPNL1	PTX10008/JNP10008 front panel with filter
JNP10008-FLTR	PTX10008/JNP10008 replaceable filter
PTX10016 Front Panels	
JNP10016-FRPNL-BB	PTX10016/JNP10016 front panel, base bundle
JNP10016-FRNT-PNL	PTX10016/JNP10016 front panel
JNP10016-FRPNL1-BB	PTX10016/JNP10016 front panel with filter, base bundle
JNP10016-FRPNL1	PTX10016/JNP10016 front panel with filter
JNP10016-FLTR	PTX10016/JNP10016 replaceable filter

About Juniper Networks

Juniper Networks brings simplicity to networking with products, solutions and services that connect the world. Through engineering innovation, we remove the constraints and complexities of networking in the cloud era to solve the toughest challenges our customers and partners face daily. At Juniper Networks, we believe that the network is a resource for sharing knowledge and human advancement that changes the world. We are committed to imagining groundbreaking ways to deliver automated, scalable and secure networks to move at the speed of business.

Corporate and Sales Headquarters

Juniper Networks, Inc.
1133 Innovation Way
Sunnyvale, CA 94089 USA

Phone: 888.JUNIPER (888.586.4737)

or +1.408.745.2000

www.juniper.net

APAC and EMEA Headquarters

Juniper Networks International B.V.

Boeing Avenue 240

1119 PZ Schiphol-Rijk

Amsterdam, The Netherlands

Phone: +31.0.207.125.700

JUNIPER NETWORKS | Engineering
Simplicity

