

SIEMENS



# Hydraulics made easy

Acvatix combi valves for simple and flexible planning and implementation of energy-efficient HVAC plants

Combi Valve  
Sizer app to  
design energy-  
efficient plants



[www.siemens.com/acvatix](http://www.siemens.com/acvatix)



## Less effort, high efficiency

The pressure independent Acvatix™ combi valves and actuators reduce energy consumption in buildings, resulting in lower energy costs. They promote efficiency by preventing an oversupply to consumers as well as mutual hydraulic interaction. In addition, the resulting accurate temperature control provides enhanced comfort for building occupants.

Acvatix combi valves are especially straightforward to plan, install and commission. Their consistent volumetric flow range and wide differential pressure ranges allow highly flexible planning. The combination of control valve and differential pressure controller in one combi valve facilitates installation and hydraulic balancing. This makes commissioning fast and easy.

# Master hydraulics with Acvatix

## Innovative technology for maximum efficiency

Acvatix combi valves are innovative products with state-of-the-art technology for variable-volume, energy-efficient HVAC applications. They are available with volume flows ranging from 0.025 to 200 m<sup>3</sup>/h and are thus suitable for all room and zone applications as well as for heating, ventilation and air conditioning systems. Their easy integration into existing systems makes them especially ideal for renovations and system expansions.

Combi valves combine the following into a valve body:

- A control valve
- A differential pressure controller that shields against pressure fluctuations in the hydraulic network
- A presetting scale to set the desired maximum volumetric flow
- Pressure measuring points for differential pressure measurement

## Products with long-term investment protection

Acvatix combi valves and actuators are extensively tested by Siemens in the company's in-house HVAC laboratory. This ensures the best quality, maximum reliability and a long service life. Reliable and fail-safe, these products provide for optimal plant operation. Combi valves additionally create cost efficiency: Straightforward hydraulic planning and sizing speed up the planning phase.

Commissioning is faster thanks to the automatic hydraulic balancing and the volumetric flow preset ability. The integrated differential pressure controller maintains a constant pressure via the internal control valve – and thus also the set volumetric flow, regardless of pressure fluctuations in the hydraulic network. Because the control is independent of differential pressure, the combi valves ensure steady temperature control. As a result, they provide for a high level of room comfort. This also makes it possible to optimally maintain return temperatures for all operating conditions, which ensures a high level of efficiency in heating and cooling. All these factors significantly reduce heating and cooling costs.

## Full support in every respect

We provide practical tools to make your daily work easier. For example, the Combi Valve Sizer app helps you to select the right products and correctly preset the combi valve. With the HVAC Integrated Tool (HIT), you can plan the complete HVAC application step by step. In addition to the tools, with Acvatix you also get the global service network from Siemens along with benefits that include short delivery times and expert support if you have questions.

## Highlights

- Straightforward planning and implementation of energy-efficient HVAC plants
- Energy efficiency without loss of comfort
- Cost-efficient thanks to straightforward sizing, presetting and simplified hydraulic balancing
- Full support in planning, engineering and service

With the Combi Valve Sizer app for smartphones you can easily select the ideal Acvatix combi valve and the right actuator. This makes planning energy-efficient HVAC plants very straightforward.





# Acvatix combi valves – straightforward, convenient and comprehensive

## 1 Maximum volumetric flow presetting



- Stepless presetting simplifies setting the desired maximum volumetric flow
- Flexible planning thanks to the consistent volumetric flow range
- Presetting prevents oversupply to the heat exchanger
- Full stroke range with any preset value contributes to high control accuracy
- Easy adjustment of maximum volumetric flow at any time when usage patterns change
- Straightforward operation – no special tools necessary for mounting and presetting, easy-to-read scale values

## 2 Integrated differential pressure controller




- Automatic shielding against pressure fluctuations in the network, for a constant volumetric flow and thereby exact control of room temperature, a higher level of comfort and lower energy consumption
- Flexible planning due to the wide differential pressure range
- No mutual hydraulic interaction between consumers in different operational situations, thus no over- or undersupply
- Fast commissioning thanks to extremely simplified hydraulic balancing

## 3 Pressure measuring points



- Straightforward testing and setting of minimum or optimum differential pressure when commissioning with the help of the pressure measuring points
- Simplified testing of plant in operation thanks to easily accessible pressure measuring points as service points
- Pressure gauge, measuring lines with measuring tips and other pressure measurement connections available as accessories

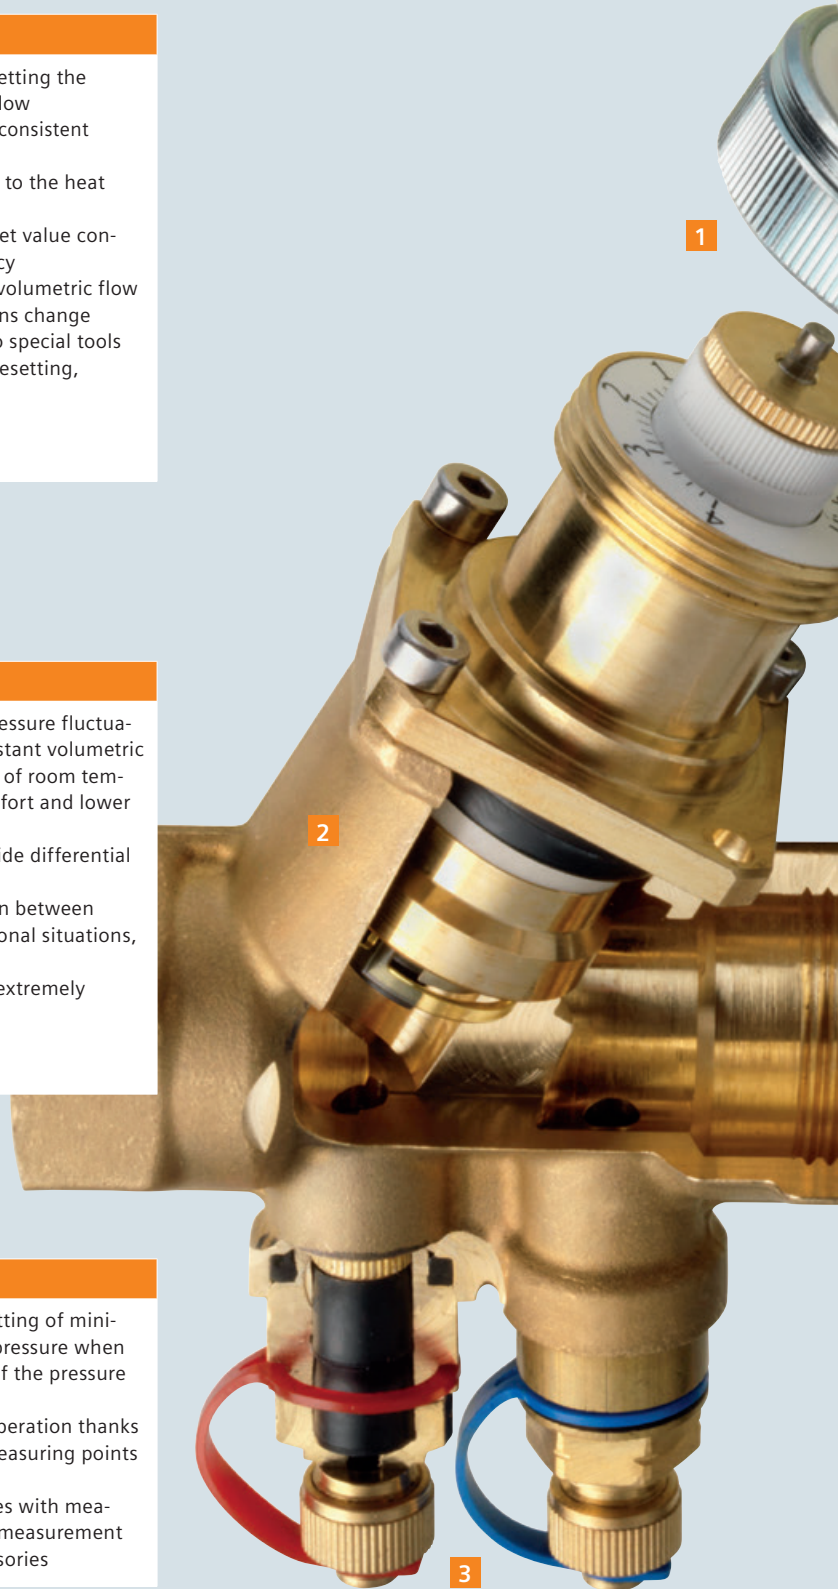



4

#### 4 Actuators for combi valves



- The ideal actuator for any control requirement
- Straightforward planning due to broad actuator range
- Additional functions for efficient plant control and quick troubleshooting
- High quality and long lifetime thanks to valve actuator combinations tested in our own HVAC laboratory

#### Comprehensive range of combi valves



PN class	Connection	DN	Volumetric flow	
PN 25	Flange	50...150	VPF53..	
PN 16	Flange	50...150	VPF43..	
PN 25	Internally threaded	10...32	VPI46..	
PN 25	Externally threaded	10...50	VPP46..	
PN 10	Externally/internally threaded	10/15	VPD../VPE..	
			I/h	10 20 30 50 100 200 500 1000 2000 5000 10000 50000 100000 200000
			m <sup>3</sup> /h	1 2 3 4 6 10 20 30 50 100 200

# Ideal for many applications

## Application areas

Acvatix combi valves are suitable for use in:

- Floor heating
- Radiators
- Chilled ceilings
- VAV (variable air volume systems)
- Fan coil units
- Zone control
- Heating groups
- Air handling units
- Boiler plants
- Chiller plants

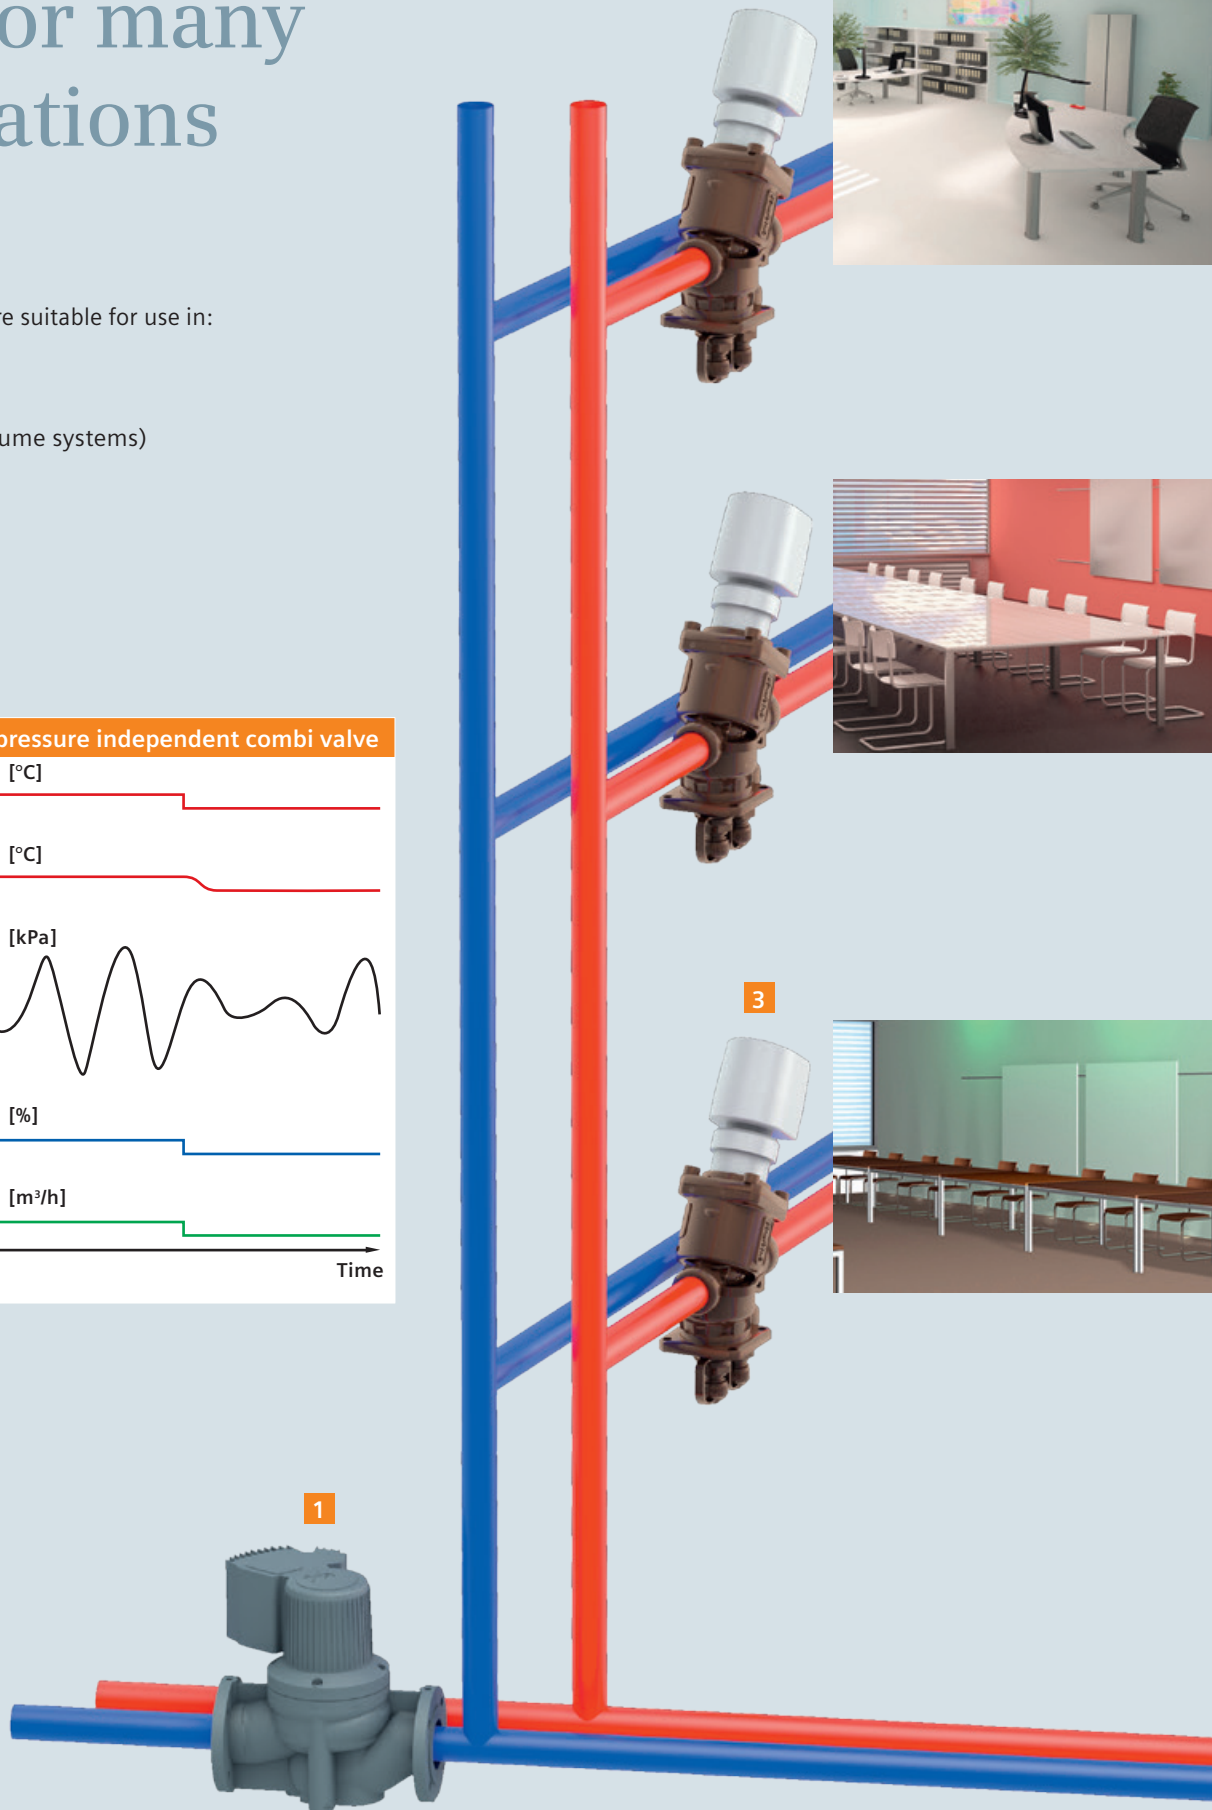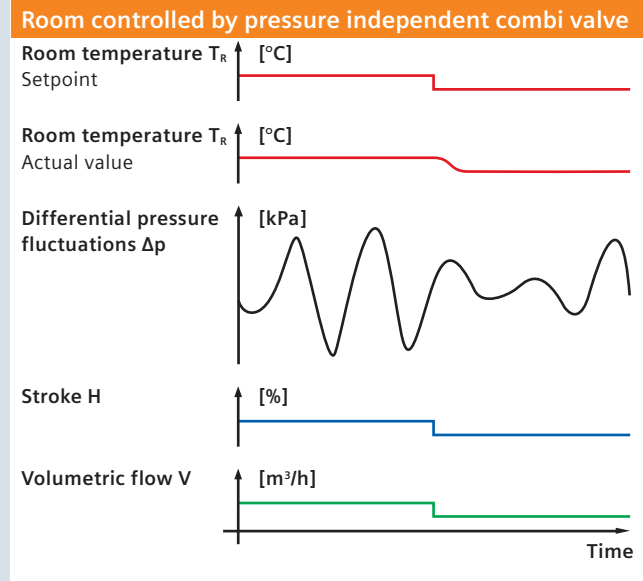






### 1 Demand-controlled pump



- Reduced energy consumption thanks to variable-volume HVAC plants with demand- or speed-controlled pumps
- Continuous speed control with differential pressure measurement for optimal adjustment of volumetric flow
- Correctly sized and selected pump to avoid undersupply in part load operation



### 2 Differential pressure measurement



- No undersupply thanks to differential pressure measurement at the hydraulically most significant consumer of a plant – usually the remotest consumer




### 3 Pressure independent combi valves



- Straightforward implementation of energy-efficient, variable-volume HVAC plants
- No mutual hydraulic interaction in a branch, thanks to the integrated differential pressure controller
- Straightforward and stepless presetting of the desired maximum volumetric flow to avoid oversupply
- The desired volumetric flow is always ensured
- Straightforward sizing and selection of combi valves via volumetric flow calculation
- Support with convenient tools from Siemens, including app, valve slide rule or HIT<sup>1)</sup>

<sup>1)</sup> HVAC Integrated Tool online at [www.siemens.com/hit](http://www.siemens.com/hit)

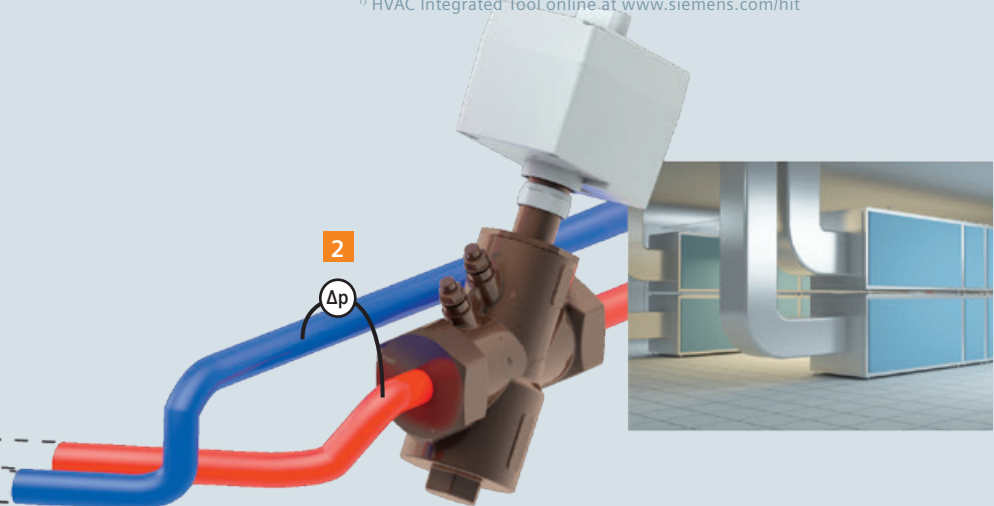

Siemens Switzerland Ltd  
Building Technologies Division  
International Headquarters  
Gubelstrasse 22  
6301 Zug  
Switzerland  
Tel +41 41 724 24 24

Siemens Building Technologies  
Brunel House  
Sir William Siemens Square, Frimley  
Camberley  
Surrey, GU16 8QD  
United Kingdom  
Tel +44 1276 696000

Siemens Ltd  
Building Technologies Division  
22/F, AIA Kowloon Tower, Landmark East  
100 How Ming Street  
Kwun Tong, Hong Kong  
Tel +852 2870 7888

The information in this document contains general descriptions of technical options available, which do not always have to be present in individual cases. The required features should therefore be specified in each individual case at the time of closing the contract. The document contains a general product overview. Availability can vary by country. For detailed product information, please contact the company office or authorized partners.

© Siemens Switzerland Ltd, 2015 • Order no. 0-92318-en

Our world is undergoing changes that force us to think in new ways: demographic change, urbanization, global warming and resource shortages. Maximum efficiency has top priority – and not only where energy is concerned. In addition, we need to increase comfort for the well-being of users. Also, our need for safety and security is constantly growing. For our customers, success is defined by how well they manage these challenges. Siemens has the answers.

**“We are the trusted technology partner for energy-efficient, safe and secure buildings and infrastructure.”**