

Field Notes

USBR

WRM

1056-1061

DEPARTMENT OF THE INTERIOR
BUREAU OF RECLAMATION
SUPPLEMENTAL SURVEY

Field Notes
of

Subdivision of

Sections 1, 2, 3, 4, 5 and 6

T. 3 N., R. 2 E.

Sections 27, 28, 29, 30, 31, 32, 33, 34, 35 and 36

T. 4 N., R. 2 E.

Sections 6 and 7

T. 3 N., R. 3 E.

and

Section 31

T. 4 N., R. 3 E.

Wind River Meridian, Wyoming

and

Surveys of tracts in said sections


Executed by Earl R. Asdell, Engineer

Under Authority of Departmental Instructions of

October 24, 1906

Survey Commenced	October 28, 1947
Survey Completed	May 10, 1948

*Rec'd at Pub. Surv. Office
July 21, 1947*

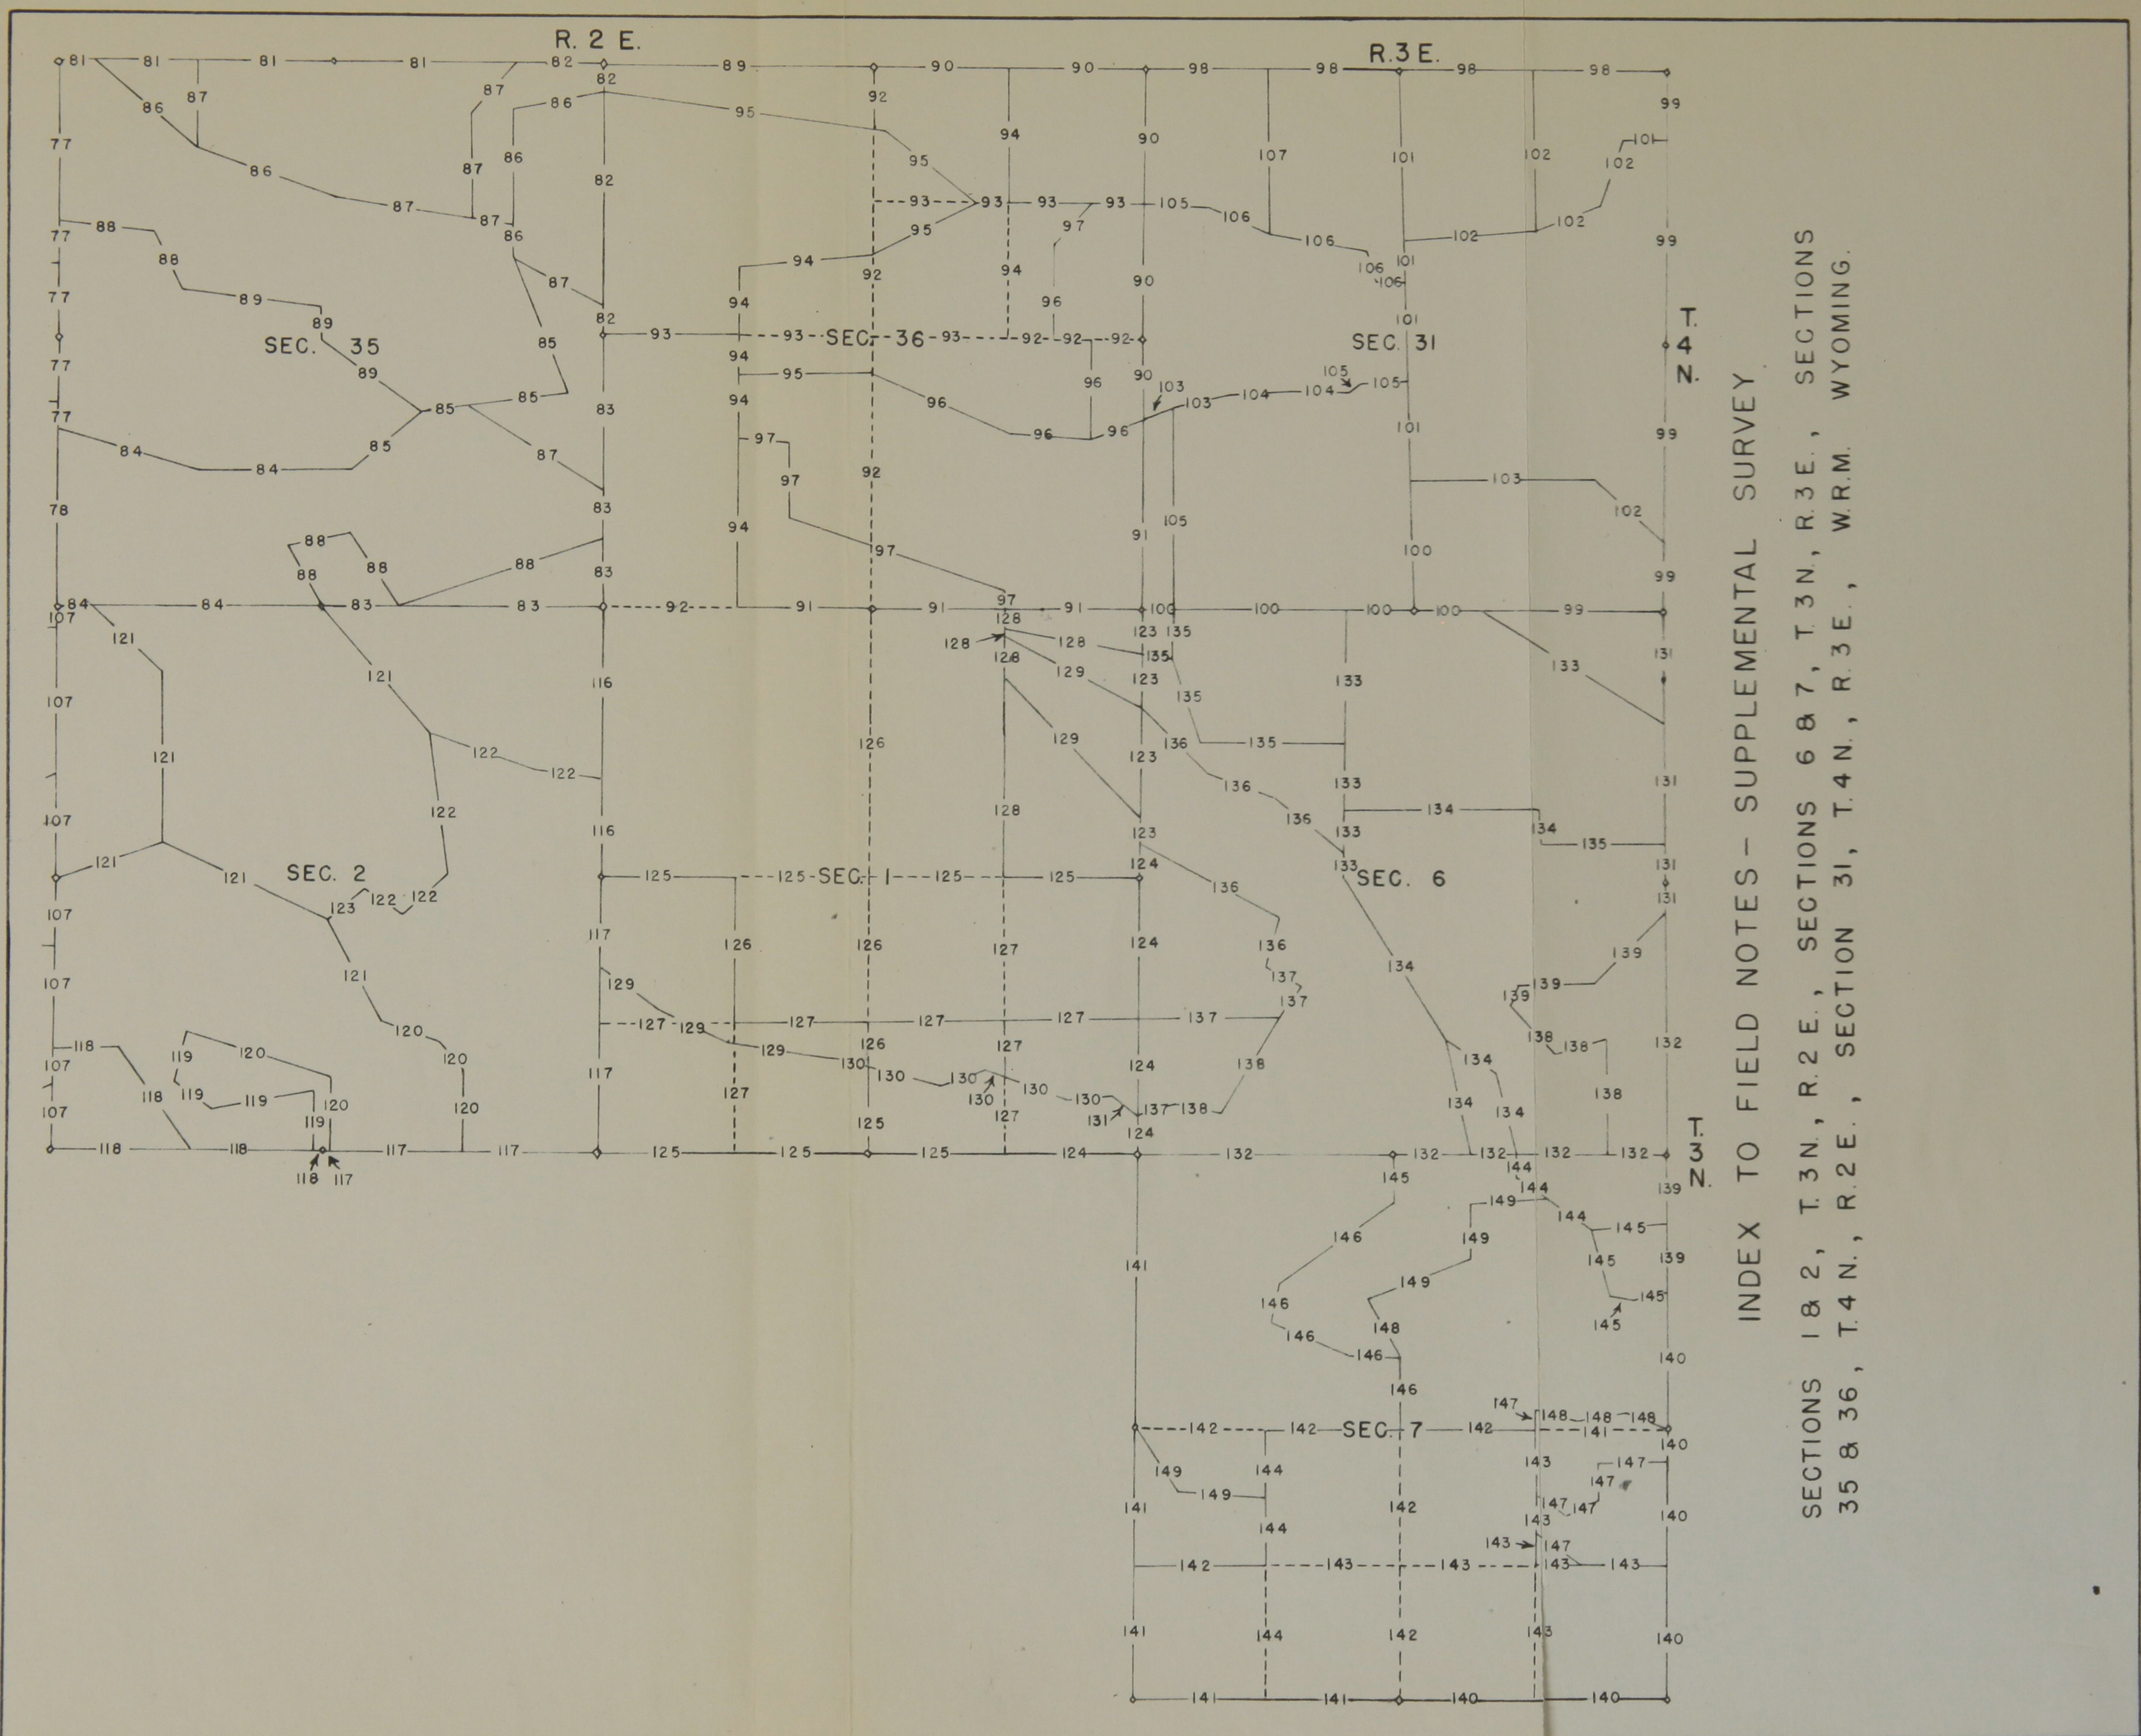

INDEX TO FIELD NOTES - SUPPLEMENTAL SURVEY
 SECTIONS 1 & 2, T. 3 N., R. 2 E., SECTIONS 6 & 7, T. 3 N., R. 3 E., SECTIONS
 35 & 36, T. 4 N., R. 2 E., SECTION 31, T. 4 N., R. 3 E., W.R.M. WYOMING.

INDEX TO PLATS

	Section	Drawing No.	Page No.
T. 3 N., R. 2 E.	1	7L-4009	X
	2	7L-4006	VII
	3	7L-4006	VII
	4	7L-4005	VI
	5	7L-4005	VI
	6	7L-4005	VI
T. 4 N., R. 2 E.	27	7L-4003	IV
	28	7L-4003	IV
	29	7L-4002	III
	30	7L-4002	III
	31	7L-4001	II
	32	7L-4000	I
	33	7L-4000	I
	34	7L-4004	V
	35	7L-4004	V
	36	7L-4007	VIII
T. 3 N., R. 3 E.	6	7L-4010	XI
	7	7L-4011	XII
T. 4 N., R. 3 E.	31	7L-4008	IX

Subdivision of section 1, T. 3 N., R. 2 E., W. R. M., Wyoming.
Subdivision of section 6, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains S. 54° 47' E.

5.20 Cor. of tracts 8 and 9 in bdy. bet. secs. 1 and 6.

From the SW. 1/16 sec. cor. of sec. 1.

S. 19° 29' W. bet. tracts 5 and 6.

2.83 The cor. of tracts 5, 6 and 10.

The areas of sec. 5 which are not included in tracts 1 through 10 are as shown on the Township Map approved Dec. 4, 1891.

Subdivision of section 6, T. 3 N., R. 3 E. W. R. M., Wyoming.


From the cor. of secs. 5, 6, 31 and 32, previously described.

Bet. secs. 5 and 6.

S. 0° 22' W.


15.97 Point for cor. of tracts 1 and 2.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



35.02 Point for cor. of tracts 2 and 6.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.




40.02 The 1/2 sec. cor. of secs. 5 and 6, a mkd. stone which is replaced with an iron pin 30 ins. long, 3/4 ins. diam., 22 ins. in the ground, set in concrete.

S. 0° 21' W.

5.02 Point for cor. of tracts 6 and 10.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.




Subdivision of section 6, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains
40.13

Cor. of secs. 5, 6, 7 and 8, and cor. of tract 10, a sandstone
12x4x4 ins. above ground, which is replaced with an iron pipe 30
ins. long, 2 ins. diam., 24 ins. in the ground, set in concrete and
mkd. 5 on the NE., 6 on the NW., 7 on the SW., 8 on the SE., and
T 3 N R 3 E on the N.
N. 89° 43' W. bet. secs. 6 and 7.


9.00

Point for cor. of tracts 6 and 10.
Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.




23.00

Point for cor. of tracts 6 and 11, sec. 6, and tracts 1 and 3,
sec. 7.
Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.



30.18

Point for cor. of tracts 7 and 11.
Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.



40.15

The $\frac{1}{4}$ sec. cor. of secs. 6 and 7, and cor. of tracts 3 and 4, sec. 7,
a marked stone which is replaced with an iron pipe 30 ins. long,
 $\frac{1}{2}$ ins. diam., 26 ins. in the ground, set in concrete and mkd.
S 6 on the N., $\frac{1}{4}$ on the W., and S 7 on the S.

78.00

Cor. of secs. 6, 7, 1 and 12, previously described.
From the cor. of tracts 1 and 2 in the bdy. bet. secs. 6 and 31
previously described.

Subdivision of section 6, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains

S. 59° 23' E. bet. tracts 1 and 2.

31.40

Cor. of tracts 1 and 2 in the bdy. bet. secs. 6 and 5.

From the cor. of tracts 2 and 3 in the bdy. bet. secs. 6 and 31, previously described.

S. 1° 20' W. bet. tracts 2 and 3.

19.84

Point for cor. of tracts 3 and 5 in bdy. of tract 2.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.




Thence bet. tracts 2 and 5.

29.84

Point for cor. of tracts 2 and 6 in bdy. of tract 5.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.




Thence bet. tracts 5 and 6.

35.84

Point for cor. of tracts 5 and 7 in bdy. of tract 6.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.




Thence bet. tracts 6 and 7.

39.69


Angle point in bdy. bet. tracts 6 and 7.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



Subdivision of section 6, T. 3 N., R. 3 E., W. R.M., Wyoming.


Chains S. 32° 14' E.
 28.00 Point for cor. of tracts 6, 7 and 11.
 Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
 with brass cap mkd.



16.92 S. 11° 47' E. bet. tracts 7 and 11.
 Cor. of tracts 7 and 11 in bdy. bet. secs. 6 and 7.

From the cor. of tracts 6, 7 and 11.
 Bet. tracts 6 and 11.


9.00 S. 57° 13' E.
 Angle point in bdy. bet. tracts 6 and 11.
 Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
 with brass cap mkd.



12.13 S. 14° 39' E.
 Cor. of tracts 6 and 11 in the bdy. bet. secs. 6 and 7.

From the cor. of tracts 2 and 6 in bdy. of tract 5.
 Bet. tracts 2 and 6.

29.18 S. 89° 56' E.
 Angle point No. 1 in bdy. bet. tracts 2 and 6.
 Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
 with brass cap mkd.




4.98 S. 1° 06' W.
 Angle point No. 2 in bdy. bet. tracts 2 and 6.

Subdivision of section 6, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains


Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



S. 89° 42' E.

19.59

Cor. of tracts 2 and 6 in bdy. bet. secs. 5 and 6.



From the cor. of tracts 3 and 5 in bdy. of tract 2.


Bet. tracts 3 and 5.

S. 89° 45' W.

21.00

Angle point in bdy. bet. tracts 3 and 5.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.




N. 18° 59' W.

12.94

Point for cor. of tracts 3, 4 and 5.


Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



N. 0° 01' E. bet. tracts 3 and 4.

7.38

Cor. of tracts 3 and 4 in the bdy. bet. sec. 6 and 31, previously described.



From the cor. of tracts 3, 4 and 5.

N. 79° 57' W. bet. tracts 4 and 5.

4.72

Cor. of tracts 4 and 5 in the bdy. bet. secs. 6 and 31, previously described.

Subdivision of section 6, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains

From the cor. of tracts 5 and 7 in bdy. of tract 6.


Bet. tracts 5 and 7.

N. 52° 40' W.

13.12

Angle point No. 1 in bdy. bet. tracts 5 and 7.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.




N. 70° 41' W.

10.00

Angle point No. 2 in bdy. bet. tracts 5 and 7.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



N. 45° 12' W.

13.75

Cor. of tracts 5 and 7 in the bdy. bet. secs. 6 and 11, previously described.

From the cor. of tracts 7 and 8 in the bdy. bet. sec. 6 and 1, previously described.


Bet. tracts 7 and 8.

S. 62° 18' E.

24.16

Angle point No. 1 in bdy. bet. tracts 7 and 8.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



S. 17° 11' W.


7.47

Angle point No. 2 in bdy. bet. tracts 7 and 8.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,


Subdivision of section 6, T. 3 N., R. 3 E., W. R.M., Wyoming.

Chains with brass cap mkd.




S. 65° 40' E.

6.00 Angle point No. 3 in bdy. bet. tracts 7 and 8.
Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.



S. 36° 09' W.

6.00 Point for cor. of tracts 7, 8 and 9.
Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.



N. 89° 45' W. bet. tracts 8 and 9.

20.95 Cor. of tracts 8 and 9 in the bdy. bet. secs. 6 and 1, previously
described.

From the cor. of tracts 7 and 9 in the bdy. bet. sec. 6 and 1, previously
described.

Bet. tracts 7 and 9.

N. 71° 42' E.

6.00 Angle point No. 1 in the bdy. bet. tracts 7 and 9.
Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.

S 6
TR 9
AP 1

TR 7
1948

Subdivision of section 6, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains

S. 76° 43' E.

7.00

Angle point No. 2 in the bdy. bet. tracts 7 and 9.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

S 6

TR 9

AP 2

TR 7

1948

N. 30° 58' E.

16.07

Cor. of tracts 7, 8 and 9.

From the cor. of tracts 6 and 10 in the bdy. bet. secs. 6 and 7.

Bet. tracts 6 and 10.

N. 0° 17' E.

16.97

Angle point No. 1 in the bdy. bet. tracts 6 and 10.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

S 6

TR 10

AP 1

TR 6

1948

S. 71° 04' W.

8.00

Angle point No. 2 in the bdy. bet. tracts 6 and 10.

Set an ironpost 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

S 6

TR 10

AP 2

TR 6

1948

N. 43° 44' W.

10.00

Angle point No. 3 in the bdy. bet. tracts 6 and 10.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

S 6

TR 6 AP 3

TR 10

1948

Subdivision of section 6, T. 3 N., R. 3 E., W. R. M., Wyoming.
Subdivision of section 7, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains N. 15° 55' E.

3.00 Angle point No. 4 in the bdy. bet. tracts 6 and 10.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.

S 6
TR 6



N. 88° 52' E.

12.03 Angle point No. 5 in the bdy. bet. tracts 6 and 10.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.

S 6
TR 6

AP 5
TR 10
1948

N. 46° 03' E.

14.94 Cor. of tracts 6 and 10 in the bdy. bet. secs. 6 and 5.

Subdivision of section 7, T. 3 N., R. 3 E., W. R. M., Wyoming.


From the cor. of secs. 5, 6, 7 and 8, previously described.

Bet. secs. 7 and 8.

S. 0° 05' W.

9.99 Point for the cor. of tracts 1 and 2.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.




19.98 The N. 1/16 sec. cor. of secs. 7 and 8 and cor. of tracts 2 and 5,

At the corner point,

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.


Chains

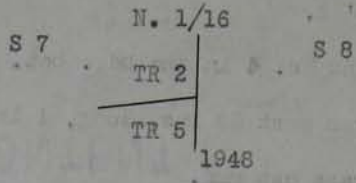


39.96 The 1/4 sec. cor. of secs. 7 and 8 and cor. of tracts 5 and 6, a sandstone 10x5x4 ins. above ground which is replaced with an iron pipe 30 ins. long, 1 1/2 ins. diam., 25 ins. in the ground, set in concrete and mkd. 1/4 on the N., S 7 on the W., and S 8 on the E.

S. 0° 12' W.

5.00 Point for cor. of tracts 6 and 7:
Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



20.04 The S 1/16 sec. cor. of secs. 7 and 8 and cor. of tract 7,
At the corner point,
Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



40.09 The cor. of secs. 7, 8, 17 and 18, a sandstone 10x5x4 ins. above ground which is replaced with an iron pipe 30 ins. long, 2 ins. diam., 28 ins. in the ground, set in concrete and mkd. 8 on the NE., 7 on the NW., 18 on the SW., 17 on the SE., and T 3 N R 3 E on the N.

N. 89° 36' W. bet. secs. 7 and 18.

20.00 The E 1/16 sec. cor. of secs. 7 and 18.
Set a hub at the corner point.

40.01 The 1/4 sec. cor. of secs. 7 and 18, a sandstone 10x6x3 ins. above ground which is replaced with an iron pin 1/2 ins. diam., 30 ins. long, 28 ins. in the ground, set in concrete.

Subdivision of section 7, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains
60.09

The W $1/16$ sec. cor. of secs. 7 and 18.


Set a hub at the corner point.

77.91

Point for cor. of secs. 7, 12, 13 and 18, an obliterated cor; the point, for which was recovered beyond reasonable doubt by measurement from known corners, such measurements being in agreement and in proper relation to the field notes for the subdivision of secs. 7 and 12, made by the Bureau of Reclamation in 1924.

At the corner point,

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

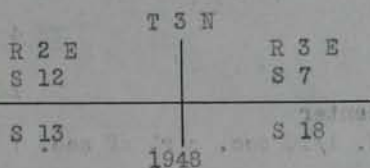


Bet. secs. 7 and 12.

N. $0^{\circ} 05'$ W.

19.89 Point for the S $1/16$ sec. cor. of secs. 7 and 12 and cor. of tract 9.

At the corner point,

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



39.78 The $\frac{1}{4}$ sec. cor. of secs. 7 and 12 and cor. of tracts 4 and 9, a sandstone $2\frac{1}{2} \times 4 \times 5$ ins. above ground which is replaced with an iron pipe 30 ins. long, 1 in. diam., 25 ins. in the ground, set in concrete and mkd. $\frac{1}{4}$ on the N., S 12 on the W., and S 7 on the E.

N. $0^{\circ} 15'$ E.

40.12 The cor. of secs. 1, 6, 7 and 12, previously described.

From the $\frac{1}{4}$ sec. cor. of secs. 7 and 8.


N. $89^{\circ} 50'$ W. along the EW center line of sec. 7.

20.05 The $\frac{1}{4}$ sec. cor. of sec. 7 and cor. of tract 5 in the bdy. of tract 6.

At the corner point,

Subdivision of section 7, T. 3 N., R. 3 E., W. R. M., Wyoming.


Chains Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground with brass cap mkd.



40.11 Intersect the N.S. center line of sec. 7. for the $C\frac{1}{4}$ sec. cor. and cor. of tracts 4 and 5.

At the corner point,


Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



60.25 The ^{center}W. 1/16 sec. cor. of sec. 7 and cor. of tract 4.

At the corner point,

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



78.11 The $\frac{1}{4}$ sec. cor. of sec. 7 and 12:

From the $\frac{1}{4}$ sec. cor. of secs. 7 and 18.

N. $0^{\circ} 3'$ E. along the N.S. center line of sec. 7.

19.97 The ^{center}S 1/16 sec. cor. of sec. 7.

Set a hub at the corner point,

39.93 Intersect the EW center line of sec. 7 at the $C\frac{1}{4}$ sec. cor., previously described.

From the S 1/16 sec. cor. of secs. 7 and 12.

S. $89^{\circ} 43'$ E. along the S 1/16 sec. line of sec. 7.

17.84 Intersect the W 1/16 sec. line of sec. 7 for the SW 1/16 cor. and cor. of tract 9.

At the corner point,

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

Subdivision of section 7, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains

SW 1/16 S 7

TR 9

1948

37.95 The ^{center}S 1/16 sec. cor. of secs. 7, previously described.

57.98 Intersect the E 1/16 sec. line of sec. 7 for the SE 1/16 sec. cor. and cor. of tract 8. The corner point falls within a cultivated field.

Set a hub at the corner point.

65.02 Point for the corner of tracts 7 and 8,

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

S 7

TR 8

TR 7

1948

78.01 The S 1/16 sec. cor. of secs. 7 and 8.

^{center}

From the E 1/16 sec. cor. of sec. 7.

S. 0° 8' W. along the E 1/16 sec. line.

9.00 Point for the cor. of tracts 6 and 7.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

S 7

TR 6

TR 7

1948

15.00 Point for the cor. of tracts 7 and 8.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

S 7

TR 7

TR 8

1948

20.00 Intersect the S 1/16 sec. line at the SE 1/16 sec. cor. previously described.

40.01 The E 1/16 sec. cor. of secs. 7 and 18.

^{center}

From the W 1/16 sec. cor. of sec. 7.

S. 0° 1' E. along the W 1/16 sec. line.


2378

Subdivision of section 7, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains
10.02

Point for the cor. of tracts 4 and 9.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.



19.93

Intersect the S 1/16 sec. line at the SW 1/16 sec. cor. previously described.

39.86

The W 1/16 sec. cor. of secs. 7 and 18.

From the cor. of tracts 1 and 3 in the bdy. bet. secs. 6 and 7.


Bet. tracts 1 and 3.

S. 0° 17' W.

3.02

Angle point in bdy. bet. tracts 1 and 3.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.




S. 54° 42' E.

6.00

Point for cor. of tracts 3 and 5 in bdy. of tract 1.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.




Thence bet. tracts 1 and 5.

14.00

Point for cor. of tracts 1, 2 and 5.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.



Subdivision of section 7, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains N. 85° 00' E. bet. tracts 1 and 2.

11.62 Cor. of tracts 1 and 2 in the E. bdy. of sec. 7.


From the cor. of tracts 1, 2 and 5.

Bet. tracts 2 and 5.

S 15° 01' E.

10.00 Angle point No. 1 in the bdy. bet. tracts 2 and 5.


Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



S. 92° 12' E.

4.00 Angle point No. 2 in the bdy. bet. tracts 2 and 5.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



N. 76° 19' E.

5.16 Cor. of tracts 2 and 5 in the bdy. bet. secs. 7 and 8.


From the 1/4 sec. cor. of secs. 6 and 7.

Bet. tracts 3 and 4.

S. 0° 03' W.

6.99 Angle point No. 1 in the bdy. bet. tracts 3 and 4.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.




S. 55° 15' W.

Subdivision of section 7, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains
20.88


Angle point No. 2 in the bdy. bet. tracts 3 and 4.
Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.



S. 14° 34' W.

5.98


Angle point No. 3 in the bdy. bet. tracts 3 and 4.
Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.



S. 67° 54' E.

12.01


Angle point No. 4 in the bdy. bet. tracts 3 and 4.
Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.



S. 89° 48' E.

7.55

Cor. of tracts 3, 4 and 5.
Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground,
with brass cap mkd.



S. 0° 03' W. bet. tracts 4 and 5.

10.81

The C₂-sec. cor. of sec. 7, previously described.

Subdivision of section 7, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains	From the cor. of tracts 7 and 8 in the E. 1/16 sec. line. S. 54° 21' E. bet. tracts 7 and 8.
8.65	Cor. of tracts 7 and 8 in the S 1/16 sec. line.

5.93	From the cor. of tracts 6 and 7 in the E 1/16 sec. line. Bet. tracts 6 and 7. S. 54° 52' E. Angle point No. 1 in the bdy. bet. tracts 6 and 7. Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

4.98	N. 64° 45' E. Angle point No. 2 in the bdy. bet. tracts 6 and 7. Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

5.00	N. 0° 31' W. Angle point No. 3 in the bdy. bet. tracts 6 and 7. Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.


10.74	N. 88° 46' E. Cor. of tracts 6 and 7 in the bdy. bet. secs. 7 and 8.

3.00	center From the E 1/16 sec. cor. of sec. 7. Bet. tracts 5 and 6. N. 0° 08' E. Angle point No. 1 in the bdy. bet. tracts 5 and 6.

Subdivision of section 7, T. 3 N., R. 3 E., W. R. M., Wyoming.

241


Chains Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

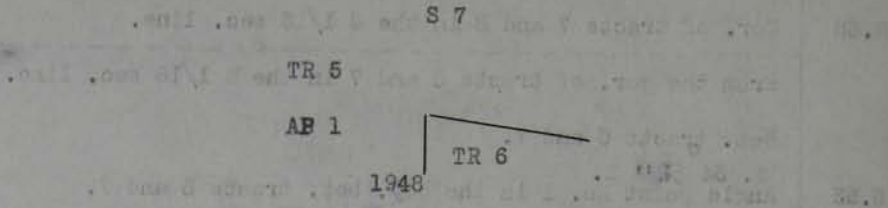

S. 74° 14' E.

6.86 Angle point No. 2 in the bdy. bet. tracts 5 and 6.


Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

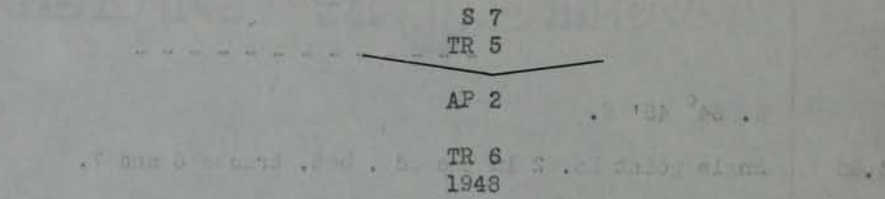

N. 80° 05' E.

6.98 Angle point No. 3 in the bdy. bet. tracts 5 and 6.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

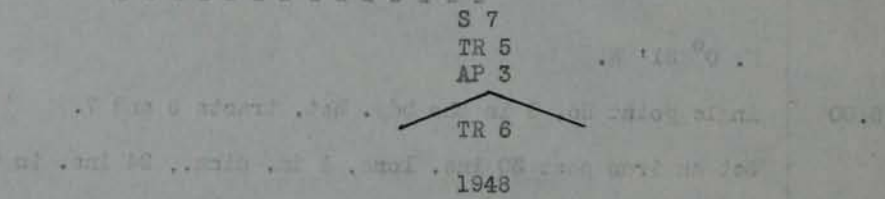

S. 69° 55' E.

6.99 The 1/2 sec. cor. of secs. 7 and 8.

From the cor. of tracts 3, 4 and 5.

Bet. tracts 3 and 5.


N. 31° 59' W.

10.00 Angle point No. 1 in the bdy. bet. tracts 3 and 5.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.

Subdivision of section 7, T. 3 N., R. 3 E., W. R. M., Wyoming.

Chains




N. 69° 35' E.

16.32

Angle point No. 2 in the bdy. bet. tracts 3 and 5.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.




N. 0° 08' E.

8.00

Angle point No. 3 in the bdy. bet. tracts 3 and 5.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.



N. 87° 42' E.

12.05

Cor. of tracts 3 and 5 in the bdy. of tract 1.

From the cor. of tracts 4 and 9 in the W 1/16 sec. line.


Bet. tracts 4 and 9.

N. 85° 02' W.

11.99

Angle point in bdy. bet. tracts 4 and 9.

Set an iron post 30 ins. long, 1 in. diam., 24 ins. in the ground, with brass cap mkd.




N. 33° 17' W.

10.80

The 1/4 sec. cor. of secs. 7 and 12.

The areas of sec. 7 which are not included in tracts 1 through 9 are as shown on the Township Map approved Dec. 4, 1891.


The sections are subdivided by the legal method of centering the sections and quarter sections with straight lines connecting opposite corresponding one-quarter section, and one sixteenth section corners, but in order to simplify the record the detail of the random lines is omitted.

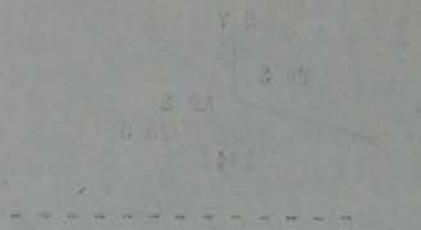

[Faint, illegible text and markings, possibly bleed-through from the reverse side of the page. Some words like 'SECTION' and 'CORNER' are barely visible.]

[Faint, illegible text at the bottom of the page, likely bleed-through.]


I, Earl R. Asdell, Engineer, Bureau of Reclamation, do hereby certify upon honor that in pursuance of Departmental Instructions bearing date of the 24th day of October, 1906, I have executed the survey of all those parts or portions of Sections 1, 2, 3, 5 and 6, T. 3 N., R. 2 E.; Sections 27, 28, 29, 30, 31, 32, 33, 34, 35 and 36, T. 4 N., R. 2 E.; Sections 6 and 7, T. 3 N., R. 3 E.; and Section 31, T. 4 N., R. 3 E.; Wind River Meridian, Wyoming, which is represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

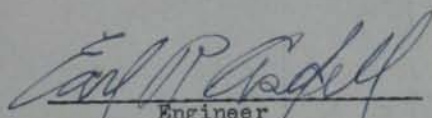
Engineer
Bureau of Reclamation



APPROVAL
BUREAU OF RECLAMATION
WASHINGTON, D. C.

JUL 13 1948, 19__

The foregoing field notes of the subdivision of Sections 1, 2, 3, 5 and 6, T. 3 N., R. 2 E.; Sections 27, 28, 29, 30, 31, 32, 33, 34, 35 and 36, T. 4 N., R. 2 E.; Sections 6 and 7, T. 3 N., R. 3 E., and Section 31, T. 4 N., R. 3 E.; Wind River Meridian, Wyoming, and the survey of tracts therein, executed by Earl R. Asdell, Engineer, Bureau of Reclamation, in accordance with Departmental Instructions of October 24, 1906, having been examined and found to conform with such instructions, are hereby approved.


Acting Commissioner

UNITED STATES
 DEPARTMENT OF THE INTERIOR
 BUREAU OF RECLAMATION
 SUPPLEMENTAL PLAT
SECTION 7, T. 3 N., R. 3 E., W.R.M., WYOMING
 AND SURVEY OF TRACTS IN SAID SECTIONS
 SURVEYED UNDER THE DIRECTION OF EARL R. ASDELL, ENGINEER
 UNDER AUTHORITY OF DEPARTMENTAL INSTRUCTIONS OF OCTOBER 24, 1906

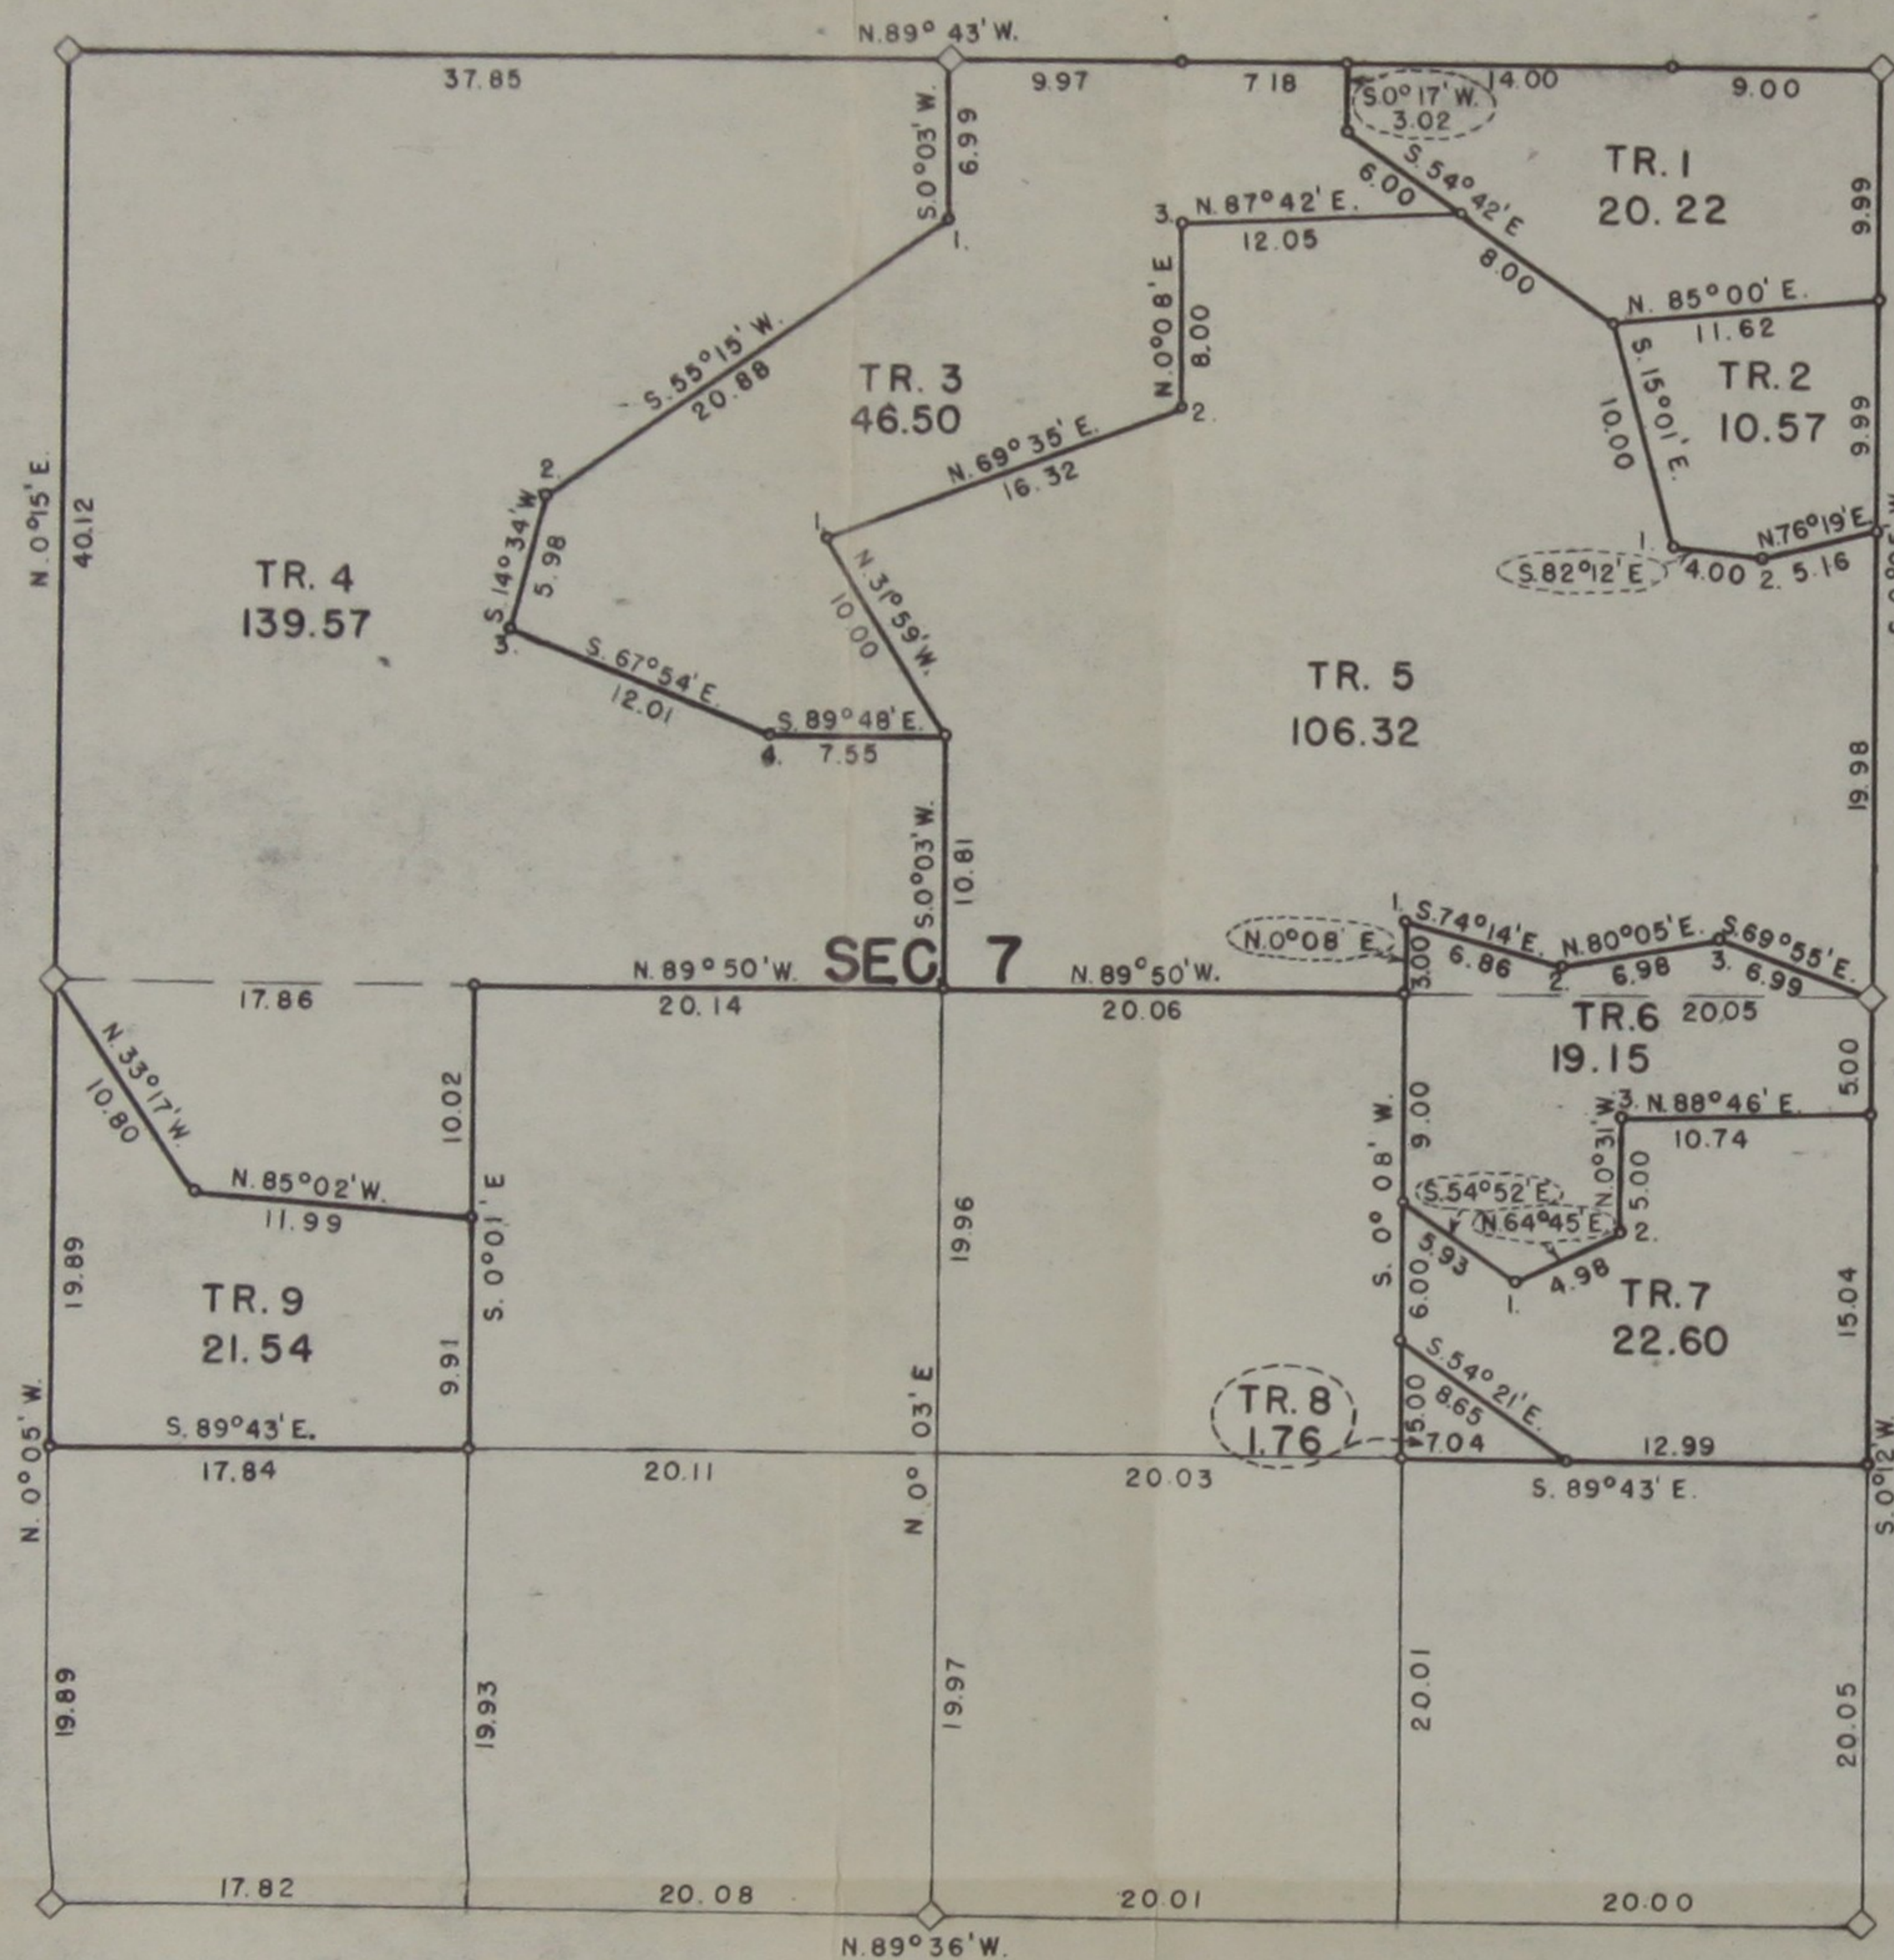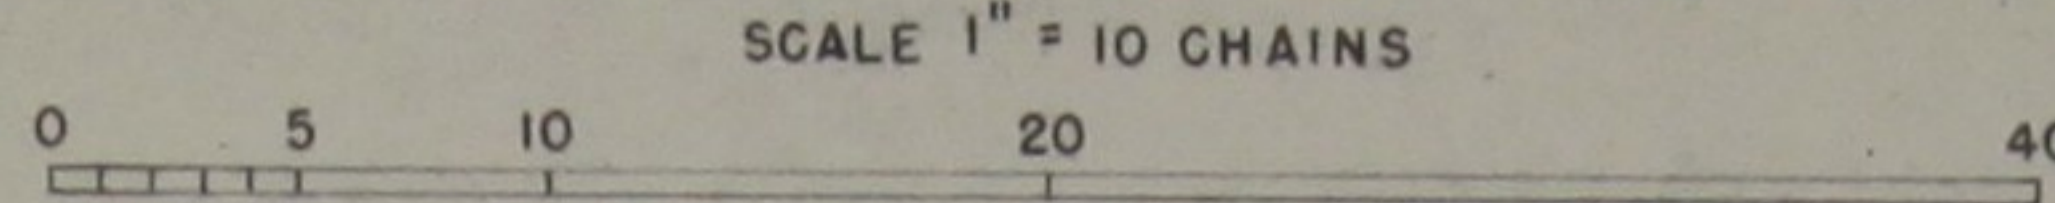

BUREAU OF RECLAMATION
 WASHINGTON, DC _____

THE ACCOMPANYING DIAGRAM OF THE SURVEY OF SECTION 7, T. 3 N., R. 3 E., W.R.M., WYOMING UNDER AUTHORITY OF DEPARTMENTAL INSTRUCTIONS OF OCTOBER 24, 1906 IS CORRECT AND ACCORDING TO FIELD NOTES THEREOF ON FILE IN THIS OFFICE WHICH HAVE BEEN EXAMINED AND APPROVED.

 COMMISSIONER

BUREAU OF LAND MANAGEMENT
 WASHINGTON, DC _____

THE ACCOMPANYING DIAGRAM OF THE SURVEY OF SECTION 7, T. 3 N., R. 3 E., W.R.M., WYOMING, IS CONFORMABLE TO THE FIELD NOTES THEREOF ON FILE IN THIS OFFICE WHICH HAVE BEEN EXAMINED AND ACCEPTED

 DIRECTOR

- DENOTES CORNERS OF PREVIOUS SURVEYS FOUND IN PLACE
- DENOTES CORNERS SET BY EARL R. ASDELL, ENGINEER
- ⊢ DENOTES WITNESS CORNERS SET BY EARL R. ASDELL

DRAWN: R.A.P. TRACED: R.A.P. CHECKED: *J.R.B.*
 7L - 4011 RIVERTON, WYOMING FEB., 1948