



PRIMEQUEST 2800E2

System configurator and order-information guide

July 2017


Contents

Configurator Overview


- 0 Overview, Overview_1
- I Base unit
- II Systemboard, CPU, MEM, Raid Controller, HDD and SSD for SB
- III Management Board (MMB)
- IV IO unit
- V Disk unit, HDD & SSD for DU
- VI Base Unit PSU, Base Unit Powercords
- VII PCI Box, PCI BOX 1, PCI BOX Powercords
- VIII PCI CARDS, PCI CARDS_1, PCI CARDS_2, PCI CARDS_3, PCI Cards_4
- IX Rack Install
- X Matrix (Max. qty. of PCIe cards, OS x Order numbers)
Change Report

PRIMEQUEST SERVER

Front side

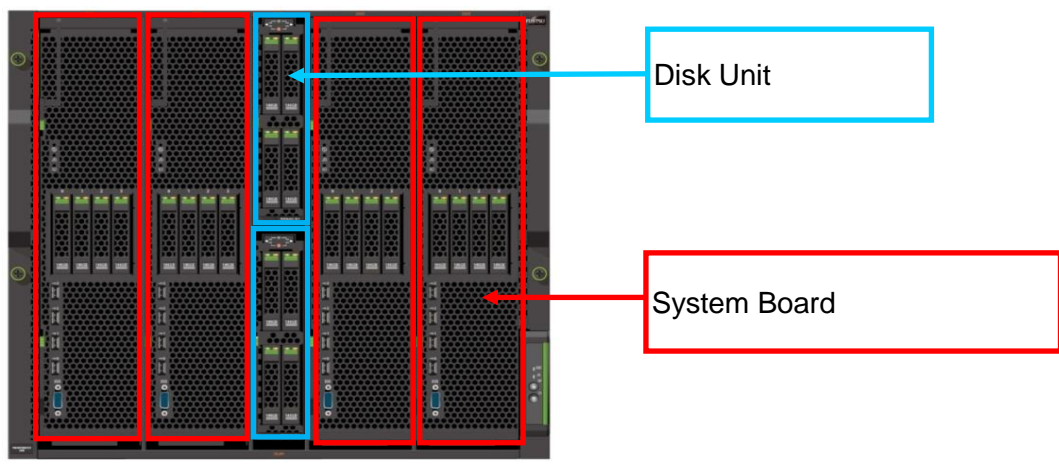

Rear side

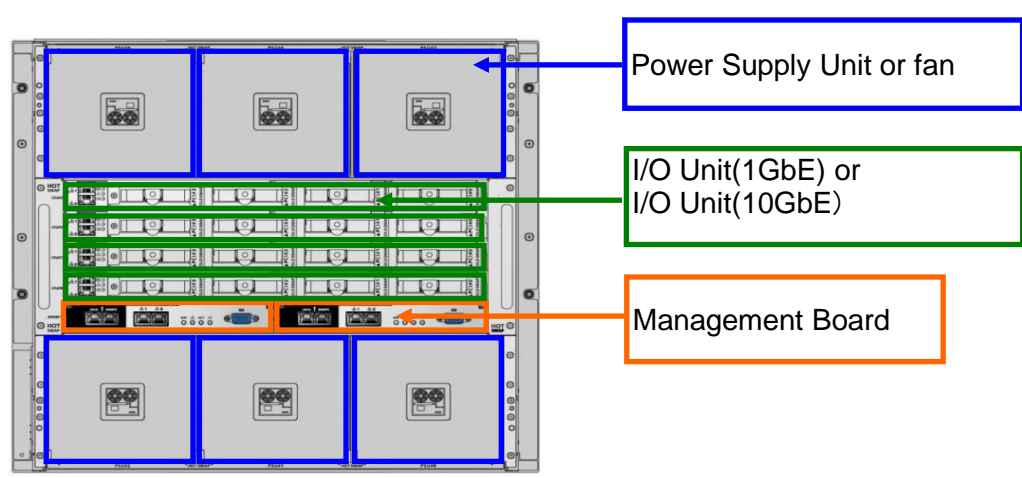


Part Numbers Legend:

Part numbers:


MX-***** as products shipped with base units via factory
(FTS: EK component)

MCX***** as products shipped separately from base units (Loose Delivery)
(FTS: LL component)

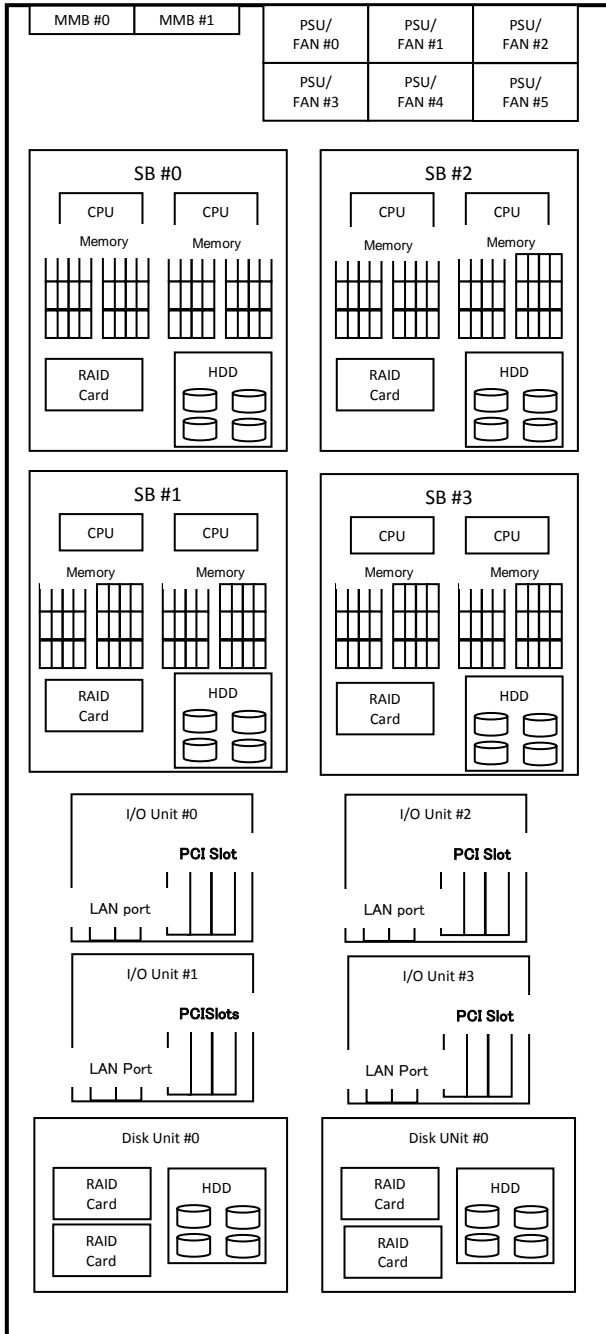

Model	PQ 2800E2
CPU	Haswell
Max CPU No./ Core No.	8 / 144
Max Mem Slot No.	192
Max Mem[TB]	12
Max SB No.	4
Reserved SB	Yes
PPAR	4
Dynamic Reconfiguration	Yes
SAS drive slot (Int/Ext)	24 / 576
SAS HDD (Int/Ext) (1.8TB HDD/slot)	43.2TB / 1036TB
Max IOU No.	4
Max OnB-GbE ports on 4 IOUL (10GbE on 4 IOUF)	8
Max PCI-Box No.	4
PCIe Slots (Int/Int+Ext)	16 / 56
Input Voltage (AC)	200-240V
Highest Operating Temp.	35 °C

→ I. Base Unit

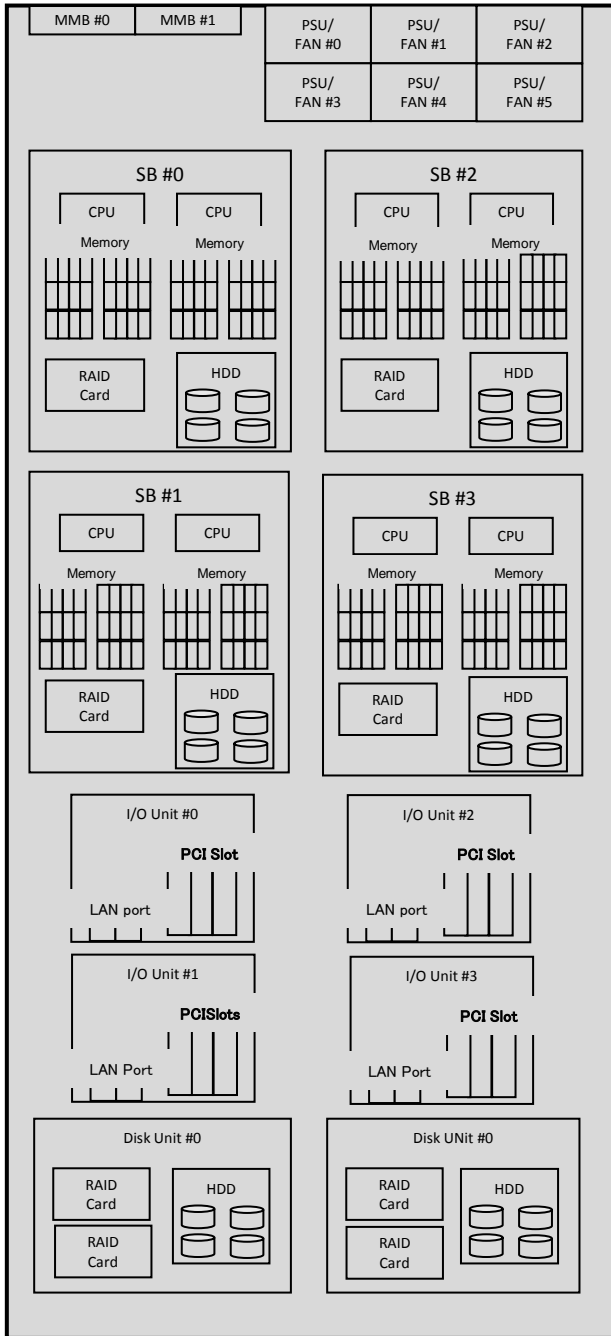

One product


Products below must be included in PO with Base Unit.
 - System Board, CPU, Memory, IO Unit, PSU, power cord
 The products below are included in base unit.
 - One unit of Management Board and one Rack Mount Kit

PRIMEQUEST 2800E2 Base Unit

MCG3AC111

- Rack mount type
- Min. one System Board must be ordered. Max. four System Board can be mounted.
- Min. one I/O Unit must be ordered. Max. four I/O Unit can be mounted.
- Max. four PCI Box can be installed.
- One Management Board(MMB) comes as standard. For MMB redundancy, one MMB can be added.
 - Four LAN ports per MMB
- Min. three PSU must be ordered. PSU does not come as standard.
- Fan must be ordered. Fan units must be mounted in empty space where PSU is not mounted.
- Power cords must be ordered. The number must be same as PSU.
- Rack space : 10U

→ **II. System Board**

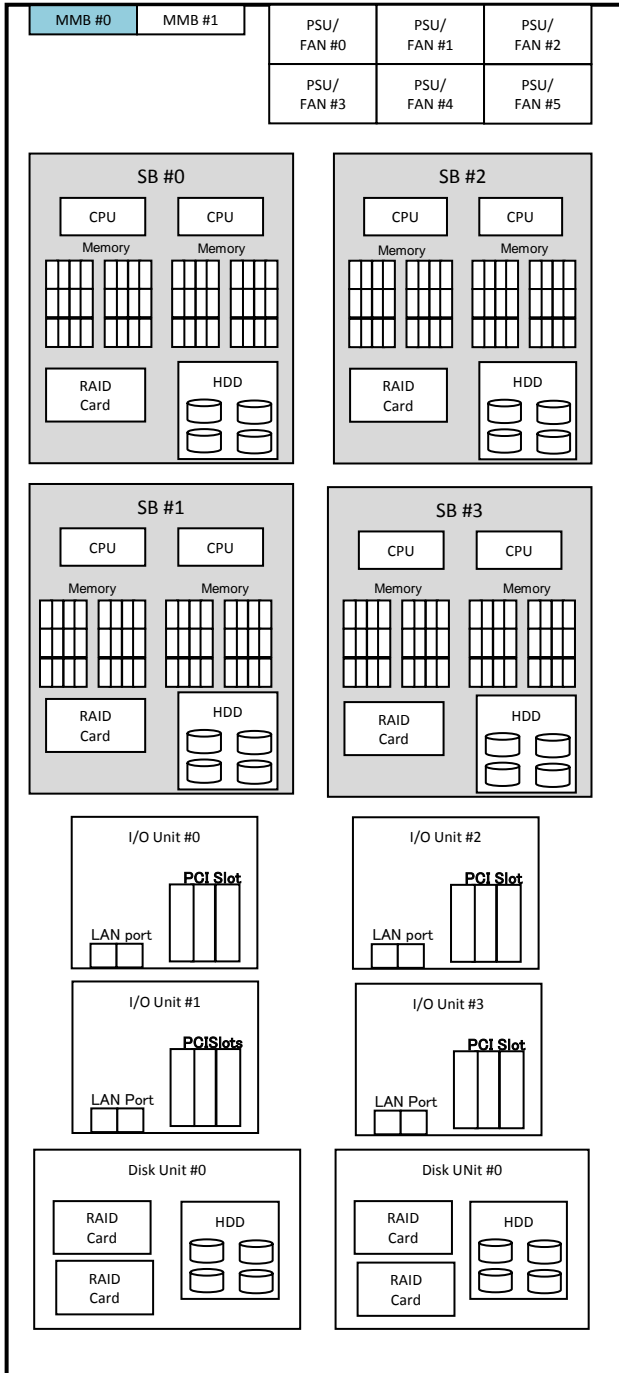

At least one product must be chosen

Max. 4 pcs per base unit
SB with TPM and SB without SB
can be mixed in base unit

System Board

MC-3HSB71 MCX3HSB71 (LD)

- This system board does not include security chip called TPM
- Min one System Board must be ordered. Max. four System Boards can be mounted,
- CPU nor memory is not mounted on System Board as standard.
- Min. one CPU Module and min. one memory must be mounted on one System Board.
- If one CPU is mounted on one System Board
 - Min. one memory having two DIMMs must be mounted. Max. 12 memory having 24 DIMMs per CPU can be mounted.
- If two CPUs are mounted on one System Board
 - Min. two memories having four DIMMs can be mounted. Max. 24 memories having 48 DIMMs can be mounted.
- One SAS RAID Controller can mount four disk drives such as HDD or SSD

System Board

MC-3HSBV1 MCX3HSBV1 (LD)

- This system board includes security chip called TPM
- This product is not orderable from China
- Min one System Board must be ordered. Max. four System Boards can be mounted,
- CPU nor memory is not mounted on System Board as standard.
- Min. one CPU Module and min. one memory must be mounted on one System Board.
- If one CPU is mounted on one System Board
 - Min. one memory having two DIMMs must be mounted. Max. 12 memory having 24 DIMMs per CPU can be mounted.
- If two CPUs are mounted on one System Board
 - Min. two memories having four DIMMs can be mounted. Max. 24 memories having 48 DIMMs can be mounted.
- One SAS RAID Controller can mount four disk drives such as HDD or SSD

Available combination of CPU and memory


		Number of CPU	
		1	2
Memory in units of two DIMMs	1	A	A
	2	B	A
	3	B	B
	~	B	B
	12	B	B
	13	C	B
	~	C	B
	24	C	B

Functions below are NOT AVAILABLE with System Board with TPM (MC-3HSBX1).

- Reserved SB
- Dynamic Partition

A : This combination of CPU and memory quantities is available.
For given number of CPUs, this quantity for memory is the minimum quantity.
B : This combination of CPU and memory quantities is available.
C : This combination of CPU and memory quantities is NOT available.

* If a partition includes multiple SB, two CPU must be mounted to each of SB in the partition.

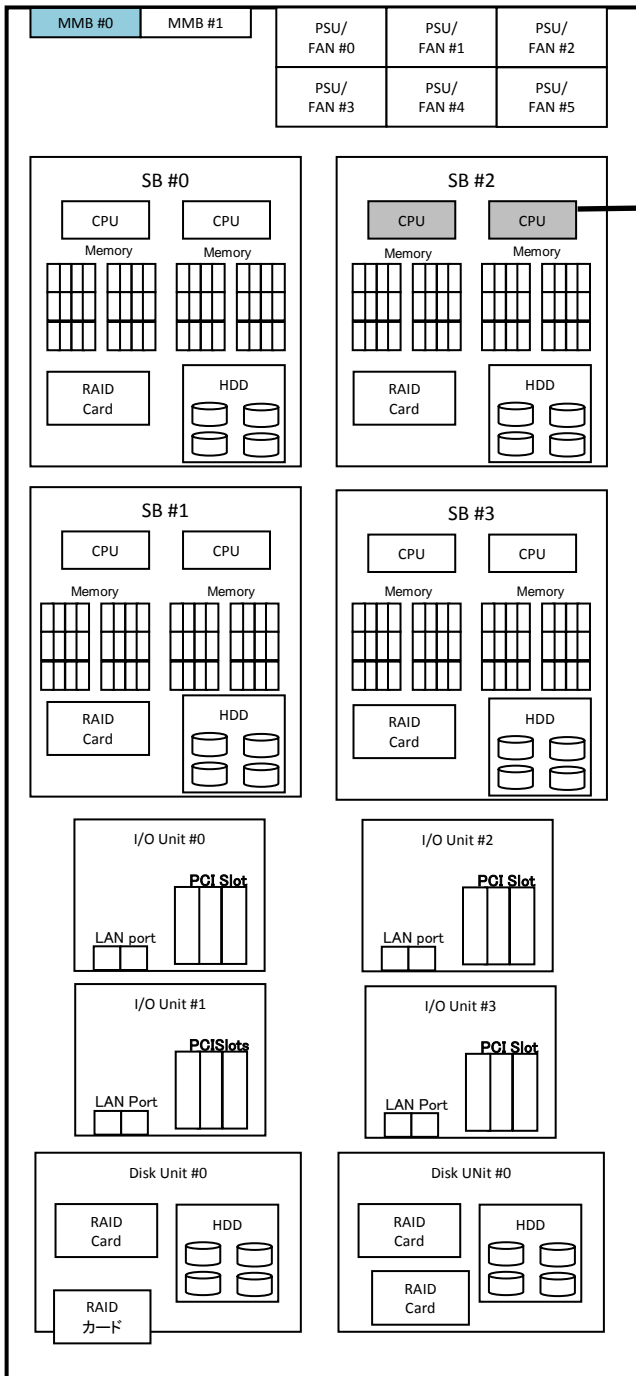


One product must be chosen

- CPU(Xeon E7-8893v3)
CPU Module(3.2GHz/4 core/45MB cache)
MC-3BDD11 MCX3BDD11 (LD)
- Max. two CPU per System Board. Min one CPU per System Board
- CPU(Xeon E7-8891v3)
CPU Module(2.80GHz/10 core/45MB cache)
MC-3BDG11 MCX3BDG11 (LD)
- Max. two CPU per System Board. Min one CPU per System Board
- CPU(Xeon E7-8890v3)
CPU Module(2.50GHz/18 core/45MB cache)
MC-3BDA11 MCX3BDA11 (LD)
- Max. two CPU per System Board. Min one CPU per System Board
- CPU(Xeon E7-8880v3)
CPU Module(2.30GHz/18 core/45MB cache)
MC-3BDE11 MCX3BDE11 (LD)
- Max. two CPU per System Board. Min one CPU per System Board
- CPU(Xeon E7-8870v3)
CPU Module(2.10GHz/18 core/45.0MB cache)
MC-3BDF11 MCX3BDF11 (LD)
- Max. two CPU per System Board. Min one CPU per System Board
- CPU(Xeon E7-8867v3)
CPU Module(2.5GHz/16 core/45.0MB cache)
MC-3BDC11 MCX3BDC11 (LD)
- Max. two CPU per System Board. Min one CPU per System Board
- CPU(Xeon E7-8860v3)
CPU Module(2.2GHz/16 core/40.0MB cache)
MC-3BDB11 MCX3BDB11 (LD)
- Max. two CPU per System Board. Min one CPU per System Board

CPU mounting condition

- The single CPU product can be mounted to one partition
- If a partition includes multiple SB, two CPU must be mounted to each of SB in the partition.

# of SB in one partition	# of CPU in one partition
1SB	1
	2
2SB	4
3SB	6
4SB	8

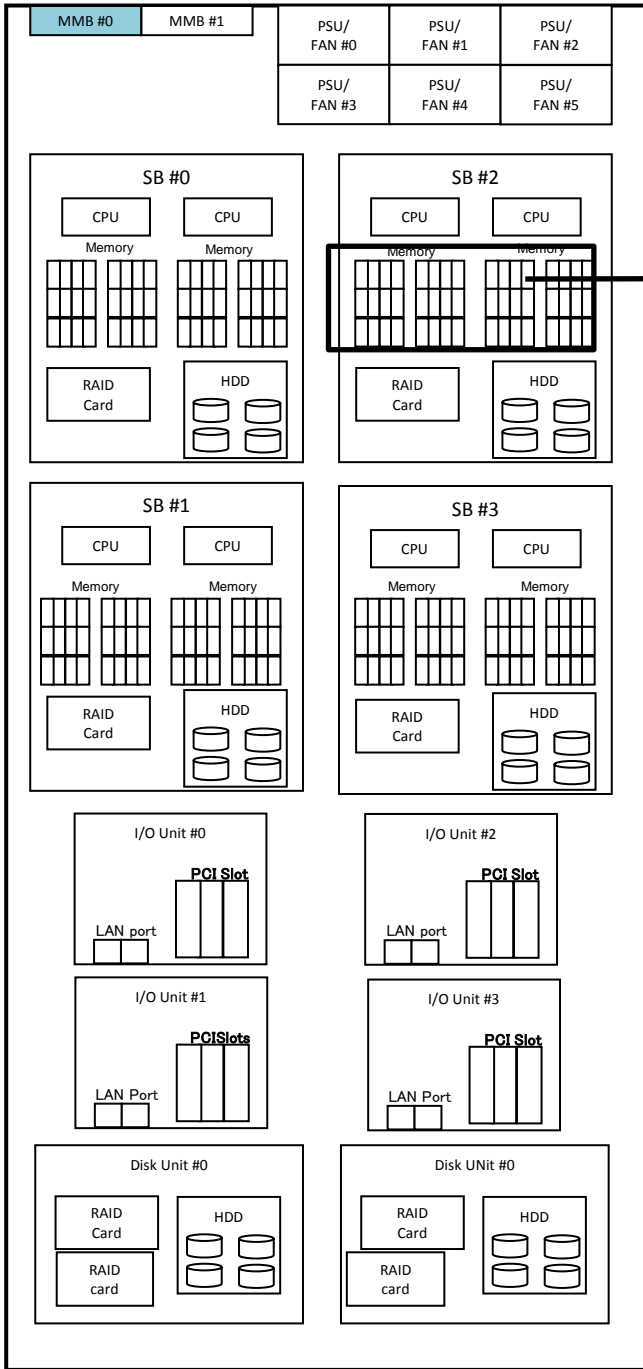

Options

Max. 2 pcs per System Board

Memory Expansion Board

MC-3HMB21 MCX3HMB21 (LD)

- One Memory Expansion Board can be mounted for one CPU
- One Memory Expansion Board has 12 DIMM slots.
- * Conditions to order Memory Expansion Board are influenced by the number of memory DIMM mounted and memory mode
- For details, please refer to "Memory Mounting Condition".

At least one product must be selected.

Max. 24 pcs per System Board

16GB memory (8GB DDR4 DIMM x 2)

MC-3CD511 MCX3DB511 (LD)

- Min. one Memory (2 x DIMMs) must be mounted for one CPU.
- Max. 12 memories (24 DIMMs) can be mounted for one CPU.
- Two 8GB 1866MT/s RDIMMs are included in this product

32GB memory (16GB DDR4 DIMM x 2)

MC-3CD611 MCX3CD611 (LD)

- Min. one Memory (2 x DIMMs) must be mounted for one CPU.
- Max. 12 memories (24 DIMMs) can be mounted for one CPU.
- Two 16GB 1866MT/s RDIMMs are included in this product

64GB memory (32GB DDR4 DIMM x 2)

MC-3CD711 MCX3CD711 (LD)

- Min. one Memory (2 x DIMMs) must be mounted for one CPU.
- Max. 12 memories (24 DIMMs) can be mounted for one CPU.
- Two 32GB 1866 MT/s LRDIMM are included in this product

64GB memory (32GB DDR4 DIMM x 2)

MC-3CD721 MCX3CD721 (LD)

- Min. one Memory (2 x DIMMs) must be mounted for one CPU.
- Max. 12 memories (24 DIMMs) can be mounted for one CPU.
- Two 32GB 1866 MT/s RDIMM are included in this product


128GB memory (64GB DDR4 DIMM x 2)

MC-3CD811 MCX3CD811 (LD)

- Min. one Memory (2 x DIMMs) must be mounted for one CPU.
- Max. 12 memories (24 DIMMs) can be mounted for one CPU.
- Two 64GB DDR4 XXXX MT/s LRDIMMs are included in this product

Memory Mode

Memory Mode

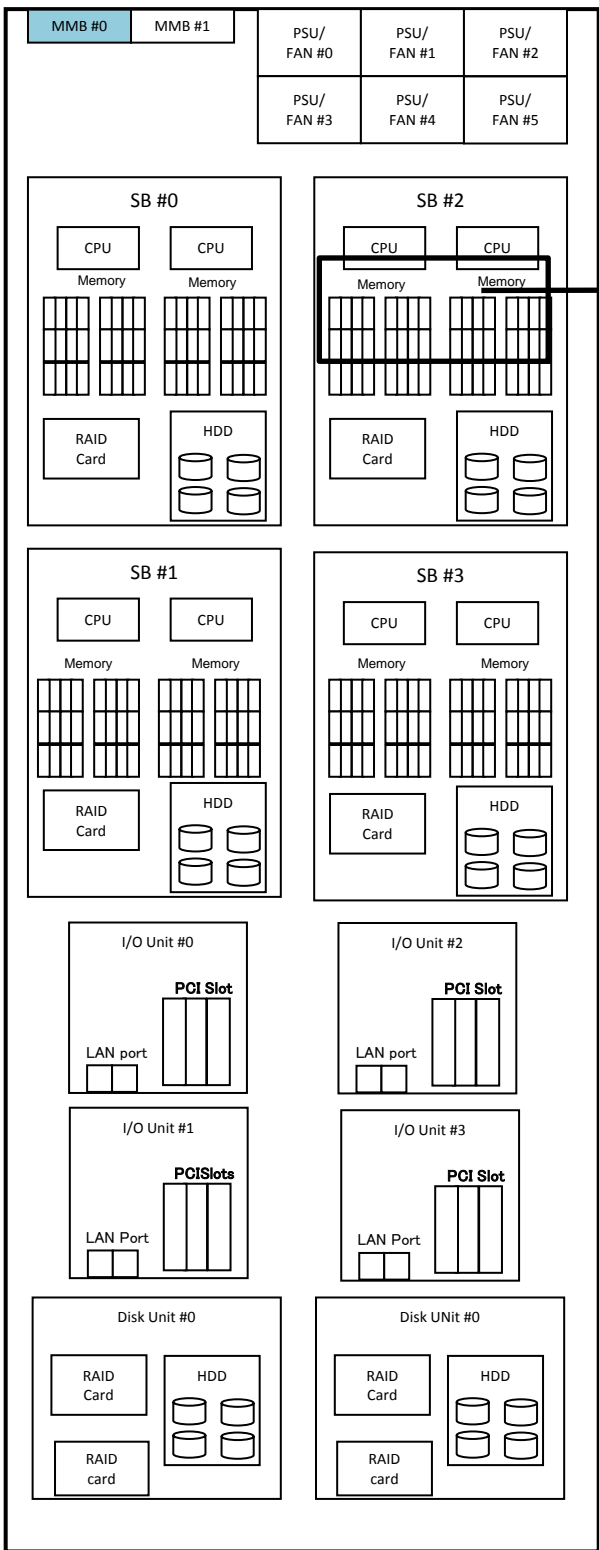

Option
Memory Mode Setting (Mirror)
MC-0PMM3

Option
Memory Mode Setting (Spare)
MC-0PMM4

Memory mounting

Memory Mounting

Memory Mounting

1. Memory and Memory Expansion Board


- (1) Memory referred in this page has two DIMMs.
- (2) Each CPU has 12 memory DIMM slots on System Board and another 12 memory DIMM slots on Memory Expansion Board.
- If Memory Expansion Board is ordered.
- (3) Please confirm the condition that order of Memory Expansion Board is necessary.

Combination of Memory Mode, number of Memory, and Memory Expansion Board

Memory Mode	# of Memory (# of DIMM)	Necessity for Memory Expansion Board
Normal Mode	1(2)	Not needed
	2~(4~)	Necessary
Mirror Mode	1(2)	Not needed
	2(4)	Not needed
	3~(6~)	Necessary
Spare Mode	1(2)	Not needed
	2(4)	Not needed
	3(6)	Not needed
	4~(8~)	Necessary

2. Memory Mounting Conditions

- (1) One partition cannot have a mixed Memory Products. Only allowable combination is 8GB RDIMM and 16GB RDIMM.
- (2) Units of memory expansions : One set (two DIMMs) for Normal Mode, two set (four DIMMs) for Mirror Mode, three sets (six DIMMs) for Spare Mode

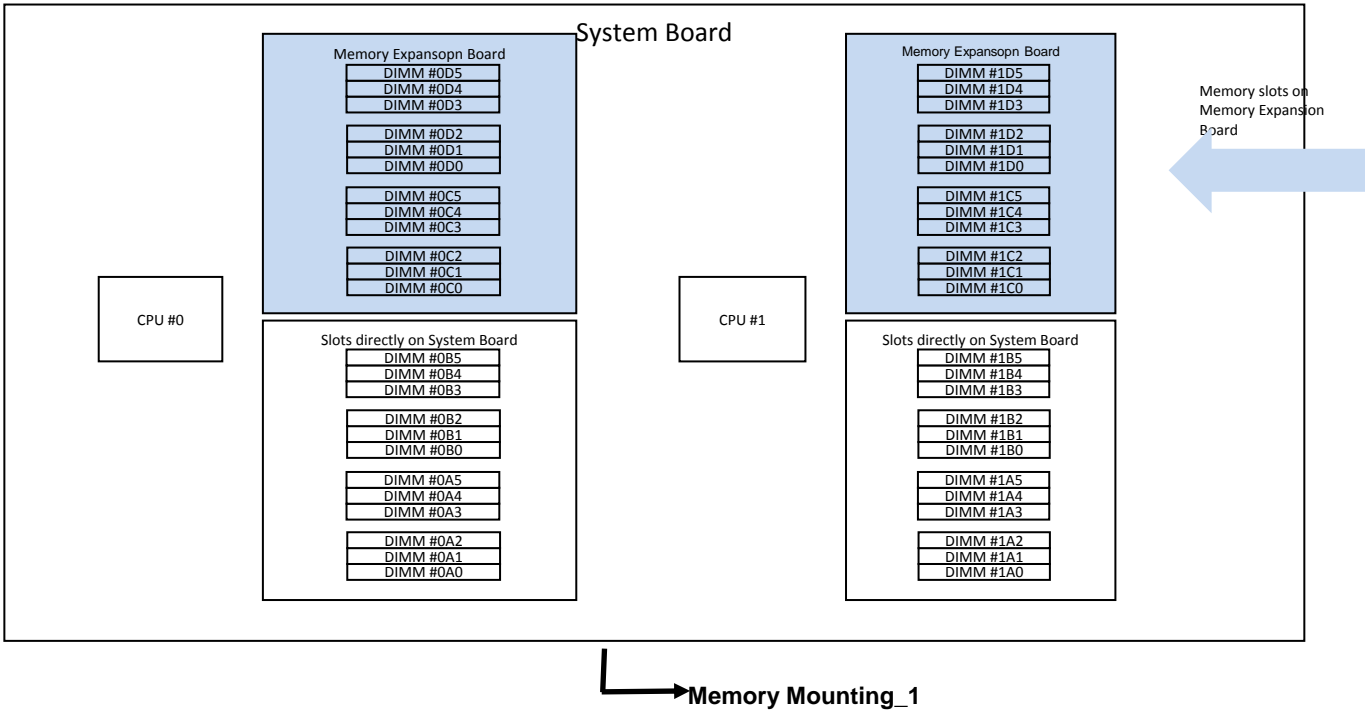

Memory Mounting_1

	PCI Address Mode (Bus Mode)is enabled		PCI Address Mode (Bus Mode) is disabled	
	One PPAR has 4 SB	One PPAR has 1,2, or 3 SB	One PPAR has 4 SB	One PPAR has 1,2, or 3 SB
Dynamic Partitioning is enabled	Case2	Case2	Not applicable	Not applicable
Dynamic Partitioning is disabled	Case2	Case1	Case1	Case1

For Case 1 installations see page Memory Mounting _2

For Case 2 installations see Page Memory Mounting _3

 [Memory Mounting_2](#)

Memory Mounting_2


Case 1

		CPU#0								CPU#1							
		0A0	0A3	0B0	0B3	0C0	0C3	0D0	0D3	1A0	1A3	1B0	1B3	1C0	1C3	1D0	1D3
		0A1	0A4	0B1	0B4	0C1	0C4	0D1	0D4	1A1	1A4	1B1	1B4	1C1	1C4	1D1	1D4
		0A2	0A5	0B2	0B5	0C2	0C5	0D2	0D5	1A2	1A5	1B2	1B5	1C2	1C5	1D2	1D5
Normal		1	1	5	5	3	3	7	7	2	2	6	6	4	4	8	8
		9	9	13	13	11	11	15	15	10	10	14	14	12	12	16	16
		17	17	21	21	19	19	23	23	18	18	22	22	20	20	24	24
Mirror		1	1	1	1	3	3	3	3	2	2	2	2	4	4	4	4
		5	5	5	5	7	7	7	7	6	6	6	6	8	8	8	8
		9	9	9	9	11	11	11	11	10	10	10	10	12	12	12	12
Spare		1	1	5	5	3	3	7	7	2	2	6	6	4	4	8	8
		1	1	5	5	3	3	7	7	2	2	6	6	4	4	8	8
		1	1	5	5	3	3	7	7	2	2	6	6	4	4	8	8

Memory Mounting_3

Case 2

		CPU#0								CPU#1							
		0A0	0A3	0B0	0B3	0C0	0C3	0D0	0D3	1A0	1A3	1B0	1B3	1C0	1C3	1D0	1D3
		0A1	0A4	0B1	0B4	0C1	0C4	0D1	0D4	1A1	1A4	1B1	1B4	1C1	1C4	1D1	1D4
		0A2	0A5	0B2	0B5	0C2	0C5	0D2	0D5	1A2	1A5	1B2	1B5	1C2	1C5	1D2	1D5
Normal	1	1	1	2	2	1	1	2	2	1	1	2	2	1	1	2	2
	3	3	3	4	4	3	3	4	4	3	3	4	4	3	3	4	4
	5	5	5	6	6	5	5	6	6	5	5	6	6	5	5	6	6
Mirror	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
Spare	1	1	1	2	2	1	1	2	2	1	1	2	2	1	1	2	2
	1	1	1	2	2	1	1	2	2	1	1	2	2	1	1	2	2
	1	1	1	2	2	1	1	2	2	1	1	2	2	1	1	2	2

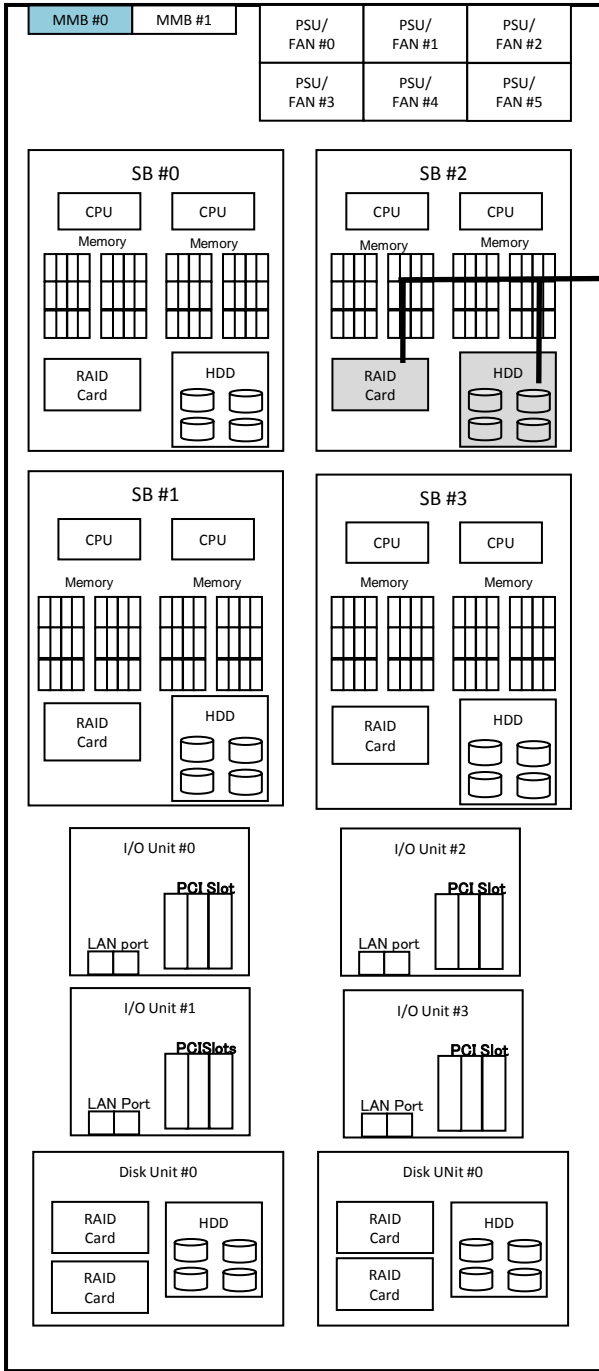

mandatory

RAID Controll Card Mount Kit

MC-0HCK31 MCX0HCK31 (LD)

- This product is necessary to RAID Controller to System Board

SAS RAID Controll Card

MC-0JSR51 MCX0JSR51 (LD)

- EP420i
- One RAID Controller can be mounted for one System Board.
- One RAID Controller can connect max. four disk drives such as HDD and SSD
- One Flash Backup Unit can be mounted
- 12Gbps for each disk drive. 2GB of cache memory
- RAID 0/1/1E/5/6/10 and hot spare supported

Option

Flash Back-up Unit

MC-0JFB31 MCX0JFB31 (LD)

- Flash Backup Unit for RAID Controller with cache memory


Option

RAID Advanced Software Options

MC-0KLA11 MCX0KLA11 (LD)

License Activation Key for CacheCade 2.0
and FastPath for PRAID EP420i

Internal HDD for SB

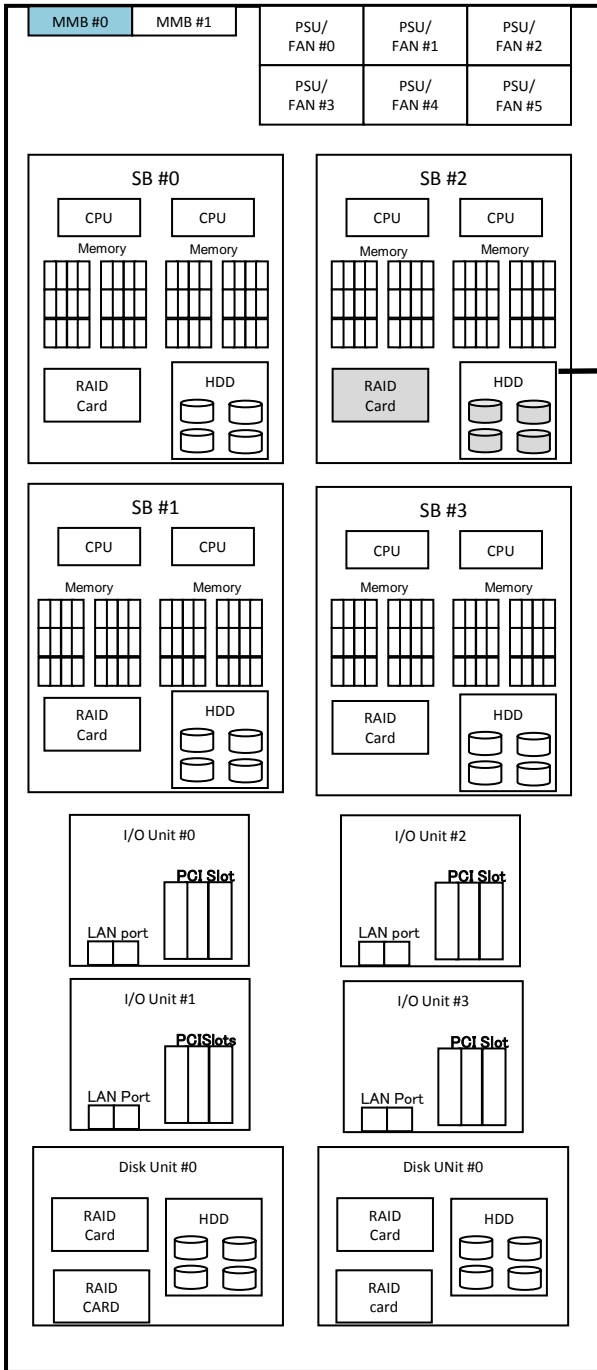


RAID Controller is necessary to mount internal HDD or SSD.

Max. 4 pcs per SB

- **300GB Internal HDD (15,000rpm)**
- 12Gbps, hot plug, 512n format
MC-5DS751 MCX5DS751 (LD)
- **300GB Internal HDD (10,000rpm)**
- 6Gbps, hot plug, 512n format
MC-5DS741 MCX5DS741 (LD)
- **600GB Hard Disk Drive (15,000rpm)**
- 12Gbps, hot plug, 512n format
MC-5DS931 MCX5DS931 (LD)
- **600GB Hard Disk Drive (10,000rpm)**
- 12Gbps, hot plug, 512n format
MC-5DS921 MCX5DS921 (LD)
- **900GB Hard Disk Drive (10,000rpm)**
- 12Gbps, hot plug, 512n format
MC-5DSA21 MCX5DSA21 (LD)
- **1.2TB Internal HDD (10,000rpm)**
- 12Gbps, hot plug, 512n format
MC-5DSB11 MCX5DSB11 (LD)
- **1.8TB Internal HDD (10,000rpm)**
- 12Gbps, hot plug, 512e format
MC-5DSC21 MCX5DSC21 (LD)

Remark
VMware does not support this 1.8 TB HDD because it does not support HDD of 512e format. For details, please refer to VMware Knowledge Base.
http://kb.vmware.com/selfservice/microsites/search.do?language=en_US&cmd=displayKC&externalId=2091600

→ Internal SSD for SB

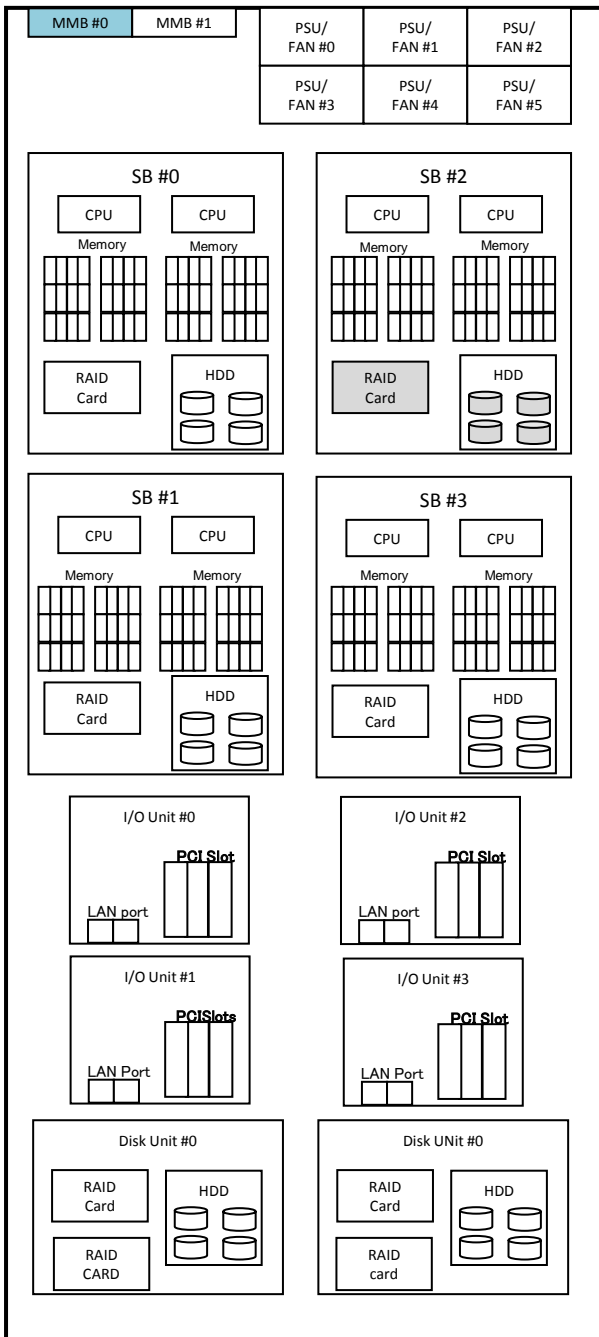


RAID Controller is necessary to mount internal HDD or SSD.


Option

Max. 4 pcs per SB


- **200GB SAS**
ME
MC-5DK731 MCX5DK731 (LD)
- 12Gbps, MLC, hot plug
- **400GB SAS SSD**
ME
MC-5DK841 MCX5DK841 (LD)
- 12Gbps, MLC, hot plug
- **800GB SAS SSD**
ME
MC-5DK911 MCX5DK911 (LD)
- 12Gbps, MLC, hot plug
- **1.6TB SAS SSD**
ME
MC-5DKA11 MCX5DKA11 (LD)
- 12Gbps, MLC, hot plug

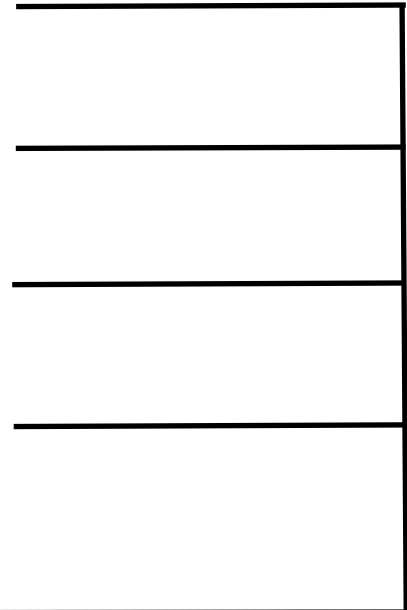

III. MMB

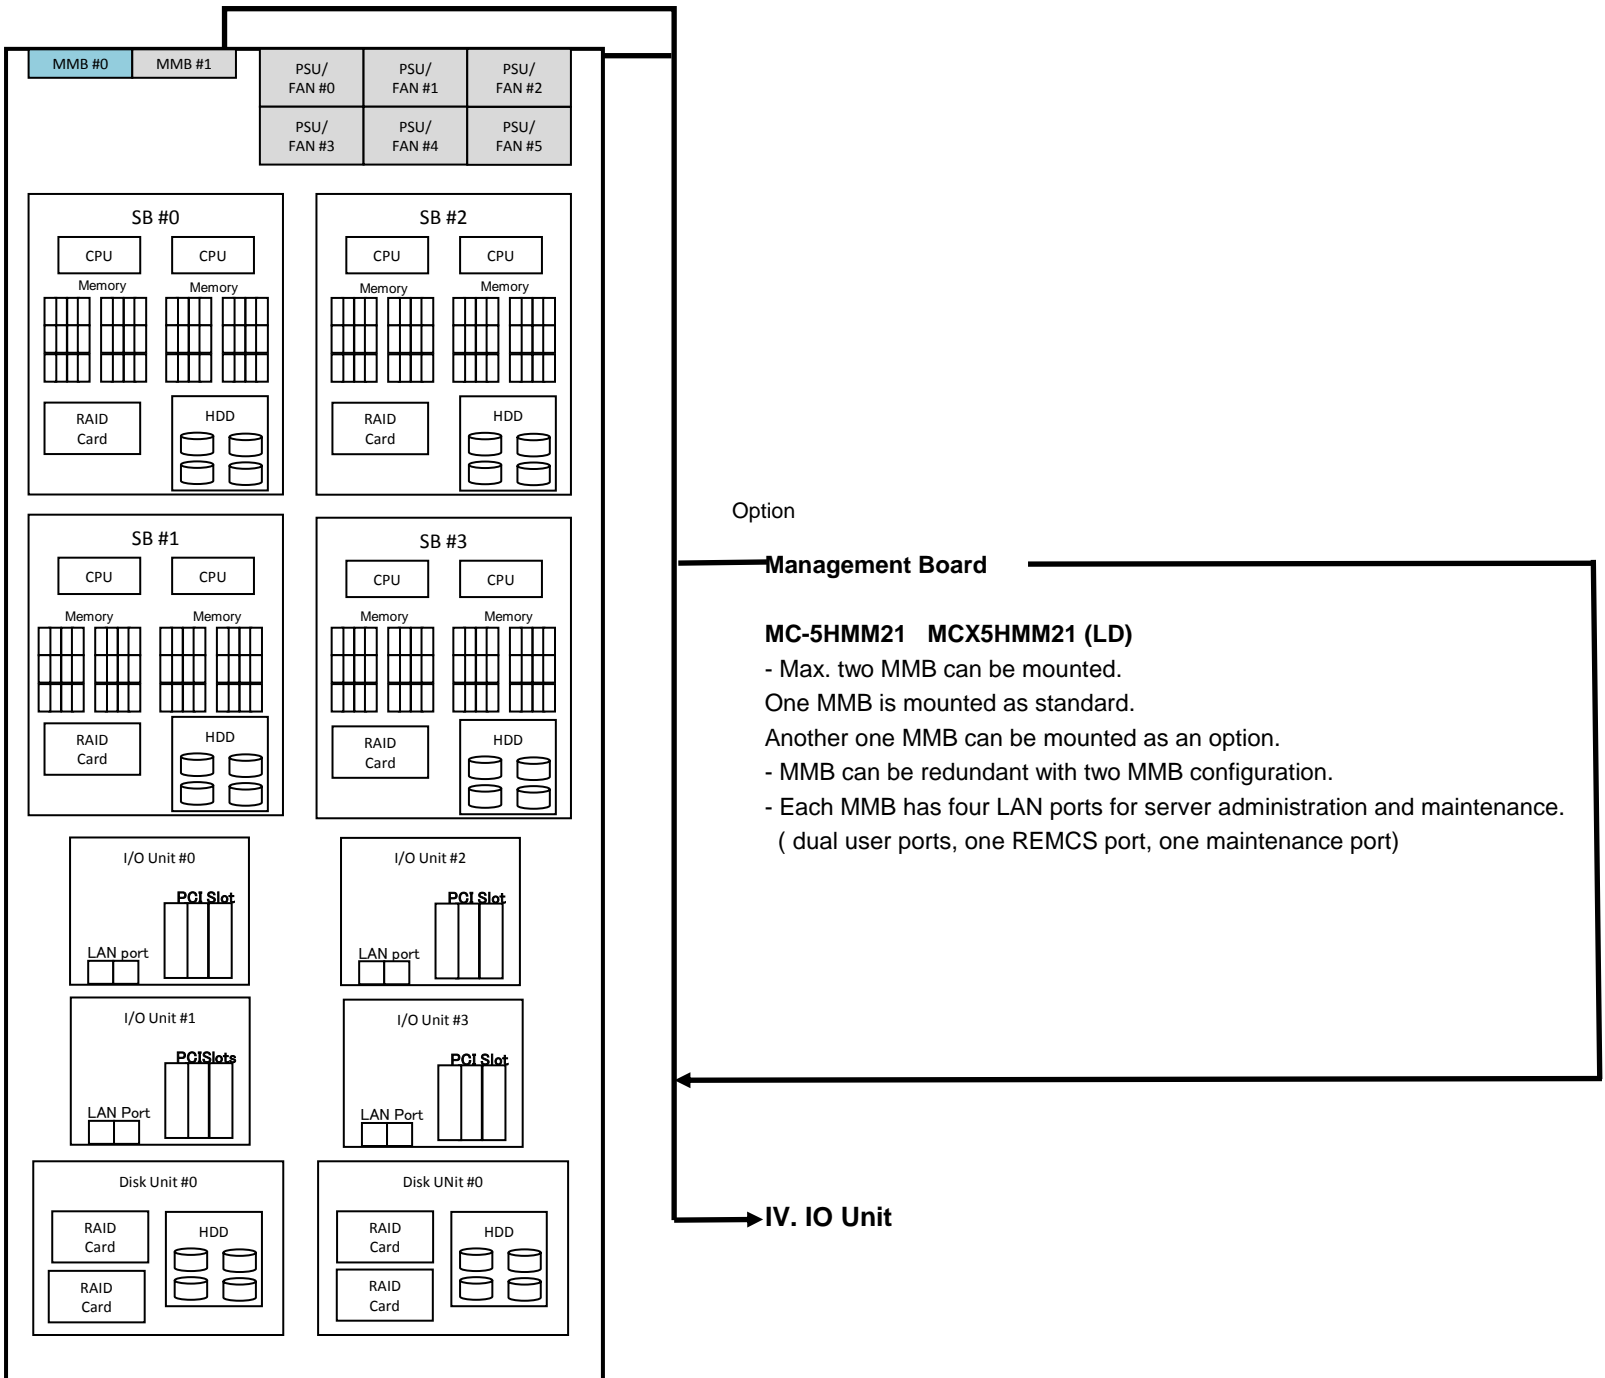

Interface	Ethernet standard	Automatic negotiation
User port	1000BASE-T/ 100BASE-TX/ 10BASE-T	Supported
REMCS port	100BASE-TX/ 10BASE-T	Supported
Maintenanance port	100BASE-TX/ 10BASE-T	Supported

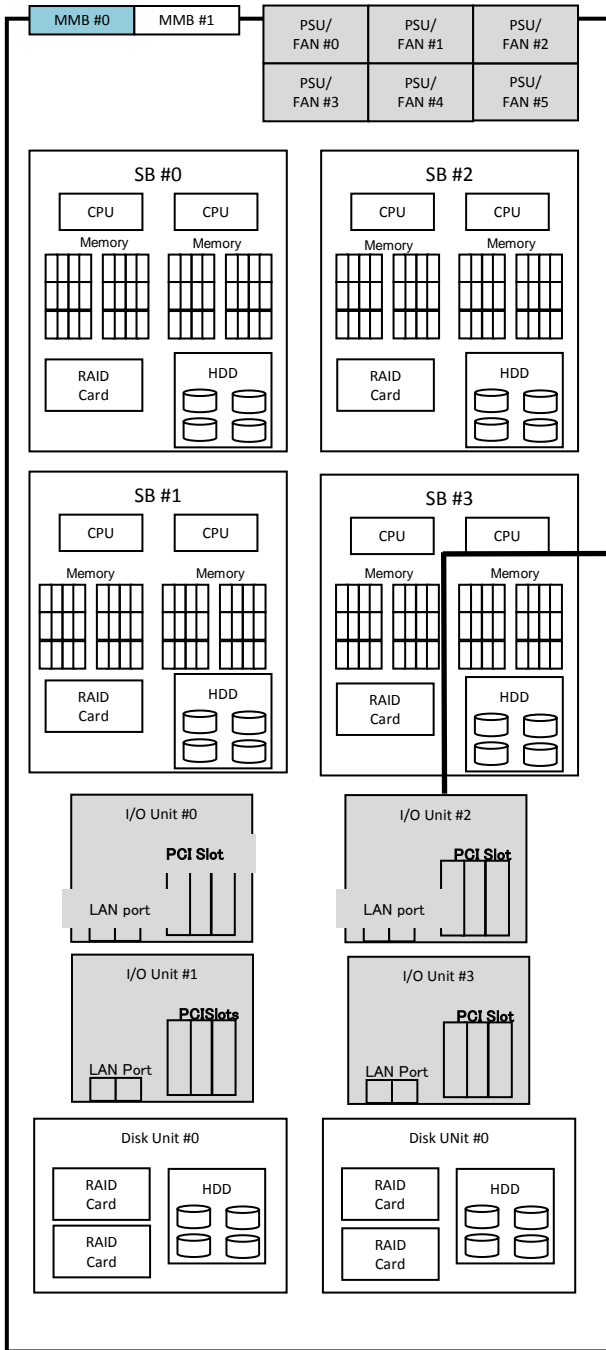

PRIMEQUEST chassis must have min, one I/O Unit for either 1GbE or 10GbE.

I/O Unit(1GbE)

MC-3HUX31 MCX3HUX31 (LD)

- Min one, Max. four I/O units can be mounted.
- Two LAN ports for 1GbE are in one I/O unit.
- Four PCIe slots (LP) per I/O Unit
- One PCI Box can be connected to PQ by mounting PCI Box Connection card. by mounting one card, six slots in PCI Box becomes available.
- PCIe slots in I/O unit cannot be hot pluggable.

I/O Unit(10GbE)

MC-3HUX41 MCX3HUX41 (LD)

- Min one, Max. four I/O units can be mounted.
- Two LAN ports for 10GbE are in one I/O unit.
- Three PCIe slots (1 LP, 2 FH) per I/O Unit
- One PCI Box can be connected to PQ by mounting PCI Box Connection card. by mounting one card, six slots in PCI Box becomes available.
- PCIe slots in I/O unit cannot be hot pluggable.


→ **V. Disk Unit**

MC-0PPA2 (MEMORY MODE PAGE) IO RESTRICTIONS

- PCI Address Mode (Bus Mode)
- Segment Mode is default

If Bus Mode (PCI Address Mode) is used in a partition, the partition is restricted as follows

Model	Segment Mode			Bus Mode			Remarks
	SB	IOU	PCI_Box	SB	IOU	PCI_Box	
4skt EP	2	4	4	2	4	4	
8skt EP	4	4	4	4	2	0	4SB configuration: Up to 2 IOUs, Cannot connect PCI-Box
				3	4	3	3SB configuration: Up to 3 PCI-Boxes
				1	4	4	2SB configuration: No restriction
				1	4	4	1SB configuration: No restriction

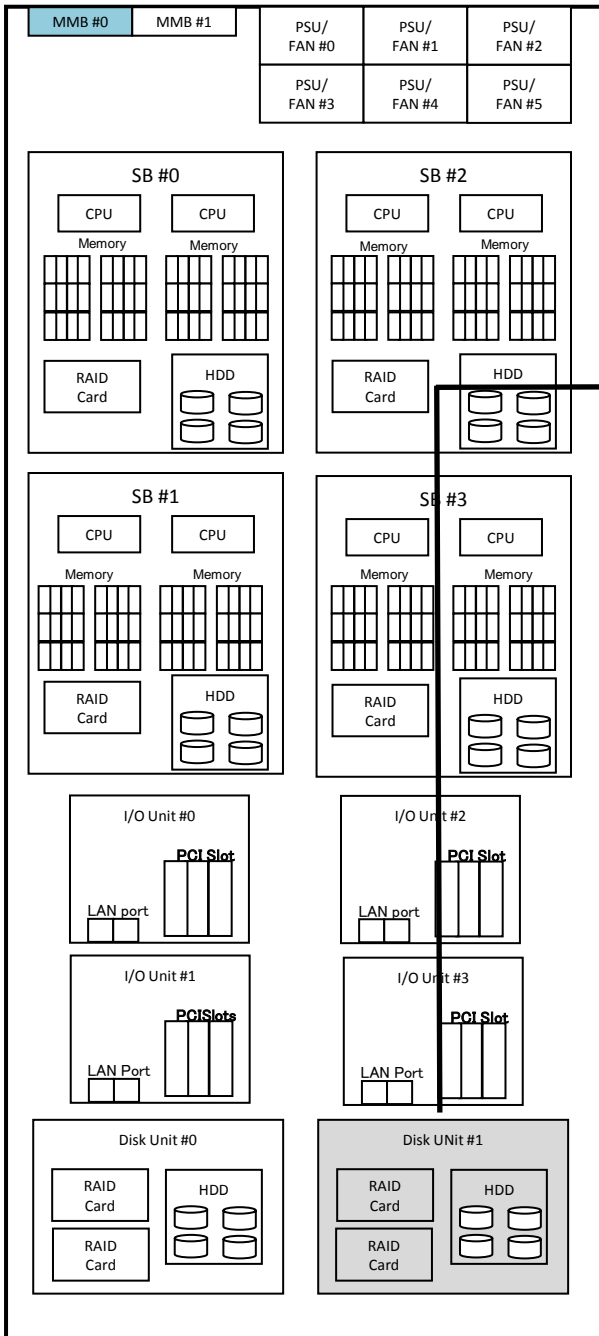

Disk Unit

Option

Disk Unit

MC-5HDU21 MCX5HDU21 (LD)

- Max. two units per chassis
- Two RAID Controller cards per Disk Unit can be mounted
- One RAID Controller card allows mounting of four disk drives such as HDD or SSD.
- This product includes DUMMP 2.5" WEFo

SAS RAID Control Card

MC-0JSR51 MCX0JS51 (LD)

Option

- One Flash Backup Unit can be mounted
- 16Gbps for each disk drive. 2GB of cache memory
- RAID 0/1/1E/5/6/10 and hot spare supported

Option

Flash Back-up Unit

MC-0JFB31 MCX0JFB31 (LD)

- Flash Backup Unit for RAID Controller with cache memory


Option

RAID Advanced Software Options

MC-0KLA11 MCX0KLA11 (LD)

License Activation Key for CacheCade 2.0 and FastPath for PRAID EP420e

Internal HDD for DU

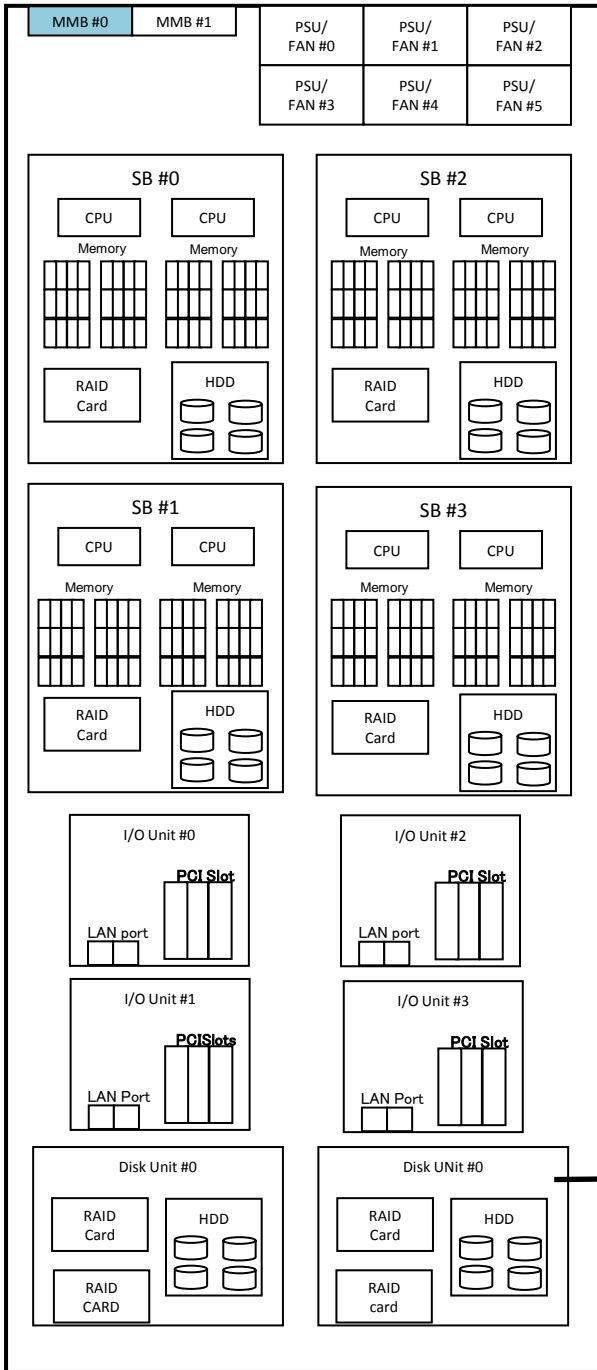

RAID Controller is necessary to mount internal HDD or SSD.

- 300GB Internal HDD (15,000rpm)**
 - 6Gbps, hot plug, 512n format
MC-5DS751 MCX5DS751 (LD)

 - 300GB Internal HDD (10,000rpm)**
 - 12Gbps, hot plug, 512n format
MC-5DS741 MCX5DS741 (LD)


 - 600GB Hard Disk Drive (15,000rpm)**
 - 12Gbps, hot plug, 512n format
MC-5DS931 MCX5DS931 (LD)

 - 600GB Hard Disk Drive (10,000rpm)**
 - 12Gbps, hot plug, 512n format
MC-5DS921 MCX5DS921 (LD)

 - 900GB Hard Disk Drive (10,000rpm)**
 - 12Gbps, hot plug, 512n format
MC-5DSA21 MCX5DSA21 (LD)


 - 1.2TB Internal HDD (10,000rpm)**
 - 12Gbps, hot plug, 512n format
MC-5DSB11 MCX5DSB11 (LD)

 - 1.8TB Internal HDD (10,000rpm)**
 - 12Gbps, hot plug, 512e format
MC-5DSC21 MCX5DSC21 (LD)
- Remark
VMware does not support this 1.8 TB HDD because it does not support HDD of 512e format. For details, please refer to VMware Knowledge Base.
http://kb.vmware.com/selfservice/microsites/search.do?language=en_US&cmd=displayKC&externalId=2091600
- Internal SSD for DU

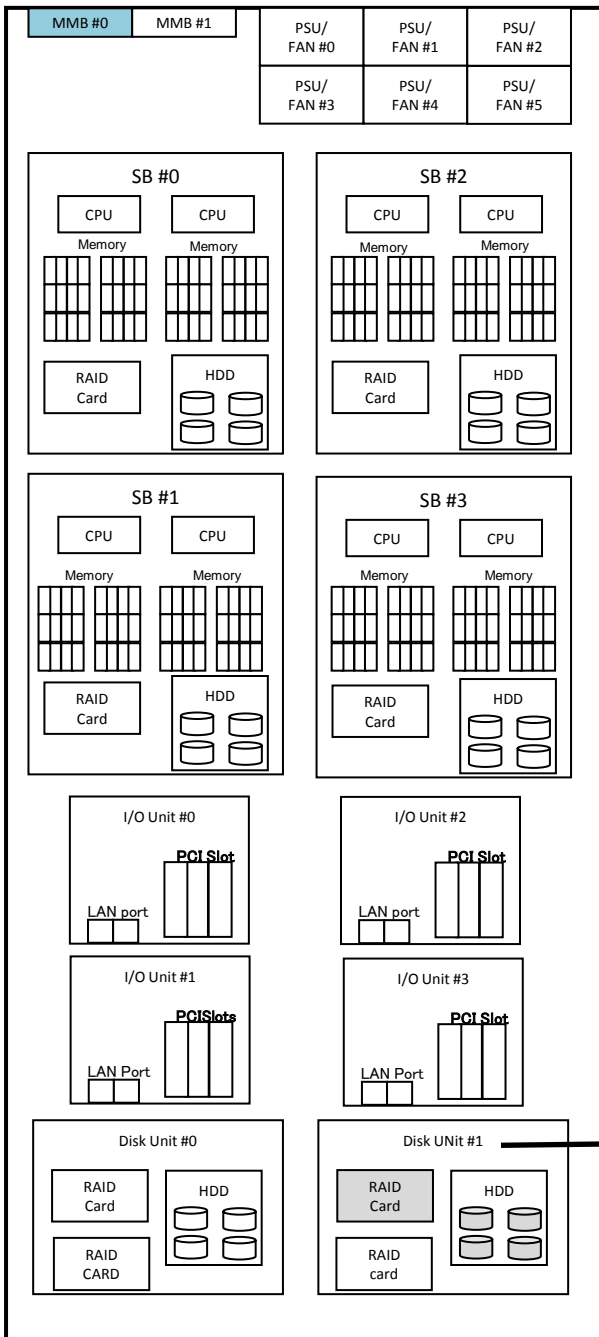


RAID Controller is necessary to mount internal HDD or SSD.

Option

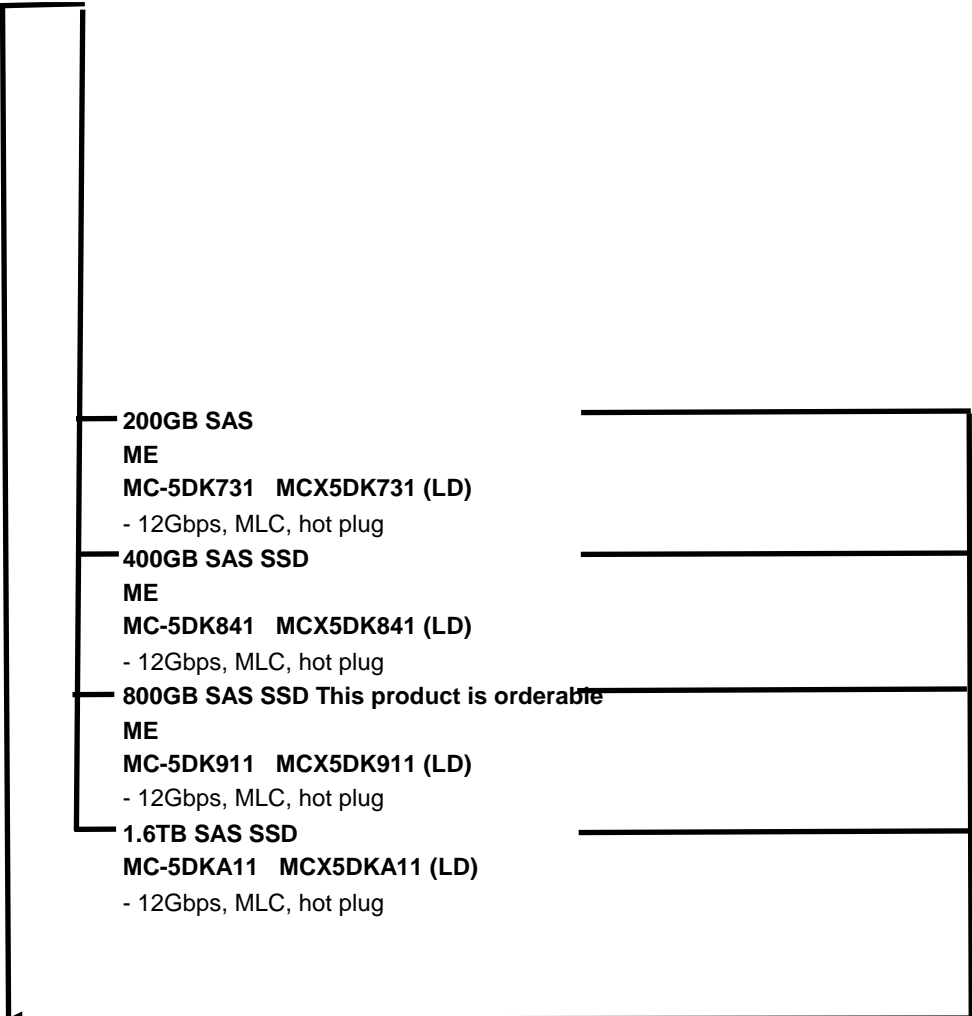

VI. Base Unit PSU

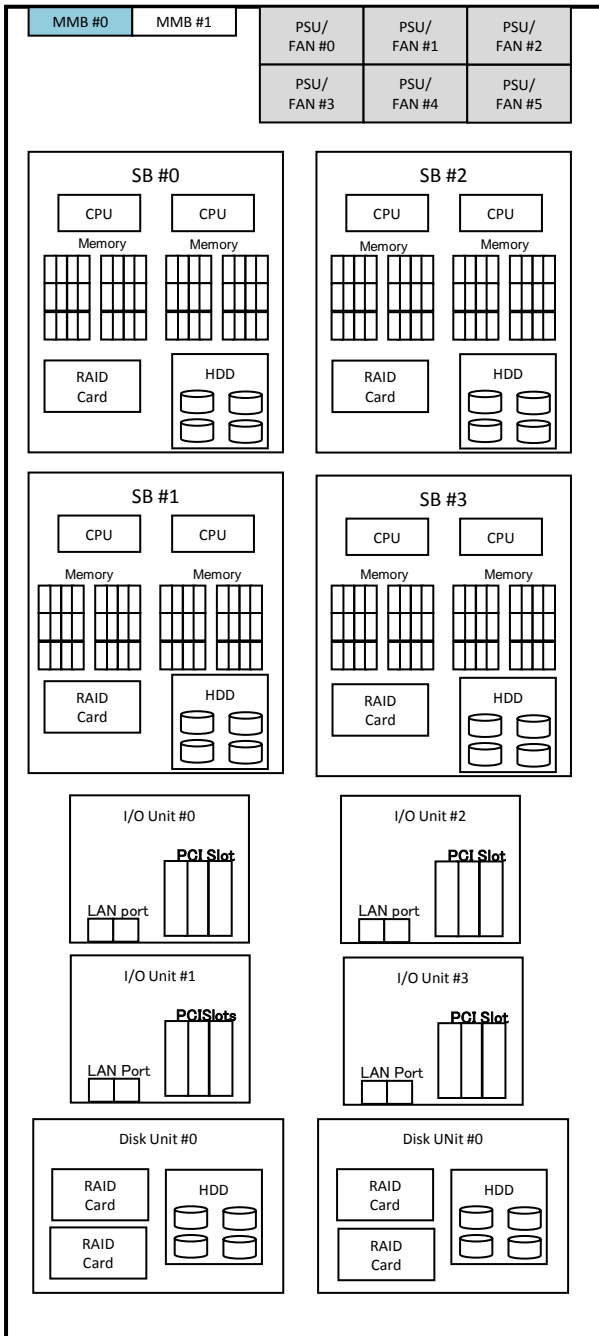

200V High Efficiency PSU

MC-5HPS41 MCX5HPS41 (LD)
- Min 3 - Max. 6 units per chassis
- 80PLUS® Platinum certified

200V Normal PSU

MC-5HPS61 MCX5HPS61 (LD)
- Min 3 - Max. 6 units per chassis
- 80PLUS® Silver certified

Please place the order so that total number of units including PSU and fan is six.
To cool server efficiently, fan must be mounted for PSU slots if they are unoccupied,

Option

fan unit


MC-5HFA41 MCX5HFA41 (LD)
- fan unit x 1

→ **Base Unit Powercords**

AC Power input	Power feed	Redundancy	# of PSU	PSU Slots
240V	Single	Not redundant	3	0, 1, 3
		redundant	3+1	0,1,3,4
	Dual	-	3x2	all

number of PSU and fan		
PSU	fan	power cord
3	3	3
4	2	4
6	no	6

- : Dual power feed help supply power even in power feed failure of data center.

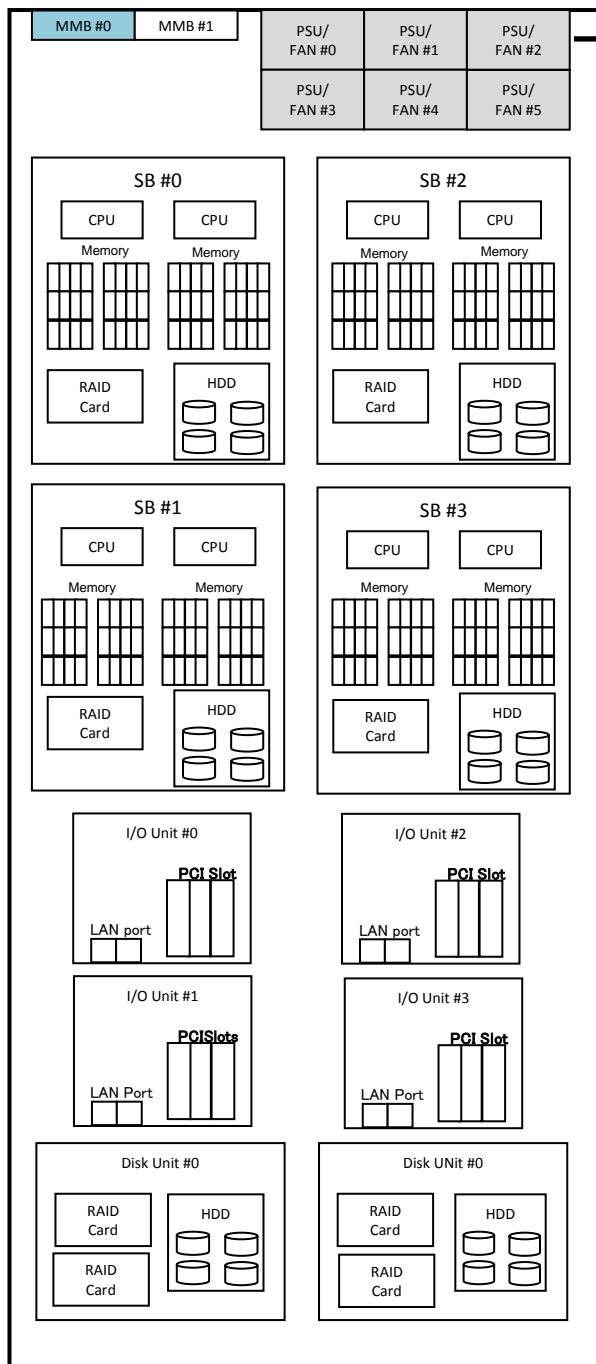

power cord

* You must order the same number of power cords with PSU.
All the power cords ordered must be of the same standard.

One must be ordered

200V IEC power cord(3m)

[MC-0HCA83]

One pcs per PSU

- IEC60320 C20, 3m
- power cord x 1


200V IEC power cord (1m)

[MC-0HCA81]

One pcs per PSU

- IEC60320 C20, 1m
- power cord x 1

→ 9. PCI Box




NOTICE FOR PSU AND POWER CORD FOR CEMEA & I, UK& NORMIC

i **The System Unit PRIMEQUEST includes no PSUs and no power cords!**
 (S26361-F3151-E300: 16A IEC320 C19 -> 16A IEC320 C20)
Different power cords can be optional ordered as L-Numbers.
 (S26361-F3151-L100 or-L200 or -L300 or -L500).
 The S26361-F3151-E300 power cords can be used for the socket strips S26361-F2262-E132 (1x3 16A IEC320)
 or S26361-F2262-E332 (3x3 16A IEC320) and to different PRIMERGY UPS systems.
 For connections out of the rack, there are 3 power cords available (S26361-F3151-L100 or-L200 or -L500).


i **The additional PSU is shipped without a power cord!**
 Different power cords can be optional ordered as L-Numbers.
 (S26361-F3151-L100 or-L200 or -L300 or -L500).

i **Power and cooling considerations**
 see separate sheet

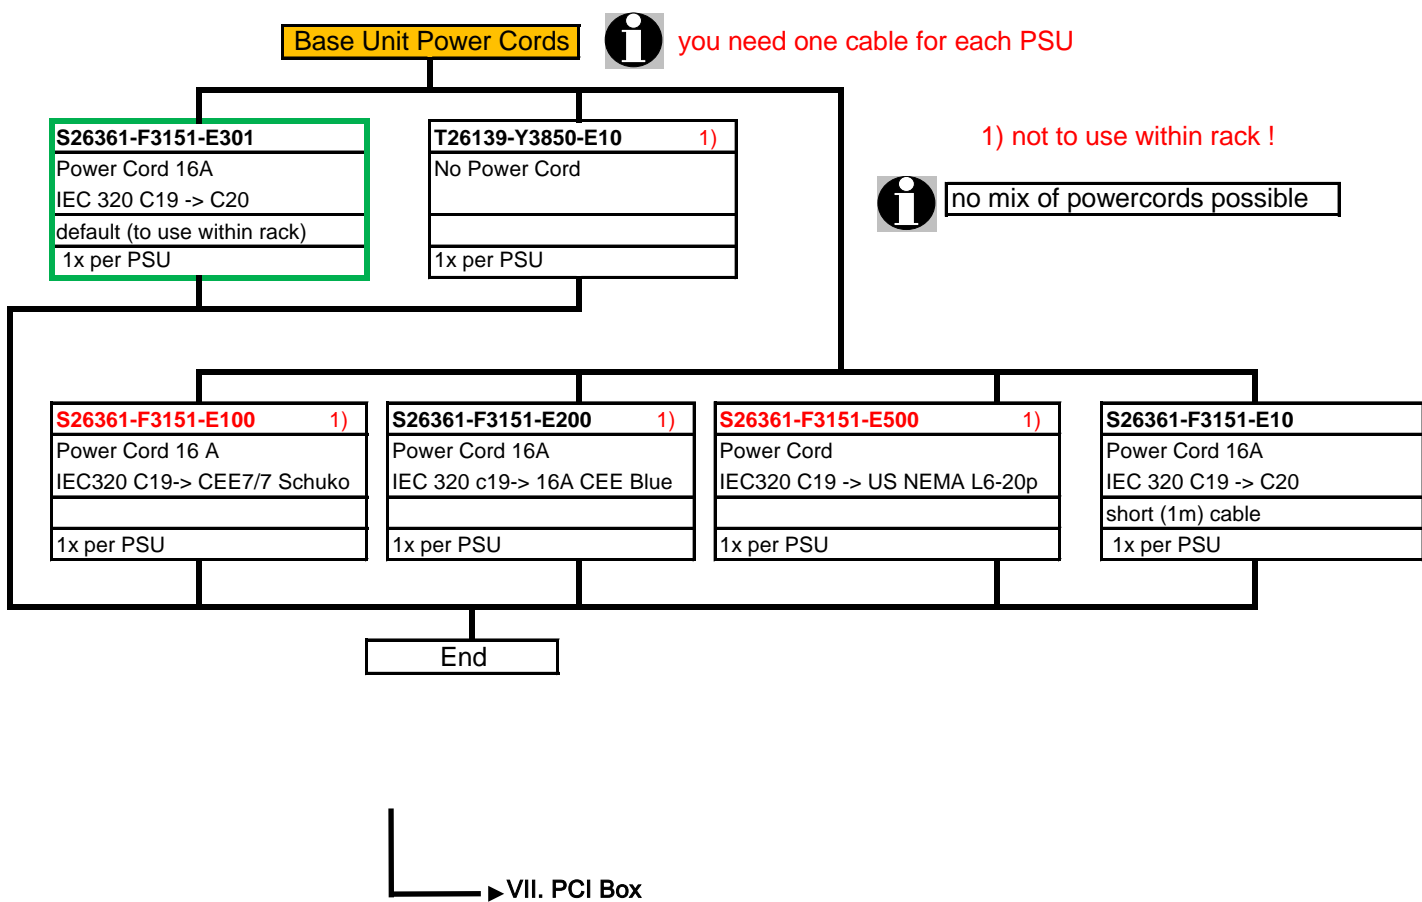



To connect with PCI Boxes, you must mount PCI Box Connection Card (MC-0JPC11) in PRIMEQUEST.
 Out of 12 PCIe slots in one PCI Box, 6 PCIe slots can be useable by mounting this card in one of two Link card slots in PCI Box and one of PCIe slots in PRIMEQUEST.
 Comes with 12 PCI Hot plug cassettes, NO PSU, NO powercord!

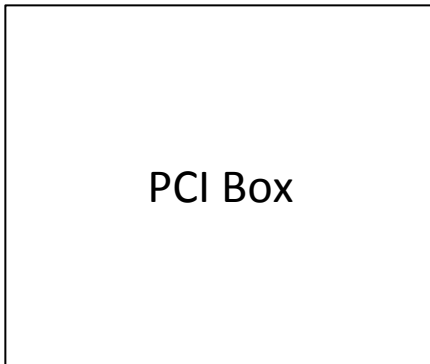

Option

PCI Box

MC-0HPB31 MCX0HPB31 (LD)

* Order number MC-0HPB31 is usable to place the order for PCI Box even without PRIMEQUEST Base Unit

- Max. 4 PCI Box connectable to PRIMEQUEST, but notice max. number depends IOU configurations
- One PCI Box has two ports to connect to PRIMEQUEST
 - One port is used to add six PCIe slots.
- If two ports are connected to PRIMEQUEST, 12 slots can be added
- one PSU must be mounted
- one additional PSU for PSU redundancy can be mounted
- fans are mounted as standard with redundant configuration
- Two PCI Box Connection Cards attached to one PCI Box
- 4 RU
- PCI cards are hot pluggable
- Following parts are included in this product
 - two PCI Box Connection cards, CSP PCI-BOX, IO-PS-DUMMY, RACK MOUNT KIT

PSU for PCI Box

MC-0HPS41 MCX0HPS41 (LD)

1 x PSU or 2 x PSU for redundancy

PCI Box Connection Card *1

MC-0JPC11 MCX0JPC11 (LD)

2 PCI Box Connection Cards for 6 PCI Slots (one for PCI Box and one for the PQ)
(up to 4 to connect 12 PCIe Slots from the PCI Box)

PCI BOX1

*1

- This product includes also following parts.
 - PCI_Box connection cable
 - PCI Express cable(2M) x2
 - PCI Box control cable(2M) x1

Base Units and PCI Boxes must have the same power supply condition.

AC power input	Power feed	Redundancy	Number of units
200V / 100V	Single	Available	1
		Not available	1+1
	Dual	-	1x2




Orderable qty	
PSU	power cord
1	1
2	2
2	2

Max. number of PCI Box connectable is determined below


		IOU 1GbE				
		0	1	2	3	4
IOU 10GbE	0	na	1	2	3	4
	1	1	2	3	4	na
	2	2	3	4	na	na
	3	3	4	na	na	na
	4	4	na	na	na	na

PCI Box Expansion Card can be mounted in #2 and #3 slots in IOU (1GbE) and #2 in IOU(10GbE).

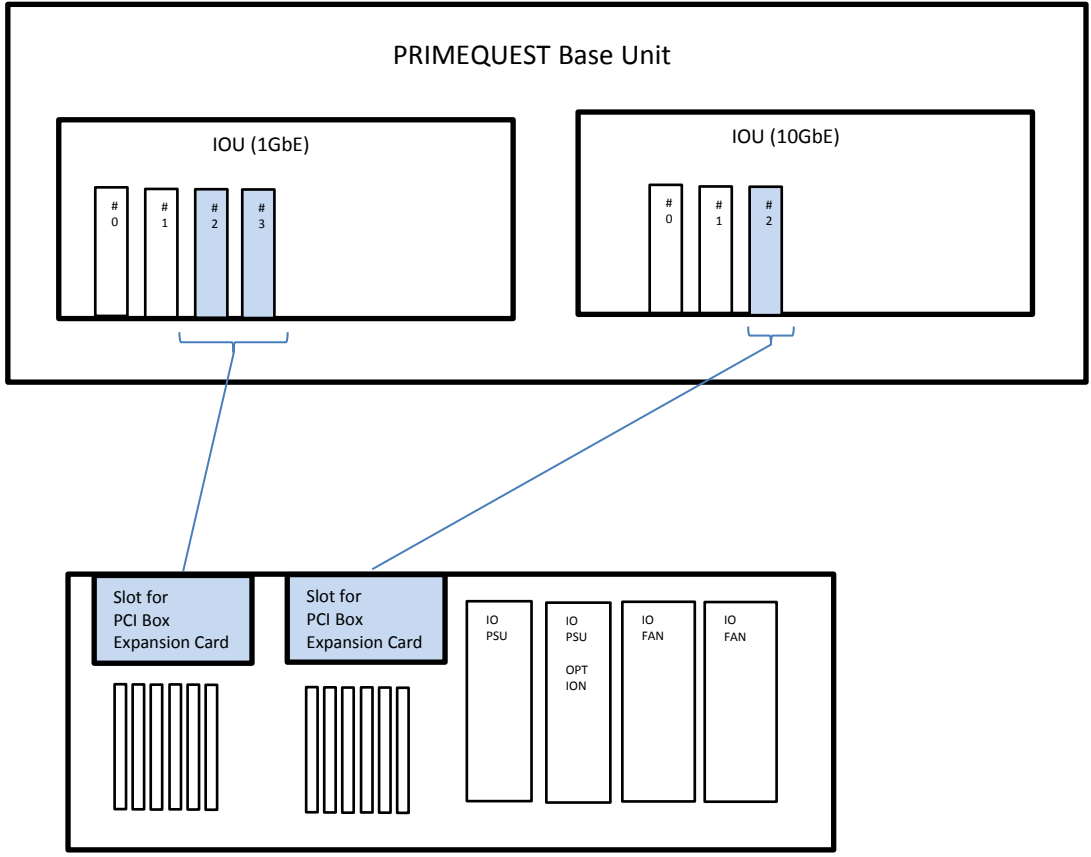


NOTICE

One PCI Box cannot be connected to two different PRIMEQUEST Base Units.

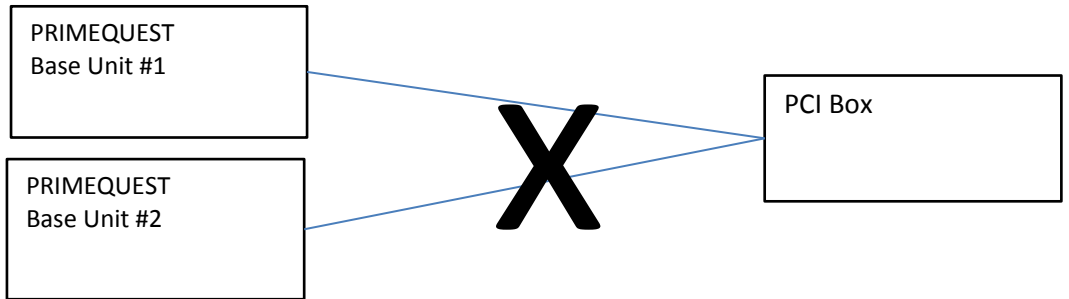

→ PCI BOX Powercords

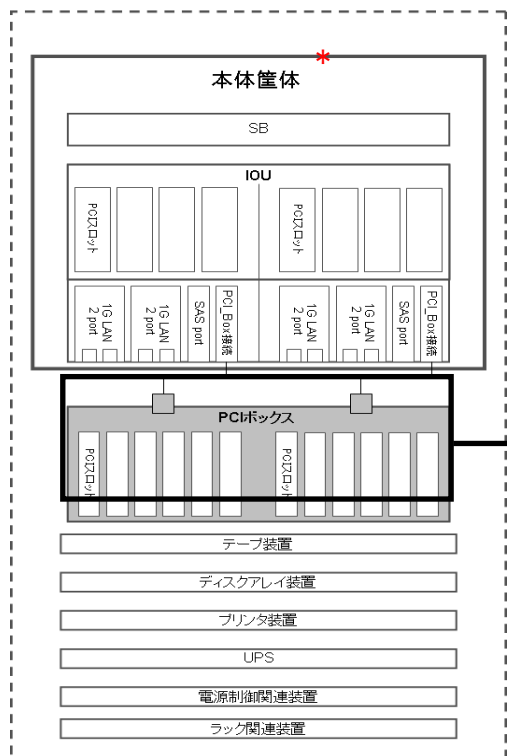


Option

200V IEC AC Cable (3m) for PCI BoX
MC-0HCAB3

200V IEC AC Cable (1m) for PCI BoX
MC-0HCAB1

NOTICE ABOUT PCI BOX POWER CORDS FOR CEMEA & I, UK & NORDIC

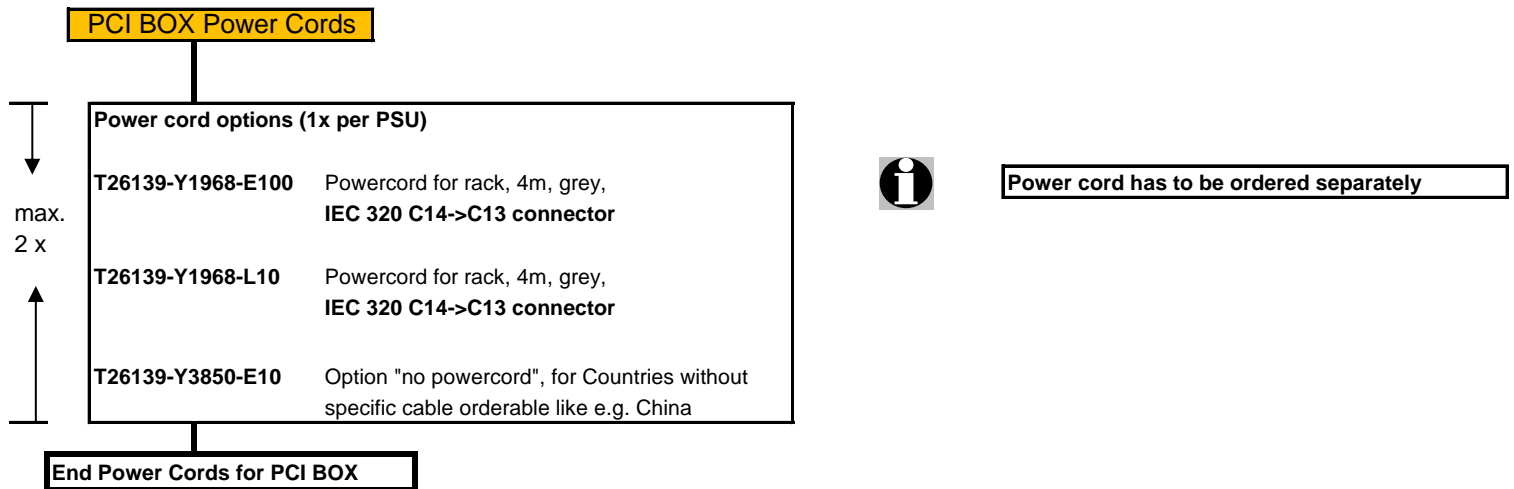


➔ VIII. PCI CARDS


Max. 56 cards can be mounted.
 I/O Unit (1GbE) : Max. 4 cards per unit
 I/O Unit (10GbE) : Max. 3 cards per unit
 PCI Box : Max. 12 cards per unit

<p>Single Channel 8Gbps Fiber Channel Card MC-0JFC31 MCX0JFC31 LD - LPe1250, Low Profile</p>	
<p>Single Channel 8Gbps Fiber Channel Card MC-0JFC91 MCX0JFC91 LD - LPe1250, Full Height</p>	
<p>Dual Channel 8Gbps Fiber Channel Card MC-0JFC41 MCX0JFC41 LD - LPe12002, Low Profile</p>	
<p>Dual Channel 8Gbps Fiber Channel Card MC-0JFCA1 MCX0JFCA1 LD - LPe12002, Full Height</p>	
<p>Single Channel 16Gbps Fiber Channel Card MC-0JFC71 MCX0JFC71 LD - LPe16000, Low Profile</p>	
<p>Single Channel 16Gbps Fiber Channel Card MC-0JFC72 - LPe16000, Full High</p>	
<p>Dual Channel Fiber Channel Card (16Gbps) MC-0JFC81 MCX0JFC81 LD - LPe16002, Low Profile</p>	
<p>Dual Channel Fiber Channel Card (16Gbps) MC-0JFC82 - LPe16002, Full High</p>	
<p>Single Channel 8Gbps Fiber Channel Card MC-0JFC51 MCX0JFC51 LD - QLE2560, Low Profile</p>	
<p>Single Channel 8Gbps Fiber Channel Card MC-0JFC52 - QLE2560, Full Height</p>	
<p>Dual Channel 8Gbps Fiber Channel Card MC-0JFC61 MCX0JFC61 LD - QLE2562, Low Profile</p>	
<p>Dual Channel 8Gbps Fiber Channel Card MC-0JFC62 - QLE2562, Full Height</p>	
<p>Single Channel 16Gbps Fiber Channel Card MC-0JFCB1 MCX0JFCB1 LD - QLE2670, Low Profile</p>	
<p>Single Channel 16Gbps Fiber Channel Card MC-0JFCB2 - QLE2670, Full Height</p>	
<p>Dual Channel 16Gbps Fiber Channel Card MC-0JFCC1 MCX0JFCC1 LD - QLE2672, Low Profile</p>	
<p>Dual Channel 16Gbps Fiber Channel Card MC-0JFCC2 - QLE2672, Full Height</p>	
<p>→ PCI CARDS_1</p>	

Max. 56 cards can be mounted.
 I/O Unit (1GbE) : Max. 4 cards per unit
 I/O Unit (10GbE) : Max. 3 cards per unit
 PCI Box : Max. 12 cards per unit


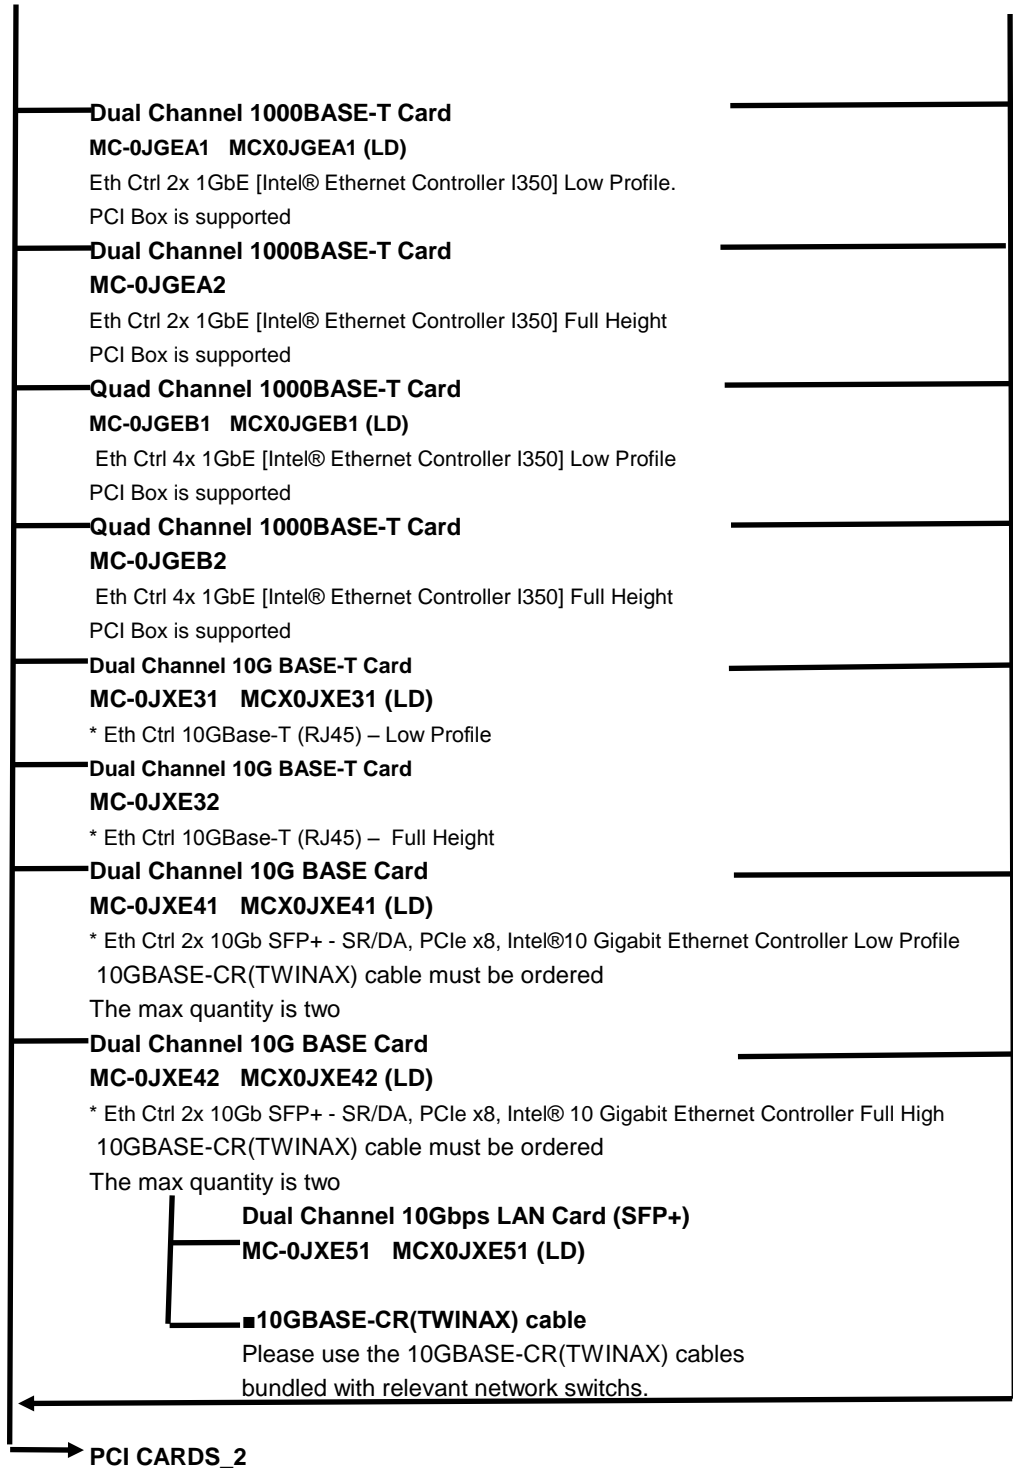


Max. 56 cards can be mounted.
 I/O Unit (1GbE) : Max. 4 cards per unit
 I/O Unit (10GbE) : Max. 3 cards per unit
 PCI Box : Max. 12 cards per unit

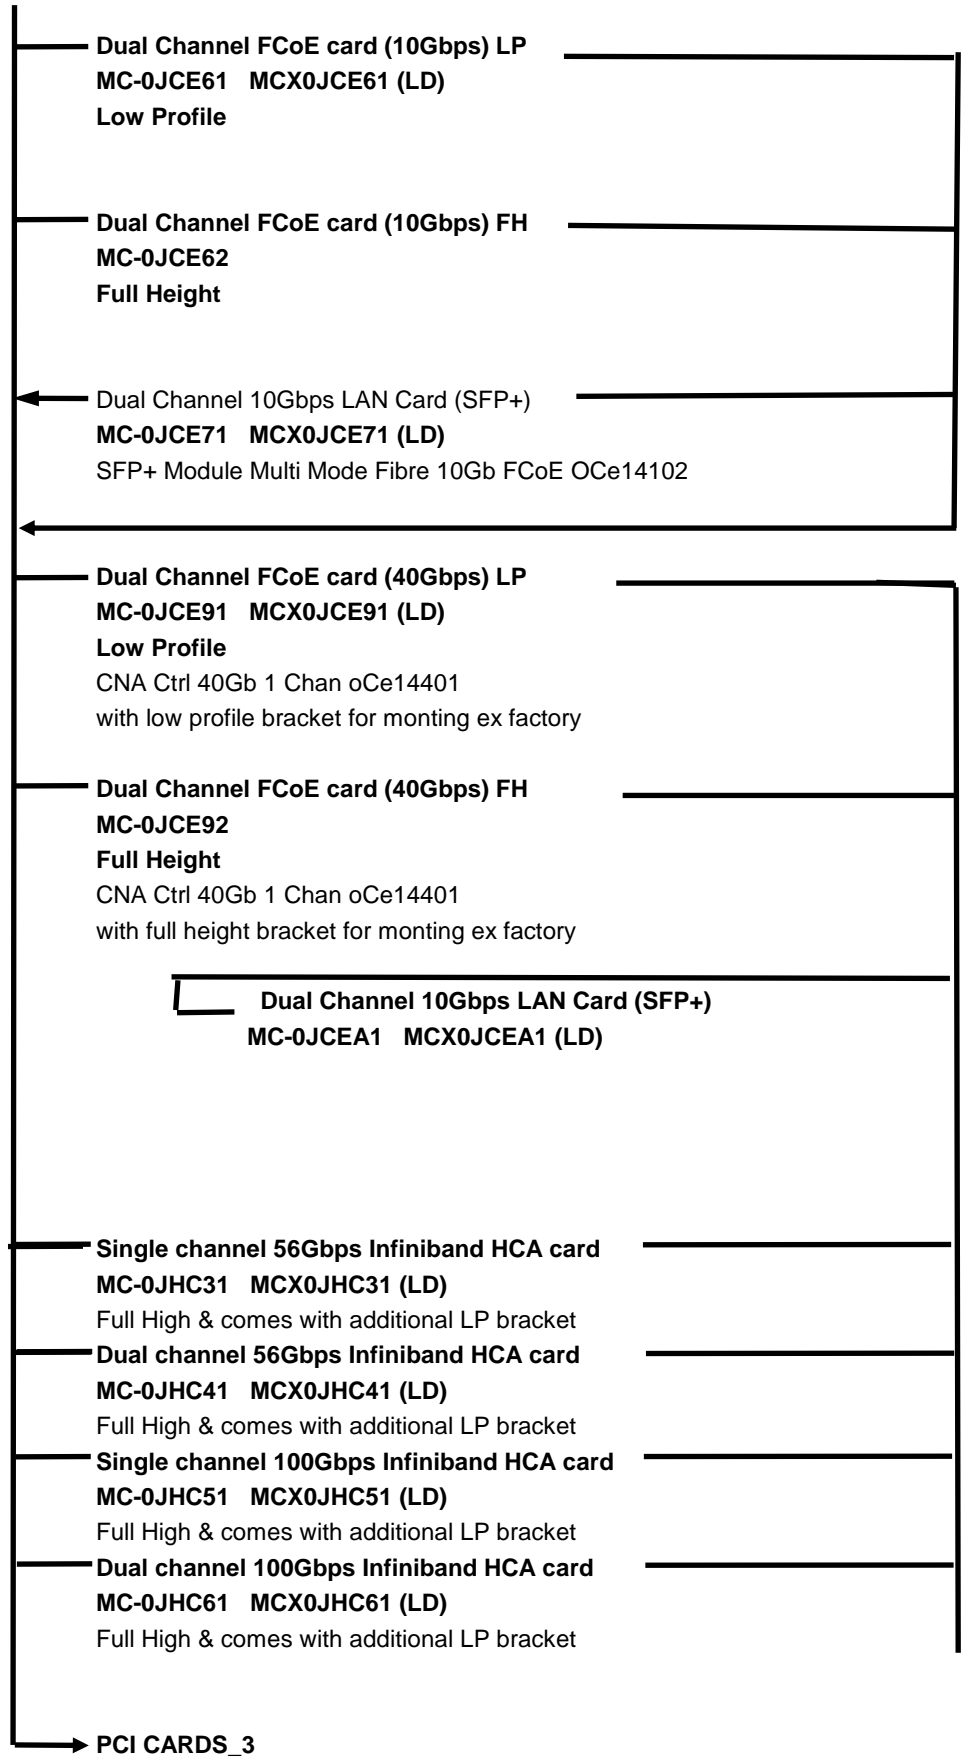

Limitation for Windows
 - Max. 64 cores per physical partiton, and
 - Max. 2 pcs per physical partition, and
 - Memory size 1TB

Max. 56 cards can be mounted.
I/O Unit (1GbE) : Max. 4 cards per unit
I/O Unit (10GbE) : Max. 3 cards per unit
PCI Box : Max. 12 cards per unit

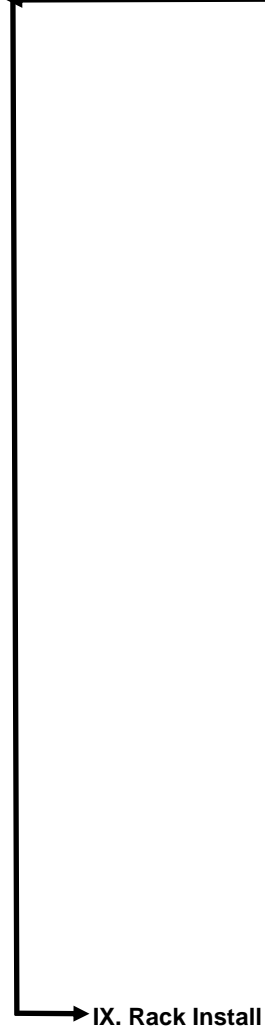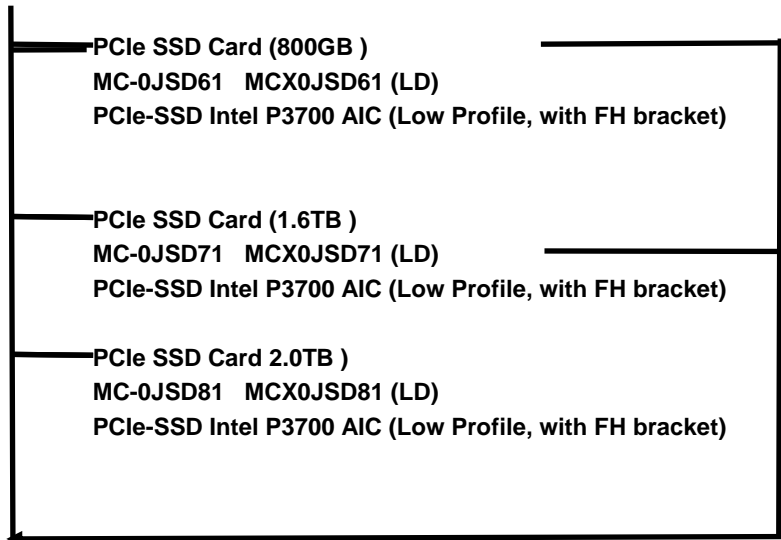

Outlet for APAC & South Americas

Following products are available for APAC

- MC-R1CBA1 : outlet (200V, IEC60320-C19,1U)
- MC-R1CBB1 : outlet for PCI BoX (200V-IEC-0U)
- MC-R1CBD1 : outlet for PCI BoX (200V-IEC-1U)

Following product is available for FBR.

- MC-R1CBC1 : outlet for FBR(200V, IEC60320-C19,0U)

Please notice these products cannot be selected in System Architect.

Rack products for APAC, North Americas, and South Americas

For details of rack products, refer to "19Inch Rack Handbook".
<https://globalpartners.ts.fujitsu.com/sites/primeweb/services/servers/primequest/document/Pages/dc-h-guide.aspx>

Rack for APAC, NA & SA

Notices for Rack Mount Kit
- Rack Mount Kit is bundled to PRIMEQUEST Base Unit
- This Rack Mount Kit is usable to mount PRIMEQUEST to Rack Units delivered from Fujitsu Japan factory and FTS factory.

Rack Units	
Model 2724 19R-272A2 24U, Base Unit	
Model 2737 19R-273A2 37U, Base Rack	Model 2737 19R-273A2 37U, Expansion Rack
Model 2742 19R-274A2 42U, Base Rack	Model 2742 19R-274B2 42U, Expansion Rack
Model 2616 19R-261A2 16U, Base Rack	
Model 2624 19R-262A2 42U, Base Rack	
Model 2642 19R-264A2 42U, Base Rack	Model 2642 19R-264B2 42U, Expansion Rack

Notices for Tilt Resistent Stabilizer
- This stabilizer must be stated in order sheet.

Tilt-Resistent Stabilizer	
L-form Stabilizer 19R-27FS1 For model 2724/2737/2742	
L-form Stabilizer 19R-26FS1 For model 2616/2624/2642	
Pull out type Stabilizer 19R-26FS2 For model 2724/2737/2742/2616/2624/2642	

Earthquake Proof Kit	
Earthquake Proof Kit 19R-27ST1 For Basic Rack for model 2724/2737/2742	
Earthquake Proof Kit 19R-27ST2 For Expansion Rack for model 2724/2737/2742	
Earthquake Proof Kit 19R-26ST1 For Basic Rack for model 2616/2624/2642	
Earthquake Proof Kit 19R-26ST2 For Expansion Rack for model 2616/2624/2642	

Notices for Blank Panel
- This is used to prevent outflow of heated air
- Spaces to joint Side Cable Duct should be covered by this product

Blank Panel	
Blank Panel (1U) 19R-26BP1 For model 2724/2737/2742/2616/2624/2642	
Blank Panel (2U) 19R-26BP2 For model 2724/2737/2742/2616/2624/2642	
Blank Panel (3U) 19R-26BP3 For model 2724/2737/2742/2616/2624/2642	

Rack Tray	
Rack Tray (Fixed Type) 19R-26TR1 For model 2724/2737/2742/2616/2624/2642	
Rack Tray (Slide Type) 19R-26TR2 For model 2724/2737/2742/2616/2624/2642	
Laptop PC Tray 19R-26TR3 For model 2724/2737/2742/2616/2624/2642	

Slide Cable Duct	
Slide Cable Duct 19R-27SD1 For model 2724/2737/2742/2616/2624/2642	

Cable Holder	
Cable Holder 19R-27CM1 For front side For model 2724/2737/2742 *1	
Cable Holder 19R-27CM2 For rear side For model 2724/2737/2742 *1	
Cable Holder 19R-26CM1 For front side For model 2616/2624 *2	
Cable Holder 19R-26CM2 For rear side For model 2616/2624 *2	
Cable Holder 19R-26CM11 For front side For model 2642 *3	
Cable Holder 19R-26CM21 For rear side For model 2642 *3	

*1 Cable Holders are bundled to Rack Units. Please include this product in order sheet if quantity of this product bundled is insufficient.
- 10 pcs for model 2742, 8 pcs for model for 2737, 6 pcs for 2724.

*2 Cable Holders are bundled to Rack Units. Please include this product in order sheet if quantity of this product bundled is insufficient.
- 6 pcs for model 2624, 4 pcs for model for 2716..


*3 Cable Holders are bundled to Rack Units. Please include this product in order sheet if quantity of this product bundled is insufficient.
- 10 pcs for model 2642.

Screw Unit	
Screw Unit 19R-26SC1 50 pcs of M6 screw units and 50 pcs of M6 cage nuts	

Rack Installation for CEMEA&I, UK & NORDIC



Support bracket 10U S26361-F2735-L41
has to be ordered for loose delivery for mounting 10U in asymmetrical FJ racks.
Support bracket S26361-F2735-L15
has to be ordered for loose delivery for mounting 4U in asymmetrical FJ racks.

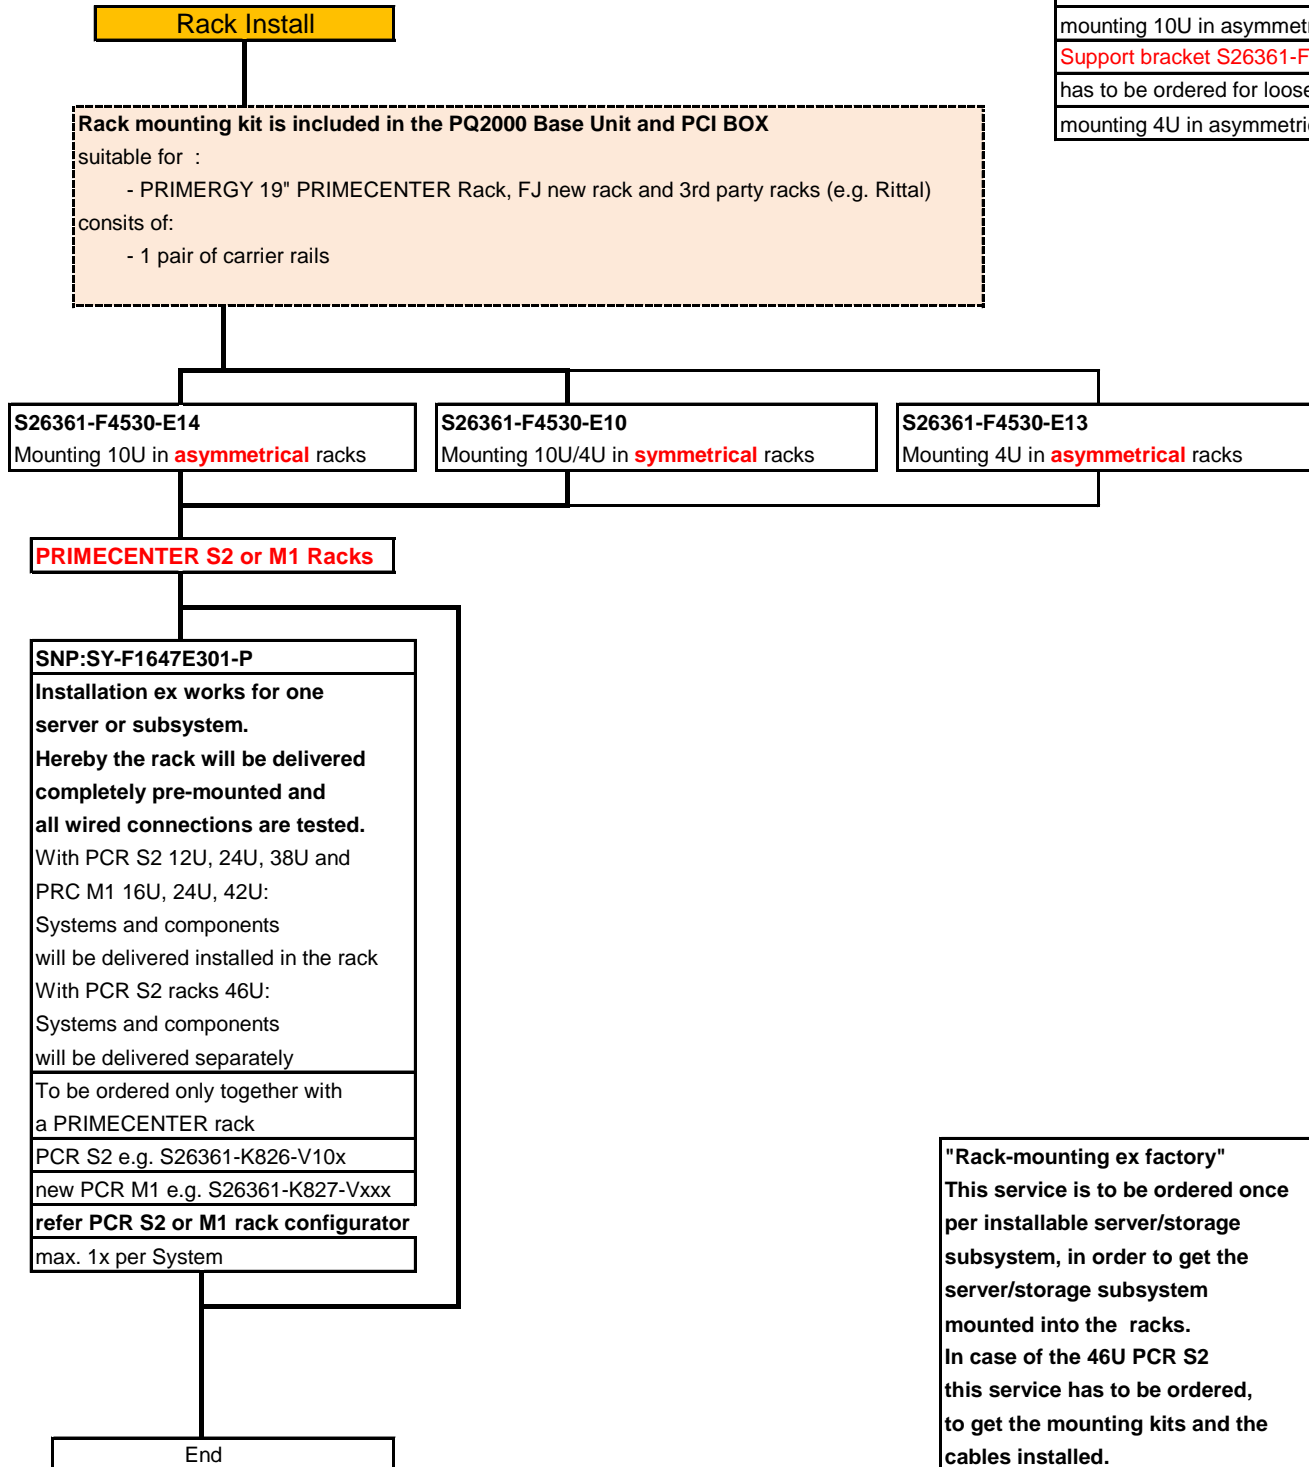

"Rack-mounting ex factory"
This service is to be ordered once per installable server/storage subsystem, in order to get the server/storage subsystem mounted into the racks.
In case of the 46U PCR S2 this service has to be ordered, to get the mounting kits and the cables installed.

For more configuration information, RACK COMPONENTS, PDU & KVM see
<http://globalsp.ts.fujitsu.com/dmsp/Publications/public/cnfgPCM1rack.pdf>

Max. quantity of PCIe cards

System configurator and order-information guide

PRIMEQUEST 2800E2 Status 2017-03-01

Product Name	Order Number	Limitation for max. Qty. of IOU	Limitation for max. Qty. of PCI Box	Limitation for max. Qty. of Sytem Board	Limitation for max. Qty. of Disk Unit	Limitation for max. Qty. of Base unit and PCI BOXes
SAS RAID controller card	MC-0JSR51	Not mountable	Not mountable	No limitation	No limitation	
SAS RAID controller card mount kit	MC-0HCK31	Not mountable	Not mountable	No limitation	Not mountable	
Flash Back-up Unit for Cougar4	MC-0JFB31	Not mountable	Not mountable	No limitation	No limitation	
RAID Advanced Software Options	MC-0KLA11	Not mountable	Not mountable	One piece per RAID card	One piece per RAID card	
Dual channel 12Gbps SAS Card	MC-0JSS31	No limitation	8	Not mountable	Not mountable	8
Dual channel 12Gbps SAS Card	MC-0JSS32	No limitation	8	Not mountable	Not mountable	8
Dual channel 12Gbps SAS RAID controller card	MC-0JSR61	No limitation	7	Not mountable	Not mountable	8
Dual channel 12Gbps SAS RAID controller card	MC-0JSR62	No limitation	7	Not mountable	Not mountable	8
FBU Mount Kit for Ext. SAS RAID Card	MC-0HCK21	1 (IOUL only)	Not mountable	Not mountable	Not mountable	4
RAID Advanced Software Options	MC-0KLA11	One piece per RAID card	One piece per RAID card	Not mountable	Not mountable	
Single Channel 8Gbps Fibre Channel Card	MC-0JFC31	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Single Channel 8Gbps Fibre Channel Card	MC-0JFC91	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 8Gbps Fibre Channel Card	MC-0JFC41	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 8Gbps Fibre Channel Card	MC-0JFCA1	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Single Channel 16Gbps Fibre Channel Card	MC-0JFC71	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Single Channel 16Gbps Fibre Channel Card	MC-0JFC72	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 16Gbps Fibre Channel Card	MC-0JFC81	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 16Gbps Fibre Channel Card	MC-0JFC82	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Single Channel 8Gbps Fibre Channel Card	MC-0JFC51	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Single Channel 8Gbps Fibre Channel Card	MC-0JFC52	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 8Gbps Fibre Channel Card	MC-0JFC61	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 8Gbps Fibre Channel Card	MC-0JFC62	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Single Channel 16Gbps Fibre Channel Card	MC-0JFCB1	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Single Channel 16Gbps Fibre Channel Card	MC-0JFCB2	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 16Gbps Fibre Channel Card	MC-0JFCC1	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 16Gbps Fibre Channel Card	MC-0JFCC2	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 1000BASE-T Card	MC-0JGEA1	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 1000BASE-T Card	MC-0JGEA2	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Quad Channel 1000BASE-T Card	MC-0JGEB1	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Quad Channel 1000BASE-T Card	MC-0JGEB2	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 10G BASE-T Card	MC-0JXE31	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 10G BASE-T Card	MC-0JXE32	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 10G BASE Card	MC-0JXE41	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 10G BASE Card	MC-0JXE42	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 10Gbps LAN Card (SFP+)	MC-0JXE51	two per LAN card	two per LAN card	Not mountable	Not mountable	
Dual Channel FCoE card (10Gbps)	MC-0JCE61	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel FCoE card (10Gbps)	MC-0JCE62	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual Channel 10Gbps LAN Card (SFP+)	MC-0JCE71	Two pieces per FCoE 10G card	Two pieces per FCoE 10G card	Not mountable	Not mountable	
Single Channel FCoE card (40Gbps)	MC-0JCE91	No limitation	No limitation	Not mountable	Not mountable	16 16 per PPAR
Single Channel FCoE card (40Gbps)	MC-0JCE92	No limitation	No limitation	Not mountable	Not mountable	16 16 per PPAR
SFP+ module for 40Gbps	MC-0JCEA1	Two pieces per FCoE 40G card	Two pieces per FCoE 40G card	Not mountable	Not mountable	
Single channel 56Gbps Infiniband HCA card	MC-0JHC31	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Dual channel 56Gbps Infiniband HCA card	MC-0JHC41	No limitation	No limitation	Not mountable	Not mountable	24 16 per PPAR
Single channel 100Gbps Infiniband HCA card	MC-0JHC51	No limitation	8	Not mountable	Not mountable	8 8 per PPAR
Dual channel 100Gbps Infiniband HCA card	MC-0JHC61	No limitation	8	Not mountable	Not mountable	8 8 per PPAR
PCIe SSD Card (800GB)	MC-0JSD61	No limitation	No limitation	Not mountable	Not mountable	48 12 per PPAR
PCIe SSD Card (1.2TB)	MC-0JSD71	No limitation	No limitation	Not mountable	Not mountable	48 12 per PPAR
PCIe SSD Card (2.0TB)	MC-0JSD81	No limitation	No limitation	Not mountable	Not mountable	48 12 per PPAR
PCI BoX connection card	MC-0JPC11	1(IOUF) 2(IOUL)	Not mountable	Not mountable	Not mountable	8

Product name	Order number				OS					
		PRIMEQUEST 2400E2	PRIMEQUEST 2800E2	PRIMEQUEST 2800E2	Win2012 R2	Win2012	RHEL	SLES 11	VMware vSphere 5	Oracle Linux/ Oracle VM
System board	MC-3HSB71	NA	A	NA	A	A	A	A	A	A
System board	MC-2HSB71	A	NA	NA	A	A	A	A	A	A
System board	MC-3HSB71B	NA	NA	A	A	A	A	A	A	A
System Board w/ TPM	MC-3HSBV1	NA	A	NA	A	A	A	A	A	A
System Board w/ TPM	MC-2HSBV1	A	NA	NA	A	A	A	A	A	A
System Board w/ TPM	MC-3HSBV1B	NA	NA	A	A	A	A	A	A	A
Xeon E7-8893v3 (4core/3.2GHz/45MB)	MC-3BDD11	NA	A	NA	A	A	A	A	A	A
Xeon E7-8893v3 (4core/3.2GHz/45MB)	MC-2BDD11	A	NA	NA	A	A	A	A	A	A
Xeon E7-8893v3 (4core/3.2GHz/45MB)	MC-3BDD11B	NA	NA	A	A	A	A	A	A	A
Xeon E7-8891v3 (10core/2.8GHz/45MB)	MC-3BDG11	NA	A	NA	A	A	A	A	A	A
Xeon E7-8891v3 (10core/2.8GHz/45MB)	MC-2BDG11	A	NA	NA	A	A	A	A	A	A
Xeon E7-8891v3 (10core/2.8GHz/45MB)	MC-3BDG11B	NA	NA	A	A	A	A	A	A	A
Xeon E7-8890v3 (18core/2.5GHz/45MB)	MC-3BDA11	NA	A	NA	A	A	A	A	A	A
Xeon E7-8890v3 (18core/2.5GHz/45MB)	MC-2BDA11	A	NA	NA	A	A	A	A	A	A
Xeon E7-8890v3 (18core/2.5GHz/45MB)	MC-3BDA11B	NA	NA	A	A	A	A	A	A	A
Xeon E7-8880v3 (18core/2.3GHz/45MB)	MC-3BDE11	NA	A	NA	A	A	A	A	A	A
Xeon E7-8880v3 (18core/2.3GHz/45MB)	MC-2BDE11	A	NA	NA	A	A	A	A	A	A
Xeon E7-8880v3 (18core/2.3GHz/45MB)	MC-3BDE11B	NA	NA	A	A	A	A	A	A	A
Xeon E7-8870v3 (18core/2.1GHz/45MB)	MC-3BDF11	NA	A	NA	A	A	A	A	A	A
Xeon E7-8870v3 (18core/2.1GHz/45MB)	MC-2BDF11	A	NA	NA	A	A	A	A	A	A
Xeon E7-8870v3 (18core/2.1GHz/45MB)	MC-3BDF11B	NA	NA	A	A	A	A	A	A	A
Xeon E7-8860v3 (16core/2.2GHz/40MB)	MC-3BDB11	NA	A	NA	A	A	A	A	A	A
Xeon E7-8860v3 (16core/2.2GHz/40MB)	MC-2BDB11	A	NA	NA	A	A	A	A	A	A
Xeon E7-8860v3 (16core/2.2GHz/40MB)	MC-3BDB11B	NA	NA	A	A	A	A	A	A	A
Xeon E7-8867v3 (16core/2.5GHz/45MB)	MC-3BDC11	NA	A	NA	A	A	A	A	A	A
Xeon E7-8867v3 (16core/2.5GHz/45MB)	MC-2BDC11	A	NA	NA	A	A	A	A	A	A
Xeon E7-8867v3 (16core/2.5GHz/45MB)	MC-3BDC11B	NA	NA	A	A	A	A	A	A	A
Memory Extension Board	MC-3HMB21	NA	A	NA	A	A	A	A	A	A
Memory Extension Board	MC-2HMB21	A	NA	NA	A	A	A	A	A	A
Memory Extension Board	MC-3HMB21B	NA	NA	A	A	A	A	A	A	A
16GB Memory (8GB DDR4 DIMM x2)	MC-3CD511	NA	A	NA	A	A	A	A	A	A
16GB Memory (8GB DDR4 DIMM x2)	MC-2CD511	A	NA	NA	A	A	A	A	A	A
16GB Memory (8GB DDR4 DIMM x2)	MC-3CD511B	NA	NA	A	A	A	A	A	A	A
32GB Memory (16GB DDR4 DIMM x2)	MC-3CD611	NA	A	NA	A	A	A	A	A	A
32GB Memory (16GB DDR4 DIMM x2)	MC-2CD611	A	NA	NA	A	A	A	A	A	A
32GB Memory (16GB DDR4 DIMM x2)	MC-3CD611B	NA	NA	A	A	A	A	A	A	A
64GB Memory (32GB DDR4 DIMM x2)	MC-3CD721	NA	A	NA	A	A	A	A	A	A
64GB Memory (32GB DDR4 DIMM x2)	MC-2CD721	A	NA	NA	A	A	A	A	A	A
64GB Memory (32GB DDR4 DIMM x2)	MC-3CD721B	NA	NA	A	A	A	A	A	A	A
64GB Memory (32GB DDR4 DIMM x2)	MC-3CD711	NA	A	NA	A	A	A	A	A	A
64GB Memory (32GB DDR4 DIMM x2)	MC-2CD711	A	NA	NA	A	A	A	A	A	A
64GB Memory (32GB DDR4 DIMM x2)	MC-3CD711B	NA	NA	A	A	A	A	A	A	A
128GB Memory (64GB DDR4 DIMM x2)	MC-3CD811	NA	A	NA	A	A	A	A	A	A
128GB Memory (64GB DDR4 DIMM x2)	MC-2CD811	A	NA	NA	A	A	A	A	A	A
128GB Memory (64GB DDR4 DIMM x2)	MC-3CD811B	NA	NA	A	A	A	A	A	A	A
256GB Memory (128GB DDR4 DIMM x2)	MC-3CD911	NA	A	NA	A	A	A	A	A	A
256GB Memory (128GB DDR4 DIMM x2)	MC-2CD911	A	NA	NA	A	A	A	A	A	A
256GB Memory (128GB DDR4 DIMM x2)	MC-3CD911B	NA	NA	A	A	A	A	A	A	A

A : Available

NA : Not Available

P: Fujitsu plans to make this product available

Single channel 56Gbps Infiniband HCA card	MC-0JHC31	A	A	A	A*1	A*1	A	A	A	NA
Dual channel 56Gbps Infiniband HCA card	MC-0JHC41	A	A	A	A*1	A*1	A	A	A	NA
Single channel 100Gbps Infiniband HCA card	MC-0JHC51	A	A	A	A*1	A*1	A	A	A	NA
Dual channel 100Gbps Infiniband HCA card	MC-0JHC61	A	A	A	A*1	A*1	A	A	A	NA
PCIe SSD Card (800GB)	MC-0JSD61	A	A	A	A	A	A	A	A	NA
PCIe SSD Card (1.6TB)	MC-0JSD71	A	A	A	A	A	A	A	A	NA
PCIe SSD Card (2TB)	MC-0JSD81	A	A	A	A	A	A	A	A	NA
PCI BoX connection card	MC-0JPC11	A	A	NA	A	A	A	A	A	A
Management Board	MC-5HMM21	A	A	NA	A	A	A	A	A	A
200V High efficiency PSU	MC-5HPS41	A	A	A	A	A	A	A	A	A
100V/200V normal PSU	MC-5HPS61	A	A	A	A	A	A	A	A	A
FAN Unit	MC-5HFA41	A	A	A	A	A	A	A	A	A
IEC AC(100V/200V) Cable (3m)	MC-0HCA83	A	A	A	A	A	A	A	A	A
IEC AC(100V/200V) Cable (1m)	MC-0HCA81	A	A	A	A	A	A	A	A	A
PCI BoX	MC-0HPB31	A	A	NA	A	A	A	A	A	A
PSU for PCI BoX	MC-0HPS41	A	A	NA	A	A	A	A	A	A
IEC AC(100V/200V) Cable (1m) for PCI BoX	MC-0HCAB1	A	A	NA	A	A	A	A	A	A
IEC AC(100V/200V) Cable (3m) for PCI BoX	MC-0HCAB3	A	A	NA	A	A	A	A	A	A
Memory Mode Setting (Normal)	MC-0PMM1	A	A	A	A	A	A	A	A	A
Memory Mode Setting (Mirror)	MC-0PMM3	A	A	A	A	A	A	A	A	A
Memory Mode Setting (Spare)	MC-0PMM4	A	A	A	A	A	A	A	A	A
Dynamic Reconfiguration (Enable)	MC-0PDP2	A	A	NA	A	A	A	A	A	A
PCI Address Bus Mode PCI Address Mode (Bus Mode)	MC-0PPA2	A	A	NA	A	A	A	A	A	A
outlet (200V, IEC60320-C19,1U) (for FBR only)	MC-R1CBA1	A	A	A	A	A	A	A	A	A
outlet for PCI BoX (200V-IEC-0U) (for FBR only)	MC-R1CBB1	A	A	A	A	A	A	A	A	A
outlet for FBR(200V, IEC60320-C19,0U) (for FBR only)	MC-R1CBC1	A	A	A	A	A	A	A	A	A
outlet for PCI BoX (200V-IEC-1U) (for FBR only)	MC-R1CBD1	A	A	A	A	A	A	A	A	A

*1 Infiniband cards in Windows is usable only under conditios

- the number of CPU core is 64 or less, and

- The number of Infiniband cards is 2 or less, and

- memory size is 1TB or less

below.

Limitation
Only 8 ports(4 cards) of dual ports FCoE cards are supported for legacy boot.
iSCSI boot with RHEL 6 or SLES 11 is NOT available.
iSCSI SW-initiator booting is NOT supported
Not allowable configuration: One partition with 2 System Boards with one CPU per System Board
<p>Infiniband card with Windows OS is allowed under conditions.</p> <ul style="list-style-type: none"> - the number of CPU core is 64 or less, and - the number of Infiniband cards is 2 or less, and - memory size is 1TB or less
It is NOT allowed to configure Multi path LAN configuration between 1Gbs LAN IOU and 1Gbps LAN IOUF.
Only legacy BIOS mode is supported for ESXi 5.x.
Do not execute "shutdown" during hot-removing a SB.
Unable to collect a dump file by XEN kernel environment, when OS panic occurs.
Up to 2 RAID cards are allowed in a partition with VMware OS.
<p>To use Oracle Linux 6.6, follow the steps below.</p> <ol style="list-style-type: none"> 1. Change "UEFI mode" into "Legacy mode". <p>Or</p> <ol style="list-style-type: none"> 2. Change PCI Address Mode from "PCI Segment Mode" to "PCI Bus Mode".
If a Extended Partition is created to Physical Partition forming of two System Boards, allowable combination of the Physical Partitions are: pair of SB0 and SB1, and pair of SB2 anf SB3
<p>PCI Hot Plug is executable PCI cards in PCI Box allotted to Extended Partition.</p> <p>Please note the limitation that PCI cards specified below are NOT executable the PCI Hot Plug even if they are allotted to PCI Box.</p> <ul style="list-style-type: none"> - RAID controll cards - PCIe SSD cards - Infiniband card

Precautions	Workaround
With IPv6, iSCSI Install of Windows 2012 R2(UEFI) fails.	Please don't use the following Hub, when iSCSI installation with IPv6. SR-S324, SR\S748, SR-S348, SR-X340HUB
Unable to construct a Logical drive by MMB CLI command, when installing OS in the initial machine state.	Use SVIM or UEFI RAID Utility to construct a Logical drive in an OS install disk.
The capacity of HDD is indicated by the unit of 1TB on EP420e (EP420i) HII Utility, even if the 1.2TB HDD and /or 1.8TB HDD was installed.	Select the disk on Drive Management menu and check the disk size on the menu.
Unable to add a PCIe card to the slot in a PCI_Box, if the command of "dr rm pcieXX" is executed and the partition is rebooted as PCI cards are not removed.	Power off the partition and replace the PCIe card with a new one in this case.
A partition populated E7-8860/1CPU can not be booted.	E7-8860v3(1CPU/1SB/1Partition) => Set PCI Address Mode to "PCI Bus Mode".
Virtual Media (RemoteStorage) for multiple partitions can not be used from a remote PC at the same time..	Please operate the following procedure. 1. Start Video Redirection for a partition. 2. Connect an iso image with Virtual Media on the Video Redirection. 3. Power on the partition on MMB WebUI. 4. Check that OS is booted. 5. Execute above procedure for other partition.
Video Redirection activation is failed when Video Redirections of multi partitions are activated at one time.	Video Redirection from a remote PC should be done to one partition only.
Uncorrectable errors occur at multiple RAID cards during SVIM installation.	The number of LAN ports should be limited to 96 and fewer for a partition during OS installation by SVIM.
	Solved with MMB 20.25 or later. Ignore "Estimated time remaining". "Progress" is correctly displayed.
	Solved with MMB 20.26 or later. Confirm the content in a detailed screen. (Press "Detail" button at the side of SEL record.)
	Solved with MMB 20.22 or later. Execute Wake-On-LAN to a partition after confirming that the power status of PPAR is powered-off.
OS restart is required, when run OCM on the PC and execute PHP of FC card .	Close OCM monitor before PHP on Windows OS.
Could not apply KB2919355 to WS12R2 on 4SB configuration.	Set the following entry to Registry Subkey „HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\services\TrustedInstaller“. Name: BlockTimeIncrement Data type: REG_DWORD Value: 0x2a30

<p>If system has more than 41 LAN ports, kdump fails to dump on external storage device.</p>	<p>Add unrelated controllers other than storage controllers for kdump to blacklist option of kdump.conf to avoid the driver loading of unnecessary drivers.</p> <p>For example, add a following line in file /etc/kdump.conf. "blacklist igb ixgbe"</p>
<p>An error may occur, when "sadumpbackup" command or "makedumpfile" command is executed. All memory region is not involved in the dump file for backup and vmcorefile, even when no error occurs.</p>	<p>Use the following revision for dump support tool. FJSVdunptools-RHEL6-2.2.1-0</p>
<p>Kdump service fails to start, when DR function is enabled and the SB configuration is the following: - SB#0(Home) + SB#3 - SB#1(Home) + SB#3 - SB#2(Home) + SB#3 - SB#3(Home) + SB#0</p>	<p>Set the crashkernel parameter to the value of 176M or less.</p>
<p>Hot-adding SB operation completes successfully. But, the number of CPU cores which are available to OS is one fewer than actual.</p>	<p>Set hyper-threading parameter is set to "Off" to support hot-adding SB function with E7-8860v3 CPUs.</p>
<p>Hot-adding SB function is supported in the following configuration, when the SKU of CPU other than E7-8860v3 is used in the system.</p> <p>- The existing partition consist of one SB and a new SB is going to be added to slot#1.</p>	<p>This limitation will be released later.</p>
<p>Setting BIOS and booting OS in legacy mode cannot be executed by using Emulex FC card.</p>	<p>Workaround: Execute setting BIOS and booting OS in UEFI mode by using Emulex FC card.</p>

