

# PRIMERGY TX100 S3

## incl. TX100 S3 Core Edition

***System configurator and order-information guide***

July 2012

### Contents

- Instructions
- Configuration diagram
- Configurator
  - 0 System software
  - I Basic unit
  - II Processor
  - III Memory
  - IV Graphics
  - V Accessible drives
  - VI RAID Controller
  - VII Hard disk drives
  - VIII Kommunikation/Network
  - IX Miscellaneous
  - X Country specific power cords
- Change report



**PRIMERGY Server**

# Instructions


This document contains basic product and configuration information that will enable you to configure your system via PC-/ System-Architect.

Only these tools will ensure a fast and proper configuration of your PRIMERGY server or your complete PRIMERGY Rack system.


You can configure your individual PRIMERGY server in order to adjust your specific requirements.

The System configurator is divided into several chapters that are identical to the current price list and PC-/ System-Architect

Please follow the lines. If there is a junction, you can choose which way or component you would like to take. Go through the configurator by following the lines from the top to the bottom.

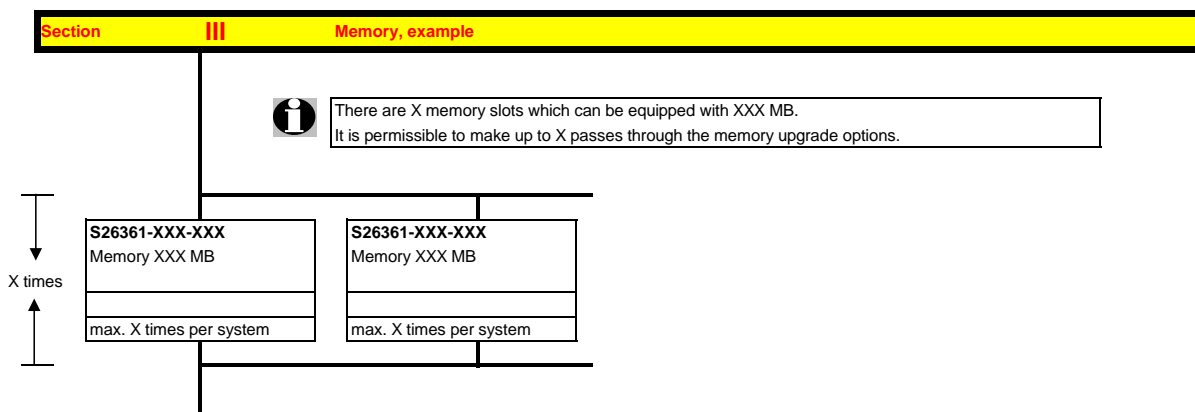

In one chapter you can only select as many components (here 4x) as the arrow indicates.



Please note that there are information symbols which indicate necessary information.




**For further information see:**

[http://ts.fujitsu.com/products/standard\\_servers/index.html](http://ts.fujitsu.com/products/standard_servers/index.html) (internet)

[https://partners.ts.fujitsu.com/com/order-supply/configurators/primergy\\_config/current/Pages/default.aspx](https://partners.ts.fujitsu.com/com/order-supply/configurators/primergy_config/current/Pages/default.aspx) (extranet)

Prices and availability see price list and PC-/ System-Architect  
 Subject to change and errors excepted

### Configuration diagram PRIMERGY TX100 S3

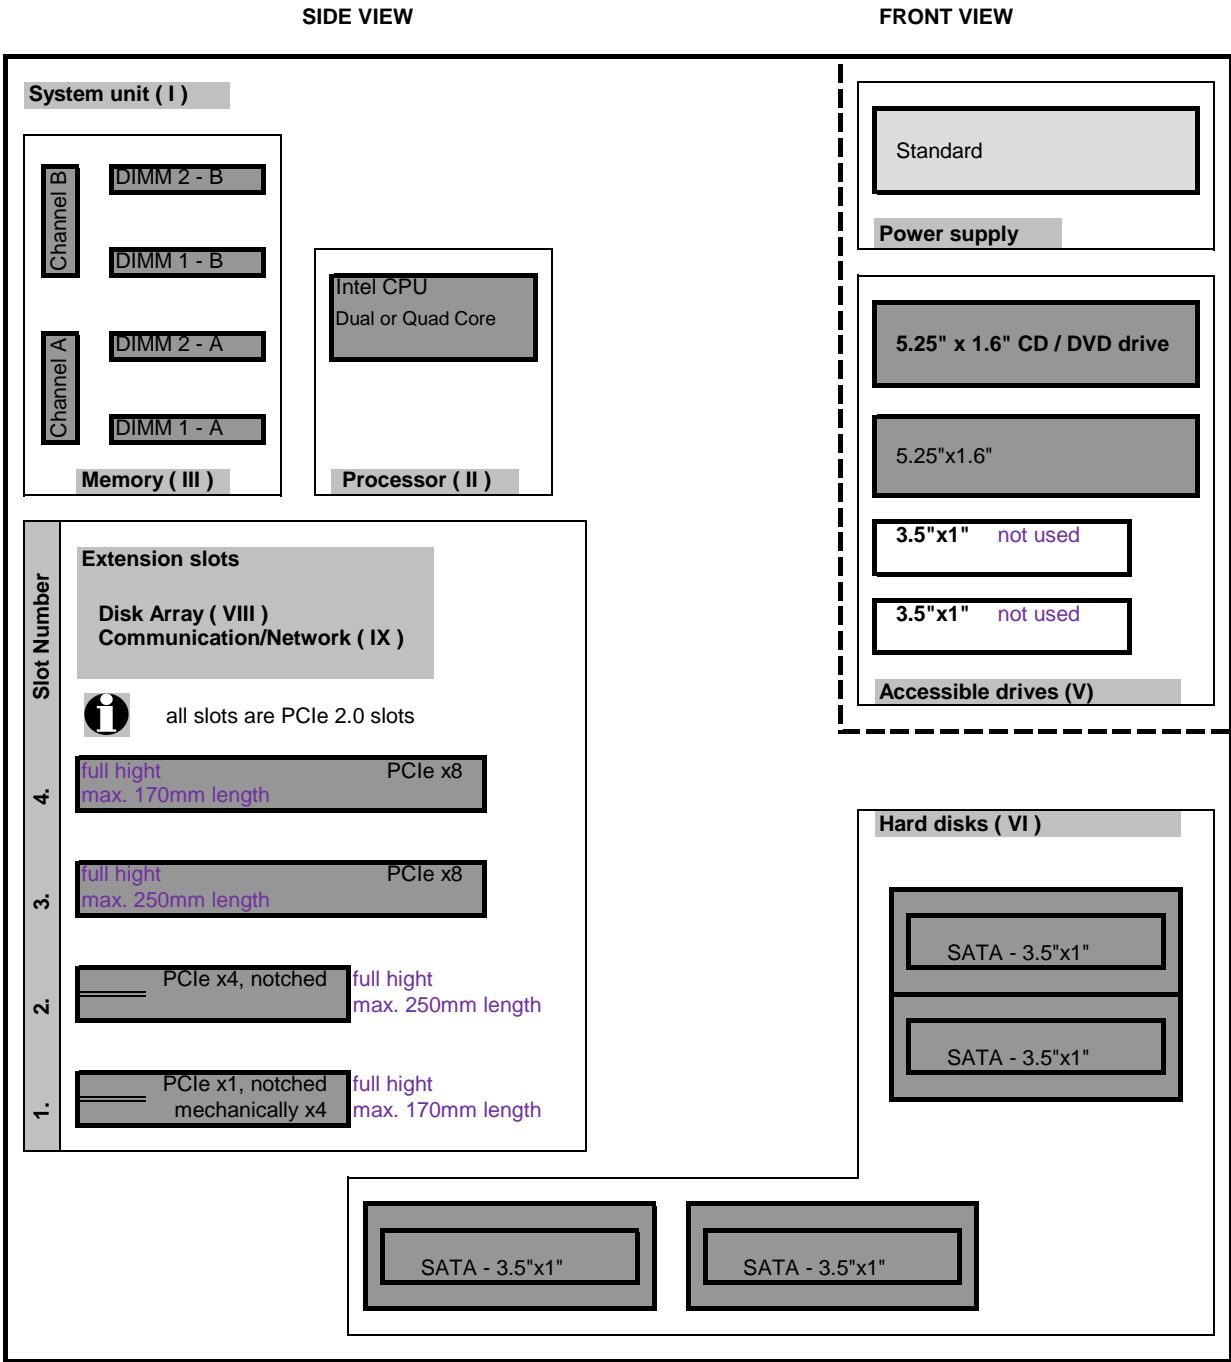

- Key:
- Included in basic unit
  - Option

Start PRIMERGY TX100 S3


**Software Configurator 32 bit**

**with OEM-Software**  
for PRIMERGY Server

**without OEM-Software**  
for PRIMERGY Server

**VMware-Software**  
- VCMS VirtualCenter Management Server


OEM-SW is bound to HW and is not allowed to be ordered separately.  
Exception: VMware SW

 For all SW products please refer to the corresponding software configurator accessible via the Extranet under Configuration & Tools, -All configurations, -Software, URL see below.

**Linux - Software \*\*)**  
 - Open Enterprise Server \*\*\*)  
 - SuSE Linux ES (OEM): LO  
 - SuSE Linux ES (Support): LS  
 - Red Hat EL (OEM): LO  
 - Red Hat EL (Support): LS

**Microsoft - Windows Server 2008: W**  
 - Windows Web Server 2008  
 - Windows Server 2008 Standard, Enterprise  
 - User, Device Client Access Licenses (CAL)  
 - Terminal Server Client Access Licenses (CAL)

**Manageability Software: V\*\*)**  
- Altiris Server Deployment

 Details eg. version numbers are published in the separate SW-Configurator

**Backup-Software / Application-Software: U**  
 - ARCserve  
 - openSM2

 \*\*) Pay attention to release and order information in PRINCE -> Operating System  
<https://partners.ts.fujitsu.com/com/products/servers/primergy/Pages/default.aspx>

**You'll find single software configurators and release lists (OS-matrix / system management / security) under following addresses:**

**for internal users:** <http://sp.ts.fujitsu.com/dmsp/docs/osrel.xlsx>  
**for partners:** <https://partners.ts.fujitsu.com/com/products/servers/primergy/Pages/default.aspx>

**Continue with PRIMERGY HW configurator**

Start PRIMERGY TX100 S3

**Software Configurator 64 bit**

with OEM-Software  
for PRIMERGY Server

without OEM-Software  
for PRIMERGY Server

**VMware-Software**  
- VCMS VirtualCenter Management Server

OEM-SW is bound to HW and is not allowed to be ordered separately.

**i** For all SW products please refer to the corresponding software configurator accessible via the Extranet under "Configuration & Tools, -All configurations, -Software, URL see below.

**Microsoft - Windows Server 2008: W**  
 - Windows Web Server 2008  
 - Windows Server 2008 Standard, Enterprise  
 - User, Device Client Access Licenses (CAL)  
 - Terminal Server Client Access Licenses (CAL)

**Linux - Software \*) \*\*)**  
**only x86\_64**  
 - SuSE Linux ES (OEM): LO  
 - SuSE Linux ES (Support): LS  
 - Red Hat EL (OEM): LO  
 - Red Hat EL (Support): LS

**Microsoft - Windows Small Business Server 2008: ROK**  
 - Windows Small Business Server 2008 Standard, Premium  
 - User, Device Client Access Licenses (CAL)

**i** Details eg. version numbers are published in the separate SW-Configurator

**i** \*\*) Pay attention to release and order information in PRINCE -> Operating System  
<https://partners.ts.fujitsu.com/com/products/servers/primergy/Pages/default.aspx>

**You'll find single software configurators and release lists (OS-matrix / system management / security) under following addresses:**

for internal users: <http://sp.ts.fujitsu.com/dmsp/docs/osrel.xlsx>  
 for partners: <https://partners.ts.fujitsu.com/com/products/servers/primergy/Pages/default.aspx>

Continue with PRIMERGY  
HW configurator

Section | Basic unit



System unit consisting of:

- \* Housing including standard power supply (no redundancy)
- \* Imprint of MAC Address on system label and delivery note as standard
- \* heat sink for CPU

Systemboard with:

- \* 4 PCI expansion slots:
  - 1x PCIe x1, mechanically x4, notched (possible to plug x16 cards)
  - 1x PCIe x4, notched; fits for lp (low profile) and fh (full high) formfactor cards
  - 2x PCIe x8all slots are PCIe 2.0 slots; PCIe 1.0 cards are fully supported as well
- \* Slot for optional TPM module
- \* 4 memory slots for up to **32GB** (1066MHz PC3 8500 / 1333MHz PC3 10600) unbuffered DDR III RAM (ECC)  
max. **8GB** modul per slot
- \* 2 bays 5.25" for accessible drives
- \* 4 LFF (3.5" Large Form Factor) bays 1" high for no hot plug SATA HD
- \* SATA controller with up to 4 HDD's using Intel **220 (Chipset)**
- \* ATI ES1000 64MB
  - 1600 x 1200 pixel with 16 bit colours and 75 Hz
  - 1280 x 1024 pixel with 16/32 bit colours and 120/75 Hz
  - 1152 x 864 pixel with 16/32 bit colours and 160/100Hz
  - 1024 x 768 pixel with 16/32 bit colours and 200/120Hz
  - 800 x 600 and 640 x 480 pixel with 32 bit colours and 200Hz
- \* Intel 10/100/1000 Mb/s ("Lewisville" **82579LM**) on-board LAN
- \* Intel 10/100/1000 Mb/s ("Hartwell" **82574L**) on-board LAN supporting **WoL, PXE and iSCSI boot**

Cables included in Base Unit:


1. SATA cabel for CD/DVD
2. **4 x SATA cabel** in basic unit (depends on base unit)

ServerView Suite Software package incl. ServerStart, ServerBooks, Management Software and Updates

External Interfaces:

- 1x RS-232-C (serial, 9 pins)
- 1x VGA (15 pins)
- 10x USB 2.0 ( 2x frontside, 4x rearside, 2x internal for backup devices, 1x internal USB Stick, 1x internal USSD / UFM)
- 1x LAN RJ45

A

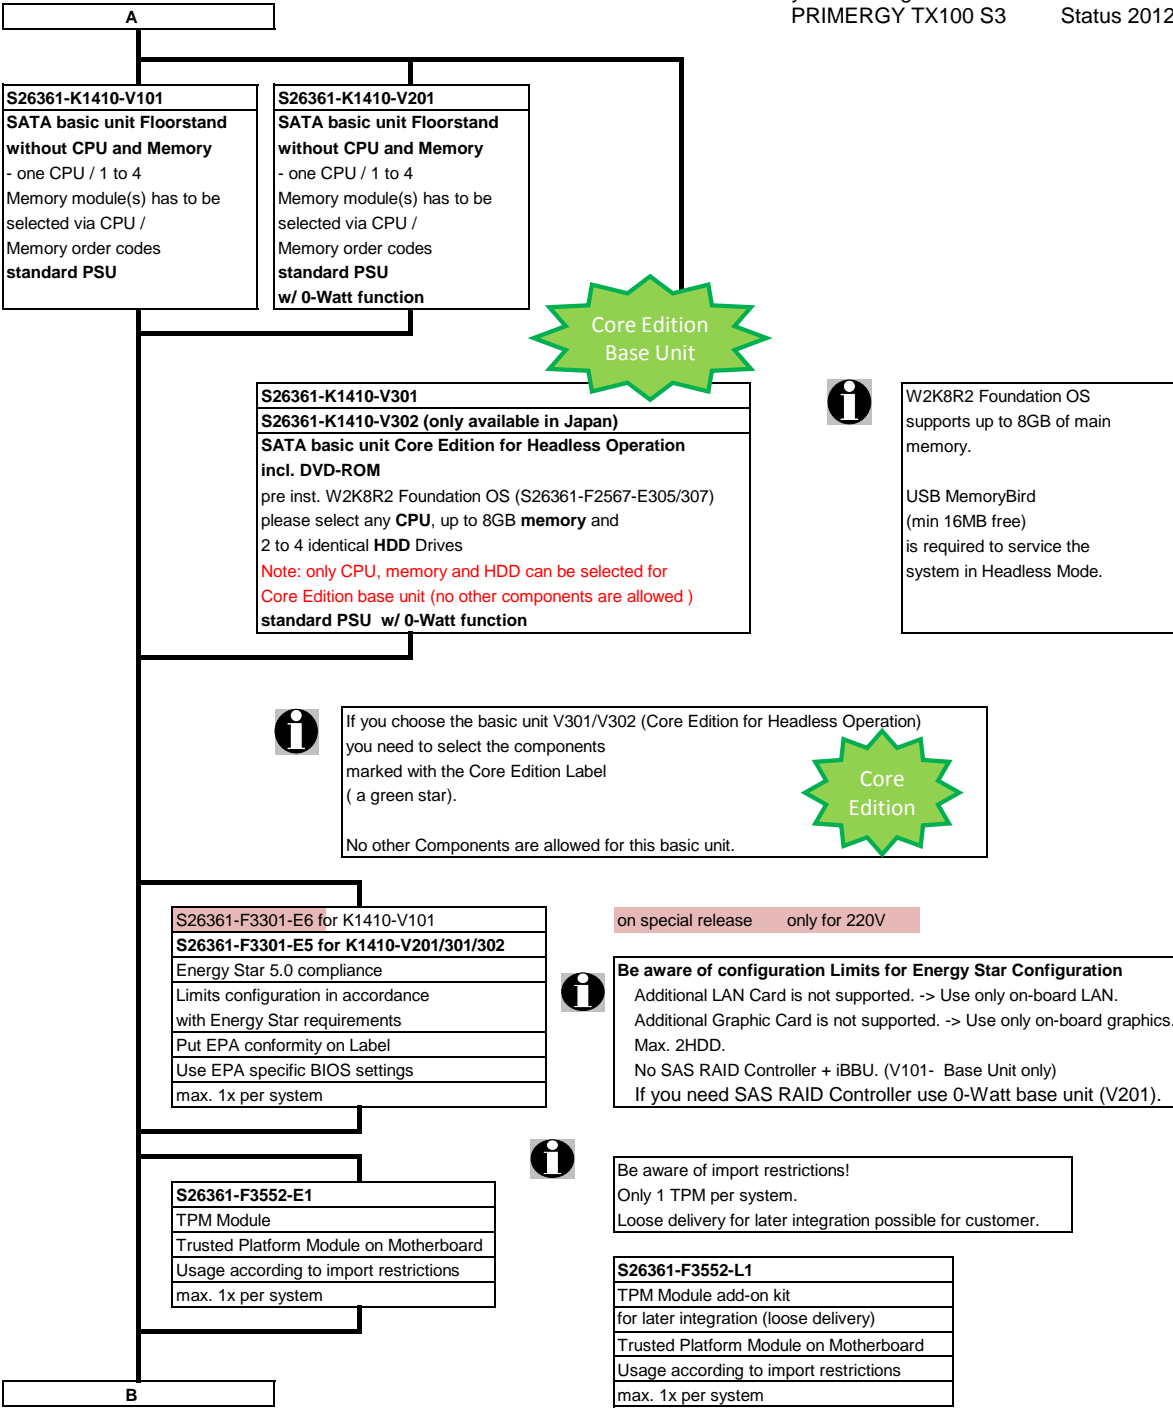

B

**Section II Processor**

One of following CPU's has to be selected for an orderable basic unit

<b>Dual-Core CPU's</b>	
- 1x 64-bit Intel Celeron (2MB SLC), Pentium (3MB SLC) or Core i3 (3MB TLC) occupies socket for one CPU	
<b>Celeron</b>	
Celeron G530 2.40GHz 2MB 2C/2T 1066MHz (65W)	<b>S26361-F3579-E253</b>
<b>Pentium</b>	
Pentium G620 2.60GHz 3MB 2C/2T 1066MHz (65W)	<b>S26361-F3579-E262</b>
<b>Core i3</b>	
Core i3-2100 3.10GHz 3MB 2C/4T 1333MHz (65W)	<b>S26361-F3579-E210</b>
Core i3-2120 3.30GHz 3MB 2C/4T 1333MHz (65W)	<b>S26361-F3579-E212</b>
<b>Quad-Core XEON CPU's</b>	
- 1x 64-bit Intel Xeon UP (8MB shared TLC = Third Level Cache) Hyper-Threading; 1333 MHz DDR3 Bus and heat pipe occupies socket for one CPU	
Xeon E3-1220 3.10GHz 8MB 4C/4T 1333MHz Turbo (80W)	<b>S26361-F3579-E322</b>
Xeon E3-1230 3.20GHz 8MB 4C/8T 1333MHz Turbo (80W)	<b>S26361-F3579-E323</b>
Xeon E3-1240 3.30GHz 8MB 4C/8T 1333MHz Turbo (80W)	<b>S26361-F3579-E324</b>



FJJ: general Release / FTS: on special release

on special release

on special release

**Section III Memory**

	There are 2 memory banks with 2 DIMM slots each.
	<b>Single channel memory configuration allow maximum flexibility:</b> Additional memory can be configured as single memory modules.
	<b>Dual channel memory configurations for maximum performance:</b> For optimum performance memory has to be configured in pairs of memory modules with identical size. max. 32GB unbuffered DDR3 RAM for UDIMMs with 8GB modules
	<b>Note**:</b> Memory is not included in the base unit and has to be configured separately, min 1x.

Unbuffered (ub) DIMMs

4x	- One DDR3- ub ECC memory module, 1.5V
	Memory 2GB 1333 SR <b>S26361-F3335-E524</b>
	Memory 4GB 1333 DR <b>S26361-F3335-E525</b>
	Memory 8GB 1333 DR <b>S26361-F3335-E526</b>
<b>Choose up to 4 order codes above.</b>	



**Section IV Graphics**

Graphics Controller ATI ES1000 on board with 64 MB attached Memory

<b>S26361-F2748-E537</b>
PY VGA LP card 512MB PCI-e x1
NVIDIA NVS300
512 MB PCIe-x1
2x DVI or 2x VGA or 1x DVI plus 1x VGA cables adapters included
Dual head + fully 3-D supported for Windows OS only native driver support for Linux OS
full high bracket
max. 1x per system

The high end optional NVIDIA NVS300 graphic card offers dual head operation and fully 3D video support.  
 The cables for either two times DVI or VGA connections are part of the delivery.  
**Remote Video direction via iRMC must be disabled.**  
 This PCIe-x1 card can also be installed in any PCIe-x4, x8 or x16 slot.  
 Only one card per server is allowed.

**PY VGA card must be installed in slot 2**

<b>S26361-F2748-L537</b>
PY VGA LP card 512MB PCI-e x1
for loose delivery

C



C

**Section V Accessible drives**



There are 2 drive bays (2x 5.25") for accessible drives.

<b>S26361-F3266-E2</b> DVD-ROM 16/48x  SATA incl. description (Ger/US) 1.6 x 5.25", black bezel max. 1x per system	<b>S26361-F3267-E2</b> DVD-RW 16x super multi drive all formats, DUAL/DL, DVD-RAM SATA  1.6 x 5.25", black bezel max. 1x per system	<b>S26361-F3585-E2</b> Blu-ray Triple Writer HH SATA 4x BD-RW, 16x DVD, 40x CD BD DL and all CD/DVD formats 1.6 x 5.25", black bezel max. 1x per system
--	---	--

<b>S26361-F3324-E4</b> Tape drive DDS Gen5 USB 5.25" 36GB, 3MB/s, USB 2.0 Connector: USB "B" with USB cable incl. description (Ger/US) data and cleaning cartridge 1.6 * 5.25", black bezel max. 1x per system	<b>S26361-F3325-E4</b> Tape drive DDS Gen6 USB 5.25" 80GB, 6MB/s, USB 2.0 Connector: USB "B" with USB cable incl. description (Ger/US) data and cleaning cartridge 1.6 * 5.25", black bezel max. 1x per system	<b>S26361-F3857-E4</b> RDX drive USB 5.25" internal 80-1.000GB, 25MB/s, USB 2.0 Connector: USB "B" with USB cable incl. description (Ger/US) without RDX cartridges 1.6 * 5.25", black bezel max. 1x per system
--	--	---



Following USB Components are available	
1) USB DVD SM / Blu-Ray	
External SuperMulti Drive	S26341-F103-L126
External Blu-Ray Drive	S26341-F103-L127
2) USB Memorybird:	
MyUSBS A910 8GB, MLC Flash	S26391-F6048-L208
MyUSBS A910 16GB, MLC Flash	S26391-F6048-L216
MyUSBS A910 32GB, MLC Flash	<b>S26391-F6048-L232</b>



RDX cartridges must be ordered separately
RDX 160GB = S26361-F3857-L160
RDX 320GB = S26361-F3857-L320
RDX 500GB = S26361-F3857-L500
RDX 1TB = S26361-F3857-L600 *
10x RDX160 = S26361-F3857-L169
10x RDX320 = S26361-F3857-L329

\* as soon as available

D

D

**Section VI RAID-Controller**

<b>S26361-F3554-E512</b> 8 port SAS RAID Controller
LSI MegaRAID SAS 2108 512MB Cache with ECC
<b>SAS 6Gb/sec</b> 8 internal ports PCIe x8, 168mm with combi bracket max. 1x per system



TX100 S3 does not support SAS HDD:  
- for use with SATA HDD only



For later upgrade to RAID you need to order S26361-F3554-L512  
with the additional RAID cable TX100 S3: S26361-F3659-L2

<b>S26361-F3257-E255</b> Cache Battery Backup Unit max. 1x per Controller
---




L-Order-Number is:  
**S26361-F3257-L210**

**Section VII Hard disk drives**



There is a 6 port SATA controller in the Base Unit.  
Up to 4 SATA LFF (3.5") hard disks can be configured.



<b>ECO SATA 3Gb/s HD 3.5" non hot plug</b>
250GB 7.200rpm,<9,0ms, 8MB Cache <b>S26361-F3574-E250</b>
Choose up to 4 order codes above.


while stock lasts

<b>ECO SATA 6Gb/s HD 3.5" non hot plug</b>
250GB 7.200rpm,<9,0ms, 8MB Cache <b>S26361-F3701-E250</b>
500GB 7.200rpm,<9,0ms, 8MB Cache <b>S26361-F3701-E500</b>
Choose up to 4 order codes above.

4x

<b>Business Critical (BC) SATA 3Gb/s HD 3.5" non hot plug</b>
250GB 7.200rpm,<9,0ms, 8MB Cache <b>S26361-F3334-E250</b>
500GB 7.200rpm,<9,0ms, 8MB Cache <b>S26361-F3334-E500</b>
1000GB 7.200rpm,<9,0ms, 8MB Cache <b>S26361-F3334-E100</b>
2000GB 7.200rpm,<9,0ms, 8MB Cache <b>S26361-F3334-E200</b>
Choose up to 4 order codes above.

E

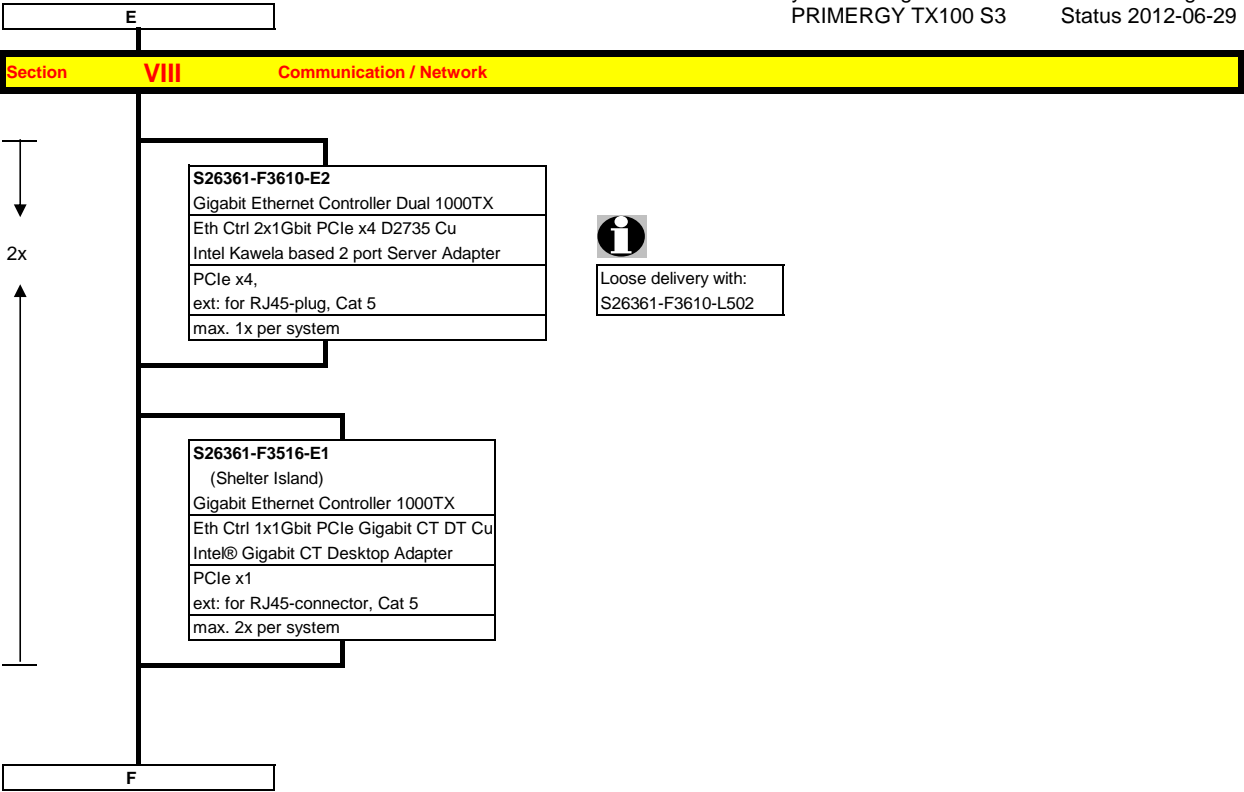

F

**Section IX Miscellaneous**

**Section X Country specific power cords, Keyboard, Mouse**

**S26361-F3301-E120**  
 CCC Certification for China



Since the beginning of this year the specifications for the approval and production monitoring for China (CCC) have become stricter. This is why the CCC certification label must in future be ordered separately

USB keyboards for following countries:

USB standard Keyboard KB400		USB professional Keyboard KBPC PX ECO
S26381-K550-E170	Switzerland	S26381-K341-E170
S26381-K550-E104	Czech/Slovak	S26381-K341-E104
S26381-K550-E120	Germany	S26381-K341-E120
	Germany / Int	S26381-K341-E122
S26381-K550-E180	Spain	S26381-K341-E180
S26381-K550-E140	France	S26381-K341-E140
S26381-K550-E165	United Kingdom	S26381-K341-E165
S26381-K550-E185	Italy	S26381-K341-E185
S26381-K550-E154	Sweden / Finland	S26381-K341-E154
S26381-K550-E102	USA / international	S26381-K341-E110

**Optional Mouse**  
 S26381-K431-E100 Mouse M480 black  
 S26381-K431-E101 Mouse M480 grey

**Power cord for floorstand versions for following countries:**  
 1,8 m, grey

T26139-Y1740-E10	D, A, B, F, NL, FIN, N, S, E, P, RUS, TR
T26139-Y1742-E10	USA, Canada
T26139-Y1743-E10	Switzerland
T26139-Y1744-E10	UK, IR
T26139-Y1745-E10	Italy
T26139-Y1746-E10	Denmark
T26139-Y3850-E10	Option "no powercord", for Countries without specific cable orderable like e.g. China



**S26361-F1452-E100**  
 REGION KIT EMEA AP  
 For Shipments to EMEA / Asia and Pacific regions  
 1x per system

**S26361-F1452-E110**  
 REGION KIT JP  
 For Shipments to Japan regions  
 1x per system

**Options and other peripherals**  
 For other options, refer to SystemArchitect and Pricelist.  
 These options are supplied lose with the shipment.  
 For suitable peripherals for this product, please refer to SystemArchitect.

**End PRIMERGY TX100 S3**

## Change Report

Date	Order number	Changes
2011-11-29		Information about max. length of PCI slots added
2011-09-01	S26361-F3301-E6	Energy Star added
2011-09-01	S26361-F3701-E250/500	ECO SATA HDDs added
2011-08-31	S26361-F3257-E255	Order Code for BBU corrected back to E255
2011-08-17	S26361-K1410-V302	Japanese Base Unit for Core Edition added
2011-08-01	S26361-F3257-E216	Order Code for BBU corrected
2011-08-01		Typos corrected
2011-06-10	S26361-K1410-V301	Edit Rules for Core Edition Base Unit
2011-05-27	S26361-K1410-Vxxx	Order Codes for Base Units changed
2011-05-26	S26361-F3579-E253	Celeron G530 added
2011-05-25	S26361-F2748-E537/L537	Order Code for VGA corrected
2011-05-25	S26361-F3610-E2/L502	Order Code for LAN corrected
2011-05-17	S26361-F3257-E255/L210	Order Code for BBU corrected
2011-05-13		HDD portfolio updated
2011-05-13	S26361-F2748-E637	NVIDIA NVS300 Graphics added
2011-04-20		CPU portfolio updated
2011-02-21		Keyboard Ordernumbers revised
2011-01-31		first draft