

5 Port Gigabit Industrial Power over Ethernet Switch with 4 PoE ports

IES51000POE



*actual product may vary from photos

DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com

IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

For the most up-to-date information, please visit: www.startech.com

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Table of Contents


Product Overview	1
Front View.....	1
Rear View.....	1
LED Indicators.....	1
Introduction	2
Packaging Contents	2
Installation	3
Wall-Mounting	3
Hardware Installation	3
Specifications.....	4
Technical Support	5
Warranty Information.....	5

Product Overview

Front View



Rear View

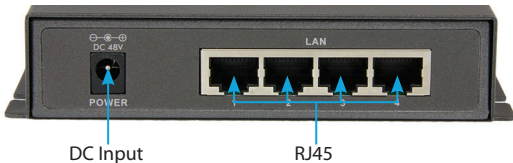

LED Indicators

LED	Function
Power (1)	Solid Green - power is on and normal
Uplink (1)	Solid Green – Connected at 1000Mbps Solid Yellow – Connected at 100Mbps Flashing Green - Ethernet Uplink activity at 1000Mbps Flashing Yellow - Ethernet Uplink activity at 100Mbps Flashing Yellow - Ethernet Uplink activity at 10M.
LAN (4)	Solid Green – Connected at 1000Mbps Solid Yellow – Connected at 100Mbps Flashing Green - Ethernet activity at 1000Mbps Flashing Yellow - Ethernet activity at 100Mbps Flashing Yellow - Ethernet activity at 10Mbps
PoE (4)	Solid Green - Power over Ethernet function is enabled OFF - PoE function is disabled, behaving as a regular LAN port

Introduction

The IES51000POE 5-Port Gigabit PoE Switch with 4 PSE ports lets you connect Gigabit Ethernet and power to four PoE-enabled devices, or a mixture of PoE and non-PoE components.

Packaging Contents

- 1 x Gigabit Ethernet PoE Switch
- 4 x Mounting Screws
- 1 x Set, Rubber Feet
- 1 x Universal Power Adapter
- 4 x Power Cords (NA / UK / EU / AU)
- 1 x Instruction Manual

Installation

Wall-Mounting

The Network Switch is designed to sit on a flat surface (such as a desktop) or mount to a wall or similar surface. Skip to the Hardware Installation section below if you are not wall-mounting the device.

1. Determine the desired location and orientation of the switch on the wall, and mark both mounting notch location on one side of the integrated mounting bracket, ensuring they are level.



2. Depending on the mounting surface, use the appropriate tools to install the included screws into the wall, leaving a gap of approximately 2 mm between the head of the screw and the wall surface.
3. Place switch back onto the wall with the mounting notches against the previously installed screws and mark the location for the mounting notches on the opposite side of the device.
4. With the switch in place on the wall, install the remaining two screws on the other side so the device is held in place.

Hardware Installation

1. Plug one end of the universal power adapter into the DC connector on the side panel of the Network Switch and the other end of the plug into an electrical outlet. The Power LED on the front of the Switch should now be lit.
2. Connect a network cable to the Uplink port on the front panel of the switch, and connect the other end of the cable into the RJ-45 port on your upstream switch or router. The Uplink connection speed should auto-detect and the appropriate LEDs will illuminate to show activity.
3. Connect your PoE or non-PoE devices to the remaining 4 ports on the rear panel of the switch (e.g. computer, IP Phone, IP Camera, etc.). The switch will auto-detect connection speed and whether PoE is required, and the appropriate LEDs will illuminate and show activity.

Specifications

Number of Ports	5 (4 POE)
Compatible Networks	10/100/1000 Mbps
Industry Standards	IEEE 802.3af Power Over Ethernet, IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX/FX, IEEE 802.3ab 1000BASE-TX, IEEE 802.3x
PoE Output	48V DC, 15.4W (per-port)
Connectors	5 x RJ-45 Female
Maximum Data Transfer Rate	2 Gbps (Full-Duplex)
Switching Architecture	Store-and-Forward
Buffer Size	512 KB
Full Duplex	Yes
Auto MDIX	Yes
Flow Control	Half-duplex back-pressure and IEEE802.3x full-duplex
Power Consumption	65W Max
Power Adapter	48V DC, 1.36A
Enclosure Material	Steel
Operating Temperature	0°C to 50°C (32°F to 122°F)
Storage Temperature	0°C to 50°C (32°F to 122°F)
Humidity	10~90% RH (Non-Condensing)
Dimensions	130 x 90 x 28 mm
Weight	366g

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit www.startech.com for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.