

Please Reffer to the S3260 Tech Spces



(<https://www.cisco.com/c/dam/en/us/products/collateral/servers-unified-computing/ucs-s-series-storage-servers/s3260-specsheet.pdf>)

Spec Sheet

Cisco UCS C3260 Rack Server

CISCO SYSTEMS
170 WEST TASMAN DR.
SAN JOSE, CA, 95134
WWW.CISCO.COM

PUBLICATION HISTORY

REV A.1 AUGUST 12, 2015

CONTENTS

OVERVIEW	3
DETAILED VIEWS	4
Chassis Front View	4
Chassis Rear View	5
BASE SERVER STANDARD CAPABILITIES and FEATURES	7
CONFIGURING the SERVER	10
STEP 1 VERIFY SERVER SKU	11
STEP 2 SELECT SYSTEM I/O CONTROLLER (OPTIONAL)	12
STEP 3 SELECT TRANSCEIVERS OR SFP CABLES FOR SYSTEM I/O CONTROLLER (OPTIONAL)	13
STEP 4 SELECT SERVER NODE	14
STEP 5 SELECT HARD DISK DRIVE (HDD) or SOLID STATE DRIVE (SSD) MULTIPACKS	18
STEP 6 SELECT BOOT DRIVES (OPTIONAL)	21
STEP 7 SELECT DISK EXPANSION TRAY AND DRIVES (OPTIONAL)	22
STEP 8 SELECT AC POWER CORD(s)	23
STEP 9 ORDER REVERSIBLE CABLE MANAGEMENT ARM (OPTIONAL)	26
STEP 10 ORDER OPTIONAL USB DRIVE	27
STEP 11 ORDER A TRUSTED PLATFORM MODULE (OPTIONAL)	28
STEP 12 ORDER A KVM CABLE (OPTIONAL)	29
STEP 13 SELECT OPERATING SYSTEM AND VALUE-ADDED SOFTWARE	30
STEP 14 SELECT OPERATING SYSTEM MEDIA KIT	32
STEP 15 SELECT SERVICE and SUPPORT LEVEL	33
OPTIONAL STEP - ORDER RACK(s)	38
OPTIONAL STEP - ORDER PDU	39
SUPPLEMENTAL MATERIAL	40
CHASSIS	40
CPUs and DIMMs	41
Physical Layout	41
Memory Population Rules	42
Internal Drive Population Guidelines	43
Upgrade and Servicing-Related Parts	44
System I/O Controller Blanking Panel	44
RACKS	45
PDUs	47
TECHNICAL SPECIFICATIONS	48
Dimensions and Weight	48
Power Specifications	49
Environmental Specifications	50
Compliance Requirements	51

OVERVIEW

The Cisco UCS C3260 is a modular, dense storage rack server with dual server nodes, optimized for large datasets used in environments such as big data, cloud, object storage, and content delivery.

The UCS C3260 chassis is a modular architecture consisting of the following modules:

1. Base Chassis: contains four power supplies, eight fans, and a rail kit.
2. Server Node: one or two server nodes, each with two CPUs, 128, 256, or 512 GB of DIMM memory, and a RAID card in pass-through mode or a RAID card with a 1 GB or 4 GB cache.
3. System I/O Controller (SIOC): one or two System I/O Controllers, each of which includes a 1300-series VIC.
4. Optional Drive Expansion Node: choice of either 4 x 4 TB drives (total capacity: 16TB) or 4 x 6 TB drives (total capacity: 24 TB).
5. Solid-State Boot Drives: up to two SSDs per server node.

The enterprise-class UCS C3260 server extends the capabilities of Cisco's Unified Computing System portfolio in a 4U form factor that delivers the best combination of performance, flexibility, and efficiency gains.

Figure 1 Cisco UCS C3260 Dense Rack Server

Front View



Rear View




DETAILED VIEWS

Chassis Front View

Figure 2 shows the Cisco UCS C3260 Rack Server.

Figure 2 Chassis Front View

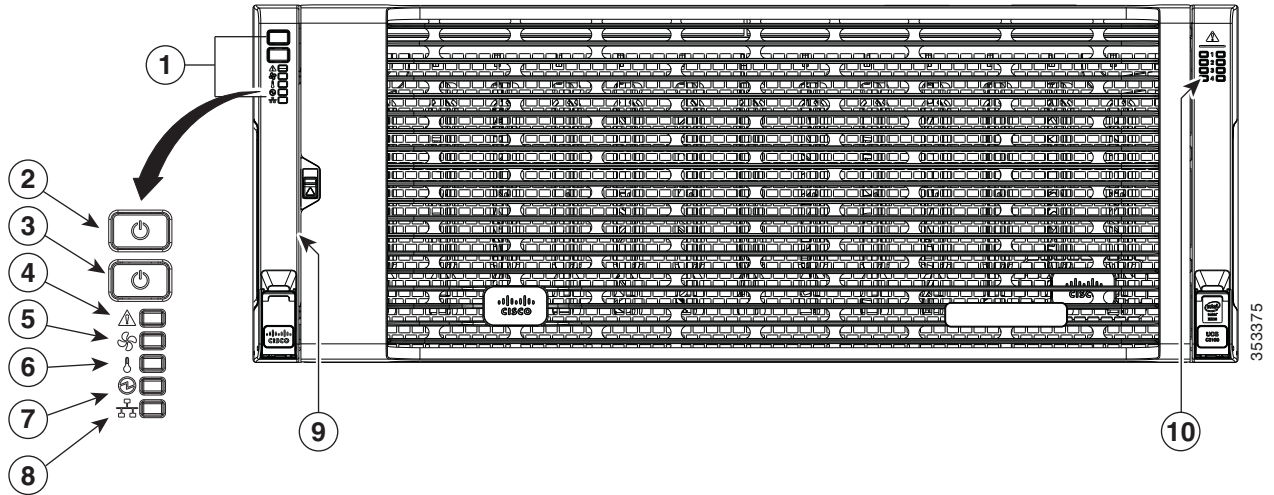


1	Operations panel	6	Temperature status LED
2	System power button/LED	7	Power supply status LED
3	System unit identification button/LED	8	Network link activity LED
4	System status LED	9	Pull-out asset tag (not visible under front bezel)
5	Fan status LED	10	Internal-drive status LEDs

Chassis Rear View

Figure 3 shows the external features of the rear panel.

Figure 3 Chassis Rear View

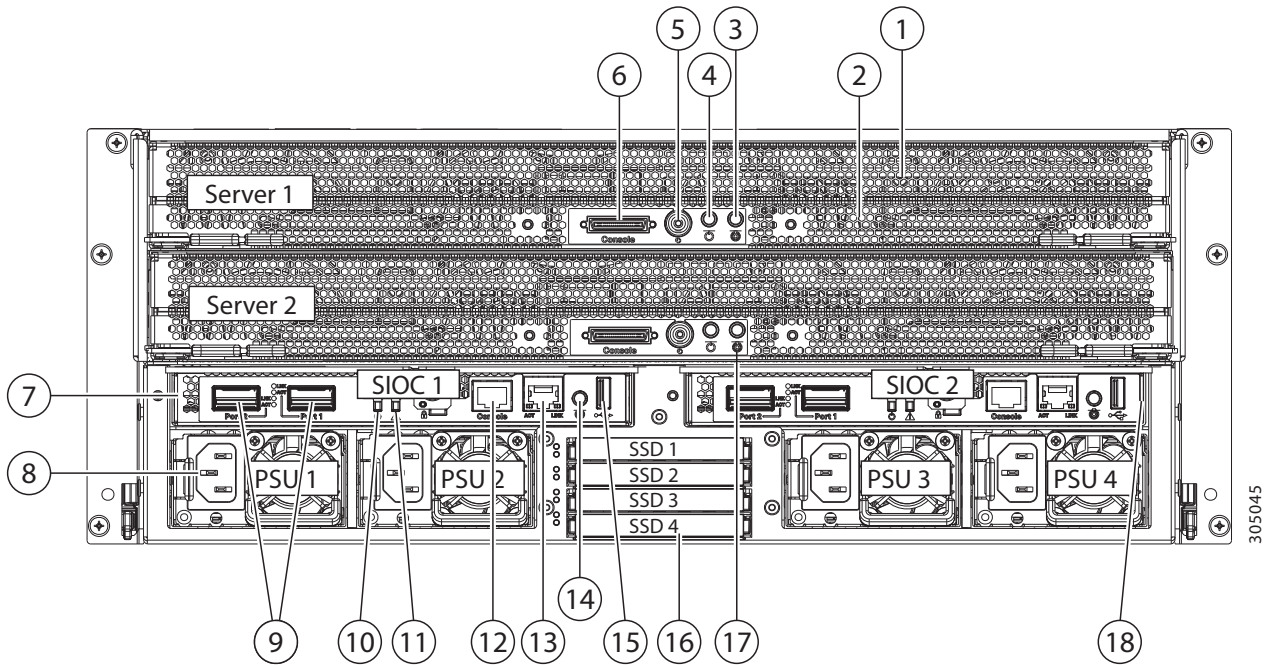

1	Server node bay 1 If there is only one server node, it must be in bay 1.	10	SIOC power LED (one each SIOC)
2	Server node health LED (behind mesh, on board)	11	System status LED (one each SIOC)
3	Server node unit identification button/LED	12	Not used at this time
4	Server node Power button/LED	13	10/100/1000 dedicated management port (RJ-45 connector) (one each SIOC) This port has a link activity and a link speed LED.
5	Server node reset button (resets processor chipset in server node)	14	SIOC unit identification LED (one each SIOC)
6	KVM console connector ¹ on server node Used with a KVM cable that provides two USB, one VGA, and one serial connector	15	USB 3.0 port (one each SIOC)

DETAILED VIEWS

7	System I/O controller (SIOC) 1	16	Solid state drive (SSD) bays (up to four 2.5-inch SSDs) SSDs 3 and 4 require a second server node. Server node 1 can manage upper SSD bays 1 and 2; server node 2 can manage lower SSD bays 3 and 4. The drives are managed by means of the PCH and OS or SW RAID.
8	Power supplies (four, redundant as 2+2)	17	Drive expander module status LED (if module is present)
9	40-Gb SFP+ ports (two on each SIOC) Each port has a link and an activity LED.	18	(Optional) SIOC 2 SIOC 2 is required if you have two server nodes.

Notes


1. For more information on the KVM port, see [ORDER A KVM CABLE \(OPTIONAL\)](#), page 29.

BASE SERVER STANDARD CAPABILITIES and FEATURES

Table 1 lists the capabilities and features of the base server. Details about how to configure the server for a particular feature or capability (for example, number of processors, disk drives, or amount of memory) are provided in *CONFIGURING the SERVER, page 10*.

Table 1 Capabilities and Features

Capability/Feature	Description
Chassis	Four rack unit (4RU) chassis
Server Node	One or two server nodes plug into the back of the server. The node contains two CPUs, up with up to 512 GB of DIMM memory, a RAID controller in pass-through mode or with up to 4 GB of RAID cache.
CPU	Two Intel Xeon E5-2600 v2 series processor family CPUs in a server node
System I/O Controller	Provides flexible I/O capability and a dedicated 1-Gbps RJ45 Management port.
Chipset	Intel® C600 series chipset
Memory	16 slots for registered ECC registered DIMMs (RDIMMs) per server node
Multi-bit Error Protection	This server supports multi-bit error protection.
Expansion slots	None
Video	Integrated 2D graphics controller supporting up to 1600 x 1200 resolution
Internal storage devices	<p>Top loading drives¹</p> <ul style="list-style-type: none"> ■ Up to 56 4 TB SAS-2 512n or 6 TB SAS-3 4Kn 3.5” hard disk drives can be installed into top-accessible drive bays, which provide hot-pluggable access. ■ Up to 14 400 GB or 1.6 TB 2.5” solid-state disk drives² can be installed into top-accessible drive bays, which provide hot-pluggable access. <p>Rear loading drives</p> <ul style="list-style-type: none"> ■ Up to four 4 TB SAS-2 512n or 6 TB SAS-3 4Kn 3.5” drives can be installed into an optional disk expander module at the back of the chassis. ■ Up to four SATA SSD drives located at the rear of the chassis for OS boot mirror (up to two per server node). <p>USB Storage</p> <ul style="list-style-type: none"> ■ The system includes one internal USB 2.0 slot inside the server node.
PCIe I/O	This system has no PCIe expansion slots
Front Panel	<ul style="list-style-type: none"> ■ A front panel controller provides status indications and control buttons
Fans	<p>Chassis:</p> <ul style="list-style-type: none"> ■ Four hot-swappable dual fan modules that provide front-to-rear cooling (8 fans total) ■ One fan in each power supply

Capability/Feature	Description									
Interfaces	<p>Rear panel</p> <ul style="list-style-type: none"> Two plug-in System I/O controllers, each with a dedicated 1 Gbps RJ45 Management port used for remote setup, a USB port, and a console port for PPC. Each controller contains a built-in 1300-series VIC. One KVM console connector on the server node (supplies two USB 2.0 connectors, one VGA DB15 video connector, one serial port (RS232) RJ45 connector, and two USB 2.0 ports). <p>Front panel</p> <ul style="list-style-type: none"> There are no interface ports on the front panel. 									
Power subsystem	<p>Four of the following hot-swappable power supplies:</p> <ul style="list-style-type: none"> 1050 W <p>Four power supplies are mandatory (redundant as 2+2).</p>									
Storage controller	<p>Each Server Node module has a mezzanine connector that supports the Cisco UCS C3X60 12G SAS RAID Controller card in pass-through mode or with write cache and SuperCap backup.</p> <p>Access to the connector and card requires removing the server module and removing its top cover.</p> <p>The Cisco UCS C3X60 12G SAS RAID Controller card with RAID cache is available with an onboard Flash-Backed Write Cache (FBWC), as shown in the table below</p> <table border="1" data-bbox="428 1041 1437 1209"> <thead> <tr> <th>RAID Card Version</th> <th>Supported RAID Levels</th> <th>Onboard FBWC</th> </tr> </thead> <tbody> <tr> <td>UCSC-C3X60-R1GB</td> <td>JBOD, RAID 0, 1, 5, 6, 10, 50, 60</td> <td>1 GB</td> </tr> <tr> <td>UCSC-C3X60-R4GB</td> <td>JBOD, RAID 0, 1, 5, 6, 10, 50, 60</td> <td>4 GB</td> </tr> </tbody> </table>	RAID Card Version	Supported RAID Levels	Onboard FBWC	UCSC-C3X60-R1GB	JBOD, RAID 0, 1, 5, 6, 10, 50, 60	1 GB	UCSC-C3X60-R4GB	JBOD, RAID 0, 1, 5, 6, 10, 50, 60	4 GB
RAID Card Version	Supported RAID Levels	Onboard FBWC								
UCSC-C3X60-R1GB	JBOD, RAID 0, 1, 5, 6, 10, 50, 60	1 GB								
UCSC-C3X60-R4GB	JBOD, RAID 0, 1, 5, 6, 10, 50, 60	4 GB								
	<p>All versions of the RAID controller support up to 60 drives. Each server node can be assigned specific drive combinations by means of CIMC Management.</p> <p>The Cisco UCS C3x60 12G SAS HBA RAID Controller is pass-through and both server nodes will see all the drives. Management of the drives will be at the OS Level with HBA Mode RAID.</p>									
	<p> NOTE: Two of the server node options do not include a RAID controller and allow pass-through drive control.</p>									
Integrated management processor	<p>Baseboard Management Controller (BMC) running Cisco Integrated Management Controller (CIMC) firmware.</p> <p>Depending on your CIMC settings, the CIMC can be accessed through the 1-GbE dedicated management port.</p>									

Notes

1. All drives are hot swappable (no preconditioning of the component is required before removal while the system is powered on).
2. Drive carriers adapt the 2.5” SSD drives to the 3.5” drive bays in the top of the chassis.

CONFIGURING the SERVER

Follow these steps to configure the Cisco UCS C3260 Rack Server:

- *STEP 1 VERIFY SERVER SKU, page 11*
- *STEP 2 SELECT SYSTEM I/O CONTROLLER (OPTIONAL), page 12*
- *STEP 3 SELECT TRANSCEIVERS OR SFP CABLES FOR SYSTEM I/O CONTROLLER (OPTIONAL), page 13*
- *STEP 4 SELECT SERVER NODE, page 14*
- *STEP 5 SELECT HARD DISK DRIVE (HDD) or SOLID STATE DRIVE (SSD) MULTIPACKS, page 18*
- *STEP 6 SELECT BOOT DRIVES (OPTIONAL), page 21*
- *STEP 7 SELECT DISK EXPANSION TRAY AND DRIVES (OPTIONAL), page 22*
- *STEP 8 SELECT AC POWER CORD(s), page 23*
- *STEP 9 ORDER REVERSIBLE CABLE MANAGEMENT ARM (OPTIONAL), page 26*
- *STEP 10 ORDER OPTIONAL USB DRIVE, page 27*
- *STEP 11 ORDER A TRUSTED PLATFORM MODULE (OPTIONAL), page 28*
- *STEP 12 ORDER A KVM CABLE (OPTIONAL), page 29*
- *STEP 13 SELECT OPERATING SYSTEM AND VALUE-ADDED SOFTWARE, page 30*
- *STEP 14 SELECT OPERATING SYSTEM MEDIA KIT, page 32*
- *STEP 15 SELECT SERVICE and SUPPORT LEVEL, page 33*
- *OPTIONAL STEP - ORDER RACK(s), page 38*
- *OPTIONAL STEP - ORDER PDU, page 39*

STEP 1 VERIFY SERVER SKU

Select the base server product ID (PID) from [Table 2](#).

Table 2 PID of the C3260 Base Server

Product ID (PID)	Description
UCSC-C3260	UCS C3260 Dense Storage Server four 1050 W power supplies, one rail kit, and bezel.

The Cisco UCS C3260 Dense Storage Server:

- Does not include internal storage drives, system I/O controller, server node (no CPU, memory, or RAID controller).



NOTE: Use the steps on the following pages to configure the server with the components that you want to include.

STEP 2 SELECT SYSTEM I/O CONTROLLER (OPTIONAL)

Select system I/O controllers from [Table 3](#). Each system I/O controller contains a built-in 1300-series VIC with two 40 Gb QSFP ports.

Table 3 PID of the System I/O Module

Product ID (PID)	Description
UCSC-C3260-SIOC	Cisco UCS C3260 System IO Controller with 1300-series VIC included

Approved Configurations

- Select one or two system I/O controllers.

Caveats

- If you select two server nodes and two SIOCs, you have the following functionality:
 - The top server node works with the left SIOC (as viewed from the rear).
 - The bottom server node works with the right SIOC (as viewed from the rear).
 - There is no cross traffic functionality between nodes (will be supported in a future release).

STEP 3 SELECT TRANSCEIVERS OR SFP CABLES FOR SYSTEM I/O CONTROLLER (OPTIONAL)

Select an appropriate system I/O controller optical transceiver or SFP cable from [Table 4](#).

Table 4 PIDs for SIOC Optical Transceivers and SFP Cables

Rate	Optical Transceiver and SFP Cable PIDs	Description
10 Gbps ¹	SFP-10G-SR	10GBASE-SR SFP optical transceiver
	SFP-H10GB-CU1M	10GBASE-CU SFP+ Cable 1 Meter
	SFP-H10GB-CU3M	10GBASE-CU SFP+ Cable 3 Meter
	SFP-H10GB-CU5M	10GBASE-CU SFP+ Cable 5 Meter
	SFP-H10GB-ACU7M	Active Twinax cable assembly, 7m
	SFP-H10GB-ACU10M	Active Twinax cable assembly, 10m
40 Gbps	QSFP-40G-SR-BD	QSFP40G bidirectional short-reach optical transceiver
	QSFP-40G-SR4	40GBASE-SR4 QSFP optical transceiver module with MPO connector
	QSFP-H40G-CU1M	40GBASE-CR4 Passive Copper Cable, 1m
	QSFP-H40G-CU3M	40GBASE-CR4 Passive Copper Cable, 3m
	QSFP-H40G-CU5M	40GBASE-CR4 Passive Copper Cable, 5m
	QSFP-H40G-ACU7M	40GBASE-CR4 Active Copper Cable, 7m
	QSFP-H40G-ACU10M	40GBASE-CR4 Active Copper Cable, 10m
	QSFP-4SFP10G-CU1M	QSFP to 4xSFP10G Passive Copper Splitter Cable, 1m
	QSFP-4SFP10G-CU3M	QSFP to 4xSFP10G Passive Copper Splitter Cable, 3m

Notes

1. In order to use a 10 Gbps SFP transceiver or cable, you must first install a QSFP to SFP 10G adapter (PID CVR-QSFP-SFP10G) in the SIOC QSFP port.

STEP 4 SELECT SERVER NODE

The server node has the following features:

- CPUs
 - Two E52600 v2 series family processor CPUs per server node
 - Quick Path Interconnect (QPI) between the CPUs for high-performance transfers between processors and I/O nodes
- Memory DIMMs
 - 8 DIMMs per CPU
 - 4 DIMM channels
 - 2 DIMMs per channel (DPC)
 - ECC DDR3L registered DIMMs (RDIMMs) or load-reduced DIMMs (LRDIMMs), operating at 1866 MHz
- RAID Controller
 - One Cisco 12G SAS RAID controller (supports JBOD and RAID levels 0,1,5,6,10,50, 60), with 1 GB or 4 GB flash-backed write cache.
 - One Cisco 12G SAS HBA controller for pass-through



NOTE: Two of the server node options (server node 6 and 7) include a RAID controller that allows for pass-through drive control.

Select one or two server node product IDs (PIDs) from [Table 5](#).

Table 5 PID of the Server Node

Product ID (PID)	Description
UCSC-C3X60-SVRN1	UCS C3X60 Complete Server Config 1 with CPU, memory, JBOD, RAID Comes with the following:
UCS-CPU-E52620B	2 CPUs: 2.10 GHz E5-2620 v2/80W 6C/15MB Cache/DDR3 1600MHz
UCS-MR-1X082RZ-A	128 GB memory: 16 x 8GB DDR3-1866-MHz RDIMM/PC3-14900/dual rank/x4/1.5v
UCSC-C3X60-R1GB	1 RAID controller: UCS C3X60 12G SAS RAID Controller with 1GB cache

Table 5 PID of the Server Node (*continued*)

Product ID (PID)	Description
UCSC-C3X60-SVRN2	UCS C3X60 Complete Server Config 2 with CPU, Memory, JBOD, RAID Comes with the following:
UCS-CPU-E52620B	2 CPUs: 2.10 GHz E5-2620 v2/80W 6C/15MB Cache/DDR3 1600MHz
UCS-MR-1X162RZ-A	256 GB memory: 16 x 16GB DDR3-1866-MHz RDIMM/PC3-14900/dual rank/x4/1.5v
UCSC-C3X60-R4GB	1 RAID controller: UCS C3X60 12G SAS RAID Controller with 4GB cache
UCSC-C3X60-SVRN3	UCS C3X60 Complete Server Config 3 with CPU, Memory, JBOD, RAID Comes with the following:
UCS-CPU-E52660B	2 CPUs: 2.20 GHz E5-2660 v2/95W 10C/25MB Cache/DDR3 1866MHz
UCS-MR-1X162RZ-A	256 GB memory: 16 x 16GB DDR3-1866-MHz RDIMM/PC3-14900/dual rank/x4/1.5v
UCSC-C3X60-R4GB	1 RAID controller: UCS C3X60 12G SAS RAID Controller with 4GB cache
UCSC-C3X60-SVRN4	UCS C3X60 Complete Server Config 4 with CPU, Memory, JBOD, RAID Comes with the following:
UCS-CPU-E52695B	2 CPUs: 2.40 GHz E5-2695 v2/115W 12C/30MB Cache/DDR3 1866MHz
UCS-MR-1X162RZ-A	256 GB memory: 16 x 16GB DDR3-1866-MHz RDIMM/PC3-14900/dual rank/x4/1.5v
UCSC-C3X60-R4GB	1 RAID controller: UCS C3X60 12G SAS RAID Controller with 4GB cache
UCSC-C3X60-SVRN5	UCS C3X60 Complete Server Config 5 with CPU, Memory, JBOD, RAID Comes with the following:
UCS-CPU-E52695B	2 CPUs: 2.40 GHz E5-2695 v2/115W 12C/30MB Cache/DDR3 1866MHz
UCS-MR-1X162RZ-A	512 GB memory: 32 x 16GB DDR3-1866-MHz RDIMM/PC3-14900/dual rank/x4/1.5v
UCSC-C3X60-R4GB	1 RAID controller: UCS C3X60 12G SAS RAID Controller with 4GB cache
UCSC-C3X60-SVRN6	UCS C3X60 Complete Server Config 6 with CPU, Memory Comes with the following:
UCS-CPU-E52660B	2 CPUs: 2.20 GHz E5-2660 v2/95W 10C/25MB Cache/DDR3 1866MHz
UCS-MR-1X082RZ-A	128 GB memory: 16 x 8 GB DDR3-1866-MHz RDIMM/PC3-14900/dual rank/x4/1.5v
UCSC-C3X60-HBA	12G SAS pass-through controller

Table 5 PID of the Server Node (*continued*)

Product ID (PID)	Description
UCSC-C3X60-SVRN7	UCS C3X60 Complete Server Config 7 with CPU, Memory Comes with the following:
UCS-CPU-E52695B	2 CPUs: 2.40 GHz E5-2695 v2/115W 12C/30MB Cache/DDR3 1866MHz
UCS-MR-1X162RZ-A	256 GB memory: 16 x 16 GB DDR3-1866-MHz RDIMM/PC3-14900/dual rank/x4/1.5v
UCSC-C3X60-HBA	12G SAS pass-through controller

Approved Configurations

- Select one or two server node PIDs.

Caveats

- The following server nodes can be mixed:
 - First set: UCSC-C3X60-SVRN2, UCSC-C3X60-SVRN3, UCSC-C3X60-SVRN4, UCSC-C3X60-SVRN5, or
 - Second set: UCSC-C3X60-SVRN6, UCSC-C3X60-SVRN7



NOTE: None of the servers in the first set of server nodes above can be mixed with any server in the second set.

Further, server node UCSC-C3X60-SVRN1 cannot be mixed with any other server node.

- If you select two server nodes, you cannot select a disk expansion tray and drives.
- If you select two server nodes, you have the following functionality:
 - The top server node works with the left SIOC (as viewed from the rear).
 - The bottom server node works with the right SIOC (as viewed from the rear).
 - There is no cross traffic functionality between nodes (will be supported in a future release).
- No DIMM configurations other than the factory default are supported.
- RAID levels supported by the 12 Gbps RAID controller (UCSC-C3X60-R4GB and UCSC-C3X60-R1GB) are as follows:
 - RAID 0 uses striping to provide high data throughput, especially for large files in an environment that does not require fault tolerance.
 - RAID 1 uses mirroring so that data written to one drive is simultaneously written to another drive which is good for small databases or other applications that require small capacity, but complete data redundancy.

- RAID 5 uses disk striping and parity data across all drives (distributed parity) to provide high data throughput, especially for small random access.
- RAID 6 uses distributed parity, with two independent parity blocks per stripe, and disk striping. A RAID 6 virtual drive can survive the loss of two drives without losing data. A RAID 6 drive group, which requires a minimum of three drives, is similar to a RAID 5 drive group. Blocks of data and parity information are written across all drives. The parity information is used to recover the data if one or two drives fail in the drive group.
- A RAID 00 drive group is a spanned drive group that creates a striped set from a series of RAID 0 drive groups.
- RAID 10, a combination of RAID 0 and RAID 1, consists of striped data across mirrored spans. A RAID 10 drive group is a spanned drive group that creates a striped set from a series of mirrored drives. RAID 10 allows a maximum of eight spans. You must use an even number of drives in each RAID virtual drive in the span. The RAID 1 virtual drives must have the same stripe size. RAID 10 provides high data throughput and complete data redundancy but uses a larger number of spans.
- RAID 50, a combination of RAID 0 and RAID 5, uses distributed parity and disk striping. A RAID 50 drive group is a spanned drive group in which data is striped across multiple RAID 5 drive groups. RAID 50 works best with data that requires high reliability, high request rates, high data transfers, and medium-to-large capacity.
- RAID 60, a combination of RAID 0 and RAID 6, uses distributed parity, with two independent parity blocks per stripe in each RAID set, and disk striping. A RAID 60 virtual drive can survive the loss of two drives in each of the RAID 6 sets without losing data. It works best with data that requires high reliability, high request rates, high data transfers, and medium-to-large capacity.

STEP 5 SELECT HARD DISK DRIVE (HDD) or SOLID STATE DRIVE (SSD) MULTIPACKS

Select drive multipacks from [Table 6](#). The drives in each multipack mount into drive trays at the top of the server.

Table 6 Available Disk Multipacks

Product ID (PID)	PID Description	Drive Type	Capacity (each)
UCSC-C3X60-14HD4	UCS C3160 1 row of 4 TB NL-SAS drives (14 total) 56 TB raw Includes 14 of the following: UCSC-C3X60-HD4TB UCS C3X60 4TB NL-SAS 7200RPM HDD with C3X60 carrier	SAS-2	4 TB 512n
UCSC-C3X60-28HD4	UCS C3160 2 rows of 4 TB NL-SAS drives (28 total) 112 TB raw Includes 28 of the following: UCSC-C3X60-HD4TB UCS C3X60 4TB NL-SAS 7200RPM HDD with C3X60 carrier	SAS-2	4 TB 512n
UCSC-C3X60-42HD4	UCS C3160 3 rows of 4 TB NL-SAS drives (42 total) 184 TB raw includes 42 of the following: UCSC-C3X60-HD4TB UCS C3X60 4TB NL-SAS 7200RPM HDD with C3X60 carrier	SAS-2	4 TB 512n
UCSC-C3X60-56HD4	UCS C3160 4 rows of 4 TB NL-SAS drives (56 total) 240 TB raw includes 56 of the following: UCSC-C3X60-HD4TB UCS C3X60 4TB NL-SAS 7200RPM HDD with C3X60 carrier	SAS-2	4 TB 512n
UCSC-C3X60-SSD4	UCS C3160 1 row of a combo of 400 GB SSDs and 4 TB NL-SAS drives (up to 14 total) includes from 2 to 14 of the following: UCSC-C3160-400SSD UCS C3160 400GB Enterprise Performance 6G SAS SSD Includes from 0 to 10 of the following: UCSC-C3X60-HD4TB UCS C3X60 4TB NL-SAS 7200RPM HDD with C3X60 carrier A maximum of 14 drives (1 row) can be selected using a combination of 400 GB SSDs and 4 TB HDDs. Select the desired number of SSDs and HDDs.	SAS-2	400 GB/ 4 TB 512n

Table 6 Available Disk Multipacks (*continued*)

Product ID (PID)	PID Description	Drive Type	Capacity (each)
UCSC-C3X60-14HD6	UCS C3160 1 row of 6 TB NL-SAS drives (14 total) 84 TB raw Includes 14 of the following: UCSC-C3X60-HD6TB UCS C3X60 6TB 12Gbps NL-SAS 7200RPM HARD DISK DRIVE including C3X60 HDD carrier (Top-load)	SAS-3	6 TB 4Kn
UCSC-C3X60-28HD6	UCS C3160 2 rows of 6 TB NL-SAS drives (28 total) 168 TB raw Includes 28 of the following: UCSC-C3X60-HD6TB UCS C3X60 6TB 12Gbps NL-SAS 7200RPM HARD DISK DRIVE including C3X60 HDD carrier (Top-load)	SAS-3	6 TB 4Kn
UCSC-C3X60-42HD6	UCS C3160 3 rows of 6 TB NL-SAS drives (42 total) 252 TB raw includes 42 of the following: UCSC-C3X60-HD6TB UCS C3X60 6TB 12Gbps NL-SAS 7200RPM HARD DISK DRIVE including C3X60 HDD carrier (Top-load)	SAS-3	6 TB 4Kn
UCSC-C3X60-56HD6	UCS C3160 4 rows of 6 TB NL-SAS drives (56 total) 336 TB raw includes 56 of the following: UCSC-C3X60-HD6TB UCS C3X60 6TB 12Gbps NL-SAS 7200RPM HARD DISK DRIVE including C3X60 HDD carrier (Top-load)	SAS-3	6 TB 4Kn
UCSC-C3X60-SSD6	UCS C3160 1 row of a combo of SSDs and 6 TB NL-SAS drives (up to 14 total) includes from 2 to 14 of either of the following: UCS-C3X60-12G0400 UCS C3X60 400GB Enterprise Performance 12G SAS SSD UCS-C3X60-12G016 UCS C3X60 1.6 TB Enterprise Performance 12G SAS SSD Includes from 0 to 10 of the following: UCSC-C3X60-HD6TB UCS C3X60 6TB 12Gbps NL-SAS 7200RPM HARD DISK DRIVE including C3X60 HDD carrier (Top-load)	SAS-3	400 GB/ 6 TB 4Kn
A maximum of 14 drives (1 row) can be selected using a combination of 400 GB or 1.6 TB SSDs and 6 TB HDDs. Select the desired number of SSDs and HDDs.			

Approved Configurations

- The UCSC-C3X60-14HD4, UCSC-C3X60-28HD4, and UCSC-C3X60-42HD4 multipacks can be selected along with the UCSC-C3X60-SSD4 multipack.
- The UCSC-C3X60-56HD4 multipack cannot be selected with any other multipack.
- The UCSC-C3X60-14HD6, UCSC-C3X60-28HD6, and UCSC-C3X60-42HD6 multipacks can be selected along with the UCSC-C3X60-SSD6 multipack.
- The UCSC-C3X60-56HD6 multipack cannot be selected with any other multipack.
- You cannot mix 4 TB SAS-2 6 Gbps 512n multipacks with 6 TB SAS-3 12 Gbps 4Kn multipacks.
- Populate drive bays starting from the highest-numbered bays to the lowest (see [Internal Drive Population Guidelines, page 43](#) for more details).

Caveats

- Because the 6 TB drives have 4096-byte sectors, VMware ESXi does not support this capability and therefore will not work with 6 TB drives.

STEP 6 SELECT BOOT DRIVES (OPTIONAL)

Select two or four optional boot drives from [Table 8](#).

Table 7 Boot Drives

Product ID (PID)	PID Description	Drive Type	Capacity (each)
UCS-C3X60-G1SD480	Cisco UCS C3X60 480GB SATA Boot SSD	SATA	480 GB
UCSC-C3X60-12SSD	UCS C3X60 SATA SSD 120GB Enterprise Value	SATA	120 GB

Approved Configurations

- Select two boot drives for one server node or four boot drives for two server nodes.
- Do not mix boot drive capacities



NOTE: Boot drives are connected to the Intel PCH on the server Node and RAID setup is handled through the OS or SW RAID functionality.

STEP 7 SELECT DISK EXPANSION TRAY AND DRIVES (OPTIONAL)

Select the optional disk expansion tray from [Table 8](#). This selection adds an extra four 4 TB drives that mount at the rear of the chassis.

Table 8 Disk Expansion Tray and Drives

Product ID (PID)	PID Description	Drive Type	Capacity (each)
UCSC-C3X60-EX16T	UCS UCS C3X60 Expander with 4 x 4TB 7200RPM NL-SAS Drives Includes the following: UCS-HD4T7KS3-E	4 TB SAS 7.2K RPM 3.5 inch HDD/hot plug/drive sled mounted	4 TB
UCSC-C3X60-EX24T	UCS UCS C3X60 Expander with 4x 6TB 12 Gbps 7200RPM NL-SAS Drives Includes the following: UCSC-C3X60-6TBRR	6 TB 12 Gbps NL-SAS 7200 RPM 3.5 inch HDD including CX360 HDD carrier (rear load)	6 TB

Approved Configurations

- Select only disk expansion tray with the four drives included.
- 6 TB drives cannot be mixed with 4 TB drives

Caveats

- If you configure two server nodes, you cannot configure a disk expansion tray with drives.

STEP 8 SELECT AC POWER CORD(S)

Using [Table 9](#), select the appropriate AC power cords. You can select a minimum of no power cords and a maximum of two. If you select the option R2XX-DMYMPWRCORD, no power cord is shipped with the server.

Table 9 Available Power Cords

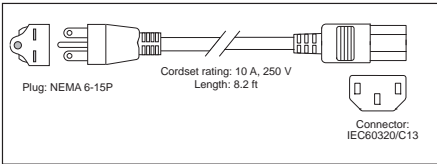
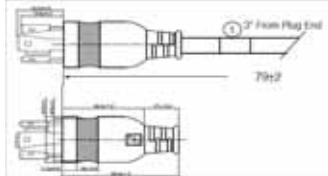
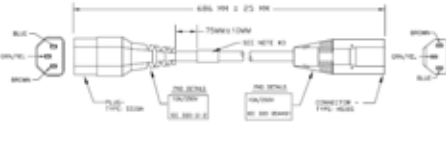
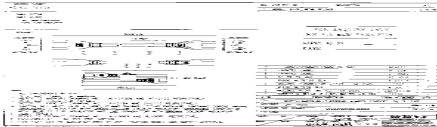
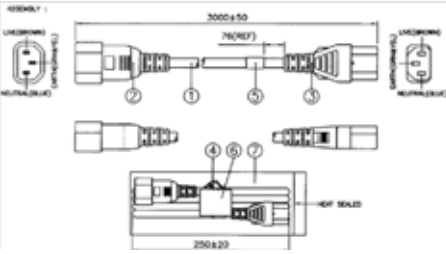
Product ID (PID)	PID Description	Images
R2XX-DMYMPWRCORD	No power cord (dummy PID to allow for a no power cord option)	Not applicable
CAB-N5K6A-NA	N5000 AC Power Cable, 6A, 250V, North America, 2.5m	
CAB-AC-L620-C13	AC Power Cord, NEMA L6-20 - C13, 2M/6.5ft	
CAB-C13-CBN	Cabinet Jumper Power Cord, 250 VAC 10A, C14-C13 Connectors	
CAB-C13-C14-2M	CABASY,WIRE,JUMPER CORD, PWR, 2 Meter, C13/C14,10A/250V	
CAB-C13-C14-AC	Power cord, C13 to C14 (recessed receptacle), 10A	

Table 9 Available Power Cords

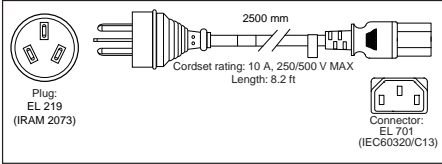
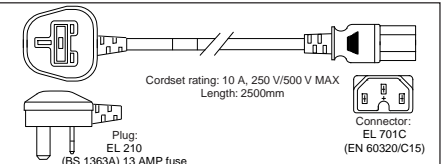
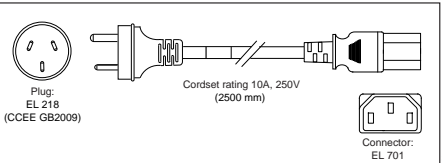
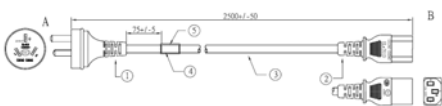
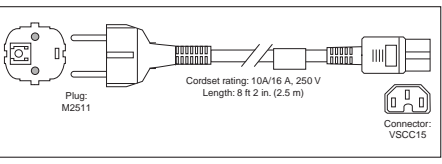
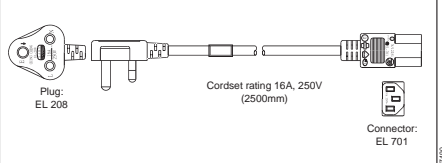
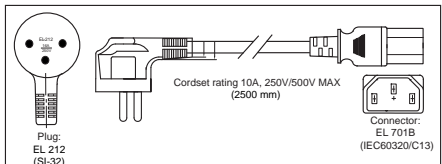
Product ID (PID)	PID Description	Images
SFS-250V-10A-AR	N5000 AC Power Cable, 10A, 250V, Argentina, 2.5m	
CAB-9K10A-AU	N5000 AC Power Cable, 10A, 250V, Australia, 2.5m	
SFS-250V-10A-CN	N5000 AC Power Cable, 10A, 250V, China, 2.5m	
CAB-250V-10A-CN	AC Power Cord - 250V, 10A - PRC	
CAB-9K10A-EU	N5000 AC Power Cable, 10A, 250V, Europe, 2.5m	
SFS-250V-10A-ID	N5000 AC Power Cable, 10A, 250V, India, 2.5m	
SFS-250V-10A-IS	N5000 AC Power Cable, 10A, 250V, Israel, 2.5m	

Table 9 Available Power Cords

Product ID (PID)	PID Description	Images
CAB-9K10A-IT	N5000 AC Power Cable, 10A, 250V, Italy, 2.5m	<p>Plug: 1/3G (CEI 23-16)</p> <p>Cordset rating: 10 A, 250 V Length: 8 ft 2 in (2.5 m)</p> <p>Connector: C15M (EN60320/C15)</p>
CAB-9K10A-SW	N5000 AC Power Cable, 10A, 250V, Switzerland, 2.5m	<p>Plug: MP232-R</p> <p>Cordset rating: 10 A, 250 V Length: 8 ft 2 in (2.5 m)</p> <p>Connector: IEC 60320 C15</p>
CAB-9K10A-UK	N5000 AC Power Cable, 10A, 250V, United Kingdom, 2.5m	<p>Cordset rating: 10 A, 250 V/500 V MAX Length: 2500mm</p> <p>Plug: EL 210 (BS 1363A) 13 AMP fuse</p> <p>Connector: EL 701 C (EN 60320/C15)</p>
CAB-250V-10A-BR	Power Cord - 250V, 10A - Brazil	<p>2,133.6 ± 25</p>

STEP 9 ORDER REVERSIBLE CABLE MANAGEMENT ARM (OPTIONAL)

The reversible cable management arm mounts on either the right or left slide rails at the rear of the server and is used for cable management. Use [Table 10](#) to order a cable management arm.

Table 10 Cable Management Arm

Product ID (PID)	PID Description
UCSC-CMA-M4	Reversible CMA for C240 M4 ball bearing rail kit

STEP 10 ORDER OPTIONAL USB DRIVE

You can order one optional USB drive. The USB drive ordering information is listed in [Table 11](#).

Table 11 USB Drive

Product ID (PID)	PID Description
UCS-USBFLSHB-16GB	UCS Servers 16 GB Flash USB Drive

See [Figure 5 on page 40](#) for the location of the USB connector

STEP 11 ORDER A TRUSTED PLATFORM MODULE (OPTIONAL)

Trusted Platform Module (TPM) is a computer chip (microcontroller) that can securely store artifacts used to authenticate the platform (server). These artifacts can include passwords, certificates, or encryption keys. A TPM can also be used to store platform measurements that help ensure that the platform remains trustworthy. Authentication (ensuring that the platform can prove that it is what it claims to be) and attestation (a process helping to prove that a platform is trustworthy and has not been breached) are necessary steps to ensure safer computing in all environments.

The TPM ordering information is listed in [Table 12](#).

Table 12 Trusted Platform Module

Product ID (PID)	PID Description
UCSX-TPM1-001	Trusted Platform Module 1.2 SPI-based for UCS Servers



NOTE: The module used in this server conforms to TPM v1.2/1.3, as defined by the Trusted Computing Group (TCG). It is also SPI-based.

STEP 12 ORDER A KVM CABLE (OPTIONAL)


The KVM cable provides a connection into the server, providing a DB9 serial connector, a VGA connector for a monitor, and dual USB 2.0 ports for a keyboard and mouse. With this cable, you can create a direct connection to the operating system and the BIOS running on the server.

The KVM cable ordering information is listed in [Table 13](#).

Table 13 KVM Cable

Product ID (PID)	PID Description
N20-BKVM=	KVM cable for server console port

Figure 4 KVM Cable

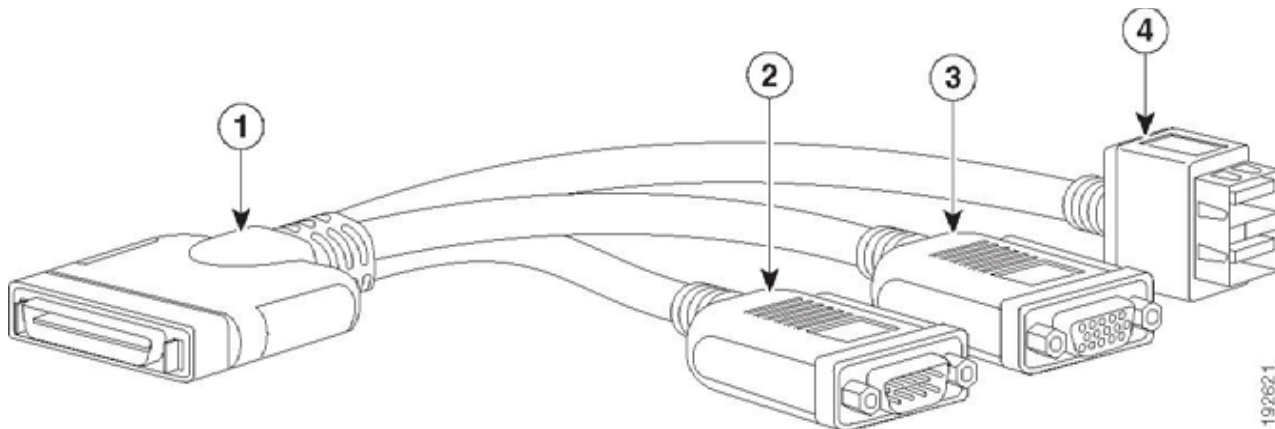

1	Connector (to server front panel)	3	VGA connector (for a monitor)
2	DB-9 serial connector	4	Two-port USB 2.0 connector (for a mouse and keyboard)

STEP 13 SELECT OPERATING SYSTEM AND VALUE-ADDED SOFTWARE

Several operating systems and value-added software programs are available. Select as desired from [Table 14](#).

Table 14 OSs and Value-Added Software (for 2-CPU servers)

PID Description	Product ID (PID)
Microsoft Windows Server	
MSWS-12-ST2S	Windows Server 2012 Standard (2 CPU/2 VMs)
MSWS-12-DC2S	Windows Server 2012 Datacenter (2 CPU/Unlimited VMs)
MSWS-12-ST2S-NS	Windows Server 2012 Standard (2 CPU/2 VMs) No Cisco SVC
MSWS-12-DC2S-NS	Windows Server 2012 Datacenter (2 CPU/Unlim VM) No Cisco SVC
MSWS-12R2-ST2S	Windows Server 2012 R2 Standard (2 CPU/2 VMs)
MSWS-12R2-DC2S	Windows Server 2012 R2 Datacenter (2 CPU/Unlimited VMs)
MSWS-12R2-ST2S-NS	Windows Server 2012 R2 Standard (2 CPU/2 VMs) No Cisco SVC
MSWS-12R2-DC2S-NS	Windows Server 2012 R2 Datacen (2 CPU/Unlim VM) No Cisco Svc
SUSE	
SLES-2S2V-1A	SUSE Linux Enterprise Svr (1-2 CPU,1 Phys);1yr Support Reqd
SLES-2S2V-3A	SUSE Linux Enterprise Svr (1-2 CPU,1 Phys);3yr Support Reqd
SLES-2S2V-5A	SUSE Linux Enterprise Svr (1-2 CPU,1 Phys);5yr Support Reqd
SLES-2SUV-1A	SUSE Linux Enterprise Svr (1-2 CPU,Unl Vrt);1yr Support Reqd
SLES-2SUV-3A	SUSE Linux Enterprise Svr (1-2 CPU,Unl Vrt);3yr Support Reqd
SLES-2SUV-5A	SUSE Linux Enterprise Svr (1-2 CPU,Unl Vrt);5yr Support Reqd
SLES-2S-HA-1S	SUSE Linux High Availability Ext (1-2 CPU); 1yr Support Reqd
SLES-2S-HA-3A	SUSE Linux High Availability Ext (1-2 CPU); 3yr Support Reqd
SLES-2S-HA-5A	SUSE Linux High Availability Ext (1-2 CPU); 5yr Support Reqd

Table 14 OSs and Value-Added Software (for 2-CPU servers) *(continued)*

PID Description	Product ID (PID)
Red Hat Enterprise Linux	
RHEL-2S-1G-1A	RHEL/2 Socket/1 Guest/1Yr Svcs Required
RHEL-2S-1G-3A	RHEL/2 Socket/1 Guest/3Yr Svcs Required
RHEL-HA-2S-1A	RHEL Option/High-Availability/2 Socket/1Yr Svcs Required
RHEL-HA-2S-3A	RHEL Option/High-Availability/2 Socket/3Yr Svcs Required
RHEL-RS-2S-1A	RHEL Option/Resilient w/Ha /2 Socket/1 Yr Svcs Required
RHEL-RS-2S-3A	RHEL Option/Resilient Storage w/ HA /2 Socket/3 Yr Svcs Reqd
RHEL-SFS-2S-1A	RHEL Option/Scalable File System/2 Socket/1 Yr Svcs Required
RHEL-SFS-2S-3A	RHEL Option/Scalable File System/2 Socket/1 Yr Svcs Required
VMware 5	
VMW-VS5-STD-1A	VMware vSphere 5 Standard for 1 Processor, 1 Year, Support Rqd
VMW-VS5-STD-2A	VMware vSphere 5 Standard for 1 Processor, 2 Year, Support Rqd
VMW-VS5-STD-3A	VMware vSphere 5 Standard for 1 Processor, 3 Year, Support Rqd
VMW-VS5-STD-4A	VMware vSphere 5 Standard for 1 Processor, 4 Year, Support Rqd
VMW-VS5-STD-5A	VMware vSphere 5 Standard for 1 Processor, 5 Year, Support Rqd
VMW-VS5-ENT-1A	VMware vSphere 5 Enterprise for 1 Processor, 1 Year Support Rqd
VMW-VS5-ENT-2A	VMware vSphere 5 Enterprise for 1 CPU, 2 Yr Support Rqd
VMW-VS5-ENT-3A	VMware vSphere 5 Enterprise for 1 CPU, 3 Yr Support Rqd
VMW-VS5-ENT-4A	VMware vSphere 5 Enterprise for 1 Processor, 4 Year Support Rqd
VMW-VS5-ENT-5A	VMware vSphere 5 Enterprise for 1 CPU, 5 Yr Support Rqd
VMW-VS5-ENTP-1A	VMware vSphere 5 Enterprise Plus for 1 Processor, 1 Year Support Rqd
VMW-VS5-ENTP-2A	VMware vSphere 5 Enterprise Plus for 1 CPU, 2 Yr Support Rqd
VMW-VS5-ENTP-3A	VMware vSphere 5 Enterprise Plus for 1 Processor, 3 Year Support Rqd
VMW-VS5-ENTP-4A	VMware vSphere 5 Enterprise Plus for 1 Processor, 4 Year Support Rqd
VMW-VS5-ENTP-5A	VMware vSphere 5 Enterprise Plus for 1 Processor, 5 Year Support Rqd
VMW-VC5-STD-1A	VMware vCenter 5 Server Standard, 1 yr support required
VMW-VC5-STD-2A	VMware vCenter 5 Server Standard, 2 yr support required
VMW-VC5-STD-3A	VMware vCenter 5 Server Standard, 3 yr support required
VMW-VC5-STD-4A	VMware vCenter 5 Server Standard, 4 yr support required
VMW-VC5-STD-5A	VMware vCenter 5 Server Standard, 5 yr support required
UCS-VMW-TERMS	Acceptance of Terms, Standalone VMW License for UCS Servers

STEP 14 SELECT OPERATING SYSTEM MEDIA KIT

Select the optional operating system media listed in [Table 15](#).

Table 15 OS Media

Product ID (PID)	PID Description
RHEL-6	RHEL 6 Recovery Media Only (Multilingual)
MSWS-12-ST2S-MD	Windows Server 2012 Standard (2 CPU/2 VMs) Recovery Media
MSWS-12-DC2S-MD	Windows Server 2012 Datacenter(2 CPU/Unlimited VM) Rec Media
MSWS-12R2-ST2S-RM	Windows Server 2012 R2 Standard (2 CPU/2 VMs) Recovery Media
MSWS-12R2-DC2S-RM	Windows Server 2012 R2 Datacen(2 CPU/Unlimited VM) Rec Media

STEP 15 SELECT SERVICE and SUPPORT LEVEL

A variety of service options are available, as described in this section.

Unified Computing Warranty, No Contract

If you have noncritical implementations and choose to have no service contract, the following coverage is supplied:

- Three-year parts coverage.
- Next business day (NBD) onsite parts replacement eight hours a day, five days a week.
- 90-day software warranty on media.
- Ongoing downloads of BIOS, drivers, and firmware updates.

SMARTnet for UCS

For support of the entire Unified Computing System, Cisco offers the Cisco SMARTnet for UCS Service. This service provides expert software and hardware support to help sustain performance and high availability of the unified computing environment. Access to Cisco Technical Assistance Center (TAC) is provided around the clock, from anywhere in the world.

Smart Call Home provides proactive, embedded diagnostics and real-time alerts. The Cisco SMARTnet for UCS Service includes flexible hardware replacement options, including replacement in as little as two hours. There is also access to Cisco's extensive online technical resources to help maintain optimal efficiency and uptime of the unified computing environment. You can choose a desired service listed in [Table 16](#).

Table 16 Cisco SMARTnet for UCS Service

Product ID (PID)	On Site?	Description
CON-PREM-C3260BSE	Yes	ONSITE 24X7X2 UCS C3260 Server
CON-OSP-C3260BSE	Yes	ONSITE 24X7X4 UCS C3260 Server
CON-OSE-C3260BSE	Yes	ONSITE 8X5X4 UCS C3260 Server
CON-OS-C3260BSE	Yes	ONSITE 8X5XNBD UCS C3260 Server
CON-S2P-C3260BSE	No	SMARTNET 24X7X2 UCS C3260 Server
CON-SNTP-C3260BSE	No	SMARTNET 24X7X4 UCS C3260 Server
CON-SNTE-C3260BSE	No	SMARTNET 8X5X4 UCS C3260 Server
CON-SNT-C3260BSE	No	SMARTNET 8X5XNBD UCS C3260 Server

SMARTnet for UCS Hardware Only Service

For faster parts replacement than is provided with the standard Cisco Unified Computing System warranty, Cisco offers the Cisco SMARTnet for UCS Hardware Only Service. You can choose from two levels of advanced onsite parts replacement coverage in as little as four hours. SMARTnet for UCS Hardware Only Service provides remote access any time to Cisco support professionals who can determine if a return materials authorization (RMA) is required. You can choose a service listed in [Table 17](#).

Table 17 SMARTnet for UCS Hardware Only Service

Product ID (PID)	Service Level GSP	On Site?	Description
CON-UCW7-C3260BSE	UCW7	Yes	UC PLUS 24X7X40S UCS C3260 Server
CON-UCW5-C3260BSE	UCW5	Yes	UC PLUS 8X5XNBDOS UCS C3260 Server

Unified Computing Partner Support Service

Cisco Partner Support Service (PSS) is a Cisco Collaborative Services service offering that is designed for partners to deliver their own branded support and managed services to enterprise customers. Cisco PSS provides partners with access to Cisco's support infrastructure and assets to help them:

- Expand their service portfolios to support the most complex network environments
- Lower delivery costs
- Deliver services that increase customer loyalty

Partner Unified Computing Support Options enable eligible Cisco partners to develop and consistently deliver high-value technical support that capitalizes on Cisco intellectual assets. This helps partners to realize higher margins and expand their practice.

PSS is available to all Cisco PSS partners, but requires additional specializations and requirements. For additional information, see the following URL:

www.cisco.com/go/partnerucssupport

The two Partner Unified Computing Support Options include:

- Partner Support Service for UCS
- Partner Support Service for UCS Hardware Only

Partner Support Service for UCS provides hardware and software support, including triage support for third party software, backed by Cisco technical resources and level three support.

See [Table 18](#).

Table 18 Partner Support Service for UCS

Product ID (PID)	Service Level GSP	On Site?	Description
CON-PSJ1-C3260BSE	PSJ1	No	UCS SUPP PSS 8X5XNBD UCS C3260 Server
CON-PSJ2-C3260BSE	PSJ2	No	UCS SUPP PSS 8X5X4 UCS C3260 Server
CON-PSJ3-C3260BSE	PSJ3	No	UCS SUPP PSS 24X7X4 UCS C3260 Server
CON-PSJ4-C3260BSE	PSJ4	No	UCS SUPP PSS 24X7X2 UCS C3260 Server
CON-PSJ6-C3260BSE	PSJ6	Yes	UCS SUPP PSS 8X5X4 Onsite UCS C3260 Server
CON-PSJ7-C3260BSE	PSJ7	Yes	UCS SUPP PSS 24X7X4 Onsite UCS C3260 Server
CON-PSJ8-C3260BSE	PSJ8	Yes	UCS SUPP PSS 24X7X2 Onsite UCS C3260 Server

Partner Support Service for UCS Hardware Only provides customers with replacement parts in as little as two hours. See [Table 19](#).

Table 19 Partner Support Service for UCS (Hardware Only)

Product ID (PID)	Service Level GSP	On Site?	Description
CON-PSW2-C3260BSE	PSW2	No	UCS W PL PSS 8X5X4 UCS C3260 Server
CON-PSW3-C3260BSE	PSW3	No	UCS W PL PSS 24X7X4 UCS C3260 Server
CON-PSW4-C3260BSE	PSW4	No	UCS W PL PSS 24X7X2 UCS C3260 Server
CON-PSW6-C3260BSE	PSW6	Yes	UCS W PL PSS 8X5XX4 Onsite UCS C3260 Server
CON-PSW7-C3260BSE	PSW7	Yes	UCS W PL PSS 24X7X4 Onsite UCS C3260 Server

Cisco Combined Services

Combined Services makes it easier to purchase and manage required services under one contract. SMARTnet services for UCS help increase the availability of your vital data center infrastructure and realize the most value from your unified computing investment. The more benefits you realize from the Cisco Unified Computing System (Cisco UCS), the more important the technology becomes to your business. These services allow you to:

- Optimize the uptime, performance, and efficiency of your UCS
- Protect your vital business applications by rapidly identifying and addressing issues
- Strengthen in-house expertise through knowledge transfer and mentoring

- Improve operational efficiency by allowing UCS experts to augment your internal staff resources
- Enhance business agility by diagnosing potential issues before they affect your operations

Unified Computing Drive Retention Service

With the Cisco Unified Computing Drive Retention (UCDR) Service, you can obtain a new disk drive in exchange for a faulty drive without returning the faulty drive. In exchange for a Cisco replacement drive, you provide a signed Certificate of Destruction (CoD) confirming that the drive has been removed from the system listed, is no longer in service, and has been destroyed.

Sophisticated data recovery techniques have made classified, proprietary, and confidential information vulnerable, even on malfunctioning disk drives. The UCDR service enables you to retain your drives and ensures that the sensitive data on those drives is not compromised, which reduces the risk of any potential liabilities. This service also enables you to comply with regulatory, local, and federal requirements.

If your company has a need to control confidential, classified, sensitive, or proprietary data, you might want to consider one of the Drive Retention Services listed in [Table 20](#), [Table 21](#), or [Table 22](#).



NOTE: Cisco does not offer a certified drive destruction service as part of this service.

Table 20 Drive Retention Service Options

Service Description	Service Program Name	Service Level GSP	Service Level	Product ID (PID)
SMARTnet for UCS Service with Drive Retention	UCS DR	UCSD7	24x7x4 Onsite	CON-UCSD7-C3260BSE
		UCSD5	8x5xNBD Onsite	CON-UCSD5-C3260BSE
SMARTnet for UCS HW ONLY+Drive Retention	UCS HW+DR	UCWD7	24x7x4 Onsite	CON-UCWD7-C3260BSE
		UCWD5	8x5xNBD Onsite	CON-UCWD5-C3260BSE

Table 21 Drive Retention Service Options for Partner Support Service

Service Description	Service Level GSP	Service Level	Product ID (PID)
Partner Support Service for UCS Drive Retention	PSJD6	8x5x4 Onsite	CON-PSJD6-C3260BSE
	PSJD7	24x7x4 Onsite	CON-PSJD7-C3260BSE

Table 22 Drive Retention Service Options for Partner Support Service (Hardware Only)

Service Description	Service Level GSP	Service Level	Product ID (PID)
Partner Support Service for UCS Drive Retention Hardware only	PSWD6	8x5x4 Onsite	CON-PSWD6-C3260BSE
	PSWD7	24x7x4 Onsite	CON-PSWD7-C3260BSE

For more service and support information, see the following URL:

http://www.cisco.com/en/US/services/ps2961/ps10312/Unified_Computing_Services_Overview.pdf

For a complete listing of available services for Cisco Unified Computing System, see this URL:

http://www.cisco.com/en/US/products/ps10312/serv_group_home.html

OPTIONAL STEP - ORDER RACK(S)

The optional R42610 rack is available from Cisco for the C-Series servers, including the C3260 server. This rack is a standard 19-inch rack and can be ordered with a variety of options, as listed in [Table 23](#). Racks are shipped separately from the C3260 server.

Table 23 Racks and Rack Options

Product ID (PID)	PID Description
RACK-UCS ¹	Cisco R42610 expansion rack, no side panels
RACK-UCS2 ¹	Cisco R42610 standard rack, w/side panels
RACK-BLANK-001	Filler panels (qty 12), 1U, plastic, toolless
RACK-CBLMGT-001	Cable mgt D rings (qty 10), metal
RACK-CBLMGT-011	Cable mgt straps (qty 10), Velcro
RACK-FASTEN-001	Mounting screws (qty 100), M6
RACK-FASTEN-002	Cage nuts (qty 50), M6
RACK-JOIN-001	Rack joining kit

Notes

1. Use these same base PIDs to order spare racks (available only as next-day replacements).

For more information about the R42610 rack, see [RACKS, page 45](#).

OPTIONAL STEP - ORDER PDU

An optional power distribution unit (PDU) is available from Cisco for the C-Series rack servers, including the C3260 server. This PDU is available in a zero rack unit (RU) style (see [Table 23](#)).

Table 24 PDU Options

Product ID (PID)	PID Description
RP208-30-2P-U-2	Zero RU PDU


For more information about the PDU, see [PDUs, page 47](#).

SUPPLEMENTAL MATERIAL

CHASSIS

An internal view of the C3260 chassis with the top cover removed is shown in *Figure 5*.

Figure 5 C3260 Server With Top Cover Off

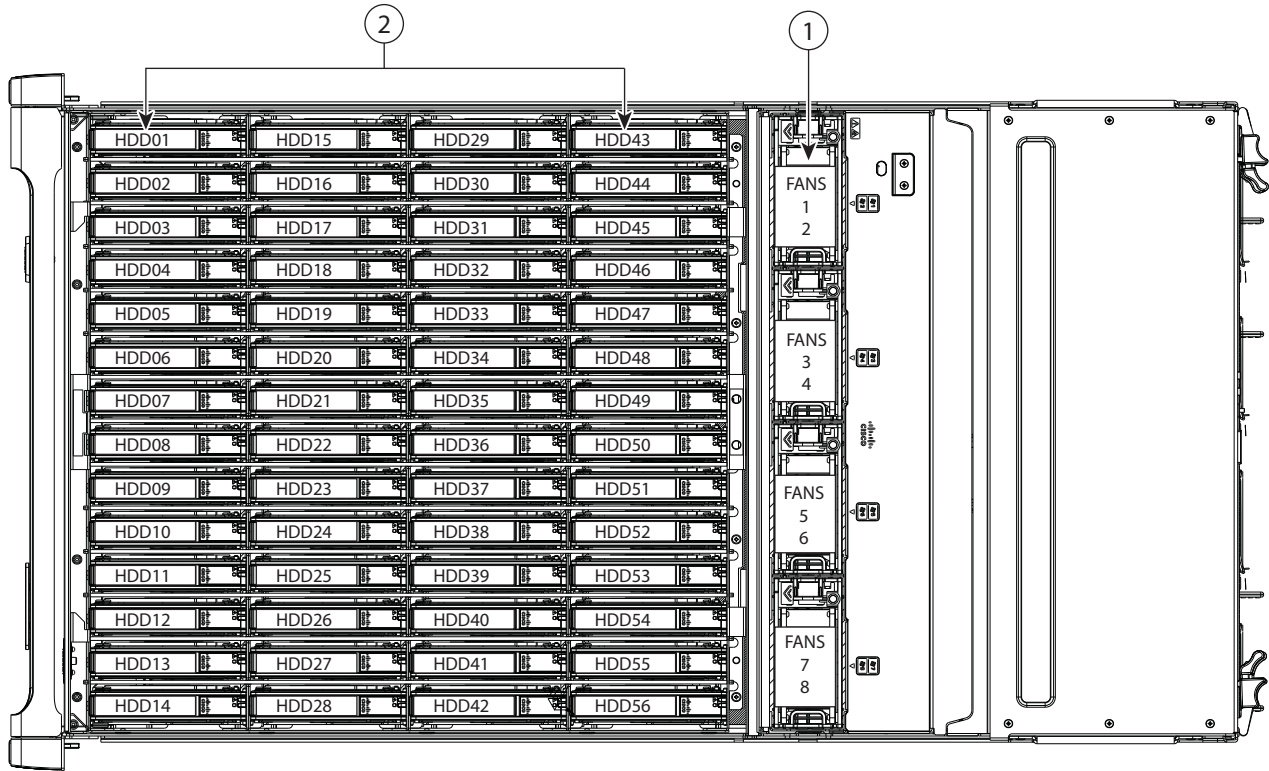

1	<p>Fan modules (four, hot-swappable) Each fan module contains two fans. Even numbers are upper fans, odd numbers are lower fans.</p>	2	<p>Internal drive bays (up to 56 2.5-inch drives, hot-swappable)</p>
---	--	---	--

CPUs and DIMMs

Physical Layout

Each CPU has four DIMM channels:


- CPU1 has channels A, B, C, and D
- CPU2 has channels E, F, G, and H

Each DIMM channel has two slots: slot 1 and slot 2. The blue-colored DIMM slots are for slot 1 and the black-colored slots for slot 2.

As an example, DIMM slots A1, B1, C1, and D1 belong to slot 1, while A2, B2, C2, and D2 belong to slot 2.

Figure 6 shows how slots and channels are physically laid out on the motherboard. The DIMM slots on the right half of the motherboard (channels A, B, C, and D) are associated with CPU 1, while the DIMM slots on the left half of the motherboard (channels E, F, G, and H) are associated with CPU 2. The slot 1 (blue) DIMM slots are always located farther away from a CPU than the corresponding slot 2 (black) slots. Slot 1 slots (blue) are populated before slot 2 slots (black).

Figure 6 Physical Layout of CPU DIMM Channels and Slots

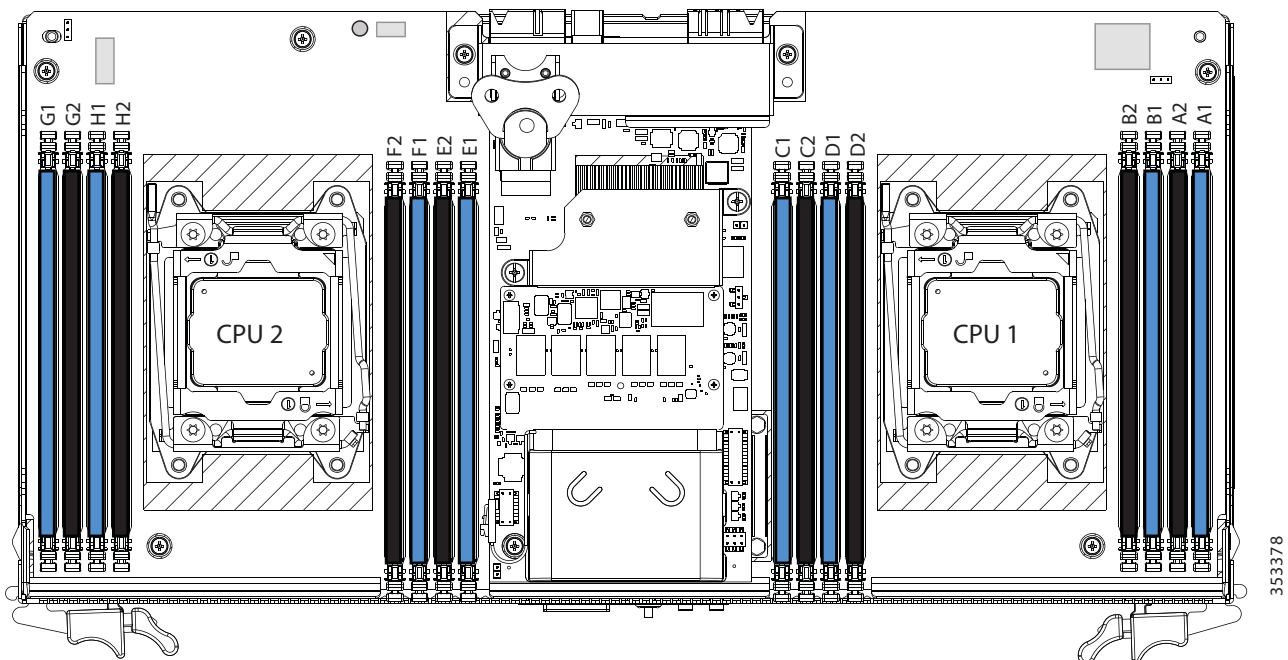

353378

Memory Population Rules

When considering the memory configuration of your server, consider the following items:

- Each channel has two DIMM slots (for example, channel A = slots A1 and A2).
 - A channel can operate with one or two DIMMs installed.
 - If a channel has only one DIMM, populate slot 1 first (the blue slot).
- When both CPUs are installed, populate the DIMM slots of each CPU identically.
 - Fill blue slots in the channels first: A1, E1, B1, F1, C1, G1, D1, H1
 - Fill black slots in the channels second: A2, E2, B2, F2, C2, G2, D2, H2
- Any DIMM installed in a DIMM socket for which the CPU is absent is not recognized.
- Observe the DIMM mixing rules shown in [Table 25](#)

Table 25 DIMM Rules for C3260 Servers

DIMM Parameter	DIMMs in the Same Channel	DIMM in the Same Slot ¹
<u>DIMM Capacity</u>		
8, 16, or 32 GB	DIMMs in the same channel (for example, A1 and A2) can have different capacities.	For best performance, DIMMs in the same slot (for example, A1, B1, C1, D1) should have the same capacity.
	Do not mix LRDIMMs with RDIMMs	Do not mix LRDIMMs RDIMMs
<u>DIMM Speed</u>		
1866-MHz ²	DIMMs will run at the lowest speed of the DIMMs/CPUs installed	DIMMs will run at the lowest speed of the DIMMs/CPUs installed
<u>DIMM Type</u>		
RDIMMs or LRDIMMs	Do not mix DIMM types in a channel	Do not mix DIMM types in a slot

Notes


1. Although different DIMM capacities can exist in the same slot, this will result in less than optimal performance. For optimal performance, all DIMMs in the same slot should be identical.
2. Only 1866-MHz DIMMs are currently available for the C3260 server.

Internal Drive Population Guidelines

The system has 56 internal drive bays in the main chassis. *Figure 7* shows the internal drive bay numbering. When populating internal drives, follow these guidelines:

- Populate drive bays starting from the highest-numbered bays to the lowest.
- The four colored boxes shown in *Figure 7* represent the four power groups in which the power is distributed for the drive bays. This might be useful for troubleshooting power rail problems.

Figure 7 Internal Drive Bay Numbering

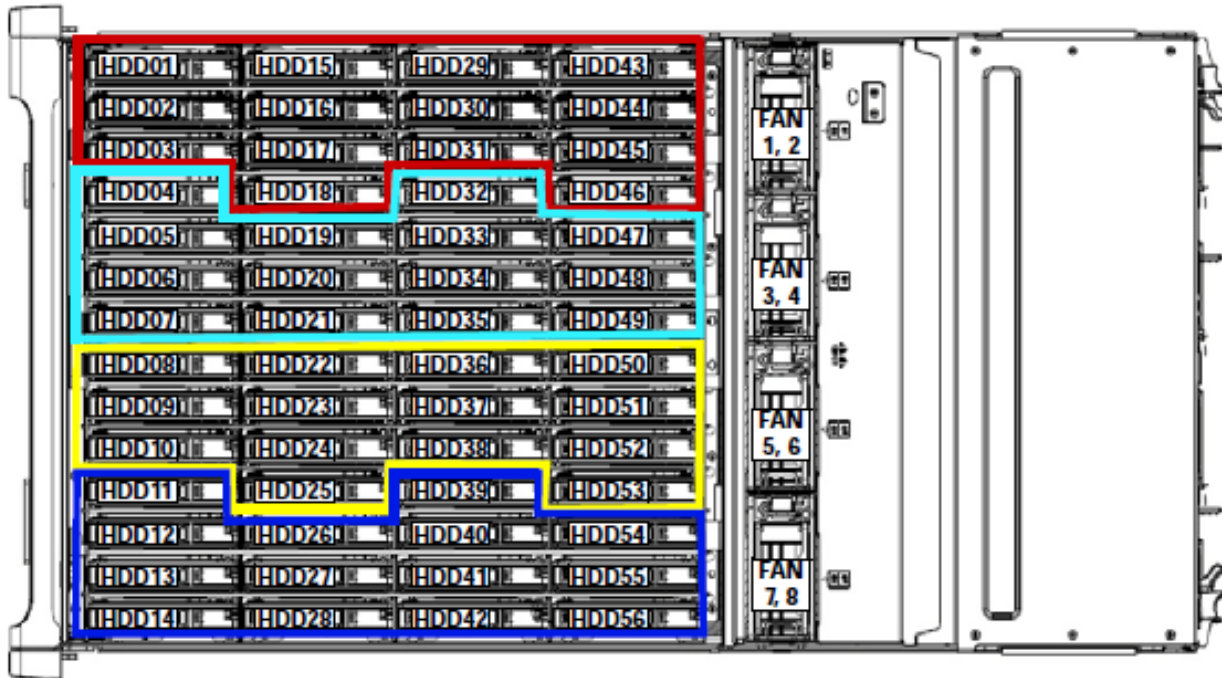

Upgrade and Servicing-Related Parts

This section lists the upgrade and servicing-related parts you may need during the life of your server. Some of these parts are configured with every server, and some may be ordered when needed or may be ordered and kept on hand as spares for future use. See [Table 26](#).

Table 26 Upgrade and Servicing-related Parts for UCS C31360 Server

Spare Product ID (PID)	Description
UCSC-C3260-SIOC=	Cisco UCS C3260 System IO Controller with mezzanine adapter card
UCSC-C3X60-14HD4=	Cisco UCS C3X60 one row of drives containing 14x 4TB (NL-SAS 7200PM). Drives w/ drive brackets. 56 TB combined total storage for add-on row
UCSC-C3X60-14HD6=	Cisco UCS C3X60 one row of drives containing 14 x 6TB Spare (NL-SAS 7200 RPM SAS-3 (total of 84 TB)
UCSC-C3X60-EX16T=	Cisco UCS C3260 Disk Expansion Tray containing up to 4x 4TB 7200 RPM NL-SAS Drives
UCSC-C3X60-EX24T=	Cisco UCS C3260 Expander with 4 x 6TB 7200RPM NL-SAS Drives
UCSC-C3X60-SSD4=	Cisco UCS C3X60 one row - 14 drives: 400 GB SSD and 4 TB drives
UCSC-C3X60-SSD6=	Cisco UCS C3X60 one row - 14 drives: 400 GB SSD and 6 TB drives
UCSC-C3X60-BLKP=	Cisco UCS C3X60 Server Node blanking plate
UCSC-C3X60-SBLKP=	Cisco UCS C3X60 SIOC blanking plate
UCSC-HS-C3X60=	Cisco UCS C3X60 Server Node CPU Heatsink FRU
UCS-CPU-GREASE3=	M4 Server CPU thermal grease syringe - needed for heatsink seal ¹
UCSC-PSU1-1050W=	Cisco UCS C3X60 1050W Power Supply Unit
UCSC-C3X60-FANM=	Cisco UCS C3X60 Fan module containing 2x80mm fans FRU
UCSC-C3X60-12SSD=	Cisco UCS C3X60 2x120GB SATA Enterprise Value SSD rear-load
UCSX-HSCK=	UCS Processor Heat Sink Cleaning Kit (when replacing a CPU) ¹
N20-BKVM=	KVM local IO cable for UCS servers console port
UCSC-C3X60-RAIL=	UCS C3X60 Rack Rails Kit

Notes

1. These parts should be ordered with the purchase of each optional or spare Intel CPU processor kit so that new thermal grease can be applied. You need the heat sink cleaning kit if you are replacing the CPU but re-using the existing heatsink. It is also needed if you RMA (return) the server node and have to move existing CPUs to the new node. In both these cases you must also have replacement grease.

System I/O Controller Blanking Panel

A system I/O controller blanking panel (UCSC-C3X60-SBLKP) must be installed if you remove a System I/O controller from the C3260 server. This panel is required to maintain system temperatures at safe operating levels, and to keep dust away from system components.

RACKS

The Cisco R42610 rack (see [Figure 8](#)) is certified for Cisco UCS installation at customer sites and is suitable for the following equipment:

- Cisco UCS B-Series servers and fabric interconnects
- Cisco UCS C-Series and select Nexus switches

The rack is compatible with hardware designed for EIA-standard 19-inch racks. Rack specifications are listed in [Table 27](#).

Table 27 Cisco R42610 Rack Specifications

Parameter	Standard Rack	Expansion Rack
Dimensions (H x W x D)	78.74 x 24 x 43.38 in. (2000 x 610 x 1102 mm)	78.74 x 23.58 x 43.38 in. (2000 x 599 x 1102 mm)
Dimensions (H x W x D) with packaging	89 x 33 x 47 in. (2261 x 838 x 1194 mm)	89 x 33 x 47 in. (2261 x 838 x 1194 mm)
Distance from front mounting rail to rear mounting rail	29.2 in (741 mm)	29.2 in (741 mm)
Weight	299.83 lb (136 kg)	231.49 lb (105 kg)
Weight with packaging	354 lb (161 kg)	284 lb (129 kg)
Side panels included	Yes	No
Equipment mounting capacity	42RU	42RU
Static load capacity	2100 lb (954 kg)	2100 lb (954 kg)
Dynamic load capacity	Not applicable	Not applicable



NOTE: The AC input connector is an IEC 320 C-14 15 A/250 VAC power inlet.

Figure 8 Cisco R42610 Rack



Front view - door closed



Front view - door open



Front view - door removed

PDU


Cisco RP Series Power Distribution Units (PDUs) offer power distribution with branch circuit protection.

Cisco RP Series PDU models distribute power to up to 24 outlets. The architecture organizes power distribution, simplifies cable management, and enables you to move, add, and change rack equipment without an electrician.

With a Cisco RP Series PDU in the rack, you can replace up to two dozen input power cords with just one. The fixed input cord connects to the power source from overhead or under-floor distribution. Your IT equipment is then powered by PDU outlets in the rack using short, easy-to-manage power cords.

The C-series severs accept the zero-rack-unit (ORU) PDU. See [Figure 9](#).

Figure 9 Zero Rack Unit PDU (PID = RP208-30-2P-U-2)

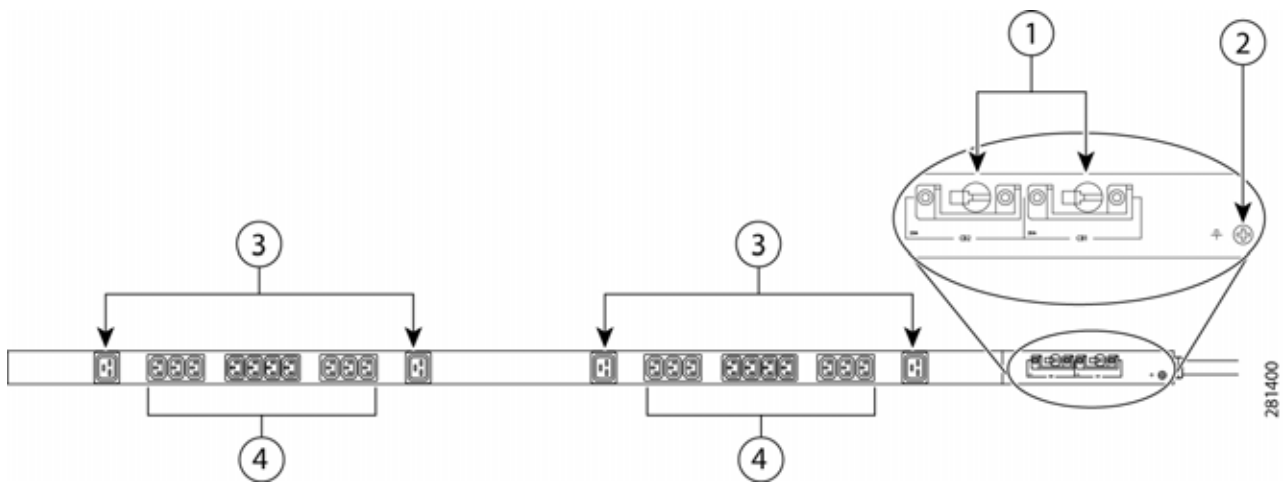

1	Breakers	3	C19 plugs
2	Ground connection	4	C13 plugs

Cisco RP Series PDU models provide two 20-ampere (A) circuit breakers for groups of receptacles. The effects of a tripped circuit are limited to a receptacle group. Simply press a button to reset that circuit.

TECHNICAL SPECIFICATIONS

Dimensions and Weight

Table 28 UCS C3260 Dimensions and Weight

Parameter	Value
Height	6.88 in (174 mm)
Width	17.46 in (444 mm)
Depth	32.00 in (813 mm)
Front Clearance	3 in. (76 mm)
Side Clearance	1 in. (25 mm)
Rear Clearance	6 in. (152 mm)
Weight (maximum configuration without rail kit)	195 lbs (88.45 kg)

Power Specifications

The server is available with a 1050 W (AC) power supply. The power supply specifications are listed in [Table 29](#).

Table 29 UCS C3260 1050 W Power Supply Specifications

Description	Specification
Class	RSP2
AC input voltage	200 to 240 VAC nominal (Range: 180 to 264 VAC)
AC input frequency	50 to 60 Hz nominal (Range: 47 to 63 Hz)
Maximum AC input current	8.5 A at 200 VAC
Maximum output power for each power supply	1050 W on main power 30 W on standby power
Power supply output voltage	Main power: 12 VDC Standby power: 12 VDC
Rated output load	Main power: 116.6 DC Amps Standby power: 2.5 DC Amps

For configuration-specific power specifications, use the Cisco UCS Power Calculator at this URL:

<http://ucspowercalc.cisco.com>.

Environmental Specifications

The power specifications for the C3260 server are listed in [Table 30](#).

Table 30 UCS C3260 Environmental Specifications

Parameter	Minimum
Temperature operating	5°C to 35°C (41°F to 95°F)
Temperature nonoperating	-40° C to 65° C (-40° F to 149° F)
Humidity (RH) operating, non-condensing	10% to 90%
Altitude, operating Derated 1° C for each 305 m	0 m to 3048 m (0 ft to 10,000 ft)
Altitude nonoperating	0 m to 12,192 m (0 ft to 40,000 ft)
Acoustic noise, operating	LWAd 5.4 Bel LpAm 38 dBA

Compliance Requirements

The regulatory compliance requirements for C-Series servers are listed in [Table 31](#).

Table 31 UCS C-Series Regulatory Compliance Requirements

Parameter	Description
Regulatory Compliance	Products should comply with CE Markings per directives 2004/108/EC and 2006/95/EC
Safety	UL 60950-1 Second Edition CAN/CSA-C22.2 No. 60950-1 Second Edition EN 60950-1 Second Edition IEC 60950-1 Second Edition AS/NZS 60950-1
EMC - Emissions	47CFR Part 15 (CFR 47) Class A AS/NZS CISPR22 Class A CISPR22 Class A EN55022 Class A ICES003 Class A VCCI Class A EN61000-3-2 EN61000-3-3 KN22 Class A CNS13438 Class A
EMC - Immunity	EN55024 CISPR24 EN300386 KN24



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)