


### Overview


### HPE ProLiant DL80 Generation9 (Gen9)

The HPE ProLiant DL80 Gen9 Server is designed with affordable storage, networking and processor scalability, and manageability in a 2U server for cost conscious service provider and SMBs. Apart from basic IT infrastructure workloads this server is ideal for running storage capacity intensive applications like cold storage, back-up due to compelling cost/GB that it offers.

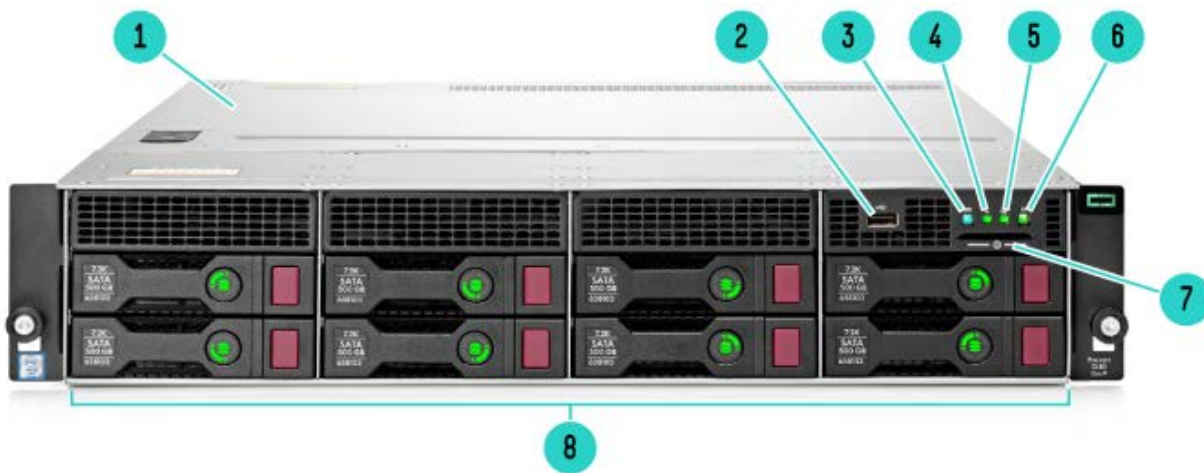

### Front View

- |                            |  |
|----------------------------|--|
| 1 Access Panel (Top Cover) | 2 USB 2.0 connector                            |
| 3 UID button/LED           | 4 Health LED                                   |
| 5 NIC status LED           | 6 Power On/Standby button and system power LED |
| 7 Serial label pull tab    | 8 8-bay LFF drive cage bay                     |

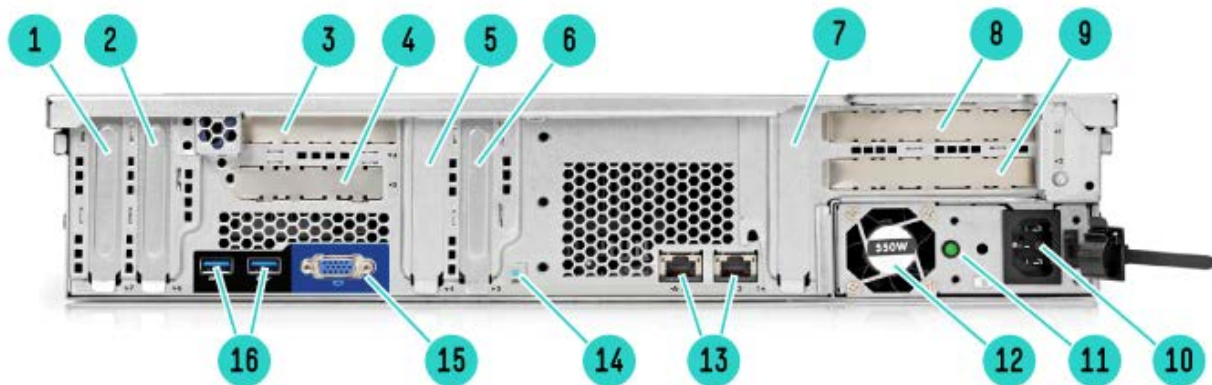


### Rear view

- |   |  |
|---|--|
| 1 Slot 7 PCIe3 x16 low-profile, standup         | 2 Slot 6 PCIe3 x8 low-profile, standup         |
| 3 Slot 4 PCIe3 x8 low-profile, riser (optional) | 4 Slot 5 PCIe3 x8 FlexibleLOM riser (optional) |
| 5 Slot 4 PCIe3 x16 low-profile, standup         | 6 Slot 3 PCIe3 x8 low-profile, standup         |
| 7 Slot 1 PCIe3 x16 low-profile, standup         |  |

## Overview

- |    |  |    |   |
|----|--|----|---|
| 9  | Slot 2 PCIe3 x8 full-height half-length riser (optional) | 8  | Slot 1 PCIe3 x16 full-height, full-length GPU riser (optional) or Slot 1 PCIe3 x8 (8, 4, 1) full-height, half-length riser (optional) |
| 11 | Power supply status LED                                  | 10 | Power supply power connection   |
| 13 | Embedded 2x1GbE network adapter                          | 12 | Non-hot-plug power supply   |
| 15 | Video connector  | 14 | UID LED   |
|    |  | 16 | USB 3.0 connectors  |

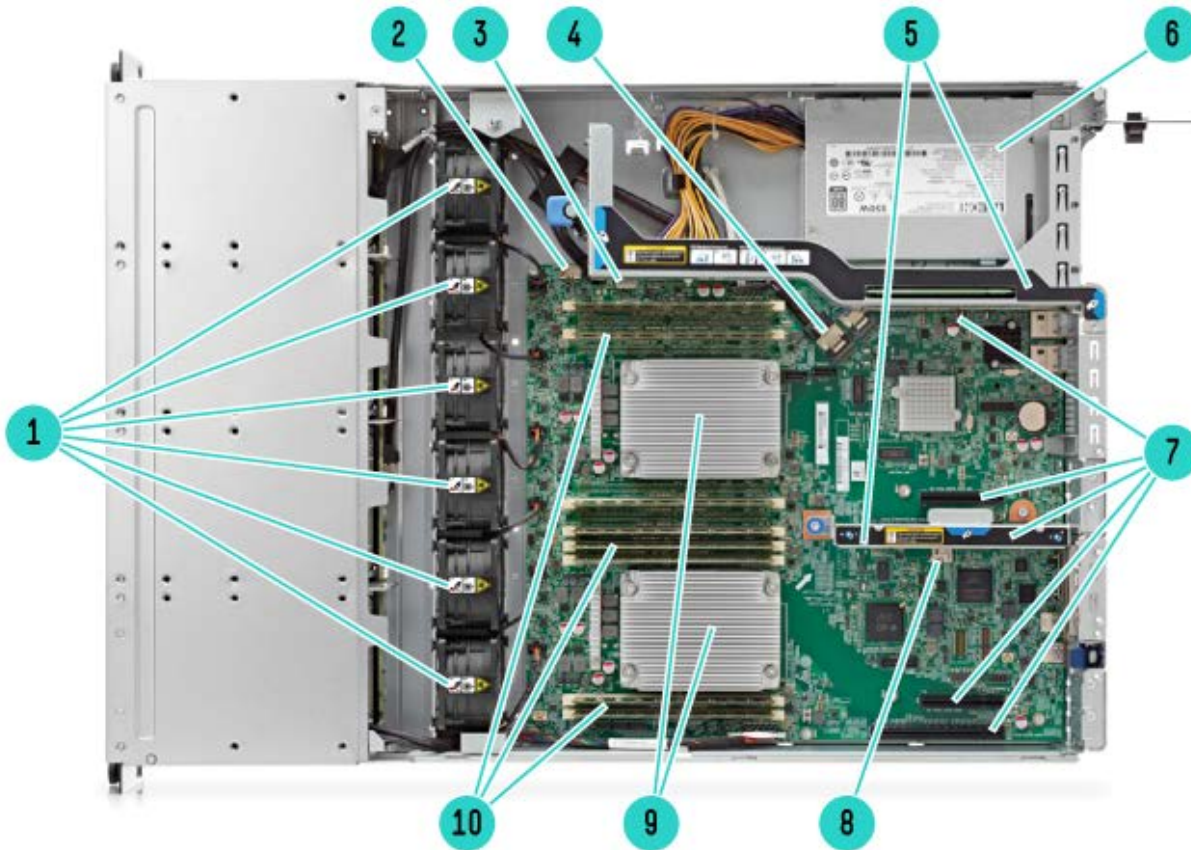

## Internal View

- |   |   |    |   |
|---|---|----|---|
| 1 | Fans shown with 6 Hot-swap fans                             | 2  | HPE Smart Storage Battery connector (optional)                                      |
| 3 | Internal USB 3.0 connector                                  | 4  | Embedded HPE Smart Array B140i Controller   |
| 5 | PCIe riser kits   | 6  | (Under) Non-Hot Plug HPE Power supply   |
| 7 | PCIe 3.0 slots  | 8  | MicroSD card slot   |
| 9 | 2 Processors, heatsink showing, with HPE Smart Socket Guide | 10 | HPE DDR4 SmartMemory DIMM slots. Shown fully populated in 8 slots (4 per processor) |

## What's New

- HPE Smart Memory 2400 MHz memory
- Intel Xeon E5-2600v4 processor support
- HPE Trusted Platform Module (TPM) 2.0
- New 900W AC/ 240VDC power supply
- New SATA Hot Plug Standard drives

## Standard Features

**NOTE:** For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Processor	Model	CPU frequency	Cores	L3 Cache	Power	QPI	DDR4 Hz
One of the following depending on model	E5-2660v3	2.6GHz	10	25MB	105W	9.6GT/s	2133
	E5-2650v3	2.3GHz	10	25MB	105W	9.6GT/s	2133
	E5-2650Lv3	1.8GHz	12	30MB	65W	9.6GT/s	2133
	E5-2640v3	2.6GHz	8	20MB	90W	8.0GT/s	1866
	E5-2630v3	2.4GHz	8	20MB	85W	8.0GT/s	1866
	E5-2630Lv3	1.8GHz	8	20MB	55W	8.0GT/s	1866
	E5-2623v3	3.0GHz	4	10MB	105W	8.0GT/s	1866
	E5-2620v3	2.4GHz	6	15MB	85W	8.0GT/s	1866
	E5-2609v3	1.9GHz	6	15MB	85W	6.4GT/s	1600
	E5-2603v3	1.6GHz	6	15MB	85W	6.4GT/s	1600
	E5-2660v4	2.0GHz	14	35MB	105W	9.6GT/s	2400
	E5-2650v4	2.2GHz	12	30MB	105W	9.6GT/s	2400
	E5-2650Lv4	1.7GHz	14	35MB	65W	9.6GT/s	2400
	E5-2640v4	2.4GHz	10	25MB	90W	8.0GT/s	2133
	E5-2630v4	2.2GHz	10	25MB	85W	8.0GT/s	2133
	E5-2630Lv4	1.8GHz	10	25MB	55W	8.0GT/s	2133
	E5-2623v4	2.6GHz	4	10MB	85W	8.0GT/s	2133
	E5-2620v4	2.1GHz	8	20MB	85W	8.0GT/s	2133
	E5-2609v4	1.7GHz	8	20MB	85W	6.4GT/s	1866
	E5-2603v4	1.7GHz	6	15MB	85W	6.4GT/s	1866

### Chipset

Intel® C610 Series Chipset

One of the following depending on model  
 Intel® E5-2600v3 Processor Family  
 Intel® E5-2600v4 Processor Family

**NOTE:** For more information regarding Intel chipsets, please see the following URL: <http://www.intel.com/products/server/chipsets/>

### On System Management Chipset

HPE iLO4 (Firmware HPE iLO4 2.0 or later), 2GB NAND.

**NOTE:** Read and learn more in the [iLO QuickSpecs](#).

One of the following depending on model

### Memory

Type:

One of the following depending on model  
 HPE SmartMemory and StandardMemory

DDR4 Registered (RDIMM) or Load Reduced (LRDIMM)

depending on model

DIMM Slots Available 8 (4 DIMM slots per processor, 4 channels per processor, 1 DIMMs per channel)

## Standard Features

Maximum Capacity (LRDIMM)	256GB	8 x 32GB LRDIMM @2400MHz
Maximum Capacity (RDIMM)	256GB	8 x 32GB RDIMM @2400MHz

### Memory Protection

One of the following depending on model

Advanced ECC	Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.
Online spare	Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.
Mirroring mode	Memory mirroring inter-socket stores a copy of memory with dynamic failover in case of failure. Once a DIMM in a mirrored set is detected as failed, the mirror failover uses its mirrored DIMM.

### Expansion Slots

Motherboard slots (Standard)

Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Form Factor	Notes
1	PCIe 3.0	x16	x16		Low Profile	CPU 1 slots
3	PCIe 3.0	x8	x8		Low Profile	CPU 1 slots
4	PCIe 3.0	x16	x16		Low Profile	CPU 1 slots
6	PCIe 3.0	x8	x8		Low Profile	CPU 2 slots
7	PCIe 3.0	x16	x16		Low Profile	CPU 2 slots

**NOTE:** Bus Width data indicates the number of physical electrical lanes running to the connector.

Primary Riser (Optional)

Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Form Factor	Notes
1	PCIe 3.0	x8	x8		Full-height, half-length slot	CPU 1 slots
2	PCIe 3.0	x8	x8		Full-height, half-length slot	CPU 1 slots

Flexible LOM Riser (Optional)

Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Form Factor	Notes
4	PCIe 3.0	x8	x8		Low profile	CPU 1 slots
5	PCIe 3.0	x8	x8		Flexible LOM	CPU 1 slots

**NOTE:** This riser is mandatory for installing FlexibleLOMs.

GPU riser (Optional)

Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Device Number	Form Factor	Notes
1	PCIe 3.0	x16	x16			Full height, full length slot	CPU 1 slots

**NOTE:** When populating slots on second riser, a second processor must be installed.

### Storage Controller

One of the following depending on model

Entry Models HPE Dynamic Smart Array B140i Controller

**NOTE:** Provides support for up to 10 SATA drives and data transmission speeds up to 6Gb/s and supports RAID 0, 1 & 5.

Base Models HPE H240 FIO Smart Host Bus Adapter

**NOTE:** H240 Provides support for up to 8 SAS/SATA drives, data transmission speeds up to 12Gb/s and supports RAID 0, 1 & 5.

## Standard Features

<b>Internal Storage Devices</b>	Optical Drives	Via USB only
	Hard Drives	None ship standard
One of the following depending on model	Hard Drive Bays	12 LFF drive bays total without Optical Bay 8 LFF drive bays total without Optical Bay

Maximum Internal Storage		CAPACITY	CONFIGURATION
One of the following depending on model	Hot Plug LFF SAS	96.0TB	12 x 8TB (with 12LFF drive cage)
	Hot Plug LFF SATA	96.0TB	12 x 8TB (with 12LFF drive cage)
	Hot Plug LFF SATA SSD	46.08TB	12 x 3.84TB (with 12LFF drive cage)
	Non-Hot Plug LFF SATA	32TB	8 x 4TB (with 8LFF drive cage)

<b>Power Supply</b>	HPE 550W FIO Power Supply
One of the following depending on model	HPE 900W AC 240V DC Redundant Power Supply
	Looking for high-efficiency power solutions at an entry-level price for your ProLiant Gen9 Essential Server? HPE Entry-Level Power Supplies offer an optimized set of features with options for both redundant and non-redundant power configurations.

The HPE 550W FIO Power Supply offers Silver-certified 80 Plus power efficiency (up to 89%) with an optimized set of features for non-redundant power configurations.

The HPE 900W AC 240VDC Power Input Module with Power Backplane can be configured to support power redundancy in ProLiant servers that offer only a single power supply bay, providing additional protection against power loss. With an 80 Plus Gold power efficiency rating (up to 92%), this power option helps to reduce operating expenses while protecting against trapped power capacity in the data center. Hot-plug AC power input modules allow for better serviceability with fast and easy deployment and replacement.

System Fans		Non-redundant	Redundant
One of the following depending on model	1P model	2 fans	4 fans
		<b>NOTE: Redundant and non-redundant fan counts vary with riser selection. 1P configurations either one of primary and secondary risers need 3 fans in non-redundant configuration.</b>	
	2P model	4 fans	5 fans
		<b>NOTE: Customers may separately purchase redundant fans with the 765516-B21 option kit. Additional fans (two) are also included in -B21 processor option kits when upgrading from one processor to two processors.</b>	
		<b>NOTE: All the riser option kits ship with necessary fan option kits.</b>	

<b>Interfaces</b>	Video	1 (Vaux Support)
	LOM Network Ports	2 x 1GbE ports
	SD Slot	1 Micro SD
	<b>NOTE: The SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered.</b>	

## Standard Features

USB	Up to 4 USB ports (standard); Front: 1xUSB 2.0 std; (1xUSB2.0 optional upgrade with quick release ears) Rear: 2xUSB 3.0 Internal: 1x USB 3.0
-----	---

**NOTE:** 12LFF drive cage models with Quick release latch rack ears supports front USB 2.0.

<b>Operating Systems and Virtualization Software Support for ProLiant Servers</b>	<b><u>Microsoft Windows Server</u></b>
	<b><u>Red Hat Enterprise Linux (RHEL)</u></b>
	<b><u>SUSE Linux Enterprise Server (SLES)</u></b>
	<b><u>Oracle Solaris</u></b>
	<b><u>VMware</u></b>

**NOTE:** For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <http://www.hp.com/go/ossupport> and our driver download page <http://h20566.www2.hp.com/hpsc/swd/public/readIndex?sp4ts.oid=7500990>.

<b>Upgradeability</b> One of the following depending on model	Upgradeable to two processors (28 cores)
	<b>NOTE:</b> Processor upgrade from E5-2600v3 to E5-2600v4 is supported. Please refer to DL80 Gen9 User Guide for more details.
	Up to 8 DIMM slots
	<b>NOTE:</b> To take advantage of DIMMs 5-8, a second processor must be installed.
	FlexibleLOM slot for 1Gigabit or 10 Gigabit Ethernet or QDR/FDR InfiniBand networking options
	<b>NOTE:</b> To take advantage of the additional 2 PCI slot upgrade, a second processor must be installed.
	Redundant Power Supply
	Redundant Fan

<b>Industry Standard Compliance</b>	ACPI 2.0b Compliant
	PCIe 3.0 Compliant
	PXE Support
	WOL Support
	Microsoft® Logo certifications
	USB 3.0 Support
	ASHRAE A3
	<b>NOTE:</b> Supports A3 extended ambience.
	<b>NOTE:</b> Refer to technical specifications section for more details.

<b>Graphics</b>	Integrated Matrox G200eH2 video standard
	<ul style="list-style-type: none"> <li>1280 x 1024 (32 bpp)</li> <li>1920 x 1200 (16 bpp)</li> </ul>

<b>HPE Server UEFI/Legacy ROM</b>	Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.
-----------------------------------	---



## Standard Features

**NOTE:** The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using RESTful API for iLO 4
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM
- Network Stack configurations

**NOTE:** For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

**NOTE:** UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen9 Server.

---

<b>Form Factor</b>	2U Rack form factor
One of the following depending on model	All models ship with Easy Install rails (Cable management arm optional). 8 LFF Drive Bay Version: 3.44 (8.75cm) Height x 17.54" (44.55 cm) Width x 23.9" (60.70 cm) Length 12 LFF Drive Bay Version: 3.44 (8.75cm) Height x 17.54" (44.55 cm) Width x 23.9" (60.70 cm) Length

---

<b>Embedded Management</b>	<b>HPE Integrated Lights-Out (HPE iLO)</b>	Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Not available on ML10 Gen9. Learn more at <a href="http://www.hpe.com/info/ilo">http://www.hpe.com/info/ilo</a> .
	<b>UEFI</b>	Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <a href="http://www.hpe.com/servers/uefi">http://www.hpe.com/servers/uefi</a> .
	<b>RESTful API</b>	RESTful API for iLO 4 is Redfish 1.0 conformance for simplified server management such as configuration and maintenance tasks based on modern industry standards. Learn more at <a href="http://www.hpe.com/info/restfulapi">http://www.hpe.com/info/restfulapi</a> .
	<b>Intelligent Provisioning</b>	Hassle free server and OS provisioning for 1 or few servers with Intelligent Provisioning. Learn more at <a href="http://www.hpe.com/servers/intelligentprovisioning">http://www.hpe.com/servers/intelligentprovisioning</a> .
	<b>Embedded Remote Support</b>	Hewlett Packard Enterprise embedded remote support, when used with Insight Online direct connect or HPE Insight Remote Support, allows HPE ProLiant servers to transmit hardware events directly to Hewlett Packard Enterprise or a

## Standard Features

Hewlett Packard Enterprise Authorized Partner for automated phone home support. Learn more at <http://www.hpe.com/info/insightonline/explore>.

---

<b>Server utilities</b>	<p><b>Smart Update</b> Optimize firmware and driver updates with Smart Update solutions including Smart Update Manager (SUM) and Service Pack for ProLiant (SPP) and smart components. Learn more at <a href="http://www.hpe.com/servers/smartupdatemanager">http://www.hpe.com/servers/smartupdatemanager</a>.</p> <p><b>HPE Systems Insight Manager (HPE SIM)</b> HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <a href="http://www.hpe.com/servers/hpsim">http://www.hpe.com/servers/hpsim</a>.</p> <p><b>Scripting Tool Kit and Windows PowerShell</b> Provision 1 to many servers using your own scripts to discover and deploy them with Scripting Tool Kit (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <a href="http://www.hpe.com/servers/proliant/stk">http://www.hpe.com/servers/proliant/stk</a> or <a href="http://www.hpe.com/servers/powershell">http://www.hpe.com/servers/powershell</a>.</p> <p><b>RESTful Interface Tool</b> RESTful Interface tool is a scripting tool to provision using RESTful API for iLO 4 to discover and deploy servers at scale. Learn more at <a href="http://www.hpe.com/info/resttool">http://www.hpe.com/info/resttool</a>.</p> <p><b>HPE iLO Mobile Application</b> Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <a href="http://www.hpe.com/info/ilo/mobileapp">http://www.hpe.com/info/ilo/mobileapp</a>.</p> <p><b>HPE Insight Online</b> HPE Insight Online, available at no additional cost as part of your Hewlett Packard Enterprise warranty, Care Pack or contractual support agreement with Hewlett Packard Enterprise, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at <a href="http://www.hpe.com/info/insightonline/explore">http://www.hpe.com/info/insightonline/explore</a>.</p>
-------------------------	---

---

<b>Security</b>	<p>Power-on password</p> <p>Serial interface control</p> <p>Administrator's password</p> <p>TPM 1.2</p> <p>TPM 2.0</p> <p><b>NOTE: TPM 2.0 works only in UEFI Mode.</b></p> <p>UEFI</p>
-----------------	---

---

<b>Warranty</b>	<p>This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack</p>
-----------------	---



## Standard Features

services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

**NOTE:** Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HPE replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>.

## Optional Features

### Embedded Management

#### iLO Essentials

HPE iLO Essentials is the preferred license for small and medium business that offers full remote server management capabilities for small and medium business via the Integrated Remote Console (IRC), virtual media, and e-mail based alerts. Learn more about HPE iLO Essentials at <http://www.hpe.com/servers/iLO/essentials>.

#### iLO Scale-Out

HPE iLO Scale-Out is the preferred license built for web hosting, cloud service providers, and high performance computing data centers, managing massive scale out environments for the DL 100 and 10 series servers, not available for ML servers. This license offers sophisticated scripting tools that provides remote access through Text Console via SSH, Dynamic power capping, Email-based Alerting and proactive notifications. For more information, visit <http://www.hpe.com/servers/iLO/scale-out>.

#### iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at <http://www.hpe.com/servers/iloadvanced>.

### Server Management

#### HPE Insight Control

HPE Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see <http://www.hpe.com/info/insightcontrol>.

### Rack and Power Infrastructure

HPE Rack and Power Infrastructure products and services create highly efficient and intelligent solutions for existing or new IT data centers. HPE Rack and Power infrastructure solutions – rack infrastructure, power protection and management, performance optimized data centers (PODs) – are the foundation you are looking for to help secure your long-term IT success. These products are designed to help you react to changes in the industry. They deliver efficient, easy-to-use capabilities to manage, monitor, deploy and provision infrastructure from entry to enterprise. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

Learn more at [HPE Rack and Power Infrastructure](#).

### High Performance Clusters

HPE Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPEC Server. A Cluster Platform Configurator simplifies ordering. <http://www.hp.com/go/clusters>.

### HPC Interconnects

**NOTE: High Performance Computing (HPC) interconnect technologies are available for this server under the HPE Cluster Platform product portfolio. These high-speed interconnects are fully supported by Hewlett Packard Enterprise when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPEC Clusters with InfiniBand Interconnects:** <http://www.hp.com/techservers/clusters/ucp/index.html>.

## Optional Features

---

**Storage Software** Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than Hewlett Packard Enterprise storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

- **Data Protection and Recovery Software**

Whether you're a large enterprise or a smaller business, Hewlett Packard Enterprise data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.

- **Data Archive and Migration Software**

Hewlett Packard Enterprise storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.

- **Storage Resource Management Software (SRM)**

Hewlett Packard Enterprise storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.

- **Data Replication Software**

Hewlett Packard Enterprise offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.

- **Storage Device Management Software**

Maximize your investment in Hewlett Packard Enterprise storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.

- **HPE StoreVirtual VSA**

With HPE StoreVirtual VSA you can use the power of virtualization to create a virtual array within your host server. Manage it as a single pool of shared storage capacity, and scale it to match your evolving needs. HPE ProLiant Gen9 servers include a 3-year limited license for HPE StoreVirtual VSA software with 1TB of capacity at no extra cost. Simply select to install HPE StoreVirtual VSA software during server setup within Intelligent Provisioning. More information, instructional videos, and free console management software are available at <http://www.hp.com/go/vsa1TB>.

**NOTE:** For more information about Storage Software including QuickSpecs, please see: <http://www.hp.com/go/storage/software>

---

**One Config Simple (SCE)** SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hp.com/SimplifiedConfig/Index>

## Service and Support

### HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support for need for your IT and business.

### Connect your devices

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%<sup>1</sup> reduction in down time, near 100%<sup>2</sup> diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support.

1- IDC 2 - HP CSC reports 2014 - 2015

### Recommended Support

#### **Basic: HPE Foundation Care NBD, three-year Support Service**

HPE Foundation Care Next Business Day connects you to Hewlett Packard Enterprise during business hours for assistance on resolving issues – This service features need based next business day hardware onsite response and software call back within two hours. In addition, Collaborative software support and provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

**<http://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>**

#### **Standard: HPE Foundation Care 24x7, three-year Support Service**

HPE Foundation Care 24x7 gives you access to Hewlett Packard Enterprise 24 hours a day, seven days a week for assistance on resolving issues. This service includes need based Hardware onsite response within four hours. In addition, collaborative software support is included in this service that provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

**<http://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>**

#### **Optimized: HPE Proactive Care\* with 24x7 coverage, three year Support Service**

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to Hewlett Packard Enterprise, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

### Parts and Materials

Hewlett Packard Enterprise will provide Hewlett Packard Enterprise-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

## Service and Support

### Related Services **HPE Server Hardware Installation**

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf>

### **HPE Installation and Startup Service**

Provides for the installation and startup of Hewlett Packard Enterprise technology including BladeSystems, C-Class enclosure, HPE ProLiant c-Class and Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and Fibre Channel), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operating system type (Windows® or Linux).

### **HPE Technology Services Support Credits**

Offer flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

---

### **HPE Education Services**

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. <http://www.hpe.com/ww/learn>

---

### **HPE Support Center**

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>

The Hewlett Packard Enterprise Support Center Mobile App\* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Support Service or Hewlett Packard Enterprise contractual support agreement.

\*HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>

## Pre-configured Models

	Entry Models		Base Models	
<b>[SKU Number]</b>	830013-B21	778640-B21	833869-B21	778641-B21
<b>Model Name</b>	HPE ProLiant DL80 Gen9 E5-2603v4 4GB-R B140i 4LFF Non-hot Plug 550W PS Entry Server	HP ProLiant DL80 Gen9 E5-2603v3 4GB-R B140i 4LFF 550W PS Entry Server	HPE ProLiant DL80 Gen9 E5-2609v4 8GB-R H240 8LFF 550W PS Base Server	HP ProLiant DL80 Gen9 E5-2609v3 8GB-R H240 8LFF 550W PS Entry Server
<b>Processor</b>	Intel® Xeon® E5-2603v4	Intel® Xeon® E5-2603v3	Intel® Xeon® E5-2609v4	Intel® Xeon® E5-2609v3
<b>Number of Processors</b>	One			
<b>Memory</b>	8GB (1x8GB Registered DIMMs STND, 2400 MHz) <b>NOTE: Due to processor limitation, these DDR4 DIMMs will operate at 1833 MHz in this model.</b>	4GB (1x4GB Registered DIMMs, 2133 MHz) <b>NOTE: Due to processor limitation, these DDR4 DIMMs will operate at 1600 MHz in this model.</b>	8GB (1x8GB Registered DIMMs, 2400 MHz) <b>NOTE: Due to processor limitation, these DDR4 DIMMs will operate at 1833 MHz in this model.</b>	8GB (1x8GB Registered DIMMs, 2133 MHz) <b>NOTE: Due to processor limitation, these DDR4 DIMMs will operate at 1600 MHz in this model.</b>
<b>Network Controller</b>	HPE Embedded Dual Port 361i Adapter Network Interface			
<b>Storage Controller</b>	HPE Dynamic Smart Array B140i		HPE H240 Smart Host Bus Adapter	HPE H240 FIO Smart Host Bus Adapter
<b>Hard Drive</b>	None ship standard			
<b>Internal Storage</b>	4 LFF HDD Bays (Non Hot Plug)		8 LFF HDD Bays	
<b>Optical Drive Bay</b>	Not Available			
<b>Optical Drive</b>	Optional via HPE Mobile USB DVDRW Drive (701498-B21)			
<b>PCI-Express Slots</b>	3 PCIe 3.0 slots (Without risers)			
<b>Power Supply</b>	(1) HPE 550W FIO Power Supply			
<b>Fans</b>	2 hot swap fans, non-redundant		4 hot plug fans, redundant	4 hot swap fans, redundant
<b>Management</b>	iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional), iLO Scale-out (optional only for DL), iLO Advanced (optional)			
<b>Form Factor</b>	Rack (2U), HPE Easy Install Rails			
<b>Warranty</b>	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response			

Country Code Key xx1 = B21

Worldwide

**NOTE: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.**

xx1 = 291

Japan

xx1 = AA1

PRC



## Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

### Step 1: Base Configuration (choose one of the following configurable models)

<b>[Chassis]</b>	HP ProLiant DL80 Gen9 Non-hot Plug 4LFF Configure-to-order Server	HP ProLiant DL80 Gen9 8LFF Configure-to-order Server	HP ProLiant DL80 Gen9 12LFF Configure-to-order Server
<b>SKU Number</b>	778686-B21	778685-B21	787217-B21
<b>Processor</b>	2 (optional) x HPE Smart Socket Guides		
<b>DIMM Slots</b>	8 DIMM slots for RDIMM, LRDIMM DDR4 Memory		
<b>Storage Controller</b>	HPE Dynamic Smart Array B140i		
<b>PCIe</b>	5 Low Profile PCIe 3.0 slots		
<b>Drive Cage</b>	4LFF Non Hot Plug	8LFF Hot Plug	12LFF Hot Plug
<b>Network Controller</b>	HPE Embedded Dual Port 361i Adapter Network Interface		
<b>Fans</b>	2 hot swap fans, non-redundant		
<b>Management</b>	iLO Management (standard), Intelligent Provisioning (standard)		
<b>USB</b>	1 front, 1 internal, 2 rear		
<b>Power Supply</b>	HP DL80 Gen9 12LFF CTO Server (787217-B21) requires the selection of at least one of HP 900W AC Power Input Module and one HP 900W RPS Power Backplane		

### Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

#### HPE Processors

Select one or two processors from Core options-Processor section below,

- If one processor is desired, select one xxxxxx-L21
- If two processors are desired, select one xxxxxx-L21 and one xxxxxx-B21.
- Up to 2 processors supported. Mixing different processor models is not supported.
- DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

For the Intel® C600 Chipset E5-2600 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x v#, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, x = L for low power SKUs and v# (not yet designated) = version number.

#### HPE Memory

Select one or more memory from Core options-Memory section below,

- UDIMM, RDIMM, and LRDIMM are all distinct memory technologies and cannot be mixed within a server.
- HPE memory options from previous generation servers are not qualified or warranted with Hewlett Packard Enterprise Gen9 systems. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9.

## Configuration Information - Factory Integrated Models

- If only one processor is installed, only half of the total DIMM slots are available. When populating with two processors all DIMM slots are available.
- Depending on the memory configuration and processor model, the memory speed may run at 2400MHz, 2133MHz, 1866MHz or 1600MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: <http://www.hp.com/go/ddr4config>.

### Power Supplies - 10 series servers

Select one or more power supplies from Core Options-Power Supplies section below:

- Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hp.com/go/hppoweradvisor>.
- HP DL80 Gen9 12LFF CTO Server (787217-B21) requires the selection of at least one of HP 900W AC Power Input Module and one HP 900W RPS Power Backplane. 4 & 8 LFF configurations support the 550W Power supply.
- By RPS Enablement Kit power options, mixing of power supplies in the same RPS enablement kit is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

## Step 3: Choose Additional Factory Integratable Options

### HPE Unique Options

Select one or more Unique options from Core options section below.

- This section may contain FIO options, please see the Unique options section below.
- FIO indicates that this option is only available as a factory installable option.

### HPE Drives

Select one or more drives from Core options-HPE Drives section below:

- The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.
- Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.
- The HPE ProLiant Gen9 Smart Storage solutions are equipped with re-designed Small Form Factor (SFF 2.5 in) and Large Form Factor (LFF 3.5 in) hot plug carriers for HPE Qualified Hard Drives and Solid State Drives. These new carriers provide status and activity indicators as well as caution indicators for "Do Not Remove".

### HPE Flexible LOM

Select a FlexibleLOM from Core options-Networking section below,

- Only one FlexibleLOM can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped.
- For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter.
- Please see the QuickSpecs for Technical Specifications and additional information: <http://www.hp.com/go/ProLiantNICs>.

### HPE Networking

Select a standup NIC adapter from Core options-Networking section below,

## Configuration Information - Factory Integrated Models

- Please see the QuickSpecs for Technical Specifications and additional information: <http://www.hp.com/go/ProLiantNICs>.
- These options are upgradeable and can be changed from the original configuration after the server is shipped.
- For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

### HPE Graphics Options

Select one or more graphics adapter from Additional options section below.

- Please see the HPE Power Advisor for estimated power consumption of your individual system configuration prior to installing GPUs. The HPE Power Advisor is located at: <http://www.hp.com/go/hppoweradvisor>.
- This section may contain FIO options, please see HPE Computation & Graphics Accelerators section below.

### HPE Cooling Options

Select one or more Fan Kits from Core options section below.

- This section may contain FIO options, please see HPE Cooling Options section below.
- FIO indicates that this option is only available as a factory installable option.

### HPE Storage Controllers

Select one or more Storage options from Additional options section below.

- The embedded B140i controller will operate in UEFI only mode. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22
- This section may contain FIO options, please see HPE Storage Controllers section below.
- FIO indicates that this option is only available as a factory installable option.

### HPE I/O Expansion Options

Select one or more Riser Kit options from Core options section below.

- To take advantage of the additional PCI slot upgrade, the second processor must be installed.
- This section may contain FIO options, please see HPE I/O Expansion Options section below.
- FIO indicates that this option is only available as a factory installable option.

### HPE Rail Kits

Select one type of rail kit from Additional options section below.

- Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen9 server.
- To assist in the installation of the server into the rack, an optional installation tool is available by contacting your local services representative (p/n 695539-001).
- See Hewlett Packard Enterprise Rack Options in Additional Options section of this QuickSpecs for more rack kit choices.

**CAUTION:** Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

## Core Options

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

<b>HPE Unique Options</b>	HP DL80 Gen9 8LFF Non-hot Plug Enablement Kit	788355-B21
	<b>NOTE:</b> Required to upgrade from 4LFF NHP to 8LFF NHP models.	
	HP DL80 Gen9 Full Height Half Length Riser Kit	765515-B21
	<b>NOTE:</b> Includes two FHHL PCIe 3.0 slots and one fan.	
	HP DL80 Gen9 GPU Enablement Kit	765518-B21
<b>NOTE:</b> Includes 1 FHFL slot, one fan and power cable required to enable GPU support. Either one of FHHL or FlexibleLOM riser or GPU riser can be selected.		
HP DL80 Gen9 FlexibleLOM Riser Kit	765514-B21	
<b>NOTE:</b> Includes one FlexibleLOM slot, one Low Profile slot and one fan.		
HP AHCI-Enable FIO Setting	801845-B21	
<b>NOTE:</b> This needs to be selected when Advanced Host Controller Interface mode is required on B140i controller.		

---

### HPE Processors **Entry Processors - E5-2600v4 series Processors**

HPE DL80 Gen9 Intel® Xeon® E5-2620v4 (2.1GHz/8-core/20MB/85W) Processor Kit	803087-B21
HPE DL80 Gen9 Intel® Xeon® E5-2620v4 (2.1GHz/8-core/20MB/85W) FIO Processor Kit	803087-L21
HPE DL80 Gen9 Intel® Xeon® E5-2623v4 (2.6GHz/4-core/10MB/85W) Processor Kit	803089-B21
HPE DL80 Gen9 Intel® Xeon® E5-2623v4 (2.6GHz/4-core/10MB/85W) FIO Processor Kit	803089-L21
HPE DL80 Gen9 Intel® Xeon® E5-2609v4 (1.7GHz/8-core/20MB/85W) Processor Kit	803091-B21
HPE DL80 Gen9 Intel® Xeon® E5-2609v4 (1.7GHz/8-core/20MB/85W) FIO Processor Kit	803091-L21
HPE DL80 Gen9 Intel® Xeon® E5-2603v4 (1.7GHz/6-core/15MB/85W) Processor Kit	803093-B21
HPE DL80 Gen9 Intel® Xeon® E5-2603v4 (1.7GHz/6-core/15MB/85W) FIO Processor Kit	803093-L21
HPE DL80 Gen9 Intel® Xeon® E5-2650Lv4 (1.7GHz/14-core/35MB/65W) Processor Kit	803095-B21
HPE DL80 Gen9 Intel® Xeon® E5-2650Lv4 (1.7GHz/14-core/35MB/65W) FIO Processor Kit	803095-L21
HPE DL80 Gen9 Intel® Xeon® E5-2630Lv4 (1.8GHz/10-core/25MB/55W) Processor Kit	803097-B21
HPE DL80 Gen9 Intel® Xeon® E5-2630Lv4 (1.8GHz/10-core/25MB/55W) FIO Processor Kit	803097-L21
<b>Entry Processors - E5-2600v3 series Processors</b>	
HP DL80 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) Processor Kit	765521-B21
HP DL80 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) FIO Processor Kit	765521-L21
HP DL80 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) Processor Kit	765523-B21

## Core Options

HP DL80 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) FIO Processor Kit 765523-L21

**Base Processors - E5-2600v3 series Processors**

HP DL80 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) Processor Kit 765525-B21

HP DL80 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) FIO Processor Kit 765525-L21

HP DL80 Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) Processor Kit 765526-B21

HP DL80 Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) FIO Processor Kit 765526-L21

HP DL80 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) Processor Kit 765530-B21

HP DL80 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) FIO Processor Kit 765530-L21

HP DL80 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) Processor Kit 765531-B21

HP DL80 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) FIO Processor Kit 765531-L21

HP DL80 Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) Processor Kit 780100-B21

HP DL80 Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) FIO Processor Kit 780100-L21

**Performance Processors - E5-2600v4 series Processors**

HPE DL80 Gen9 Intel® Xeon® E5-2660v4 (2.0GHz/14-core/35MB/105W) Processor Kit 803079-B21

HPE DL80 Gen9 Intel® Xeon® E5-2660v4 (2.0GHz/14-core/35MB/105W) FIO Processor Kit 803079-L21

HPE DL80 Gen9 Intel® Xeon® E5-2650v4 (2.2GHz/12-core/30MB/105W) Processor Kit 803081-B21

HPE DL80 Gen9 Intel® Xeon® E5-2650v4 (2.2GHz/12-core/30MB/105W) FIO Processor Kit 803081-L21

HPE DL80 Gen9 Intel® Xeon® E5-2640v4 (2.4GHz/10-core/25MB/90W) Processor Kit 803083-B21

HPE DL80 Gen9 Intel® Xeon® E5-2640v4 (2.4GHz/10-core/25MB/90W) FIO Processor Kit 803083-L21

HPE DL80 Gen9 Intel® Xeon® E5-2630v4 (2.2GHz/10-core/25MB/85W) Processor Kit 803085-B21

HPE DL80 Gen9 Intel® Xeon® E5-2630v4 (2.2GHz/10-core/25MB/85W) FIO Processor Kit 803085-L21

**Performance Processors - E5-2600v3 series Processors**

HP DL80 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) Processor Kit 765528-B21

HP DL80 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) FIO Processor Kit 765528-L21

HP DL80 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) Processor Kit 765529-B21

## Core Options

HP DL80 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) FIO Processor Kit	765529-L21
HP DL80 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) Processor Kit	765532-B21
HP DL80 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) FIO Processor Kit	765532-L21

**NOTE:** Processor upgrade from E5-2600v3 to E5-2600v4 is supported. Please refer to DL80 Gen9 User Guide for more details.

### HPE Memory

#### Registered DIMMs (RDIMMs) for E5-2600v4 Series

HP 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805347-B21
HP 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805349-B21
HPE 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	836220-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805351-B21

**NOTE:** These DIMMs are supported only with E5-2600v4 processors.

#### Registered DIMMs (RDIMMs) for E5-2600v3 Series

HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726717-B21
HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726718-B21
HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit	759934-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726719-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	728629-B21

**NOTE:** These DIMMs are supported only with E5-2600v3 processors.

#### Load Reduced DIMMs (LRDIMMs) for E5-2600v4 Series

HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Registered Memory Kit	805353-B21
---	------------

**NOTE:** These DIMMs are supported only with E5-2600v4 processors.

#### Load Reduced DIMMs (LRDIMMs) for E5-2600v3 Series

HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726720-B21
HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726722-B21

**NOTE:** These DIMMs are supported only with E5-2600v3 processors.

#### HPE Standard Memory for E5-2600v4 Series

HPE 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Standard Memory Kit	851353-B21
--	------------

**NOTE:** These memory options are available as standalone only and cannot be configured in the factory. These are standard memory DIMMs with no Smart Memory features.

**NOTE:** These DIMMs are supported only with E5-2600v4 processors.

#### HPE Standard Memory for E5-2600v3 Series

HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Standard Memory Kit	803026-B21
---	------------



## Core Options

HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Standard Memory Kit 803028-B21

**NOTE:** These memory options are available as standalone only and cannot be configured in the factory. These are standard memory DIMMs with no Smart Memory features.

**NOTE:** These DIMMs are supported only with E5-2600v3 processors.

---

**HPE Optical Drives** HP Mobile USB Non Leaded System DVD RW Drive 701498-B21

---

### HPE Drives

#### SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 4TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive	801888-B21
HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	628065-B21
HP 3TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive	801886-B21
HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659339-B21
HP 2TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive	801884-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659337-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive	801882-B21
HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659341-B21

#### SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HPE 8TB 6G SATA 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive	819203-B21
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765255-B21
HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765253-B21
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	753874-B21
HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	693687-B21
HPE 4TB 6G SATA 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive	861678-B21
HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	628061-B21
HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658079-B21
HPE 2TB 6G SATA 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive	861676-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	657750-B21
HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658071-B21

#### 6G SATA SC Hot Plug LFF 7.2K (3.5-inch) Standard Drives

HPE 1TB 6G SATA 7.2K rpm LFF (3.5in) SC Standard 1yr Warranty Hard Drive	858594-B21
HPE 2TB 6G SATA 7.2K rpm LFF (3.5in) SC Standard 1yr Warranty Hard Drive	858596-B21

#### 6G SATA Hot Plug LFF (3.5-inch) SC 512e Performance Drives

## Core Options

HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drives	793665-B21
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive	793667-B21
<b>6G SATA Hot Plug with SmartDrive LFF (3.5-inch) Midline 512e Helium Drives</b>	
HP 8TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive	793695-B21
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive	793683-B21
<b>SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives</b>	
HPE 8TB 12G SAS 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive	819201-B21
HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765259-B21
HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	761477-B21
HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	695510-B21
HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765257-B21
HPE 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	818367-B21
HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652766-B21
HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652757-B21
HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652753-B21
HPE 2TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	818365-B21
<b>SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives</b>	
HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	765424-B21
HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737394-B21
HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737261-B21
<b>12G SAS Hot Plug LFF (3.5-inch) SC 512e Performance Drives</b>	
HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive	793669-B21
HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive	793671-B21
<b>12G SAS Hot Plug SmartDrive LFF (3.5-inch) Midline 512e Helium Drives</b>	
HP 8TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive	793703-B21
HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive	793699-B21
<b>12G SAS Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives</b>	
HP 1.6TB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	762272-B21
<b>6G SATA Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives</b>	
HP 200GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804642-B21
HP 400GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804668-B21
HP 800GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804674-B21
HP 1.2TB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804680-B21

## Core Options

HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691856-B21
HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691860-B21
<b>6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value M1 Solid State Drives</b>	
HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive	764945-B21
HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive	764943-B21
HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive	764941-B21
HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive	764939-B21
HP 200GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804616-B21
HP 800GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804628-B21
HP 1.6TB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804634-B21
HP 480GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	832417-B21
<b>6G SATA Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives</b>	
HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive	756660-B21
HP 480GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State Drive	789147-B21
HP 80GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804578-B21
HP 120GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804584-B21
HP 240GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804590-B21
HP 480GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804596-B21
HP 800GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804602-B21
HP 1.6TB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804608-B21
HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718183-B21
HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive	756639-B21
<b>6G SATA Hot Plug LFF (3.5-inch) Enterprise Boot Solid State Drives</b>	
HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive	718171-B21
<b>6G SATA Hot Plug LFF (3.5-inch) RI-3 SCC SSD</b>	
HP 3.84TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816933-B21
HP 1.92TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816923-B21
HP 960GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816913-B21
HP 480GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816903-B21

## Core Options

HP 240GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive 816893-B21

HP 120GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive 816883-B21

### **6G SATA Hot Plug LFF (3.5-inch) MU-3 SCC SSD**

HP 1.92TB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive 817015-B21

HP 960GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive 816999-B21

HP 480GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive 816989-B21

HP 240GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive 816979-B21

HP 120GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive 816969-B21

### **M.2 SSD**

HP Dual 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers 777894-B21

HP 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers 788028-B21

**NOTE: M.2 drives go in PCIe slot and use B140i SATA controller only.**

### **Hard Drive Blank Kits**

HP Large Form Factor Hard Drive Blank Kit 666986-B21

### **Hard Drive Kits**

HP DL80 Gen9 8LFF Non-hot Plug Enablement Kit 788355-B21

**NOTE: Required to move from 4LFF NHPE model to 8 LFF NHPE model.**

## HPE Networking

### **1 Gigabit Ethernet adapters**

HP Ethernet 1Gb 4-port 331T Adapter 647594-B21

HP Ethernet 1Gb 4-port 366T Adapter 811546-B21

HP Ethernet 1Gb 2-port 332T Adapter 615732-B21

HP Ethernet 1Gb 2-port 361T Adapter 652497-B21

### **10 Gigabit Ethernet adapters**

HP Ethernet 10Gb 2-port 530SFP Adapter 652503-B21

HP Ethernet 10Gb 2-port 530T Adapter 656596-B21

HP Ethernet 10Gb 2-port 561T Adapter 716591-B21

HP Ethernet 10Gb 2-port 560SFP+ Adapter 665249-B21

HP Ethernet 10Gb 2-port 546SFP+ Adapter 779793-B21

HPE Ethernet 10Gb 2-port 562SFP+ Adapter 727055-B21

### **FlexibleLOM Adapters**

HP Ethernet 1Gb 4-port 366FLR Adapter 665240-B21

HP Ethernet 10Gb 2-port 561FLR-T Adapter 700699-B21

HP FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter 700751-B21

HP FlexFabric 10Gb 2-port 533FLR-T Adapter 700759-B21

## Core Options

HP Ethernet 10Gb 2-port 546FLR-SFP+ Adapter	779799-B21
HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter	665243-B21
HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter	727054-B21

<b>HPE InfiniBand</b>	HP InfiniBand FDR 2-port 545QSFP Adapter	702211-B21
	HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter	764284-B21

<b>HPE I/O Expansion Options</b>	HP DL80 Gen9 FlexibleLOM Riser Kit	765514-B21
	<b>NOTE: Includes one FlexibleLOM slot, one Low Profile slot and one fan.</b>	
	HP DL80 Gen9 Full Height Half Length Riser Kit	765515-B21
	<b>NOTE: Includes two FLFH PCIe 3.0 slots and one fan.</b>	
	HP DL80 Gen9 GPU Enablement Kit	765518-B21
	<b>NOTE: Includes 1 FHFL slot, one fan and power cable required to enable GPU support. Either one of FHHL or FlexibleLOM riser or GPU riser can be selected.</b>	

<b>HPE Power Supplies</b>	<b>HPE ProLiant Gen9 Essential Server Power Supplies - Non-Redundant</b>	
	HP 550W FIO Power Supply Kit	730941-B21
	<b>NOTE: This is a Factory Installed Option (FIO) only.</b>	
	<b>NOTE: Supports Silver-level efficiency (89%) with a standard C14 inlet connector. No support for HPE Power Discovery Services. Only compatible with select HPE ProLiant Gen9 Essential servers.</b>	
	<b>HPE ProLiant Gen9 Essential Server Power Supplies - Redundant</b>	
	<b>NOTE: This Power supply supports both 100-240V AC and 240V DC.</b>	
	<b>NOTE: Supports Gold-level efficiency (92%) with a standard C14 inlet connector. No support for HPE Power Discovery Services. Only compatible with select HPE ProLiant Gen9 Essential servers.</b>	
	<b>NOTE: HPE 900W Gold (Redundant) AC 240VDC Power Input Module (775595-B21/ 828734-B21) must be used with Power Backplane (814835-B21).</b>	
	<b>NOTE: Each Redundant Power Supply Backplane can support up to two (2) power input modules.</b>	
	<b>NOTE: Redundant AC Power Input Modules do not share power. Redundant AC Power Input Module #1 is the primary AC Power Input Module. Redundant AC Power Input Module #2 is the backup AC Power Input Module.</b>	
	<b>NOTE: Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.</b>	
	<b>NOTE: Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <a href="http://www.hp.com/go/hppoweradvisor">http://www.hp.com/go/hppoweradvisor</a>.</b>	

<b>HPE Computation and Graphics Accelerators</b>	HP NVIDIA Quadro K2200 Graphics Accelerator	J0G89A
	<b>NOTE: GPU enablement kit (P/N: 765518-B21) is required with this option.</b>	
	HP NVIDIA Quadro K4200 Graphics Accelerator	J0G90A
	<b>NOTE: GPU enablement kit (P/N: 765518-B21) is required with this option.</b>	
	<b>NOTE: 1 GPU supported per Server, attached to the Primary CPU.</b>	
	<b>NOTE: Only the above listed Graphics cards are HPE standard supported options in this server.</b>	

## Core Options

**NOTE:** The NVIDIA Quadro modules are supported only on 64-bit versions of Linux and Windows operating systems as well as on Virtual Machine client operating systems. The supported bare metal operating systems are RHEL6, SLES 11 and Windows Server 2012 R2.

**NOTE:** Please see the HPE Power Advisor for estimated power consumption of your individual system configuration prior to installing GPUs. The HPE Power Advisor is located at: <http://www.hp.com/go/hppoweradvisor>.

---

### HPE Cooling Options

HP DL80 Gen9 Redundant Fan Kit

765516-B21

**NOTE:** Includes two fans and is required to move from non-redundant to redundant fan configurations. Since each riser includes a fan as well, please refer to user-guide for exact fan requirements to enable fan redundancy.



## Memory

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

<b>HPE Insight Software</b>	<b>HPE Insight Control</b>	
	HPE Insight Control including 1yr 24x7 Technical Support and Updates 1-server LTU	C6N27A
	HPE Insight Control including 1yr 24x7 TSU E-LTU	C6N28ABE
	HPE Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO LTU	C6N36A
	HPE Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO E-LTU	C6N36ABE
	HPE Insight Management Media Kit	C6N31A

**NOTE:** Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

**NOTE:** Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24x7 HPE Software Technical Support and Update Service.

**NOTE:** Licenses ship without media. The HPE Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

**NOTE:** For additional license options please see the QuickSpecs at: <http://www.hpe.com/h20195/v2/gethtml.aspx?docname=c04123391>.

<b>Embedded Management</b>	<b>HPE iLO Advanced</b>	
	HPE iLO Advanced including 1yr 24x7 Technical Support and Updates 1-server LTU	512485-B21
	HPE iLO Advanced including 3yr 24x7 Tech Support and Updates 1-server LTU	BD505A
	HPE iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU	E6U59ABE
	HPE iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU	E6U64ABE
	<b>HPE iLO Essentials</b>	
	HPE iLO Essentials including 3yr 24x7 Tech Support and Updates 1-server LTU	BD774A
	HPE iLO Essentials including 1yr 24x7 Tech Support and Updates 1-server LTU	BD775A
	HPE iLO Essentials including 3yr 24x7 Technical Support and Updates E-LTU	E6U61ABE
	HPE iLO Essentials including 1yr 24x7 Technical Support and Updates E-LTU	E6U62ABE
	<b>HPE iLO Scale-out</b>	
	HPE iLO Scale-Out 3yr 24x7 Tech Support and Updates Flexible Quantity LTU	BD776A
	HPE iLO Scale-Out including 3yr 24x7 Tech Support and Updates Flex Qty E-LTU	BD776AAE
	HPE iLO Scale-Out including 3yr 24x7 Tech Support and Updates Tracking LTU	BD777A
	HPE iLO Scale-Out 1yr 24x7 Tech Support and Updates Flexible Quantity LTU	BD778A
	HPE iLO Scale-Out including 1yr 24x7 Tech Support and Updates Flex Qty E-LTU	BD778AAE
	HPE iLO Scale-Out including 1yr 24x7 Tech Support and Updates Tracking LTU	BD779A

<b>HPE Converged Infrastructure Management Software</b>	<b>HPE OneView</b>	
	HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
	HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
	HPE OneView Physical Media Kit LTU	E5Y37A

## Memory

HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU E5Y43A

### HPE OneView without iLO Advanced

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU P8B24A

HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU P8B25A

HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU P8B26AAE

HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU P8B31A

HPE Operations Analytics for HPE OneView LTU K8G29A

HPE Operations Analytics for HPE OneView E-LTU K8G29AAE

**NOTE: Full licenses of HPE OneView Advanced also provide the right-to-use HPE Insight Control without additional charge.**

**NOTE: Server provisioning (via 'HPE Insight Control server provisioning') is licensed as part of HPE OneView Advanced and provides multi-server OS and driver provisioning. Media kit #BD883A can be ordered for a physical copy of this software (USB flash drive).**

**NOTE: Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/oneview>.**

**NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.**

## HPE Security

HP Trusted Platform Module 2.0 Kit 745823-B21

HP Trusted Platform Module Option 488069-B21

HP 2U Security Bezel Kit 666988-B21

**NOTE: Quick Release Ear FIO kit (P/N: 778109-B21) is required for installing security bezel.**

HP DL80 Gen9 Quick Release Ear FIO Kit 778109-B21

**NOTE: Quick Release Ears are mandatory for 12LFF models.**

HP DL80 Gen9 Thumbscrew Ear FIO Kit 787211-B21

## HPE Storage Controllers

### SAS Controllers

#### HPE Smart Array Controllers

HP Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller 726821-B21

HP Smart Array P440/2GB FBWC 12Gb 1-port Int SAS Controller 820834-B21

**NOTE: Includes the HPE Smart Storage Battery.**

HP Smart Array P840/4GB FBWC 12Gb 2-ports Int SAS Controller 726897-B21

HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller 726825-B21

HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller 761872-B21

**NOTE: Includes the HPE Smart Storage Battery.**

HP Smart Array P840/4GB FBWC 12Gb 2-ports Int FIO SAS Controller 761874-B21

**NOTE: Includes the HPE Smart Storage Battery.**

HP Smart Array P841/4GB FBWC 12Gb 4-ports Ext SAS Controller 726903-B21

#### HPE Smart Host Bus Adapters

HP H240 12Gb 2-ports Int Smart Host Bus Adapter 726907-B21

HP H240 12Gb 2-ports Int FIO Smart Host Bus Adapter 761873-B21

HP H241 12Gb 2-ports Ext Smart Host Bus Adapter 726911-B21

## Memory

### HPE Cable Options

HP DL60/80/120 Gen9 4LFF Cable FIO Kit 777331-B21

HP DL80 Gen9 LFF Smart Array P440/P840 SAS Cable Kit 779619-B21

**NOTE:** One cable kit must be selected with P440 controller.

**NOTE:** Two of these cable kits must be selected with P840 controller.

HP DL80 Gen9 LFF Smart HBA H240 SAS Cable Kit 779622-B21

**NOTE:** Two cable Kits must be selected with H240.

**NOTE:** One of the above cables is required to be selected depending on the combination of chassis and storage controller. Cable option kit descriptions include the right chassis and storage controllers names.

**NOTE:** FIO indicates that this option is only available as a factory installable option. Please select FIO option if you want the option to be factory installed.

**NOTE:** NHPE server chassis (Mod-x) includes SATA cables required to connect drives to embedded B140i SATA controller.

### Optional Software

HPE SmartCache No Media 24x7 Technical Support 1-server LTU D7S26A

HPE SmartCache No Media 24x7 Technical Support Flexible LTU D7S27A

HPE SmartCache No Media 24x7 Technical Support E-LTU D7S27AAE

**NOTE:** HPE SmartCache is supported when one of the supported Smart Array Controllers is installed in the server.

**NOTE:** HPE SmartCache comes standard (no licensing is required) if the HPE Smart Array P840 Controller is installed in the server.

### Optional Upgrades

HP 96W Smart Storage Battery with 145mm Cable for DL/ML/SL Servers 727258-B21

**NOTE:** This option is mandatorily required with HPE Smart Array controllers. One server can accommodate only 1 Smart Storage Battery that would suffice the requirement of all HPE Smart Array controllers.

---

**HPE Tape Backup** **NOTE:** For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hp.com/go/tape>. For hardware and software compatibility of HPE tape backup products see: <http://www.hp.com/storage/SPOCK> and <http://www.hp.com/go/ebs>.

**NOTE:** For Internal drives to be connected to DL servers please make sure that you order rack mount kit as well.

### Tape Drives

HPE StoreEver LTO-7 Ultrium 15000 External Tape Drive BB874A

HPE StoreEver LTO-6 Ultrium 6650 SAS External Tape Drive EH964A

HPE StoreEver LTO-6 Ultrium 6250 External Tape Drive EH970A

HPE StoreEver LTO-5 Ultrium 3000 SAS External Tape Drive EH958B

HPE StoreEver LTO-5 Ultrium 3280 SAS External Tape Drive EH900B

HPE StoreEver LTO-4 Ultrium 1760 SAS External Tape Drive EH920B

HPE StoreEver LTO-3 Ultrium 920 SAS External Tape Drive EH848B

HPE StoreEver Mini-SAS High Density to 4-lane Mini-SAS External Fanout 2m Cable K2R09A

HPE StoreEver Mini-SAS High Density to 4-lane Mini-SAS External Fanout 4m Cable K2R10A

### Tape Libraries

HPE StoreEver MSL2024 0-drive Tape Library AK379A

**Memory**

HPE StoreEver MSL4048 0-drive Tape Library AK381A

**HPE Tape Storage Systems**

HPE StoreEver 1U SAS Rack Mount Kit AE459B

HPE StoreEver LTO-4 Ultrium 1760 SAS (1) in a 1U Rack Mount Kit EH946C

HPE StoreEver LTO-5 Ultrium 3000 SAS Tape Drive in a 1U Rack Mount Kit EJ014B

HPE StoreEver LTO-6 Ultrium 6250 Tape Drive in a 1U Rack Mount Kit COL99A

HPE StoreEver 1/8 G2 LTO-6 Ultrium 6250 Fibre Channel Tape Autoloader COH19A

**HPE StoreEver MSL6480**

HPE StoreEver MSL6480 Scalable Base Module QU625A

HPE StoreEver MSL6480 Scaleable Expansion Module QU626A

**HPE Disk Backup HPE RDX Removable Disk Backup System**

HPE RDX+ 3TB USB 3.0 External Disk Backup System P9L72A

HP RDX 2TB USB3.0 External Disk Backup System E7X53B

HP RDX+ 500GB External Backup System B7B66B

HP RDX+ 1TB External Backup System B7B69B

HPE RDX 3TB USB 3.0 Internal Disk Backup System P9L71A

HP RDX+ External Docking System C8S07B

HP D3700 Enclosure QW967A

HP D3600 Enclosure QW968A

**HPE StoreOnce Backup systems**

HPE StoreOnce 3100 8TB System BB913A

HPE StoreOnce 3520 12TB System BB922A

HPE StoreOnce 3540 24TB System BB914A

HPE StoreOnce 5100 48TB System BB915A

**HPE Storage Options Emulex Fibre Channel HBAs**

HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter AJ762B

HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter AJ763B

HP StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter C8R38A

HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter C8R39A

**QLogic Fibre Channel HBAs**

HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter AJ764A

HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter AK344A

HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter QW971A

HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter QW972A

**Converged Network Adapter**

HP StoreFabric CN1200E 10Gb Converged Network Adapter E7Y06A

HP StoreFabric CN1100R Dual Port Converged Network Adapter QW990A

HPE StoreFabric CN1200E 10GBASE-T Dual Port Converged Network Adapter N3U51A

HPE StoreFabric CN1100R 10GBASE-T Dual Port Converged Network Adapter N3U52A

**HPE Disk Storage Systems Disk Enclosures**

HP D6000 Dual I/O Module Disk Enclosure QQ695A

## Memory

HP D6000 w/35 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 140TB Bundle	E7W30A
HP D6000 w/70 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 280TB Bundle	E7W31A
HP D6000 w/70 3TB 6G SAS 7.2K LFF Dual port MDL HDD 210TB Bundle	QQ700A
HP D6000 w/70 2TB 6G SAS 7.2K LFF Dual port MDL HDD 140TB Bundle	QQ698A
HP D6000 w/35 2TB 6G SAS 7.2K LFF Dual port MDL HDD 70TB Bundle	QQ697A
HP D6000 w/35 3TB 6G SAS 7.2K LFF Dual port MDL HDD 105TB Bundle	QQ699A
HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB Bundle	E7W32A
HP D6000 w/70 6TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 420TB Bundle	MOT57A
HP D6000 w/35 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 280TB Bundle	MOT58A
HP D6000 w/70 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 560TB Bundle	MOT59A

### HPE Data Center Racks

#### HPE Advanced Series Racks

HPE 11648 1075mm Pallet Universal Rack	H6J87A
HPE 11648 1075mm Shock Universal Rack	H6J88A
HPE 11642 1075mm Pallet Universal Rack	H6J65A
HPE 11642 1075mm Shock Universal Rack	H6J66A
HPE 11642 1200mm Pallet Universal Rack	H6J67A
HPE 11642 1200mm Shock Universal Rack	H6J68A
HPE 11636 1075mm Pallet Universal Rack	H6J77A
HPE 11636 1075mm Shock Universal Rack	H6J78A
HPE 11622 G2 1075mm Pallet Universal Rack	H6J83A
HPE 11622 G2 1075mm Shock Universal Rack	H6J84A
HPE 11614 1075mm Shock Universal Rack	H6J82A

**NOTE:** Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

#### HPE Enterprise Series Racks

HPE 647 1075mm Pallet Intelligent Series Rack	BW911A
HPE 647 1075mm Shock Intelligent Series Rack	BW912A
HPE 647 1200mm Pallet Intelligent Series Rack	BW913A
HPE 647 1200mm Shock Intelligent Series Rack	BW914A
HPE 642 1075mm Pallet Intelligent Series Rack	BW903A
HPE 642 1075mm Shock Intelligent Series Rack	BW904A
HPE 642 1200mm Pallet Intelligent Series Rack	BW907A
HPE 642 1200mm Shock Intelligent Series Rack	BW908A
HPE 636 1075mm Pallet Intelligent Series Rack	BW895A
HPE 636 1075mm Shock Intelligent Series Rack	BW896A
HPE 842 1075mm Pallet Intelligent Series Rack	BW917A
HPE 842 1075mm Shock Intelligent Series Rack	BW918A

**NOTE:** Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

#### HPE Standard Series Rack

HPE V142 1075mm deep Pallet 100 series Rack	AF046A
---	--------

**NOTE:** Please see the [HPE Standard Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

## Memory

<b>HPE Power Distribution Units (PDUs)</b>	<b>HPE Basic Power Distribution Units (PDU)</b>	
	HPE Basic 1.9kVA/L5-20P 16A/120V Outlets (12) 5-20R/Horizontal NA/JP PDU	H5M54A
	HPE Basic 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU	H5M56A
	HPE Basic 2.8kVA/L5-30P 24A/120V Outlets (18) 5-20R/Vertical NA/JP PDU	H5M55A
	HPE Basic 4.9kVA/60320 C20 Detachable 16A/230V Outlets (20) C13/Vertical WW PDU	H5M57A
	HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (20) C13/Vertical NA/JP PDU	H5M58A
	HPE Basic 7.3kVA/60309 5-wire 32A/230V Outlets (20) C13/Vertical INTL PDU	H5M68A
	HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13/Vertical NA/JP PDU	H5M61A
	HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU	H5M59A
	HPE Basic 7.3kVA/60309 3-wire 32A/230V Outlets (24) C13 (6) C19/Vertical INTL PDU	H5M70A
	HPE Basic 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (6) C19/Vertical NA PDU	H5M60A
	HPE Basic 11kVA/60309 63A 3-wire 48A/230V Outlets (30) C13 (6) C19/Vertical INTL PDU	H5M71A
	HPE Basic 9.2kVA/50A Terminal Block 40A/230V Outlets (30) C13 (6) C19/Vertical WW PDU	H5M75A
	HPE Basic 3Ph 5.7kVA/ L21-20P 16A/120-208V Outlets (24) C13 (3) 5-20R/Vertical NA/JP PDU	H5M63A
	HPE Basic 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (24) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU	H5M64A
	HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU	H5M62A
	HPE Basic 3Ph 11kVA/60309 5-wire 16A/230V Outlets (24) C13 (6) C19/Vertical INTL PDU	H5M72A
	HPE Basic 3Ph 11kVA/60309 16A/240V Outlets (36) C13 (6) C19/Vertical NA PDU	H5M67A
	HPE Basic Modular 2.8kVA/L5-30P 24A/120V Outlets (4) C19/Horizontal NA/JP PDU	252663-D71
	HPE Basic Modular 4.9kVA/L6-30P 24A/208V Outlets (4) C19/Horizontal NA/JP Core Only PDU	252663-D74
	HPE Basic Modular 8.3kVA/CS8265C 40A/208V Outlets (4) C19/Horizontal NA/JP PDU	252663-D75
	HPE Basic Modular 7.3kVA/60309 3-wire 32A/230V Outlets (4) C19/Horizontal INTL Core Only PDU	252663-B33
	HPE Basic Modular 9.2kVA/60309 63A 3-wire 40A/230V Outlets (4) C19/Horizontal INTL PDU	252663-B34
	HPE Basic Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF512A
	HPE Basic Modular 3Ph 11kVA/60309 5-wire 16A/230V Outlets (6) C19/Horizontal INTL PDU	AF513A
	HPE Basic Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF519A
	HPE Basic Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF511A

## Memory

HPE Basic Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU	AF518A
HPE Basic 3Ph 11kVA/60309 5-wire 16A/230V Outlets (36) C13 (6) C19/Vertical INTL PDU	H5M73A
HP 800VA - 277V Input / 230V Output NA Rack Mount Transformer	H3X09A
<b>NOTE: Please see the <a href="#">HPE Basic Power Distribution Units (PDU) QuickSpecs</a> for information on additional options and product specifications.</b>	
<b>HPE Metered Power Distribution Units (PDU)</b>	
HPE Metered 2.8kVA/L5-30P 24A/120V Outlets (12) 5-20R/Horizontal NA/JP PDU	D9N43A
HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU	D9N46A
HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (12) C13/Horizontal NA/JP PDU	D9N44A
HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (16) C13/Vertical WW PDU	D9N45A
HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (12) C13/Vertical NA/JP PDU	G9Z05A
HPE Metered 7.3kVA/60309 3-wire 32A/230V Outlets (12) C13/Vertical INTL PDU	G9Z06A
HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (4) C19/Vertical NA/JP PDU	D9N47A
HPE Metered 7.3kVA/60309 32A 3-wire/230V Outlets (20) C13 (4) C19/Vertical INTL PDU	D9N48A
HPE Metered 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13 (3) C19/Vertical NA/JP PDU	D9N51A
HPE Metered 3Ph 5.7kVA/L21-20P 16A/120-208V Outlets (13) C13 (3) 5- 20R/Vertical NA/JP PDU	D9N52A
HPE Metered 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (18) C13 (3) C19 (3) 5- 20R/Vertical NA/JP PDU	D9N53A
HPE Metered 3Ph 11kVA/60309 5-wire 16A/230V Outlets (18) C13 (3) C19/Vertical INTL PDU	D9N55A
HPE Metered 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (3) C19/Vertical NA PDU	D9N49A
HPE Metered 7.3kVA/60309 32A 3-wire/230V Outlets (32) C13 (4) C19/Vertical INTL PDU	D9N50A
HPE Metered 3Ph 11kVA/60309 5-wire 16A/230V Outlets (30) C13 (3) C19/Vertical INTL PDU	D9N57A
HPE Metered 3Ph 14.4kVA/CS8365C 40A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	D9N58A
HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (30) C13 (3) C19/Vertical NA/JP PDU	D9N61A
HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	D9N62A
HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (24) C13 (3) C19/Vertical NA/JP PDU	D9N54A
HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	D9N59A
HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	G9Z07A

## Memory

HPE Metered 3Ph 19.9kVA/L22-30P 24A/277V Outlets (30) RF-203P-HP/Vertical NA PDU	D9N63A
HPE Metered 3Ph 22kVA/60309 5-wire 32A/230V Outlets (30) C13 (3) C19/Vertical INTL PDU	D9N56A
HPE Metered 3Ph 22kVA/60309 5-wire 32A/230V Outlets (12) C13 (12) C19/Vertical INTL PDU	D9N60A
HPE Metered 3Ph 22kVA/60309 5-wire WT 32A/230V Outlets (12) C13 (12) C19/Vertical INTL PDU	G9Z08A
HP Environmental Sensor for Remote Monitored and Managed PDUs	E2D53A

**NOTE: Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on additional options and product specifications.**

**HPE Intelligent Power Distribution Unit (PDU)**

HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF520A
HPE Intelligent Modular 8.3kVA/CS8265C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF521A
HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF522A
HPE Intelligent Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V (6) C19/Horizontal NA/JP PDU	AF523A
HPE Intelligent Modular 3Ph 11kVA/L22-20P 16A/240V Outlets (6) C19/Horizontal NA/JP PDU	AF900A
HPE Intelligent Modular 3Ph 17.3kVA/60309 30A 5-wire 24A/240V (6) C19/Horizontal NA/JP PDU	AF901A
HPE Intelligent Modular 7.3kVA/60309 3-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU	AF525A
HPE Intelligent Modular 3Ph 11kVA/60309 5-wire 16A/230V Outlets (6) C19/Horizontal INTL PDU	AF526A
HPE Intelligent Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU	AF527A
HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 60A 4-wire 48A/208V (12) C19/Horizontal NA/JP PDU	AF535A
HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 30A 5-wire 24A/240V (12) C19/Horizontal NA/JP PDU	AF537A
HPE Intelligent Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (12) C19/Horizontal INTL PDU	AF538A
HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (6) C19/Horizontal NA/JP PDU	AF531A
HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (20) C13 (6) C19/Horizontal NA/JP PDU	AF532A
HPE Intelligent Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF533A
HPE Intelligent Modular 7.3kVA/60309 3-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU Kit	AF534A
HP 5xC13 Intelligent PDU Extension Bar G2 Kit	AF547A
HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar	AF528A

**NOTE: Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on additional options and product specifications.**



## Memory

### HPE Metered and Switched Power Distribution Units (PDU)

HPE Metered Switched 2.8kVA/L5-30P 24A/120V Outlets (24) 5-20R /Vertical NA/JP PDU	H8B48A
HPE Metered Switched 3.6kVA/60320 C20 Detachable 16A/230V Outlets (7) C13 (1) C19/Vertical WW PDU	H8B49A
HPE Metered Switched 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (4) C19/Vertical NA/JP PDU	H8B50A
HPE Metered Switched 7.3kVA/60309 3-wire 32A/230V Outlets (20) C13 (4) C19/Vertical INTL PDU	H8B51A
HPE Metered Switched 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13 (6) C19/Vertical NA/JP PDU	H8B52A
HPE Metered Switched 3Ph 8.6kVA/L2190-30P 24A/208V Outlets (23) C13 C19 (1) 520R/Vertical NA/JP PDU	H8B53A
HPE Metered Switched 3Ph 11kVA/60309 5-wire 16A/230V Outlets (21) C13 (3) C19/Vertical INTL PDU	H8B54A
HPE Metered Switched 3Ph 14.4kVA/CS8365C 40A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	H8B55A
HPE Metered Switched 3Ph 17.3kVA/60309 4-wire 48A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	H8B56A

**NOTE:** Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on additional options and product specifications.

**NOTE:** To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

### HPE Rack Mount Consoles, KVM Switches, and Keyboards

#### HPE Location Discovery Services

HP Location Discovery Services LCD8500 Kit	TL052A
--	--------

**NOTE:** Please see the [HPE Location Discovery Services QuickSpecs](#) for Technical Specifications and additional information.

#### HPE Rack Mount Consoles

HP LCD8500 1U US Rackmount Console Kit	AF630A
HP LCD8500 1U UK Rackmount Console Kit	AF631A
HP LCD8500 1U DE Rackmount Console Kit	AF632A
HP LCD8500 1U FR Rackmount Console Kit	AF633A
HP LCD8500 1U JP Rackmount Console Kit	AF642A
HP LCD8500 1U RU Rackmount Console Kit	AF643A
HP LCD8500 1U INTL Rackmount Console Kit	AF644A
HP LCD8500 1U US TAA Rackmount Console Kit	AF645A

#### HPE KVM Switches

HP 0x1x8 G3 KVM Console Switch	AF651A
HP 0x2x16 G3 KVM Console Switch	AF652A
HP TAA 0x2x16 G3 KVM Console Switch	AF653A
HP USB Remote Access Key for G3 KVM Console Switches	AF650A
HP KVM Console USB Interface Adapter	AF628A
HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618A
HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software	AF619A
HP KVM Console USB 2.0 Virtual Media CAC Interface Adapter	AF629A
HPE KVM Console USB/Display Port Interface Adapter	AF654A
HPE KVM Console USB 8-pack Interface Adapter	AF655A

## Memory

HP 1x4 USB/PS2 KVM Console Switch	AF611A
HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620A
HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software	AF622A

**NOTE:** To learn more, please visit the [HPE KVM Switches web page](#).

### HPE USB Keyboard and Mouse

HP USB BFR with PVC Free US Keyboard/Mouse Kit	631341-B21
HP USB BFR with PVC Free UK Keyboard/Mouse Kit	631344-B21
HP USB BFR with PVC Free FR Keyboard/Mouse Kit	631346-B21
HP USB BFR with PVC Free ES Keyboard/Mouse Kit	631348-B21
HP USB BFR with PVC Free DE Keyboard/Mouse Kit	631358-B21
HP USB BFR with PVC Free JP Keyboard/Mouse Kit	631360-B21
HP USB BFR with PVC Free IT Keyboard/Mouse Kit	631362-B21
HP USB BFR with PVC Free CN Keyboard/Mouse Kit	631364-B21
HP USB BFR with PVC Free AE Keyboard/Mouse Kit	638212-B21
HP USB BFR with PVC Free RU Keyboard/Mouse Kit	638214-B21
HP USB BFR with PVC Free IN Keyboard/Mouse Kit	672097-D63
HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit	672097-373
HP USB BFR with PVC Free Intl Keyboard/Mouse Kit	672097-B33
HP USB BFR with PVC Free PT Keyboard/Mouse Kit	672097-133
HP USB BFR with PVC Free TR Keyboard/Mouse Kit	672097-143
HP USB BFR with PVC Free CZ Keyboard/Mouse Kit	672097-223
HP USB BFR with PVC Free FI Keyboard/Mouse Kit	672097-353
HP USB BFR with PVC Free SE Keyboard/Mouse Kit	672097-103
HP USB BFR with PVC Free CH Keyboard/Mouse Kit	672097-113
HP USB BFR with PVC Free KR Keyboard/Mouse Kit	672097-KD3

**NOTE:** Please see the [HPE USB Keyboard and Mouse QuickSpecs](#) for information on additional options and product specifications.

### Rail Kits

HP 2U Small Form Factor Easy Install Rail Kit	733660-B21
HP 2U Cable Management Arm for Easy Install Rail Kit	733664-B21

### HPE Other Options

HP Rack LED Light Kit	BW939A
HP Kit LCD 1.83m Latch Display Port Cable	G7T29A
HP Advanced Power Manager Kit	741192-B21

## HPE Uninterruptible HPE DirectFlow Three Phase UPS

### Power Systems (UPS)

#### Power Unit (1U UPS)

HP R12000 DirectFlow - 1U Rackmount Uninterruptible Power System	G9Y75A
HP R12000 DirectFlow - POD 1U Rackmount Uninterruptible Power System	AF478A
HP RP12000/3 12000VA Three Phase INTL 6U Rackmount Uninterruptible Power System	AF437A

#### Input/Output Module Options for 1U UPS

HP 32A 400-415 Volt Three Phase INTL R12000 DirectFlow UPS IEC309 Input/Output Module	AF488A
---	--------

## Memory

HP 30A 400-415 Volt Three Phase NA R10000 DirectFlow UPS IEC309 Input/Output Module	AF489A
HP 32A 380 Volt Three Phase China R12000 DirectFlow UPS Unterminated Input/Output Module	AF490A
HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 Input/Output Module	AF491A
HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	AF492A
HP 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	G9Y76A
<b>Power Unit (2U UPS)</b>	
HP R18000 DirectFlow - 2U Rackmount Uninterruptible Power System	AF479A
<b>Input/Output Module Options for 2U UPS</b>	
HP 32A 400-415 Volt Three Phase INTL R18000 DirectFlow UPS IEC309 Input/Output Module	AF483A
HP 30A 380 Volt Three Phase China R18000 DirectFlow UPS Unterminated Input/Output Module	AF485A
HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF486A
HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF487A
HP 30A 400 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	D9Q02A
HP 30A 400-415V Three Phase NA R18000 DirectFlow UPS 1:1 IEC309 Input/Output Module	AF484A
<b>NOTE: All Input/Output Modules support dual output outlets except the AF484A.</b>	
<b>Battery Pack Options</b>	
HP DirectFlow UPS - 1U Rackmount Lithium-ion Battery Pack	AF480A
HP DirectFlow UPS - 3U Rackmount VRLA Battery Pack	AF482A
HP WW DirectFlow Secondary Battery Cable	AF497A
<b>NOTE: Please see the <a href="#">HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs</a> for information on additional options and product specifications.</b>	
<b>HPE Tower UPS</b>	
<b>HPE T750 G4 UPS Models</b>	
HP T750 G4 NA/JP Uninterruptible Power System	J2P85A
HP T750 G4 INTL Uninterruptible Power System	J2P88A
<b>HPE T1000 G4 UPS Models</b>	
HP T1000 G4 NA/JP Uninterruptible Power System	J2P86A
HP T1000 G4 INTL Uninterruptible Power System	J2P89A
<b>HPE T1500 G4 UPS Models</b>	
HP T1500 G4 NA/JP Uninterruptible Power System	J2P87A
HP T1500 G4 INTL Uninterruptible Power System	J2P90A
<b>HPE Rack/Tower UPS</b>	
<b>HPE R/T2200 G4 UPS Models</b>	
HP R/T2200 G4 NA/JP Uninterruptible Power System	J2R00A
<b>HPE R/T3000 G4 UPS Models</b>	
HP R/T3000 G4 Low Voltage NA/JP Uninterruptible Power System	J2R01A

## Memory

HP R/T3000 G4 High Voltage NA/JP Uninterruptible Power System	J2R02A
HP R/T3000 G4 High Voltage INTL Uninterruptible Power System	J2R04A

### R1500 G4 Models

HP R1500 G4 NA Uninterruptible Power System	J2Q99A
HP R1500 G4 JP/TWN Uninterruptible Power System	J2R05A
HP R1500 G4 INTL Uninterruptible Power System	J2R03A

### R7000 Uninterruptible Power System (UPS)

HP R7000 4U 50A High Voltage NA/JP Uninterruptible Power System	AF462A
HP R7000 4U IEC-32A High Voltage INTL Uninterruptible Power System	AF463A

### R5000 Uninterruptible Power System (UPS)

HP R5000 3U L630 High Voltage NA/JP Uninterruptible Power System	AF460A
HP R5000 3U IEC309-32A High Voltage INTL Uninterruptible Power System	AF461A

**NOTE:** Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on additional options and product specifications.

### HPE UPS Options

HP R/T2200 G4 Extended Runtime Module	J2R09A
HP R/T3000 G4 Extended Runtime Module	J2R10A
HP 2U Rack/Tower UPS Shipping Kit	L4Q11A
HP DirectFlow UPS Management Card	AF493A

**NOTE:** To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

## HPE USB and SD Options

### HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HP 32GB microSD Enterprise Mainstream Flash Media Kit	700139-B21
HP 8GB microSD Enterprise Mainstream Flash Media Kit	726116-B21
HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit	737953-B21
HP Dual 8GB microSD Enterprise Midline USB Kit	741279-B21

## HPE Support Services

### Installation & Start-up Services

HPE Installation ML/DL Series 10 Service	U7WZ5E
HPE Startup ML/DL Series 10 Service	U7WZ7E

### Foundation Care

HPE 3 year Foundation Care Next business day DL80 Gen9 Service	U7WG1E
HPE 3 year Foundation Care Next business day with DMR DL80 Gen9 Service	U7WG2E
HPE 3 year Foundation Care Next business day with CDMR DL80 Gen9 Service	U7WG3E
HPE 3 year Foundation Care 24x7 DL80 Gen9 Service	U7WG4E
HPE 3 year Foundation Care 24x7 wDMR DL80 Gen9 Service	U7WG5E
HPE 3 year Foundation Care 24x7 wCDMR DL80 Gen9 Service	U7WG6E


### Proactive Care

HPE 3 year Proactive Care 24x7 DL80 Gen9 Service	U7WK1E
HPE 3 year Proactive Care 24x7 with DMR DL80 Gen9 Service	U7WK2E
HPE 3 year Proactive Care 24x7 with CDMR DL80 Gen9 Service	U7WK3E

**NOTE:** For a full list of available support services, please visit <https://ssc.hpe.com/portal/site/ssc/>

## Memory

### Memory Population guidelines

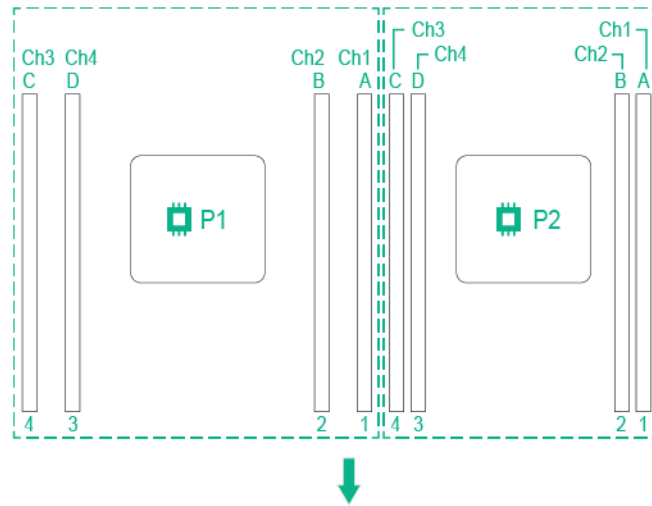

#### General Memory Population Rules and Guidelines:

- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors and load the channels similarly whenever possible.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Do not mix RDIMMs or LRDIMMs.
- Quad rank RDIMMs are not supported in HPE ProLiant DL80 Gen9 servers.
- DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the memory type and number of installed processors.
- To realize the performance memory capabilities listed in this document, HPE SmartMemory is required.

#### Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-2600v4 Series Processor Family

Memory Bandwidth and Capacity					
[DIMM Type]	Registered DIMMs (RDIMMs)				Load Reduced (LRDIMMs)
<b>HPE SKU P/N</b>	805347-B21	805349-B21	836220-B21	805351-B21	805353-B21
<b>DIMM Rank</b>	Single Rank	Single Rank	Dual Rank	Dual Rank	Dual Rank
<b>DIMM Capacity</b>	8GB	16GB	16GB	32GB	32GB
<b>Voltage</b>	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
<b>DRAM Depth [bit]</b>	1G	1G	2G	2G	2G
<b>DRAM Width [bit]</b>	x8	x4	x4	x4	x4
<b>DRAM Density</b>	8Gb	8Gb	4Gb	8Gb	8Gb
<b>CAS Latency</b>	17-17-17	17-17-17	17-17-17	17-17-17	17-17-17

## Memory

<b>DIMM Native Speed (MT/s)</b>	2400	2400	2400	2400	2400
<b>SLOTS THAT CAN BE POPULATED</b>					
8 slot servers	8	8	8	8	8
<b>MAXIMUM CAPACITY (GB)</b>					
	64	128	128	256	256
<b>POPULATED DIMM SPEED (MT/s)</b>					
<b>1 DIMM Per Channel</b>	2400	2400	2400	2400	2400
<b>2 DIMM Per Channel</b>	n/a	n/a	n/a	n/a	n/a
<b>3 DIMM Per Channel</b>	n/a	n/a	n/a	n/a	n/a

**NOTE:** DL80 has 1 DIMM per channel and hence 2 DIMMs and 3 DIMMs per channel memory speeds are not applicable on DL80.

## Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-2600v3 Series Processor Family

Memory Bandwidth and Capacity							
[DIMM Type]	Registered DIMMs (RDIMMs)					Load Reduced (LRDIMMs)	
<b>HPE SKU P/N</b>	726717-B21	726718-B21	759934-B21	726719-B21	728629-B21	726720-B21	726722-B21
<b>DIMM Rank</b>	Single Rank	Single Rank	Dual Rank	Dual Rank	Dual Rank	Dual Rank	Quad Rank
<b>DIMM Capacity</b>	4GB	8GB	8GB	16GB	32GB	16GB	32GB
<b>Voltage</b>	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
<b>DRAM Depth [bit]</b>	512M	1G	512M	1G	1G	2G	2G
<b>DRAM Width [bit]</b>	x8	x4	x8	x4	x4	x4	x4
<b>DRAM Density</b>	4Gb	4Gb	4Gb	4Gb	4Gb	8Gb	8Gb
<b>CAS Latency</b>	15-15-15	15-15-15	15-15-15	15-15-15	15-15-15	15-15-15	15-15-15
<b>DIMM Native Speed (MT/s)</b>	2133	2133	2133	2133	2133	2133	2133
<b>SLOTS THAT CAN BE POPULATED</b>							
8 slot servers	8	8	8	8	8	8	8
<b>MAXIMUM CAPACITY (GB)</b>							
	32	64	64	128	256	128	256
<b>POPULATED DIMM SPEED (MT/s)</b>							
<b>1 DIMM Per Channel</b>	2133	2133	2133	2133	2133	2133	2133
<b>2 DIMM Per Channel</b>	n/a	n/a	n/a	n/a	n/a	n/a	n/a

## Memory

<b>3 DIMM Per Channel</b>	n/a	n/a	n/a	n/a	n/a	n/a	n/a
---------------------------	-----	-----	-----	-----	-----	-----	-----

**NOTE:** DL80 has 1 DIMM per channel and hence 2 DIMMs and 3 DIMMs per channel memory speeds are not applicable on DL80.

### DIMM slot and configuration diagram

#### DIMM slot and configuration diagrams

##### Basic memory slot & population diagram

- Population order; start with "A" first, "B" second, "C" third, etc.
- When one processor is installed, install DIMMs in sequential alphabetic order: A, B, C, D, E, F ...
- When two processors are installed, install DIMMs in sequential alphabetic order: CPU1-A, CPU2-A, CPU1-B, CPU2-B, CPU1-C, CPU2-C

CPU #1 IS PROCESSOR ON LEFT - LOOKING FROM FRONT OF SERVER

	CPU 1		CPU 2	
	Slot #	population order	Slot #	population order
Chnl 1	1	A1	1	A1
	CPU 1		CPU 2	
	Slot #	population order	Slot #	population order
Chnl 2	2	B2	2	B2
	CPU 1		CPU 2	
	Slot #	population order	Slot #	population order
Chnl 4	3	D3	3	D3
	CPU 1		CPU 2	
	Slot #	population order	Slot #	population order
Chnl 3	4	C4	4	C4

### Memory Speed by Processor Model

Processor Models	Supported Memory Speeds
E5-2603v3, E5-2609v3	1600MT/s
E5-2620v3, E5-2630v3, E5-2630Lv3, E5-2640v3, E5-2623v3	1866MT/s
E5-2650v3, E5-2660v3, E5-2650Lv3	2133MT/s
E5-2609v4, E5-2603v4	1866MT/s
E5-2620v4, E5-2623v4, E5-2630Lv4, E5-2640v4, E5-2630v4	2133MT/s
E5-2650Lv4, E5-2660v4, E5-2650v4	2400MT/s

### Standard and Maximum Memory Capacity (Pre-configured Models)


Pre Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
E5-2603v4, E5-2609v4, E5-2609v3	8GB (1x8GB)	232GB (7x32GB, 1x8GB)	256GB (8x32GB)
E5-2603v3	4GB (1x4GB)	228GB (7x32GB, 1x4GB)	256GB (8x32GB)

## Memory

### DDR4 memory options part number decoder

**NOTE:** Capacity references are rounded to the common gigabyte (GB) values.


- 2GB = 2,048MB
- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB
- 64GB = 65,536MB

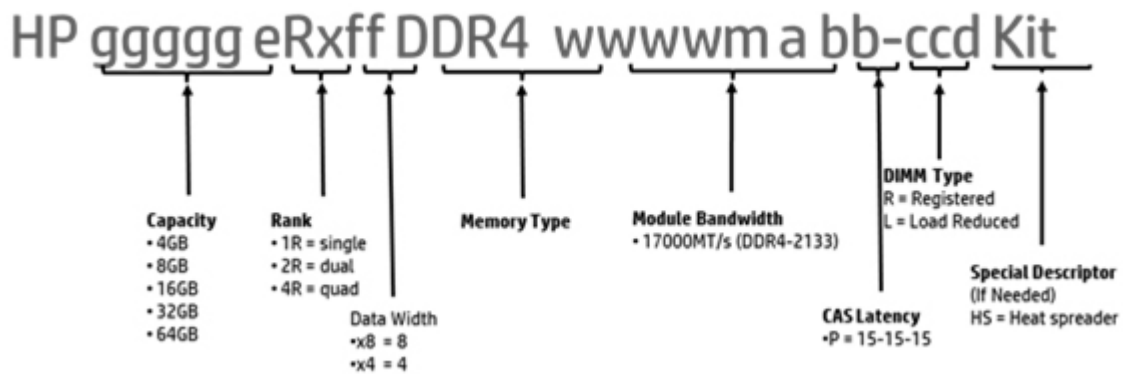



Storage


4-bay LFF non-hot-plug drive model



1-4

4 x LFF SATA Non-Hot Pluggable Hard Drive Bays


8-bay LFF non-hot plug drive model

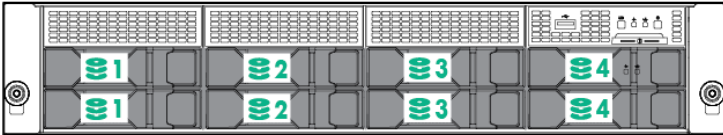

1-8

8 x LFF SATA Non- Hot Pluggable Hard Drive Bays


8-bay LFF hot-plug drive model

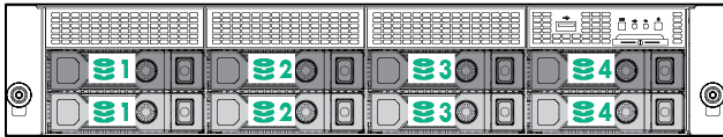

1-8

8 x LFF SATA/SAS/SDD Hot Pluggable Hard Drive Bays

12-bay LFF hot-plug drive model

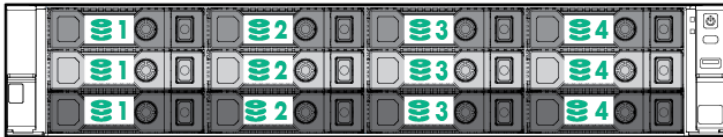

1-12

12 x LFF SATA/SAS/SDD Hot Pluggable Hard drive bays

## Technical Specifications

<b>System Unit</b>	<b>Dimensions</b> (with bezel)	3.45 x 18.98 x 24.97 in (8.75 x 44.55 x 60.7 cm)		
	<b>Weight</b> (approximate)	Maximum:	47/6 lb (21.59 kg)	
		Minimum:	36.58 lb (16.59 kg)	
	<b>Input Requirements</b>	Rated Line Voltage	100 to 240 VAC	
		Rated Input Current	For 550W Power Supply: 6.7 A (at 100 VAC) 3.3 A (at 200 VAC)	
		Rated Input Frequency	47 to 63 Hz	
		Rated Input Power	For 550 W Power Supply: < 670 W (at 100 VAC), < 660 W (at 200 VAC),	
		<b>BTU Rating</b>	Maximum	For 550 W Power Supply: 2201 BTU/hr (at 100 VAC), 2153 BTU/hr (at 200 VAC)
	<b>Power Specifications</b>	To review typical system power ratings use the Power Advisor which is available via the online tool located at URL: <a href="http://www.hp.com/go/proliant-energy-efficient">http://www.hp.com/go/proliant-energy-efficient</a> or <a href="http://www.hp.com/go/hppoweradvisor">http://www.hp.com/go/hppoweradvisor</a> - Click on the system of interest. Example: DL80 Gen9- Follow the instructions of the next screens.		
	<b>Power Supply Output</b>	Rated Steady-State Power	For 550 W Power Supply: 550 W (at 100 VAC), 550 W (at 200 VAC),	
Maximum Peak Power		For 550 W Power Supply: 550 W (at 100 VAC), 550 W (at 200 VAC),		
<b>System Inlet Temperature</b>	Standard Operating Support	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).		
	Extended Ambient Operating Support	For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <a href="http://www.hp.com/servers/ashrae">http://www.hp.com/servers/ashrae</a>		
System performance may be reduced if operating in the extended ambient operating range or with a fan fault.				

**NOTE:** Supports A3 extended ambient.

## Technical Specifications

	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
<b>Relative Humidity</b>	Operating	Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity.
(non-condensing)	Non-operating	5% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
<b>Altitude</b>	Operating	3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
<b>Acoustic Noise</b>	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
	<b>Idle</b>	
	L WAd	Entry: 4.8 B Base: 4.7 B
	L pAm	Entry: 34 dBA Base: 33 dBA
	<b>Operating</b>	
	L WAd	Entry: 4.9 B Base: 4.9 B
	L pAm	Entry: 34 dBA Base: 36 dBA
	<b>NOTE: The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.</b>	
<b>Emissions Classification (EMC)</b>	FCC Rating	Class A
	Normative Standards	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS14336-1; CNS13438; GB4943; GB9254; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1
	<b>NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.</b>	
	<b>NOTE: The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.</b>	

---

<b>HPE Dynamic Smart Array B140i Controller</b>	<b>Number of PCI links</b>	Four
	<b>PCI link rate</b>	4 Gb/s
	<b>Storage protocol support</b>	SATA

## Technical Specifications

<b>SAS/SATA peak data transfer rate</b>	6 Gb/s
<b>Number of SAS/SATA links</b>	10 links
<b>SAS/SATA connectivity</b>	2x4 connectors; 2x1 connectors
<b>Expander support</b>	No
<b>Drives supported (max)</b>	Up to 10 Internal Drives
<b>RAID support</b>	0, 1, 10, 5 SATA
<b>Software management</b>	HPE SSA, SMH, SIM
<b>Warranty</b>	Server warranty
<b>HPE Secure Encryption license</b>	Not Supported
<b>HPE SmartCache License</b>	Not Supported
<b>HPE Smart Storage Administrator</b>	Supported

---

<b>HPE Embedded Dual Port 361i Adapter</b>	<b>Network Interface</b>	10Base-T/100Base-TX/1000Base-TX	
	<b>Compatibility</b>	IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX IEEE 1588, IEEE 802.1AS IEEE 802.3az - Energy Efficient Ethernet (EEE)	
	<b>Data Transfer Method</b>	PCI Express v 2.0, 5.0 GT/s, two lanes (x2)	
	<b>Controller</b>	Intel I350 Powerville	
	<b>Network Transfer Rate</b>	10Base-T (Half-Duplex)	10 Mb/s per port, 40 Mb/s combined
		10Base-T (Full-Duplex)	20 Mb/s per port, 80 Mb/s combined
		100Base-TX (Half-Duplex)	100 Mb/s per port, 400 Mb/s combined
		100Base-TX (Full-Duplex)	200 Mb/s per port, 800 Mb/s combined
		1000Base-TX (Half and Full-Duplex)	1000Mb/s per port, 4000 Mb/s combined
	<b>Connector</b>	Two RJ-45	
<b>Cable Support</b>	10 Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)	

## Technical Specifications

10/100/1000 Base-TX Category 5 or higher UTP; up to 328 ft (100 m)

---

**Environment-  
friendly Products  
and Approach****End-of-life  
Management and  
Recycling**

Hewlett-Packard offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

## Summary of Changes

Date	Version History	Action	Description of Change
17-Jun-2016	From Version 14 to 15	Added	Power supply information was added to the Configuration Information – Factory Integrated Models section.
6-Jun-2016	From Version 13 to 14	Added	Added new HDD offering to the HPE Drives section.
		Changed	New options added to the HPE Disk Backup and HPE Storage Options.
8-Apr-2016	From Version 12 to 13	Changed	HPE Processors section was revised.
31-Mar-2016	From Version 11 to 12	Added	Added new HPE Smart Memory 2400 MHz memory, Intel Xeon E5-2600v4 processor support, new HPE Trusted Platform Module (TPM) 2.0, new 900W AC/ 240VDC power supply, new SATA Hot Plug Standard drives.
		Changed	Power Supply, Upgradeability, Embedded Management, Service and Support, Pre-configured Models, HPE Security, and Memory sections were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
16-Feb-2016	From Version 10 to 11	Added	New HDD offering was added to HPE Drives.
		Changed	HPE Power Supplies, HPE Computation and Graphics Accelerators, HPE Data Center Racks, and HPE Power Distribution Units (PDUs) were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
17-Dec-2015	From Version 9 to 10	Added	Smart Buy models were added to the NA version.
1-Dec-2015	From Version 8 to 9	Added	New options added to HPE Disk Backup, HPE Disk Storage Systems, and HPE Power Distribution Units (PDUs).
		Changed	On System Management Chipset, Maximum Internal Storage, Embedded Management, and Server utilities were revised.  Product images were updated.
		Removed	Obsolete SKUs were removed from QuickSpecs.
28-Sep-2015	From Version 7 to 8	Added	Added new 6Gb SATA Solid State Drives.  Added new HPE OneView management software.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
17-Aug-2015	From Version 6 to 7	Added	New Solid State Drives offering was added to Core Options.
		Changed	Maximum Internal Storage was revised.
		Removed	Obsolete SKUs were removed from QuickSpecs.
10-Jun-2015	From Version 5 to 6	Added	Added new HPE Drives: HPE 8TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive

## Summary of Changes

			HPE 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive  HPE 8TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive  HPE 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive
1-Jun-2015	From Version 4 to 5	Added	New Hard Drives were added to Core Options.  Added new HPE Power Supplies options.  Added new HPE OneView LTUs to HPE Converged Infrastructure Management Software.  New RDX+ backup external backup options added to HPE Disk Backup.
		Changed	Core Options and Additional Options were revised.
		Removed	Obsolete SKUs were removed from QuickSpecs.
24-Apr-2015	From Version 3 to 4	Added	Added 813534-B21 and 813535-B21 to HPE Power Supplies.
30-Mar-2015	From Version 2 to 3	Added	New Hard Drives offering.  Optional Software added to HPE Storage Controllers.
		Changed	HPE Memory, HPE Disk Storage Systems, HPE USB and SD Options, HPE Storage Controllers, and HPE Disk Storage Systems were updated.
9-Feb-2015	From Version 1 to 2	Added	Added HP Insight Software.  Added new G4 UPS models.
		Changed	HPE Memory, HPE Tape Backup, HPE Disk Backup, HPE Rack Mount Consoles, KVM Switches, and Keyboards, and HPE Uninterruptible Power Systems (UPS) sections were revised.



[hpe.com/qref/dl80gen9](http://hpe.com/qref/dl80gen9)

## Summary of Changes



**Sign up for updates**

---

© Copyright 2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

c04447832 - 15089 - Worldwide - V15 - 17-June-2016

