


Overview

HPE ProLiant DL580 Gen10 Server

The HPE ProLiant DL580 Gen10 Server is a high-density, four-socket server with high performance, scalability and reliability, all in a 4U chassis. Supporting the latest Intel® Xeon® Scalable processors, the HPE ProLiant DL580 Gen10 Server offers greater processing power, up to 6 TB of faster memory, IO of up to sixteen PCIe 3.0 slots, plus the intelligence and simplicity of automated management with HPE OneView and HPE iLO 5.


The HPE ProLiant DL580 Gen10 Server is the ideal server for business critical workloads, virtualization, server consolidation, database, business processing, graphics intensive and general 4P data-intensive applications where the right performance is paramount.

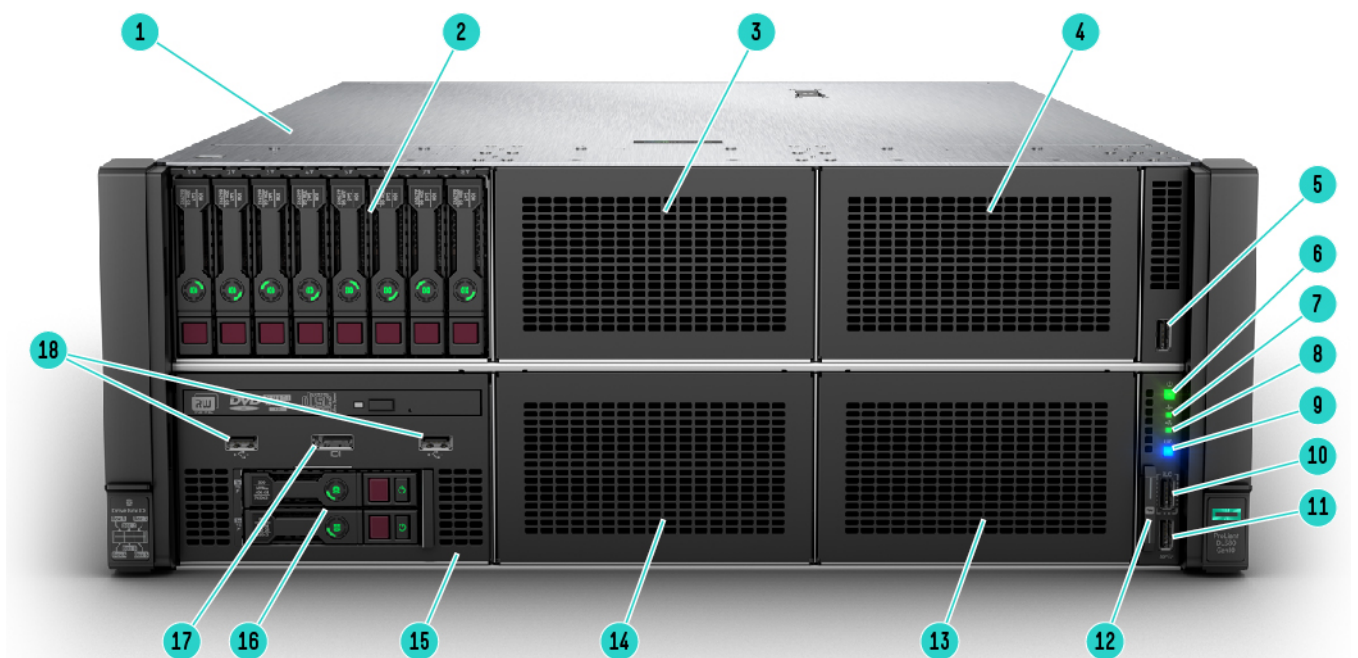

Front View – DL580 Gen10

1. Quick removal access panel
2. Box 1 (8 SFF, 6 SFF+2 NVMe or 8 NVMe (supports only 4 NVMe drives) SSD optional)
3. Box 2 (8 SFF, 6 SFF+2 NVMe or 8 NVMe PCIe SSD optional)
4. Box 3 (8 SFF, 6 SFF+2 NVMe or 8 NVMe PCIe SSD optional)
5. Front USB 3.0 port
6. Power On/Standby button and system power LED button
7. Health LED
8. NIC status
9. UID button
10. iLO Front Service Port
11. Front USB 3.0 port
12. Serial label pull tag
13. Box 6 (8 SFF)
14. Box 5 (8 SFF)
15. Box 4 (8 SFF or Universal Media bay)
16. Optional 2 SFF HDD, requires optional Universal Media bay
17. Optional front display port (via Universal Media Bay)
18. Optional USB 2.0 (via Universal Media Bay)


Overview

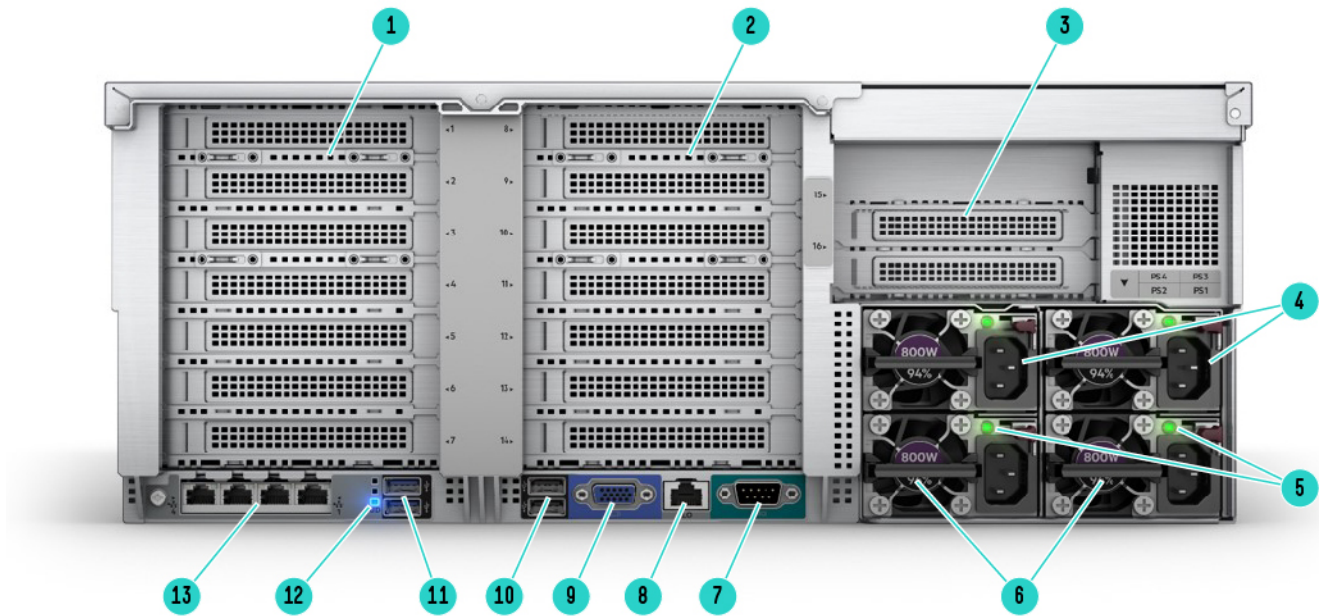

Rear View – DL580 Gen10

- | | |
|--|--|
| 1. PCIe Slots (Slots 1-7 top to bottom), requires primary riser | 2. PCIe Slots (Slots 8-14 top to bottom), requires secondary riser (includes tertiary riser) |
| 3. PCIe Slots (Slots 15-16 top to bottom), requires tertiary riser (included with secondary riser) | 4. Power supply Power connection (max. 4) |
| 5. Power supply Power LED (max. 4) | 6. HPE Flexible Slot Power Supply, 800W PS shown (max. 4) |
| 7. Serial connector | 8. Dedicated iLO connector |
| 9. VGA (video) connector | 10. USB connectors 2.0 (2) |
| 11. USB connectors 3.0 (2) | 12. Unit ID LED |
| 13. FlexibleLOM ports (Port 1 on right side) | |

Overview

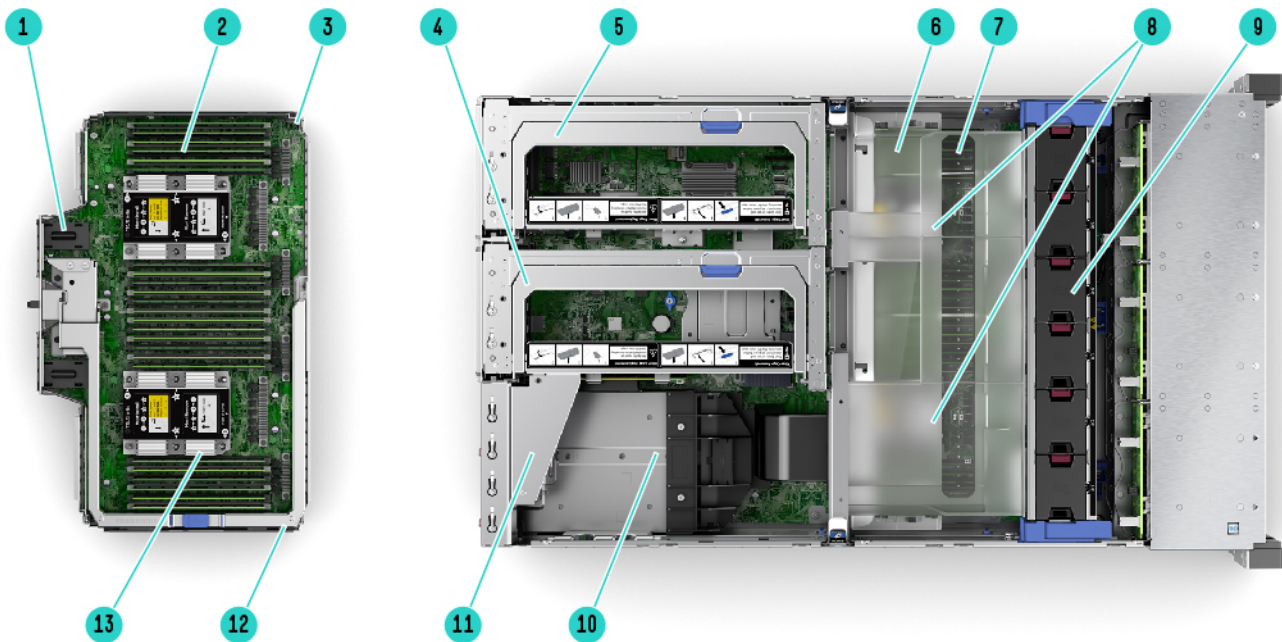

Internal View: DL580 Gen10 with upper CPU mezzanine tray

1. Left connector used for DL580 4-port NVMe Mezzanine card (Daughter card)
2. DDR4 DIMM slots. Shown fully populated in 24 slots (12 per processor)
3. Upper CPU Mezzanine Board Kit
4. Optional secondary PCIe riser (includes tertiary riser)
5. Optional primary PCIe riser
6. Air baffle
7. DDR4 DIMM slots on CPU board kit. Shown fully populated in 24 slots (12 per processor) under the air baffle
8. 2 Processors (under the air baffle)
9. Fan cage shown with 12 standard Hot-plug fans
10. (Under) Max. 4 Hot Plug redundant HPE Flexible Slot Power supplies
11. Optional Tertiary riser (included with secondary riser)
12. Handle for removing upper CPU Mezzanine Board Kit
13. 2 Processors, heatsink showing on upper CPU mezzanine board kit

What's New

- Support for new core boosting Intel® Xeon® Processors 6143 and 8165
- Support for up to 24 16GB NVDIMM

Platform Information

Platform Information

Form Factor	4U Rack Form Factor Entry, Base and Performance pre-configured models ship with Gen10 Rail Kits and Cable Management Assembly
Chassis Types	48 SFF with optional Universal Media Bay NOTE: The Universal Media Bay (872267-B21) is not available with the 48 SFF front end, and can only be populated in Box 4. NOTE: All pre-configured models come with embedded software RAID support for 10 SATA drives. Optional HPE Smart Array Controllers can be added.
System Fans	12 Hot Plug Fans (with N+1 redundancy) NOTE: 12 hot plug fans are shipped as standard.

Standard Features

Processors

One, two, three or four of the following depending on model.

NOTE: For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4 MT/s	Memory per socket
Platinum Processors							
Platinum 8180M Processor	2.5 GHz	28	38.50 MB	205W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8180 Processor	2.5 GHz	28	38.50 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8176M Processor	2.1 GHz	28	38.50 MB	165W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8176 Processor	2.1 GHz	28	38.50 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8170M Processor	2.1 GHz	26	35.75 MB	165W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8170 Processor	2.1 GHz	26	35.75 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8168 Processor	2.7 GHz	24	33.00 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8165 Processor	2.3 GHz	24	33.00 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8164 Processor	2.0 GHz	26	35.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8160M Processor	2.1 GHz	24	33.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8160 Processor	2.1 GHz	24	33.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8158 Processor	3.0 GHz	12	24.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8156 Processor	3.6 GHz	4	16.50 MB	105W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8153 Processor	2.0 GHz	16	22.00 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold Processors							
Gold 6154 Processor	3.0 GHz	18	24.75 MB	200W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6152 Processor	2.1 GHz	22	30.25 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6150 Processor	2.7 GHz	18	24.75 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6148 Processor	2.4 GHz	20	27.50 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6146 Processor	3.2 GHz	12	27.45 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6144 Processor	3.5 GHz	8	27.45 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6143 Processor	2.8 GHz	16	22.00 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6142M Processor	2.6 GHz	16	22.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Gold 6142 Processor	2.6 GHz	16	22.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6140M Processor	2.3 GHz	18	24.75 MB	140W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Gold 6140 Processor	2.3 GHz	18	24.75 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6138 Processor	2.0 GHz	20	27.50 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6136 Processor	3.0 GHz	12	24.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6134M Processor	3.2 GHz	8	24.75 MB	130W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Gold 6134 Processor	3.2 GHz	8	24.75 MB	130W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6132 Processor	2.6 GHz	14	19.25 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6130 Processor	2.1 GHz	16	22.00 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6128 Processor	3.4 GHz	6	19.25 MB	115W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6126 Processor	2.6 GHz	12	19.25 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 5122 Processor	3.6 GHz	4	16.50 MB	105W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 5120 Processor	2.2 GHz	14	19.25 MB	105W	2 @ 10.4 GT/s	2400 MT/s	768 GB
Gold 5118 Processor	2.3 GHz	12	16.50 MB	105W	2 @ 10.4 GT/s	2400 MT/s	768 GB

Standard Features

Gold 5115 Processor	2.4 GHz	10	13.75 MB	85W	2 @ 10.4 GT/s	2400 MT/s	768 GB
---------------------	---------	----	----------	-----	---------------	-----------	--------

NOTE: Platinum 8165 processor and Gold 6143 processors support core boosting technology

NOTE: Platinum - 2 and 4 socket capable, 2S - 2UPI, 4S - 3UPI, 8S - 3UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2666 MT/s, 768 GB memory capacity (1.5 TB on select skus with the M suffix), Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA), 48 lanes PCIe 3.0, advanced RAS.

NOTE: Gold - 2 and 4 socket capable, 2S - 2UPI, 4S - 3UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2400 MHz (SKU 5122=supports 2666), 768 GB memory capacity (1.5 TB on select skus with the M suffix), Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512(1x 512-bit FMA) (SKU 5122 supports 2x 512 bit FMA), 48 lanes PCIe 3.0, advanced RAS.

NOTE: Processors with 130W or higher will ship with the High Performance heat sink plus SKUs 8156, 6128, 5122 as noted below. All other will processors will ship with the Standard heat sink.

NOTE: 61xx and 81xx processors support 3 UPI links and all processors are connected in a cross bar configuration with each processor connected to another directly in a four processor system. 51xx processors support 2 UPI links only and all processors are connected in a ring configuration with processors 1, 3 and 2, 4 not connected directly in a four processor system.

NOTE: 3 processor configurations are not supported for 51xx Gold processors.

Chipset

Intel C621 Chipset

NOTE: For more information regarding Intel® chipsets, please see the following URL:

<http://www.intel.com/products/server/chipsets/>

On System Management Chipset

HPE iLO 5 ASIC

NOTE: Read and learn more in the [iLO QuickSpecs](#).

Memory

One of the following depending on model

Type:	SmartMemory Registered (RDIMM), Load Reduced (LRDIMM)
DIMM Slots Available	48 12 DIMM slots per processor, 6 channels per processor, 2 DIMMs per channel
Maximum capacity (LRDIMM)	6 TB 48 x 128 GB LRDIMM @ 2666 MT/s
Maximum capacity (RDIMM)	1.5 TB 48 x 32 GB RDIMM @ 2666 MT/s
Maximum capacity (NVDIMM)	384 GB 24 x 16 GB NVDIMM @ 2666 MT/s

NOTE: Mixing of RDIMM and LRDIMM memory is not supported.

NOTE: Memory speed depends on the processor selected.

NOTE: Intel memory processors (with suffix M) are needed for supporting 1.5TB memory per processor.

NOTE: Maximum of 6 NVDIMMs are supported per processor.

Memory Protection

For details on the HPE Server Memory Options RAS feature, visit: <http://www.hpe.com/docs/memory-ras-feature>.

Expansion Slots

Primary 6-slot Riser (Optional) (872336-B21)	Expansion Slots #	Technology	Bus/Connector Width	Form Factor/Connector	Notes
	2	PCIe 3.0	x16	Full length/full height	Proc 3
	3	PCIe 3.0	x8	Full length/full height	Proc 3
	4	PCIe 3.0	x16	Full length/full height	Proc 3
	5	PCIe 3.0	x8	¾ length/full height	Proc 1
	6	PCIe 3.0	x8	¾ length/full height	Proc 1
	7	PCIe 3.0	x8	¾ length/full height	Proc 1

Standard Features

None (J4)	NVMe	x8	Slimline	Proc 1
None (J3)	NVMe	x8	Slimline	Proc 3

Primary 7-slot Riser (Optional) 878214-B21	Expansion Slots(Primary/ Secondary) #	Technology	Bus/Connector Width	Form Factor/ Connector	Notes
	1	PCIe 3.0	x8	Full length/full height	Proc 3
	2	PCIe 3.0	x16	Full length/full height	Proc 3
	3	PCIe 3.0	x8	Full length/full height	Proc 3
	4	PCIe 3.0	x16	Full length/full height	Proc 3
	5	PCIe 3.0	x8	¾ length/full height	Proc 1
	6	PCIe 3.0	x16	¾ length/full height	Proc 1
	7	PCIe 3.0	x8	¾ length/full height	Proc 1

Secondary and Tertiary 8-slot Riser (Optional) 872338-B21	Expansion Slots #	Technology	Bus/Connector Width	Form Factor/ Connector	Notes
	9	PCIe 3.0	x16	Full length/full height	Proc 4
	10	PCIe 3.0	x8	Full length/full height	Proc 4
	11	PCIe 3.0	x16	Full length/full height	Proc 4
	12	PCIe 3.0	x8	¾ length/full height	Proc 2
	13	PCIe 3.0	x8	¾ length/full height	Proc 2
	14	PCIe 3.0	x8	¾ length/full height	Proc 2
	15	PCIe 3.0	x8	¾ length/full height	Proc 2
	16	PCIe 3.0	x8	¾ length/full height	Proc 2
	None (J3)	NVMe	x8	Slimline	Proc 2
	None (J4)	NVMe	x8	Slimline	Proc 4

Secondary and Tertiary 9-slot Riser (Optional) 872340-B21	Expansion Slots(Primary/ Secondary) #	Technology	Bus/Connector Width	Form Factor/ Connector	Notes
	8	PCIe 3.0	x8	Full length/full height	Proc 4
	9	PCIe 3.0	x16	Full length/full height	Proc 4
	10	PCIe 3.0	x8	Full length/full height	Proc 4
	11	PCIe 3.0	x16	Full length/full height	Proc 4
	12	PCIe 3.0	x8	¾ length/full height	Proc 2
	13	PCIe 3.0	x16	¾ length/full height	Proc 2
	14	PCIe 3.0	x8	¾ length/full height	Proc 2
	15	PCIe 3.0	x8	¾ length/full height	Proc 2
	16	PCIe 3.0	x8	¾ length/full height	Proc 2

Standard Features

Primary Riser (Optional)	Expansion Slots (Primary) #	Technology	Bus/Connector Width	Form Factor /Connector	Notes
878360-B21 (includes the 4-port NVMe Mezzanine card)	None	NVMe	x8	Slimline	Proc 1
	None	NVMe	x8	Slimline	Proc 1
	None	NVMe	x8	Slimline	Proc 1
	None	NVMe	x8	Slimline	Proc 1
4-port NVMe Mezzanine card (included with 878360-B21)	Expansion Slots #	Technology	Bus/Connector Width	Form Factor/Connector	Notes
	None	NVMe	x8	Slimline	Proc 3
	None	NVMe	x8	Slimline	Proc 3
	None	NVMe	x8	Slimline	Proc 3
	None	NVMe	x8	Slimline	Proc 3

NOTE: A minimum of 1 primary riser needs to be ordered.

NOTE: The secondary riser is shipped with the tertiary riser and can be installed only after the primary riser has been installed. The tertiary riser cannot be ordered separately.

NOTE: Slot availability is dependent on the processor installed. Please refer the above table carefully to make decisions on adding PCIe cards.

NOTE: The expansion slots at the back are numbered in ascending order from top to bottom and from left to right.

NOTE: The optional NVMe riser (878360-B21) supports a maximum of 16 NVMe drives and includes a primary 4-port riser and a 4-port NVMe mezzanine card. The 4-port NVMe mezzanine card goes on top of the HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) and requires three or four processor configuration.

NOTE: A maximum of 1 primary, 1 secondary and 1 tertiary riser can be installed in one server.

NOTE: Controllers and SAS expanders are supported only in the primary and tertiary risers only. Not supported in the secondary riser.

Network Controller

The HPE ProLiant DL580 Gen10 servers offer a flexible network technology - FlexibleLOMs, which offers customers a choice of 1 Gb, 10 Gb, 25 Gb or 10 Gb base-T Ethernet or converged networking in their embedded adapter. A range of NIC cards are also available to enhance networking capabilities.

NOTE: For additional details see the Networking Section of this document.

Model	Adapter
Entry Model	HPE Ethernet 1Gb 4-port 331FLR Adapter
Base Model	HPE FlexFabric 10Gb 2-port 535FLR-T Adapter
Performance Model	HPE FlexFabric 10/25 Gb 2-port 640FLR-SFP28 Adapter

Storage Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#).

Software RAID HPE Smart Array S100i SR Gen10 SW RAID

NOTE: HPE Smart Array S100i SR Gen10 SW RAID will operate in UEFI mode only. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.

NOTE: HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled. For enabling, please select HPE FIO Enable Smart Array SW RAID (784308-B21).

Essential RAID	HPE Smart Array E208i-p SR Gen10 Controller
	HPE Smart Array E208e-p SR Gen10 Controller
Performance RAID	HPE Smart Array P408i-p SR Gen10 Controller
	HPE Smart Array P408e-p SR Gen10 Controller

Standard Features

Internal Storage Devices

One of the following depending on model

Optical Drive

Optional: DVD-ROM, DVD-RW

Hard Drives

None ship standard

Hard Drive Bays

8 hot plug SFF SAS/SATA HDD Bay in Entry, Base and Performance Models
 Optional 8 NVMe SSD Express Bay Enablement Kit
 Optional Premium 6SFF and 2 NVMe or 8SFF Bay Kit

Processor to riser to drive bay mapping for NVMe drives

Processor/s	Riser/s	Drive Bay and Box	Max. NVMe drives
1 proc	Primary 6-slot riser (872336-B21)	8 NVMe in Box 2	2
		6 SFF plus 2 NVMe in Box 2 or Box 3	
2 proc (also includes 1 proc configuration)	Primary 6-slot riser (872336-B21) and Secondary 8-slot riser (872338-B21)	8 NVMe in Box 2	4
		6 SFF plus 2 NVMe in Box 1 and Box 3	
		6 SFF plus 2 NVMe in Box 1 and Box 2	
		6 SFF plus 2 NVMe in Box 3 and Media Bay (2 NVMe)	
	Secondary 8-slot riser (872338-B21)	6 SFF plus 2 NVMe in Box 2 and Media Bay (2 NVMe)	2
8 NVMe in Box 2			
6 SFF plus 2 NVMe in Box 1			
3 proc (also supports 1 proc and 2 proc configurations)	Primary 6-slot riser (872336-B21)	8 NVMe in Box 2	4
		6 SFF plus 2 NVMe in Box 3 and Box 2	
	Primary 6-slot riser (872336-B21) and Secondary 8-slot riser (872338-B21)	8 NVMe in Box 2	6
		6 SFF plus 2 NVMe in Box 1, Box 2, and Box 3	
	2x 4-port NVMe riser (878360-B21)	8 NVMe in Box 2 and Box 3	16
	2x 4-port NVMe riser (878360-B21) and Secondary 8-slot riser (872338-B21)	8 NVMe in Box 2, Box 3, and 6 SFF plus 2 NVMe in Box 1	18
8 NVMe in Box 1, Box 2, and Box 3			

Standard Features

		8 NVMe in Box 2, Box 3, and Media Bay (2 NVMe)	
4 proc (also supports 1 proc, 2 proc and 3 proc configurations)	Primary 6-slot riser (872336-B21) and Secondary 8-slot riser (872338-B21)	8 NVMe in Box 2	8
		6 SFF plus 2 NVMe in Box 1,2,3 and Media Bay (2 NVMe)	
	2x 4-port NVMe riser (878360-B21) and Secondary 8-slot riser (872338-B21)	8 NVMe in Box 2, Box 3, and Box 1	20
2x 4-port NVMe riser (878360-B21) and Secondary 8-slot riser (872338-B21)	8 NVMe in Box 2, Box 3, 6 SFF plus 2 NVMe in Box 1, and Media Bay (2 NVMe)		

NOTE: Maximum number of NVMe drives supported depends on a combination of processor, box, drive bay and riser. Please refer the above table carefully before creating configurations.

NOTE: Box 1 is populated by 8 SFF SAS/SATA bay (878366-B21) and shipped as default without any drives.

NOTE: The 8 NVMe drive option (878362-B21) can only be placed in Box 1, 2 and 3. When the 8 NVMe drive option is placed in Box 1, only the first 4 NVMe (left to right) drives can be populated.

NOTE: The 6 SFF plus 2 NVMe drive option (878364-B21) can only be placed in Box 1, 2 and 3.

NOTE: The Universal Media Bay (872267-B21) not available with the 48 SFF front end, and can only be populated in Box 4. The media bay can support 2 NVMe via the optional 2 SFF premium kit (880121-B21).

NOTE: The 8 SFF can be upgraded with a multiple drive bay options with field upgrades. Please refer front diagram detail for available options. For optimal upgrade please upgrade Box 1, Box 2, Box 3, Box 4, Box 5 and Box 6 when using the 8 SFF HDD bay for a 48 SFF configuration.

NOTE: A maximum of 20 NVMe drives can be supported with 4 NVMe drives in Bay 1, 8 NVMe drives in Bay 2 and 8 NVMe drives in Bay 3 or with 2 NVMe drives in Bay 1, 8 NVMe drives in Bay 2, 8 NVMe drives in Bay 3 and 2 NVMe drives in Box 4 using the Universal Media Bay (872267-B21).

NOTE: All pre-configured models come with embedded software RAID support for 10 SATA drives and also include P408i-p Smart Array controller. Optional HPE Smart Array Controllers can be added.

NOTE: The 2x 4-port NVMe riser (878360-B21) comes with 2 separate 4-port NVMe risers and the NVMe riser which installs on the upper processor mezzanine tray cannot be used in a 2 processor configuration.

Maximum Internal Storage

	CAPACITY	CONFIGURATION
Hot Plug SFF SATA HDD	96 TB	48 x 2 TB
Hot Plug SFF SAS HDD	96 TB	48 x 2 TB
Hot Plug SFF SATA SSD	184 TB	48 x 3.84 TB
Hot Plug SFF SAS SSD	368 TB	48 x 7.68 TB
SFF NVMe SSD	40 TB	20 x 2 TB

Standard Features

Power Supply

One of the following depending on model

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

NOTE: Available in 94% efficiency.

NOTE: Must order 4x 800W Flex Slot PSU.

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

NOTE: Available in 94% efficiency.

NOTE: 1600W Power supplies only support high line voltage (200VAC to 240VAC).

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (416151-B21). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#)

Interfaces

Serial	1 rear
Video	1 front (optional with Universal Media Bay), 1 rear
HPE iLO Remote Management Network Port	1
HPE iLO Front Service Port	1
Micro SD Slot	1 (Internal), 2 (Optional, internal)
USB 2.0 Ports	4 total: 2 front (optional); 2 rear
USB 3.0 Ports	5 total: 1 front; 2 rear, 2 internal

NOTE: 2 front (optional) USB 2.0 ports need the HPE DL560 Gen10 Universal Media Bay Kit (872267-B21).

Operating Systems and Virtualization Software Support for ProLiant Servers

[Windows Server 2012 R2](#)

[Windows Server 2016](#)

[VMware ESXi 6.0 U3](#)

[VMware ESXi 6.5 and U1 upon release](#)

[Red Hat Enterprise Linux \(RHEL\) 6.9 and 7.3](#)

[SUSE Linux Enterprise Server \(SLES\) 11 SP4 and 12 SP2](#)

[CentOS 6.9 and 7.3](#)

NOTE: Not directly supported / Community Supported (Based on RHEL so RHEL testing and enablement applicable to CentOS) CentOS 6.9 / CentOS 7.3.

NOTE: For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server. <http://www.hpe.com/info/ossupport>.

Industry Standard Compliance

ACPI 6.1 Compliant

PCIe 3.0 Compliant

Standard Features

WOL Support
Microsoft® Logo certifications
PXE Support
USB 3.0 Compliant (internal); USB 2.0 Compliant (external ports via SUV)
SMBIOS 3.1
UEFI 2.6
Redfish API

NOTE: For additional technical thermal details regarding ambient temperatures, humidity and features support please visit: <http://www.hpe.com/servers/ashrae>.

Graphics

- Integrated Video Standard
- Video modes up to 1920 x 1200@60Hz (32 bpp)
- 16MB Video Memory
- HPE iLO 5 on system management memory
- 32 MB Flash
- 4 Gbit DDR 3 with ECC protection

HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 servers have a UEFI Class 2 implementation and support both UEFI Mode (default) and Legacy BIOS Mode.

NOTE: The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- Workload profiles for simple performance optimization

UEFI Boot Mode only:

- TPM 2.0 support
- NVMe Boot Support
- Platform Trust Technology (PTT) can be enabled
- iSCSI Software Initiator Support
- HTTP/HTTPs Boot support as a PXE alternative
- Boot support for option cards that only support a UEFI option ROM

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen10 Server.

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <http://www.hpe.com/info/ilo>.

Standard Features

UEFI	Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at http://www.hpe.com/servers/uefi .
Intelligent Provisioning	Hassle free server and OS provisioning for one or more servers with Intelligent Provisioning. Learn more at http://www.hpe.com/servers/intelligentprovisioning .
iLO RESTful API	iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at http://www.hpe.com/info/restfulapi .

Server Utilities

Active Health System	The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at http://www.hpe.com/servers/ahs .
Active Health System Viewer	Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: http://www.hpe.com/servers/ahsv .
Smart Update	Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at http://www.hpe.com/info/smartupdate .
iLO Amplifier Pack	Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9 and Gen10 HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities. Learn more at http://www.hpe.com/servers/iLOamplifierpack .
HPE iLO Mobile Application	Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: http://www.hpe.com/info/ilo/mobileapp .
RESTful Interface Tool	RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at http://www.hpe.com/info/resttool .
Scripting Tools	Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at http://www.hpe.com/servers/stk or http://www.hpe.com/servers/powershell .
HPE OneView Standard	HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at http://www.hpe.com/info/oneview .
HPE Systems Insight Manager (HPE SIM)	Ideal for environments already using HPE SIM, it allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers. Also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at http://www.hpe.com/info/hpesim .

Standard Features

Security

- UEFI Secure Boot and Secure Start support
- Immutable Silicon Root of Trust
- FIPS 140-2 validation (iLO 5 certification in progress)
- Common Criteria certification (iLO 5 certification in progress)
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)
- iLO Security Modes including a New iLO Advance Premium Security Edition License
- Granular control over iLO interfaces
- Smart card (PIV/CAC) and Kerberos based 2-factor Authentication
- Tamper-free updates – components digitally signed and verified
- Secure Recovery – recover critical firmware to known good state on detection of compromised firmware
- Ability to rollback firmware
- Secure erase of NAND/User data
- TPM (Trusted Platform Module) 1.2 option
- TPM (Trusted Platform Module) 2.0 option
- Bezel Locking Kit
- Chassis Intrusion detection option

NOTE: HPE Trusted Platform Module 2.0 Option (864279-B21) works with Gen10 servers with UEFI Mode and not Legacy Mode. The Trusted Platform Module 2.0 Option can be configured to the 1.2 version through the UEFI BIOS to support TPM 1.2 functionality.

NOTE: HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

About Trusted Platform Module

Trusted Platform Module (TPM) is a separate processor that monitors the system state. TPM is a passive component needing to be updated and not able to lock down any component in the system except access to its own memory. It also provides some cryptographic operations - among them: creating RSA key pairs, and working with them.

The first verification of signatures happens by code on the CPU, which can be intercepted and replaced. Emulating a "properly" booted system is possible by sending the right values to the TPM.

HPE supports two version of TPM, the 1.2 device and the 2.0 device. The TPM 2.0 device works with Gen10 servers that are using a Linux operating system or Microsoft Windows Server 2016. Both TPM 1.2 and 2.0 are compatible with HPE ProLiant Gen9 and Gen10 servers. These TPM modules are not compatible with server generations prior to Gen9. Once the TPM module is installed, it locks into place and cannot be removed, nor can it be replaced with a different TPM device.

HPE Silicon Root of Trust

HPE's Silicon Root of Trust provides protection because as soon as the server is powered on and the iLO firmware comes alive, it looks into the silicon for the immutable fingerprint that verifies all the firmware code is valid and uncompromised. Over a million lines of firmware code run, before the operating system starts, making it essential to confirm that all server essential firmware is free from malware or compromised code.

Silicon Root of Trust is included with iLO5 Standard with all platforms that contain the iLO5 chip. That includes ML, DL, Apollo, C-Class Blades, and Synergy Compute Modules. HPE Cloudline and the HPE Microserver do not have silicon root of trust, since they do not contain an iLO5 silicon chip. This technology is NOT available on any previous version of HP ProLiant like the Gen9, Gen8, or Gen 7 servers, nor can those previous generations be retrofitted to accommodate the silicon root of trust.

The silicon validates the iLO 5 firmware code before it is fetched and executed. If any malware or compromised code has been inserted in the iLO 5 firmware, the silicon will detect that, because any infected firmware code will not match-up with the hash burned into the silicon. From there, the iLO 5 firmware validates the rest of the server firmware, namely the UEFI, CPLD, IE, and

Standard Features

ME. The UEFI then validates the connection to the operating system, thus completing a complete root, or chain, that is anchored into the silicon.

During operation of the server, HPE has a new technology that conducts run-time firmware validation that checks the firmware stored in the server. At any point, if compromised code or malware is inserted in any of the critical firmware, an iLO audit log alert is created to notify the customer that a compromised has occurred.

In the unlikely event of a breach into the HPE server firmware, after detection has been completed, the customer may then securely recover the firmware automatically to a previous known good state. HPE provides this function through a new HPE license called, HPE iLO Advanced Premium Security Edition.

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/>.

Optional Features

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at <http://www.hpe.com/servers/iloadvanced>.

HPE iLO Advanced Premium Security Edition

HPE iLO Advanced Premium Security Edition for iLO 5 includes iLO Advanced License plus high-end security modes, unique security capabilities, like Automatic FW recovery; Runtime FW verification, and Secure erase. Learn more about HPE iLO Advanced Premium Security Edition at: <http://www.hpe.com/servers/ilopremium>.

HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9 and Gen10 servers. To learn more visit <http://www.hpe.com/info/oneview>.

HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hpe.com/info/cmu>.

GPGPU Information

HPE NVIDIA Tesla P40 24GB Computational Accelerator

HPE NVIDIA Quadro P6000 Graphics Accelerator

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go – and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

Optional Features

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance.

<https://h22174.www2.hp.com/SimplifiedConfig/Welcome#>

Service and Support

HPE Pointnext

Protect your business beyond warranty with HPE Support Services

HPE Pointnext provides a comprehensive portfolio including Advisory and Transformational, Professional, and Operational Services to help accelerate your digital transformation. From the onset of your transformation journey, Advisory and Transformational Services focus on designing the transformation and creating a solution roadmap. Professional Services specializes in creative configurations with flawless and on-time implementation, and on-budget execution. Finally, operational services provides innovative new approaches like Flexible Capacity and Datacenter Care, to keep your business at peak performance. HPE is ready to bring together all the pieces of the puzzle for you, with an eye on the future, and make the complex simple.

Connect your devices:

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Reduce down time and improve diagnostic accuracy with a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE

Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to HPE support.

Learn more about getting connected at <http://www.hpe.com/services/getconnected>

Parts and Materials

HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. <http://www.hpe.com/ww/learn>

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>

HPE's Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

*HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>

Pre-configured Models

	Entry Model	Base Model	Performance Model
SKU Number	869848-B21	869847-B21	869845-B21
Model Name	HPE ProLiant DL580 Gen10 5120 2P 64GB-R P408i-p 8SFF 4x800W PS Entry Server	HPE ProLiant DL580 Gen10 6148 4P 128GB-R P408i-p 8SFF 4x1600W PS Base Server	HPE ProLiant DL580 Gen10 8164 4P 256GB-R P408i-p 8SFF 4x1600W PS Perf Server
Processor	Intel® Xeon® 5120	Intel® Xeon® 6148	Intel® Xeon® 8164
Number of Processors	2	4	4
Memory	64 GB (4x 16GB Registered DIMMs, 2666 MT/s) NOTE: 24 DIMM slots available with Entry Model; 2 more processor slots and 24 more DIMMs available via optional HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21).	128 GB (8x 16GB Registered DIMMs, 2666 MT/s)	256 GB (8x 32GB Registered DIMMs, 2666 MT/s)
Network Controller	1 Gb 4-port 331FLR Adapter	10GbE FlexFabric 2-port 535FLR-T Adapter	10/25GbE FlexFabric 2-port 640FLR-T Adapter
Storage Controller	HPE Smart Array P408i-p controller NOTE: Additional Storage controllers are available as options, to enable both SAS capability as well as provide data retention with flash-backed write cache (FBWC).		
Power Supply	4x 800W	4x 1600W	4x 1600W NOTE: 1600W Power supplies only support high line voltage (200VAC to 240VAC).
PCI-Express Slots	3 PCIe 3.0 slots available NOTE: 16 PCIe 3.0 slots available with the secondary riser and 4 processors installed.	16 PCIe 3.0 slots available	16 PCIe 3.0 slots available
Hard Drive	None ship standard		
Internal Storage	8 SFF Drive Bays NOTE: Can be expanded up to a max. of 48 SFF drives, with optional HPE DL580 Gen10 8SFF HDD Bay Kit (878366-B21). NOTE: Optionally NVMe SSD drives can be added with HPE DL580 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay Kit (878364-B21) which can be added to Box1, 2 or 3 or HPE DL580 NVMe 8 SSD Express Bay Enablement Kit (878362-B21) which can be added to Box 1 (only 4 NVMe drives), Box 2 and Box 3. NOTE: Alternatively, optional HPE DL560 Gen10 Universal Media Bay Kit (872267-B21) can be added in Box 4.		
Optical Drive Bay	Optional via Universal Media Bay		
Optical Drive	Optional via Universal Media Bay		
Fans	12 hot plug fans, n+1 redundant		
Management	HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced, HPE iLO Advanced Premium Security Edition and HPE OneView Advanced (require licenses)	HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced, HPE iLO Advanced Premium Security Edition (requires license) and HPE OneView Advanced	
Form Factor	Rack (4U), HPE DL580 Gen10 4U Rail Kit with CMA		
Warranty	3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response		

Pre-configured Models

Country Code Key	xx1 = B21	Worldwide
	NOTE: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.	
	xx1 = 291	Japan
	xx1 = AA1	PRC

Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

Server description	HPE ProLiant DL580 Gen10 8SFF Configure-to-order Server
SKU Number	869854-B21
TAA SKU	878213-B21
Chipset	Intel® C621 Chipset
Processor	4U Server Chassis with 2 processor slots available; 4 processor configuration would require optional HPE ProLiant HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21)
DIMM Slots	24 DIMM slots for RDIMM, LRDIMM DDR4 Memory; 48 DIMM configuration would require optional HPEProLiant HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) and 4 processors
Network Controller	None. FlexibleLOM slot (various options can be chosen for networking; NIC cards also available via expansion slots)
Storage Controller	HPE Smart Array S100i NOTE: HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled. For enabling, please select HPE FIO Enable Smart Array SW RAID (784308-B21).
PCIe	None. Must order a primary riser (16 PCIe 3.0 slots are available if all processors are chosen and the primary, secondary and tertiary Riser Kits have been installed)
Drive Cage - included	8 SFF in Box 1, no drives
Fans	12 hot plug fans, (n+1) redundant
Management	HPE iLO Standard with Intelligent Provisioning and (Standard); HPE OneView Standard (requires download) and HPE iLO Advanced (require additional licenses), HPE iLO Advanced Premium Security Edition (require additional licenses), HPE OneView Advanced (require additional licenses)
microSD Slots	1 microSD card slot (internal)
TPM Connector	1 Trusted Platform Module (TPM) connector
UEFI	BIOS Legacy mode (field configurable) or Unified Extensible Firmware Interface (UEFI) mode (default)
USB	7 USB ports (2 USB 2.0 and 5 USB 3.0), Optional 2 front available via universal media kit upgrade
Video Ports	2 video ports (1 front optional via the Universal Media Kit upgrade option, 1 rear)
Rails	HPE DL580 Gen10 4U Rail Kit with CMA

NOTE: Trade Agreement Act (TAA) and means that these SKUs are manufactured in countries that are part of the global trade act. This provides greater security assurance that these servers come from countries that signed the agreement act. This is particularly important to HPE customers in our federal sector and other verticals that have concerns about the country of origin for our solutions.

NOTE: TAA chassis are only orderable in North America and Canada.

NOTE: PCIe slot availability is dependent on the number of processors and riser kits installed. Please refer to the "Expansion slots" section for more details.

NOTE: For the DL580 Gen10, the number of processors can be one, two, three or four installed. For three or four processors, the HPE DL5x0 Gen10 CPU Mezzanine Board Kit is required.

NOTE: This applies to CTO configurations, field upgrades may differ depending on field configuration.

Configuration Information - Factory Integrated Models

Step 2a: Choose Processor Options

Processor Option Kits	Required Processor
HPE DL580 Gen10 Intel® Xeon-Platinum 8180M (2.5GHz/28-core/205W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878159-L21
HPE DL580 Gen10 Intel® Xeon-Platinum 8180 (2.5GHz/28-core/205W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878158-L21
HPE DL580 Gen10 Intel® Xeon-Platinum 8176M (2.1GHz/28-core/165W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878157-L21
HPE DL580 Gen10 Intel® Xeon-Platinum 8176 (2.1GHz/28-core/165W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878156-L21
HPE DL580 Gen10 Intel® Xeon-Platinum 8170M (2.1GHz/26-core/165W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878155-L21
HPE DL580 Gen10 Intel® Xeon-Platinum 8170 (2.1GHz/26-core/165W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878154-L21
HPE DL580 Gen10 Intel® Xeon-Platinum 8168 (2.7GHz/24-core/205W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878153-L21
HPE DL580 Gen10 Intel® Xeon-Platinum 8165 (2.8GHz/24-core/205W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	P00881-L21
HPE DL580 Gen10 Intel® Xeon-Platinum 8164 (2.0GHz/26-core/145W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878152-L21
HPE DL580 Gen10 Intel® Xeon-Platinum 8160M (2.1GHz/24-core/145W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878151-L21
HPE DL580 Gen10 Intel® Xeon-Platinum 8160 (2.1GHz/24-core/145W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878150-L21
HPE DL580 Gen10 Intel® Xeon-Platinum 8158 (3.0GHz/12-core/105W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878149-L21
HPE DL580 Gen10 Intel® Xeon-Platinum 8156 (3.6GHz/4-core/105W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878148-L21
HPE DL580 Gen10 Intel® Xeon-Platinum 8153 (2.0GHz/16-core/125W) FIO Processor Kit	878147-L21
HPE DL580 Gen10 Intel® Xeon-Gold 6154 (3.0GHz/18-core/200W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878146-L21
HPE DL580 Gen10 Intel® Xeon-Gold 6152 (2.1GHz/22-core/135W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878145-L21
HPE DL580 Gen10 Intel® Xeon-Gold 6150 (2.7GHz/18-core/165W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878144-L21
HPE DL580 Gen10 Intel® Xeon-Gold 6148 (2.4GHz/20-core/145W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878143-L21
HPE DL580 Gen10 Intel® Xeon-Gold 6146 (3.2GHz/12-core/165W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878142-L21
HPE DL580 Gen10 Intel® Xeon-Gold 6144 (3.5GHz/8-core/150W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	878141-L21
HPE DL580 Gen10 Intel® Xeon-Gold 6143 (2.8GHz/16-core/205W) FIO Processor Kit NOTE: Ships with Performance Heatsink.	P00880-L21
HPE DL580 Gen10 Intel® Xeon-Gold 6142M (2.6GHz/16-core/150W) FIO Processor Kit	878140-L21

Configuration Information - Factory Integrated Models

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 6142 (2.6GHz/16-core/145W) FIO Processor Kit 878139-L21

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 6140M (2.3GHz/18-core/135W) FIO Processor Kit 878138-L21

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 6140 (2.3GHz/18-core/135W) FIO Processor Kit 878137-L21

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 6138 (2.0GHz/20-core/120W) FIO Processor Kit 878136-L21

HPE DL580 Gen10 Intel® Xeon-Gold 6136 (3.0GHz/12-core/150W) FIO Processor Kit 878135-L21

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 6134M (3.2GHz/8-core/130W) FIO Processor Kit 878134-L21

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 6134 (3.3GHz/8-core/130W) FIO Processor Kit 878133-L21

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 6132 (2.6GHz/14-core/140W) FIO Processor Kit 878132-L21

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 6130 (2.1GHz/16-core/120W) FIO Processor Kit 878131-L21

HPE DL580 Gen10 Intel® Xeon-Gold 6128 (3.4GHz/6-core/115W) FIO Processor Kit 878130-L21

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 6126 (2.6GHz/12-core/120W) FIO Processor Kit 878129-L21

HPE DL580 Gen10 Intel® Xeon-Gold 5122 (3.6GHz/4-core/105W) FIO Processor Kit 878128-L21

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 5120 (2.2GHz/14-core/105W) FIO Processor Kit 878127-L21

HPE DL580 Gen10 Intel® Xeon-Gold 5118 (2.3GHz/12-core/105W) FIO Processor Kit 878126-L21

HPE DL580 Gen10 Intel® Xeon-Gold 5115 (2.4GHz/10-core/85W) FIO Processor Kit 878125-L21

NOTE: If more than one processor is desired select one xxxxxx-L21 and one, two or three corresponding xxxxxx-B21 processors. Mixing different processor models is not supported.

Step 2b: Choose Memory Options (at least one Memory Kit is required)

Only one of the following from each list unless otherwise noted

HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 815097-B21

HPE 8GB (1x8GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 876181-B21

HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 815098-B21

HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 835955-B21

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 815100-B21

HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit 815101-B21

HPE 128GB (1x128GB) Octal Rank x4 DDR4-2666 CAS-22-19-19 3DS Load Reduced Memory Kit 815102-B21

NOTE: LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

Step 2c: Choose Power Supplies (at least one Power Supply Kit is required)

Only one or more of the following from each list unless otherwise noted

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 865414-B21

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 830272-B21

NOTE: Select one or more power supplies. For 800W, 4 power supplies need to be selected.

NOTE: 1600W Power supplies only support high line voltage (200VAC to 240VAC).

NOTE: Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at:

Configuration Information - Factory Integrated Models

<http://www.hpe.com/info/hppoweradvisor>

NOTE: All power supplies in a server should match. Mixing Power Supplies is not supported.

NOTE: HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs).

Visit [HPE power cords](#) for a full list of optional power cords.

Step 2d: Choose network adapters (at least one Adapter is required)

Only one of the following from each list unless otherwise noted

HPE Ethernet 10/25Gb 2-port 631FLR-SFP28 Adapter	817709-B21
HPE FlexFabric 10Gb 4-port 536FLR-T Adapter	764302-B21
HPE FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter	700751-B21
HPE Ethernet 10Gb 2-port 535FLR-T Adapter	817721-B21
HPE Ethernet 1Gb 4-port 331FLR Adapter	629135-B22
HPE FlexFabric 10Gb 2-port 533FLR-T Adapter	700759-B21
HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter	727054-B21
HPE Ethernet 10Gb 2-port 562FLR-T Adapter	817745-B21
HPE Ethernet 1Gb 4-port 366FLR Adapter	665240-B21
HPE Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter	817749-B21
HPE Ethernet 10/25Gb 2-port 622FLR-SFP28 Converged Network Adapter	867334-B21

Step 3: Choose Additional Factory Integratable Options

Only one of the following from each list unless otherwise noted

HPE Gen10 TPM 1.2 FIO Setting	872108-B21
-------------------------------	------------

NOTE: TPM 2.0 is set as default, for 1.2 TPM setting instead, please select this option.

HPE OneView

HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU	P8B31A
HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU	E5Y43A

BIOS Mode

HPE Legacy FIO Mode Setting	758959-B22
-----------------------------	------------

NOTE: Selecting this option will change the UEFI BIOS setting into Legacy BIOS Setting.

Controller State

HP FIO Enable Smart Array S100i Setting	784308-B21
---	------------

NOTE: If not selecting an HPE Storage Controller, this option may be selected to support RAID and Hot-plug capabilities for SATA hard drives. The S100i does not support SAS hard drives.

Step 4: Choose Additional Options for Factory Integration from Core and additional Options sections below

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Unique Options

HPE DL580 Gen10 12Gb 24-port SAS Expander Card Kit with Cables	881101-B21
HPE DL560 Gen10 Universal Media Bay Kit	872267-B21
HPE DL580 NVMe 8 SSD Express Bay Enablement Kit	878362-B21
HPE DL580 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay Kit	878364-B21
HPE DL580 Gen10 8SFF HDD Bay Kit	878366-B21
HPE DL580 Gen10 2SFF Premium HDD Front NVMe/SAS/SATA Kit	880121-B21
NOTE: Needs to be ordered with the HPE DL560 Gen10 Uni Media Bay Kit (872267-B21).	
HPE DL5x0 Gen10 System Insight Display Kit	872261-B21
HPE DL5x0 Gen10 CPU Mezzanine Board Kit	872222-B21
HPE DL5x0 Gen10 CPU Mezzanine UPI Performance Kit	875608-B21
HPE DL580 Gen10 4U Rail Kit with Cable Management Arm	872151-B21
HPE DL580 Gen10 6-slot 4 x8/2 x16 2-port 4 NVMe Slimline Primary Riser Kit	872336-B21
NOTE: This kit supports 6 PCIe slots and 2 NVMe ports which can support up to 4 NVMe drives.	
HPE DL580 Gen10 8-slot 6 x8/2 x16 2-port 4 NVMe Slimline Secondary Riser Kit	872338-B21
NOTE: This kit supports 8 PCIe slots and 2 NVMe ports which can support up to 4 NVMe drives.	
HPE DL580 Gen10 9-slot 6 x8/3 x16 Secondary Riser Kit	872340-B21
HPE DL580 Gen10 7-slot 4 x8/3 x16 Primary Riser Kit	878214-B21
HPE DL580 Gen10 2x 4-port 16 NVMe Slimline Riser Kit	878360-B21
NOTE: This kit occupies the primary riser slot, supports 16 NVMe drives and must be ordered when supporting greater than 8 NVMe drives.	
HPE DL580 Gen10 GPU Bracket Kit	P00268-B21
NOTE: A GPU bracket (P00268-B21) kit is needed to install GPUs in slots 4 and 11 and must be ordered along with the GPU cable kits 871828-B21 (for P6000) or 871829-B21 (for P40). Refer Expansion Slots sections for additional details on risers.	
HPE DL380 Gen10 8-pin Cable Kit	871828-B21
HPE DL380 Gen10 8-pin Keyed Cable Kit	871829-B21
NOTE: 1 cable kits supports 3 GPUs and 2 cable kits must be ordered when supporting 4 GPUs.	
NOTE: The HPE DL5x0 Gen10 CPU Mezz Kit (872222-B21) is needed for three or four processor configurations.	
NOTE: The HPE DL580 Gen10 8SFF HDD Bay Kit (878366-B21) is shipped default with the server.	
NOTE: A minimum of 1 primary riser must be ordered.	

HPE Processors

HPE DL580 Gen10 Intel® Xeon-Platinum 8180M (2.5GHz/28-core/205W) Processor Kit	878159-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Platinum 8180 (2.5GHz/28-core/205W) Processor Kit	878158-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Platinum 8176M (2.1GHz/28-core/165W) Processor Kit	878157-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Platinum 8176 (2.1GHz/28-core/165W) Processor Kit	878156-B21
NOTE: Ships with Performance Heatsink.	

Core Options

HPE DL580 Gen10 Intel® Xeon-Platinum 8170M (2.1GHz/26-core/165W) Processor Kit	878155-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Platinum 8170 (2.1GHz/26-core/165W) Processor Kit	878154-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Platinum 8168 (2.7GHz/24-core/205W) Processor Kit	878153-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Platinum 8165 (2.8GHz/24-core/205W) Processor Kit	P00881-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Platinum 8164 (2.0GHz/26-core/150W) Processor Kit	878152-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon® -Platinum 8160M (2.1GHz/24-core/145W) Processor Kit	878151-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Platinum 8160 (2.1GHz/24-core/145W) Processor Kit	878150-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Platinum 8158 (3.0GHz/12-core/105W) Processor Kit	878149-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Platinum 8156 (3.6GHz/4-core/105W) Processor Kit	878148-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Platinum 8153 (2.0GHz/16-core/125W) Processor Kit	878147-B21
HPE DL580 Gen10 Intel® Xeon-Gold 6154 (3.0GHz/18-core/200W) Processor Kit	878146-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Gold 6152 (2.1GHz/22-core/135W) Processor Kit	878145-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Gold 6150 (2.7GHz/18-core/165W) Processor Kit	878144-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Gold 6148 (2.4GHz/20-core/145W) Processor Kit	878143-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Gold 6146 (3.2GHz/12-core/165W) Processor Kit	878142-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Gold 6144 (3.5GHz/8-core/150W) Processor Kit	878141-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Gold 6143 (2.8GHz/16-core/205W) Processor Kit	P00880-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Gold 6142M (2.6GHz/16-core/150W) Processor Kit	878140-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Gold 6142 (2.6GHz/16-core/145W) Processor Kit	878139-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Gold 6140M (2.3GHz/18-core/140W) Processor Kit	878138-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Gold 6140 (2.3GHz/18-core/140W) Processor Kit	878137-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Gold 6138 (2.0GHz/20-core/125W) Processor Kit	878136-B21
HPE DL580 Gen10 Intel® Xeon-Gold 6136 (3.0GHz/12-core/150W) Processor Kit	878135-B21
NOTE: Ships with Performance Heatsink.	
HPE DL580 Gen10 Intel® Xeon-Gold 6134M (3.2GHz/8-core/130W) Processor Kit	878134-B21

Core Options

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 6134 (3.3GHz/8-core/130W) Processor Kit 8781133-B21

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 6132 (2.6GHz/14-core/140W) Processor Kit 8781132-B21

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 6130 (2.1GHz/16-core/125W) Processor Kit 8781131-B21

HPE DL580 Gen10 Intel® Xeon-Gold 6128 (3.4GHz/6-core/115W) Processor Kit 8781130-B21

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 6126 (2.6GHz/12-core/125W) Processor Kit 8781129-B21

HPE DL580 Gen10 Intel® Xeon-Gold 5120 (2.2GHz/14-core/105W) Processor Kit 8781128-B21

NOTE: Ships with Performance Heatsink.

HPE DL580 Gen10 Intel® Xeon-Gold 5120 (2.2GHz/14-core/105W) Processor Kit 8781127-B21

HPE DL580 Gen10 Intel® Xeon-Gold 5118 (2.3GHz/12-core/105W) Processor Kit 8781126-B21

HPE DL580 Gen10 Intel® Xeon-Gold 5115 (2.4GHz/10-core/85W) Processor Kit 8781125-B21

NOTE: If more than one processor is desired select one xxxxxx-L21 and one, two or three corresponding xxxxxx-B21 processors. Mixing different processor models is not supported.

Memory Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, HPE recommends memory from the list located here: <http://www.hpe.com/products/recommend>. Best product availability is limited to US, Canada, and Latin America at this time.

HPE Memory

NOTE: Hewlett Packard Enterprise memory from previous generation servers is not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen10. For additional information, please see the [HPE SmartMemory QuickSpecs](#).

NOTE: LRDIMM and RDIMM are all distinct memory technologies and cannot be mixed within a server.

HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 815097-B21

HPE 8GB (1x8GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 876181-B21

HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 815098-B21

HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 835955-B21

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 815100-B21

HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit 815101-B21

HPE 128GB (1x128GB) Octal Rank x4 DDR4-2666 CAS-22-19-19 3DS Load Reduced Memory Kit 815102-B21

NOTE: The maximum memory speed is a function of the memory type, memory configuration, and processor model.

HPE Persistent Memory

HPE 16GB NVDIMM Single Rank x4 DDR4-2666 Module Kit 845264-B21

NOTE: A maximum of 6 NVDIMMs are supported per processor and the DL560 can support a maximum of 24 NVDIMMs.

NOTE: Please refer to <http://www.hpe.com/info/persistentmemory> for NVDIMM population rules and guidelines.

HPE Optical Drives

HPE 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive 726536-B21

NOTE: The optional Universal Media Bay Kits are required for this option. (HPE ProLiant DL560 Gen10 Universal Media Bay kit - 872267-B21).

HPE 9.5mm SATA DVD-RW JackBlack G9 Optical Drive 726537-B21

Core Options

NOTE: The optional Universal Media Bay Kits are required for this option. (HPE ProLiant DL560 Gen10 Universal Media Bay kit - 872267-B21).

HPE Mobile USB Non Leaded System DVD RW Drive

701498-B21

NOTE: External.

HPE Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Enterprise - 12G SAS - SFF Drives

HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870753-B21
HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872475-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870757-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	870763-B21
HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872477-B21
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870759-B21
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	870765-B21
HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872479-B21
HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	872481-B21
HPE 2.4TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	881457-B21

Midline - 12G SAS - SFF Drives

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD	832514-B21
HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	765464-B21
HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765466-B21

SSD Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, HPE recommends SSDs from the list located here: <http://www.hpe.com/products/recommend>.

Write Intensive - SAS - SFF - Solid State Drives

HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873351-B21
HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873355-B21
HPE 1.6TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873357-B21

Write Intensive - SATA - SFF - Solid State Drives

HPE 400GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872355-B21
HPE 800GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872359-B21
HPE 1.6TB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872363-B21

Read Intensive - SAS - SFF - Solid State Drives

HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872390-B21
HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872392-B21
HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872394-B21
HPE 7.68TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	870144-B21

Read Intensive - SATA - SFF - Solid State Drives

HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868814-B21
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	877740-B21
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875503-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	877746-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868818-B21

Core Options

HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875509-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	877752-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868822-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875511-B21
HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	877758-B21
HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868826-B21
HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875513-B21
HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	877764-B21
HPE 3.8TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868830-B21

Read Intensive - NVMe - SFF - Solid State Drives

HPE 480GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	875587-B21
HPE 960GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	875589-B21
HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	875591-B21

NOTE: A NVMe (878366-B21) or Premium (878364-B21) drive cage are required to support these drives in conjunction with the NVMe riser kit (878360-B21).

NOTE: NVMe drives are not supported by HPE Smart Array controllers.

Read Intensive – M.2 – Solid State Drives

HPE 150GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD	875317-B21
HPE Dual 150GB SATA Read Intensive M.2 - UFF to SFF SCM 3yr Wty Digitally Signed Firmware SSD	880875-B21
HPE 480GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD	875319-B21
HPE 480GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD	875498-B21
HPE Dual 480GB SATA Read Intensive M.2 - UFF to SFF SCM 3yr Wty Digitally Signed Firmware SSD	880877-B21
HPE 960GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD	875500-B21
HPE 1.92GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD	875496-B21

Mixed Use - SAS - SFF - Solid State Drives

HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872374-B21
HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873359-B21
HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872376-B21
HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873363-B21
HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872382-B21
HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873365-B21
HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872386-B21
HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873367-B21

Mixed Use - SATA - SFF - Solid State Drives

HPE 240GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	880295-B21
HPE 240GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875483-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875470-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	877776-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872344-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	877782-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875474-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872348-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	877788-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875478-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872352-B21

Core Options

Mixed Use - NVMe - SFF - Solid State Drives

HPE 400GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	875593-B21
HPE 800GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	875595-B21
HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	875597-B21

NOTE: A NVME (878366-B21) or Premium (878364-B21) drive cage are required to support these drives in conjunction with the NVMe riser kit (878360-B21).

NOTE: NVMe drives are not supported by HPE Smart Array controllers.

Mixed Use – SATA - M.2 – Solid State Drives

HPE 240GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD	875488-B21
HPE 480GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD	875490-B21
HPE 960GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD	875492-B21
HPE 1.92TB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD	875494-B21

NOTE: M.2 drives go in the Primary Riser and use S100i SATA controller only.

NOTE: M.2 supports Software RAID only.

Hard Drive Blank Kits

HPE Small Form Factor Hard Drive Blank Kit	666987-B21
--	------------

Hard Drive Kits

HPE Universal SATA HHHL 3yr Wty M.2 Kit	878783-B21
---	------------

HPE Networking

25 Gigabit Ethernet adapters

HPE Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter	817749-B21
HPE Ethernet 10/25Gb 2-port 640SFP28 Adapter	817753-B21
HPE Ethernet 4x25Gb 1-port 620QSFP28 Adapter	817762-B21
HPE Ethernet 10/25Gb 2-port 621SFP28 Adapter	867328-B21
HPE Ethernet 10/25Gb 2-port 631SFP28 Adapter	817718-B21

10 Gigabit Ethernet adapters

HPE Ethernet 10Gb 2-port 521T Adapter	867707-B21
HPE Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
HPE Ethernet 10Gb 2-port 530T Adapter	656596-B21
HPE Ethernet 10Gb 2-port 535T Adapter	813661-B21
HPE Ethernet 10Gb 2-port 562T Adapter	817738-B21
HPE Ethernet 10Gb 2-port 562SFP+ Adapter	727055-B21

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/us/en/product-catalog/servers/server-adapters.hits-12.html>

1 Gigabit Ethernet adapters

HPE Ethernet 1Gb 4-port 331T Adapter	647594-B21
HPE Ethernet 1Gb 2-port 332T Adapter	615732-B21
HPE Ethernet 1Gb 2-port 361T Adapter	652497-B21
HPE Ethernet 1Gb 4-port 366T Adapter	811546-B21

FlexibleLOM Adapters

HPE Ethernet 1Gb 4-port 331FLR Adapter	629135-B22
HPE Ethernet 1Gb 4-port 366FLR Adapter	665240-B21

Core Options

HPE FlexFabric 10Gb 2-port 533FLR-T Adapter	700759-B21
HPE FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter	700751-B21
HPE Ethernet 10Gb 2-port 535FLR-T Adapter	817721-B21
HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter	727054-B21
HPE Ethernet 10Gb 2-port 562FLR-T Adapter	817745-B21
HPE Ethernet 10/25Gb 2-port 622FLR-SFP28 Converged Network Adapter	867334-B21
HPE Ethernet 10/25Gb 2-port 631FLR-SFP28 Adapter	817709-B21
HPE FlexFabric 10Gb 4-port 536FLR-T Adapter	764302-B21

NOTE: Please see the NIC QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/us/en/product-catalog/servers/server-adapters.hits-12.html>

HPE InfiniBand

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter	764284-B21
HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR-QSFP Adapter	764285-B21
HPE InfiniBand EDR/Ethernet 100Gb 1-port 840QSFP28 Adapter	825110-B21
HPE InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter	825111-B21
HPE 100Gb 1-port OP101 QSFP28 x8 PCIe Gen3 with Intel® Omni-Path Architecture Adapter	829334-B21
HPE 100Gb 1-port OP101 QSFP28 x16 PCIe Gen3 with Intel® Omni-Path Architecture Adapter	829335-B21
HPE InfiniBand EDR 100Gb 1-port 841QSFP28 Adapter	872725-B21

NOTE: For additional InfiniBand information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154440>

HPE I/O Expansion Options

HPE DL580 Gen10 7-slot 4 x8/3 x16 Primary Riser Kit	878214-B21
HPE DL580 Gen10 9-slot 6 x8/3 x16 Secondary Riser Kit	872340-B21

NOTE: Includes the tertiary riser kit.

HPE DL580 Gen10 2x 4-port 16 NVMe Slimline Riser Kit	878360-B21
--	------------

NOTE: Occupies the primary riser slot. Includes a primary 4-port riser and a 4-port NVMe mezzanine card. The 4-port NVMe mezzanine card It goes on top of the HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) and requires a 3 or 4 processor configuration to support all 16 NVMe drives.

NOTE: Must be selected if more than 8 NVMe drives are selected. It supports upto 16 NVMe drives.

NOTE: Does not contain any additional PCIe slots.

HPE DL580 Gen10 6-slot 4 x8/2 x16 2-port 4 NVMe Slimline Primary Riser Kit	872336-B21
HPE DL580 Gen10 8-slot 6 x8/2 x16 2-port 4 NVMe Slimline Secondary Riser Kit	872338-B21

NOTE: Secondary riser kit includes the tertiary riser kit.

NOTE: A maximum of 2 risers can be selected, 1 primary riser and another secondary riser (which includes tertiary riser kit).

NOTE: Risers are optional kits which can be utilized depending on riser and processor selection. Refer to "Expansion Slots" section for additional details on risers.

HPE Power Supplies

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	830272-B21
--	------------

NOTE: Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).

NOTE: 1600W Power supplies only support high line voltage (200VAC to 240VAC).

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865414-B21
---	------------

NOTE: 4x 800W power supplies must be selected.

NOTE: Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard

Core Options

C-14 power inlet connector.

NOTE: Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hpe.com/info/hppoweradvisor>.

NOTE: All power supplies in a server should match. Mixing Power Supplies is not supported.

NOTE: Option kits contain the specified power supply and a PDU IEC cable.

NOTE: HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional HPE power cords.

Part number	Card	Qty support	Processor support	PCIe speed
Q0V76A	NVIDIA Quadro P6000 GPU Module	4	All	Gen3
Q0V80A	NVIDIA Tesla P40 24GB Module	4	All	Gen3

NOTE: Check the power usage via the HPE Power Advisor Tool located at <http://www.hpe.com/info/hppoweradvisor>.

NOTE: A maximum of four GPU cards can be supported, two in primary riser expansion slots (4 and 6) and another two in secondary riser expansion slots (11 and 13). A GPU bracket (P00268-B21) kit is needed to install GPUs in slots 4 and 11 and must be ordered along with the GPU cable kits 871828-B21 (for P6000) or 871829-B21 (for P40). Refer Expansion Slots sections for additional details on risers.

NOTE: 1 cable kits supports three GPUs and two cable kits must be ordered when supporting four GPUs.

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

iLO Advanced

HPE iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU	E6U59ABE
HPE iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU	E6U64ABE
HPE iLO Advanced including 3yr 24x7 Tech Support and Updates 1-server LTU	BD505A
HPE iLO Advanced including 3yr 24x7 Tech Support and Updates Flexible Quantity LTU	BD506A
HPE iLO Advanced including 3yr 24x7 Tech Support and Updates Tracking LTU	BD507A

HPE Converged Infrastructure Management Software

HPE OneView Physical Media Kit LTU	E5Y37A
------------------------------------	--------

HPE OneView Advanced (with HPE iLO Advanced)

HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU	E5Y43A

HPE OneView Advanced (without HPE iLO Advanced)

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE

NOTE: Full licenses of HPE OneView Advanced also provide the right-to-use HPE Insight Control without additional charge.

NOTE: Server provisioning (via 'HPE Insight Control server provisioning') is licensed as part of HPE OneView Advanced and provides multi-server OS and driver provisioning.

NOTE: Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>.

NOTE: Electronic and flexible-quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Please see the [HPE OneView QuickSpecs](#) for technical specifications and additional information.

HPE PCIe Workload Accelerator Options

HPE Write Intensive PCIe Workload Accelerator

HPE 1.6TB NVMe Write Intensive HH/HL PCIe Workload Accelerator	803197-B21
HPE 800GB NVMe Write Intensive HH/HL PCIe Workload Accelerator	803195-B21

HPE Mixed Use PCIe Workload Accelerator

HPE 2.0TB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803204-B21
HPE 1.6TB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803202-B21
HPE 800GB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803200-B21
HPE 1.6TB PCIe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card	877825-B21
HPE 3.2TB PCIe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card	877827-B21
HPE 6.4TB PCIe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card	877829-B21

NOTE: Please see the [HPE PCIe Workload Accelerators for ProLiant Servers QuickSpecs](#) for Technical Specifications and additional information.

Additional Options


HPE Security

HPE Trusted Platform Module 2.0 Gen10 Option	864279-B21
HPE Gen10 4U Bezel Kit	869872-B21
OEM Gen10 4U Bezel Kit	869873-B21
HPE Gen10 Chassis Intrusion Detection Kit	867824-B21
HPE Bezel Lock Kit	875519-B21

NOTE: HPE Trusted Platform Module 2.0 Option (864279-B21) works with Gen10 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen9 servers or earlier generation variants. HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

HPE Smart Array Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#).

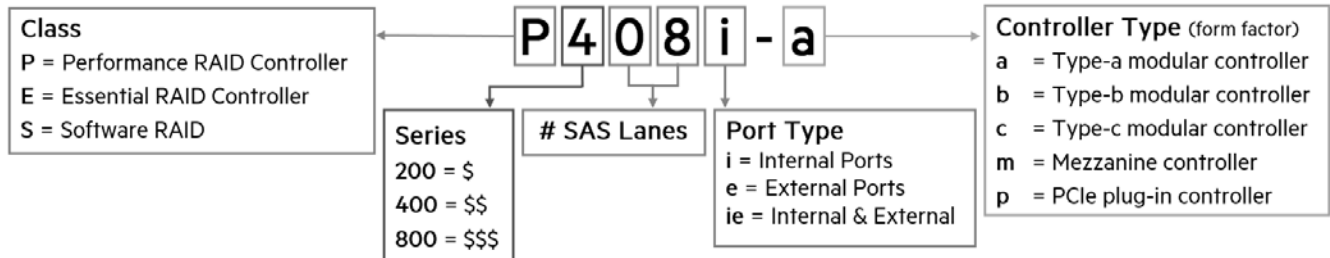

Performance RAID Controllers

NOTE: All performance RAID controllers are supported by the HPE Smart Storage Battery (P01366-B21), which supports multiple devices and is sold separately.

NOTE: Only standup controllers are supported and there is no support for AROC controllers.

HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller	830824-B21
HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller	804405-B21

Essential RAID Controllers

HPE Smart Array E208i-p SR Gen10 (8 Internal Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804394-B21
HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804398-B21

Optional Software

HPE Smart Array SR Secure Encryption (Data at Rest Encryption/per Server Entitlement) E-LTU	Q2F26AAE
HPE Smart Array SR SmartCache (Single Key/Single Server) LTU	D7S26A
HPE Smart Array SR SmartCache (Single Key/Multiple Servers) LTU	D7S27A
HPE Smart Array SR SmartCache (Single Key/Multiple Servers) E-LTU	D7S27AAE

NOTE: SmartCache is offered on HPE Smart Array performance RAID controllers.

Optional Upgrades

HPE 96W Smart Storage Battery (up to 20 Devices) with 145mm Cable Kit	P01366-B21
---	------------

NOTE: Provides backup power for multiple HPE Smart Array controllers or other devices. Is required with performance RAID controllers.

HPE Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see:

<http://www.hpe.com/storage/storeever>. For hardware and software compatibility of Hewlett Packard Enterprise tape backup products <http://www.hpe.com/storage/BURAccompatibility>.

Additional Options

HPE Storage Options

Emulex Fibre Channel HBAs

HPE StoreFabric SN1200E 16Gb Single Port Fibre Channel Host Bus Adapter	Q0L13A
HPE StoreFabric SN1200E 16Gb Dual Port Fibre Channel Host Bus Adapter	Q0L14A
HPE StoreFabric SN1600E 32Gb Single Port Fibre Channel Host Bus Adapter	Q0L11A
HPE StoreFabric SN1600E 32Gb Dual Port Fibre Channel Host Bus Adapter	Q0L12A

QLogic Fibre Channel HBAs

HPE StoreFabric SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter	P9D93A
HPE StoreFabric SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter	P9D94A
HPE StoreFabric SN1600Q 32Gb Single Port Fibre Channel Host Bus Adapter	P9M75A
HPE StoreFabric SN1600Q 32Gb Dual Port Fibre Channel Host Bus Adapter	P9M76A

Converged Network Adapter

HPE StoreFabric CN1100R Dual Port Converged Network Adapter	QW990A
HPE StoreFabric CN1100R 10GBASE-T Dual Port Converged Network Adapter	N3U52A
HPE StoreFabric CN1200E 10Gb Converged Network Adapter	E7Y06A
HPE StoreFabric CN1200E 10GBASE-T Dual Port Converged Network Adapter	N3U51A

HPE Racks

NOTE: Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

NOTE: Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

NOTE: Please see the [HPE Standard Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Power Distribution Units (PDUs)

NOTE: Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

NOTE: Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

NOTE: Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.

NOTE: Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

HPE Uninterruptible Power Systems (UPS)

NOTE: To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#)

NOTE: Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.

NOTE: Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

HPE Rack Options

NOTE: Please see the [HPE KVM Switches web page](#) for information on these products and their specifications.

Rail Kits

HPE DL580 Gen10 4U Rail Kit with Cable Management Arm	872151-B21
---	------------

Additional Options

HPE USB and SD Options

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HPE 32GB microSD Mainstream Flash Media Kit	700139-B21
HPE 8GB microSD Enterprise Mainstream Flash Media Kit	726116-B21
HPE 8GB USB Enterprise Mainstream Flash Media Drive Key Kit	737953-B21
HPE Dual 8GB microSD Enterprise Midline USB Kit	741279-B21

NOTE: Please see the [HPE Flash Media Kits QuickSpecs](#) for additional information.

HPE Support Services


HPE 3Y PC 24x7 DL580 Gen10 SVC	H9FX1E
HPE 3Y PC 24x7 wDMR DL580 Gen10 SVC	H9FX2E
HPE 3Y PC CTR DL580 Gen10 SVC	H9FY0E
HPE 3Y PC CTR wDMR DL580 Gen10 SVC	H9FY1E
HPE 3Y PC 24x7 wCDMR DL580 Gen10 SVC	H9FX3E
HPE 3Y PC CTR wCDMR DL580 Gen10 SVC	H9FY2E

Memory

Memory Population guidelines

HPE DL360/DL380/DL560*/DL580* Gen10 servers

2 slots per channel

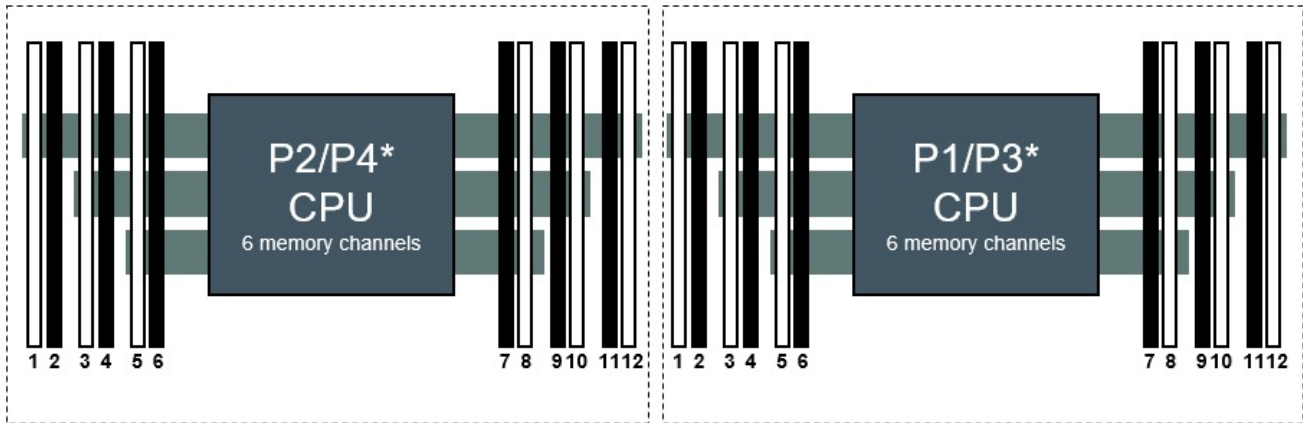

* HPE DL560/DL580 is a 4 socket server (uses P3, P4)

Front of server

HPE ProLiant Gen10 12 slot per CPU DIMM Population Order											
1 DIMM							8				
2 DIMMs							8	10			
3 DIMMs							8	10		12	
4 DIMMs			3		5		8	10			
5 DIMMs *			3		5		8	10			12
6 DIMMs	1		3		5		8	10			12
7 DIMMs *	1		3		5		7 8	10			12
8 DIMMs			3	4	5	6	7 8	9 10			
9 DIMMs *	1		3		5		7 8	9 10	11	12	
10 DIMMs *	1		3	4	5	6	7 8	9 10			12
11 DIMMs *	1		3	4	5	6	7 8	9 10	11	12	
12 DIMMs	1	2	3	4	5	6	7 8	9 10	11	12	
* Unbalanced, not recommended											

General Memory Population Rules and Guidelines:

- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.

Memory

- For details on the HPE Server Memory Options Population Rules, visit: <http://www.hpe.com/docs/memory-population-rules>.
- To realize the performance memory capabilities listed in this document, HPE DDR4 SmartMemory is required. For additional information, please see the [HPE DDR4 SmartMemory QuickSpecs](#).

HPE 16GB NVDIMM for Gen10 Servers - Population Rules and Guidelines:

- Maximum of (12) 16GB NVDIMMs for 2 socket servers and (24) 16GB NVDIMMs for 4 socket servers.
- If NVDIMM-N interleaving is disabled, then any number of NVDIMM-Ns may be used, and the NVDIMM-Ns should be populated in this order:
 - Choose a CPU with open slots (based on NUMA proximity), if any.
 - Pick a channel with two open slots, if any. This keeps the NVDIMM-N from sharing bandwidth with regular memory. Populate the white slot.
 - Pick a channel with an open slot that already has an NVDIMM-N rather than a regular DIMM, if any. This slot must be a black slot. Keep NVDIMM-N traffic away from regular DIMM traffic.
- If NVDIMM-N interleaving is enabled, then the same interleaving balance restrictions that applied to regular DIMMs also apply to the NVDIMM-Ns using the remaining open slots. When assigning the NVDIMM-Ns to those open channels per the regular DIMM placement rules:
 - It's important to keep the same number of DIMMs on the same memory controller.
 - Choose the number of NVDIMM-Ns per CPU based on desired block device size and NUMA locality.
 - Pick a memory controller with a channel with two open slots, if any.
 - Pick a channel with two open slots, if any. This keeps the NVDIMM-N from sharing bandwidth with regular memory. Populate the white slot.
- Please visit the [HPE Server Memory Options Population Rules](#) for detailed configuration rules and best practices.

Memory Speed Table					
500 Series Platforms - DL580 Gen 10					
DIMM Type	Register DIMM (RDIMM)				
HPE SKU P/N	815097-B21	876181-B21	815098-B21	835955-B21	815100-B21
SKU Description	HPE 8GB 1Rx8 PC4-2666V-R Kit	HPE 8GB 2Rx8 PC4-2666V-R Kit	HPE 16GB 1Rx4 PC4-2666V-R Kit	HPE 16GB 2Rx8 PC4-2666V-R Kit	HPE 32GB 2Rx4 PC4-2666V-R Kit
DIMM Rank ->	Single Rank (1R)	Dual Rank (2R)	Single Rank (1R)	Dual Rank (2R)	Dual Rank (2R)
DIMM Capacity ->	8 GB	8 GB	16 GB	16 GB	32 GB
Voltage	1.2V	1.2V	1.2V	1.2V	1.2V
DRAM depth [bit]	1G	512 MB	2G	1G	2G
DRAM Width [bit]	x8	x8	x4	x8	x4
DRAM Density	8 Gb	4 Gb	8 Gb	8 Gb	8 Gb
CAS Latency	19-19-19	19-19-19	19-19-19	19-19-19	19-19-19
DIMM Native Speed (MT/s)	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
Intel® Xeon® Platinum and Gold 81xx/61xx Processors Officially Supported Memory Speed (MT/s)					
1 DIMM Per Channel	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
2 DIMM Per Channel	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
Intel® Xeon® Gold 51xx Processors Officially Supported Memory Speed (MT/s)					
1 DIMM Per Channel	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s
2 DIMM Per Channel	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s

Memory

DIMM Type	Load Reduced (LRDIMM)	Load Reduced (LRDIMM)
HPE SKU P/N	815101-B21	815102-B21
SKU Description	HPE 64 GB 4Rx4 PC4-2666V-L Kit	HPE 128GB 8Rx4 PC4-2666V-L Kit
DIMM Rank ->	Quad Rank (4R)	Octal Rank (8R)
DIMM Capacity ->	64 GB	128 GB
Voltage	1.2V	1.2 V
DRAM depth [bit]	2G	2G
DRAM Width [bit]	x4	x4
DRAM Density	8 Gb	8 Gb
CAS Latency	19-19-19	22-19-19
DIMM Native Speed (MT/s)	2666 MT/s	2666 MT/s
Intel® Xeon® Platinum and Gold 81xx/61xx Processors Officially Supported Memory Speed (MT/s)		
1 DIMM Per Channel	2666 MT/s	2666 MT/s
2 DIMM Per Channel	2666 MT/s	2666 MT/s
Intel® Xeon® Gold 51xx Processors Officially Supported Memory Speed (MT/s)		
1 DIMM Per Channel	2400 MT/s	2400 MT/s
2 DIMM Per Channel	2400 MT/s	2400 MT/s

For details on the HPE Server Memory speed, visit: <https://www.hpe.com/docs/memory-speed-table>

Standard and Maximum Memory Capacity (Pre-configured Models)

Pre Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
5120	64 GB (4 x16 GB)	384 GB (24 x16 GB)	6144GB (48 x128 GB)
6148	128 GB (8 x16 GB)	384 GB (48 x16 GB)	6144GB (48 x128 GB)
8164	256 GB (8 x32 GB)	1536 GB (48 x32 GB)	6144GB (48 x128 GB)

DDR4 memory options part number decoder


NOTE: Capacity references are rounded to the common gigabyte (GB) values.

- 4 GB = 4,096 MB
- 8 GB = 8,192 MB
- 16 GB = 16,384 MB
- 32 GB = 32,768 MB
- 64 GB = 65,536 MB
- 128 GB = 131,072 MB

For more information on memory, please see the Memory QuickSpecs: [HPE DDR4 SmartMemory](#)

Storage

24 SFF (+2 SFF) hot-plug drive model and 16 NVMe SSDs with Universal Media Bay

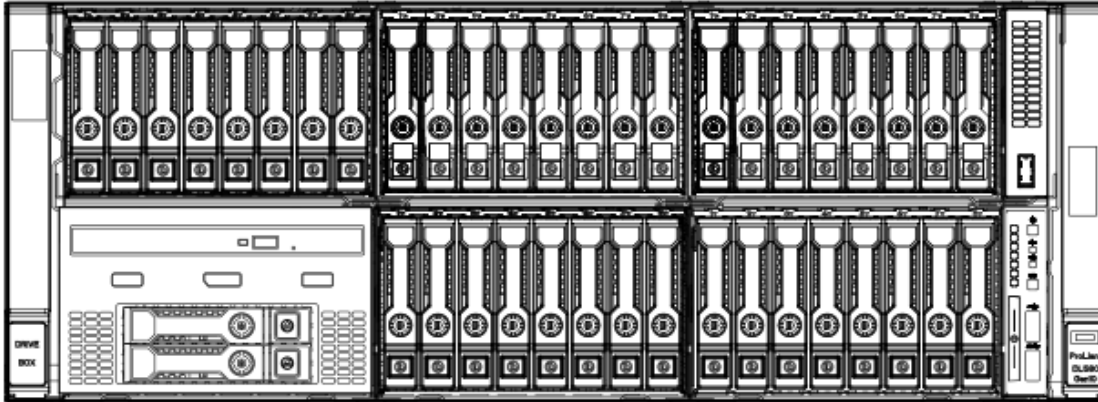

Technical Specifications

System Unit

Dimensions (H x W x D) (with bezel)	17.48cm x 44.55cm x 75.18cm 6.88 x 17.54 x 29.60 in	
Weight (approximate)	51.71 kg 114 lb 28.12 kg 62 lb	Maximum: (all hard drives, power supplies, DIMMs and processors installed) Minimum: (one processor, one standard heatsink, one air baffle, one hard drive, two power supply, one DIMM, one NIC one rail kit with CMA and one primary riser installed)
Input Requirements (per power supply)	Rated Input Voltage	100 - 127 VAC, 200 – 240 VAC, 240VDC for China Only (800W Platinum PS only) 200 - 240 VAC, 240 VDC for China only (1600W PS only)
	Rated Input Current	9.4 A (100 VAC), 4.5 A (200 VAC), 3.8 A at 240VDC for China only (800W Platinum PS only) 8.7 A at 200 VAC, 7.2 A at 240 VAC - (1600W PS only)
	Rated Input Frequency	50 to 60 Hz (Not applicable for VDC ranges)
	Maximum Rated Input Power	940 W (100 VAC), 900 W (200VAC), 912 W at 240 VDC for China only - (800W Platinum PS only) 1734 W at 200 VAC 1720 W at 240 VAC - (1600W PS only)
BTU Rating	Maximum	3207 BTU/hr at 100 VAC, 3071 BTU/hr at 200 VAC, 3112 BTU/hr at 240 for China only - (800W Platinum PS only) 5918 BTU/hr at 200 VAC, 5884 BTU/hr at 240 VAC - (1600W PS only)
Power Supply Output (per power supply)	Rated Steady-State Power	800 W at 100 VAC to 127 VAC input, 800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Platinum PS only) 1600 W at 200 VAC to 240 VAC input, 1600 W at 240 VDC input - (1600W PS only)
	Maximum Peak Power	800 W at 100 VAC to 127 VAC input, 800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Platinum PS only) 2200 W for 1ms (turbo mode) at 200 VAC to 240 VAC input - (1600W PS only)
		NOTE: To review typical system power ratings use the HPE Power Advisor which is available online located at url: http://www.hpe.com/info/hppoweradvisor .
System Inlet Temperature	Standard Operating Support	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).
	Extended Ambient Operating Support	For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hpe.com/servers/ashrae

Technical Specifications

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
Relative Humidity	Operating	8% to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
(non-condensing)	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
Altitude	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Acoustic Noise

Listed are the declared A-Weighted sound power levels (L_{WA_d}) and declared average bystander position A-Weighted sound pressure levels (L_{pA_m}) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Product Configuration	Entry	Base	Performance
Idle - L_{WA_d}	5.4 B	5.4 B	5.3 B
Idle - L_{pA_m}	37 dBA	36 dBA	36 dBA
Operating - L_{WA_d}	5.8 B	6.1 B	6.1 B
Operating - L_{pA_m}	39 dBA	43 dBA	44 dBA

NOTE: Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.

Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

Please refer to the appropriate QuickSpecs lists below for technical specifications on controllers.

For information on the HPE Smart Array E208i-p SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array E208e-p SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array P408i-p SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array P408e-p SR Gen10 Controller please refer to their [QuickSpecs](#).

Technical Specifications

Environment-friendly Products and Approach

End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs** in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
18-Dec-2017	From Version 3 to 4	Changed	Configuration Information – Factory Integrated Models and Core Options were revised.
04-Dec-2017	From Version 2 to 3	Added	Added support for new core boosting Intel® Xeon® Processors 6143 and 8165. Added support for up to 24 16GB NVDIMM.
		Changed	Processors, Memory, and Acoustic Noise were revised.
16-Oct-2017	From Version 1 to 2	Added	Added note – 1600W Power supplies only support high line voltage (200VAC to 240VAC) – to power supplies. Added HPE Support Services. Added acoustic noise to the Technical Specifications section.
25-Sep-2017	Version 1	New	New QuickSpecs.



[Sign up for updates](#)

© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a00021850ENW - 16053 - Worldwide – V4 - 18-December-2017

