

# Liebert® IS-WEBRT3 Card™

## Quick Start Guide

### 1 INSTALL


- Locate the Liebert IntelliSlot bay on your Liebert equipment. You might need to remove a plastic cover.
- Insert the Liebert IS-WEBRT3 Card into the bay.
- Secure the card with the supplied screws.
- Connect the card to your network with a CAT5 Ethernet cable.



### 2 SET LIEBERT IS-WEBRT3 CARD PASSWORD

- Insert the Liebert PSI-RT3 Software CD and install Liebert DeskPro-Net Utility on your computer.
- Start Liebert DeskPro-Net Utility by clicking on **Start>Programs>NetAgent>DeskPro-Net Utility**. The software will automatically find and list available Liebert IS-WEBRT3 cards.
- Double-click on a card in the list to launch it.
- Enter an Account (login name) and Password—**Record the login and password and save them in a safe place.**

Control functions

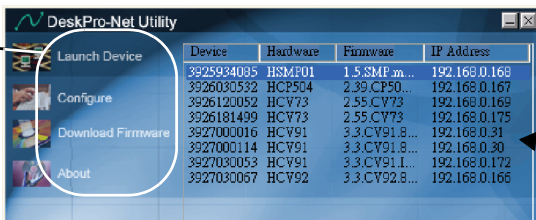

Device	Hardware	Firmware	IP Address
3925934035	HSMF01	1.5.SMP.m...	192.168.0.168
3926030592	HCP504	2.39.CP50...	192.168.0.167
3926120052	HCY73	2.55.CY73	192.168.0.169
3926181499	HCY73	2.55.CY73	192.168.0.175
3927000016	HCY91	3.3.CY91.3...	192.168.0.31
3927000114	HCY91	3.3.CY91.3...	192.168.0.30
3927030053	HCY91	3.3.CY91.1...	192.168.0.172
3927030057	HCY92	3.3.CY92.3...	192.168.0.166

Liebert IS-WEBRT3 cards found

### 3 CONFIGURE LIEBERT IS-WEBRT3 CARD

- Highlight the card in the list and click **Configure** to change the card's IP address, subnet mask, and gateway settings (see your network administrator for the settings).

The Liebert IS-WEBRT3 card can be used with DHCP or BOOTP, where the system assigns an address, but this makes troubleshooting difficult.

- Liebert MultiLink™ will communicate with the Liebert IS-WEBRT3 card. The software can be configured to shut down a computer system in response to utility power failure and the UPS' battery backup time.

## User Manual

This Quick Start Guide is designed to give you the information you need to install and configure the Liebert IS-WEBRT3 Card. A full user manual, SL-52665, is available online at [www.liebert.com](http://www.liebert.com). Liebert recommends that new users consult the user manual.

## Web Support

The IS-WEBRT3 Card delivers Web management and control to Liebert equipment. All users on your network will be able to view status information. Control and configuration capabilities are protected by a username and password combination.

You can change the password from the Web or from DeskPro-Net Utility.

## Liebert MultiLink™ Support

Liebert MultiLink software, can be downloaded at [multilink.liebert.com](http://multilink.liebert.com)

## SNMP Support

The Liebert IS-WEBRT3 Card enables SNMP management of Liebert PSI equipment. To integrate the card into your SNMP implementation, you will need to compile the UPS MIB on your network management station (NMS). The UPS MIB is included in this package on CD-ROM and supports both Windows and Unix file formats.

## Liebert Nform Support

Utilizing the SNMP and Web technologies built into each of the Intellislot Web cards, Liebert Nform will centrally manage alarm notifications to provide you with an easy interface to access critical system information.

A downloadable edition is available online at [nform.liebert.com](http://nform.liebert.com)

---

## Technical Support/Service

### Web Site

[www.liebert.com](http://www.liebert.com)

### Monitoring

800-222-5877

[monitoring@emersonnetworkpower.com](mailto:monitoring@emersonnetworkpower.com)

Outside the US: 614-841-6755

### Locations

#### United States

1050 Dearborn Drive

P.O. Box 29186

Columbus, OH 43229

### Locations

#### Europe

Via Leonardo Da Vinci 8  
Zona Industriale Tognana  
35028 Piove Di Sacco (PD) Italy  
+39 049 9719 111  
Fax: +39 049 5841 257

#### Asia

7/F, Dah Sing Financial Centre  
108 Gloucester Road, Wanchai  
Hong Kong  
852 25722201  
Fax: 852 28029250

SL-52660\_REV01\_07-08

