


Overview


HP ProLiant DL380 Generation9 (Gen9)

The HP ProLiant DL380 Gen9 Server delivers the best performance and expandability in the HP 2P rack portfolio. Reliability, serviceability and near continuous availability, backed by a comprehensive warranty, make it ideal for any environment. Deploy the data center standard.

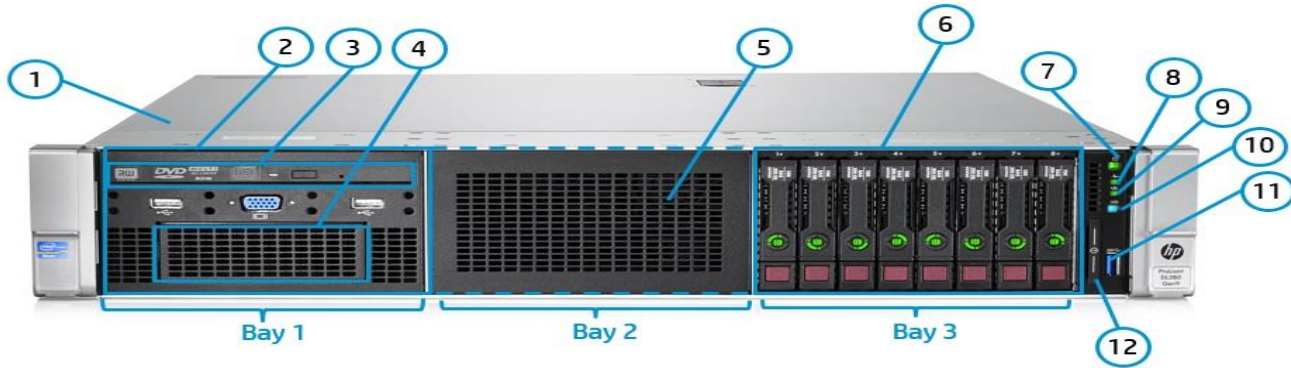

Front View - 8SFF Chassis with Optional Universal Media Bay shown

1. Quick removal access panel
2. Universal Media bay. 2 USB 2.0 and VGA standard (8SFF bay optional)
3. Optional Optical drive. Requires Universal Media bay
4. Optional 2 SFF HDD, blank shown. Requires Universal Media bay.
5. Drive Bay 2. Blank shown, 8SFF optional.
6. 8 SFF Drive Cage Bay
7. Power On/Standby button and system power LED button
8. Health LED
9. NIC status
10. UID button
11. USB 3.0
12. Serial label pull tag

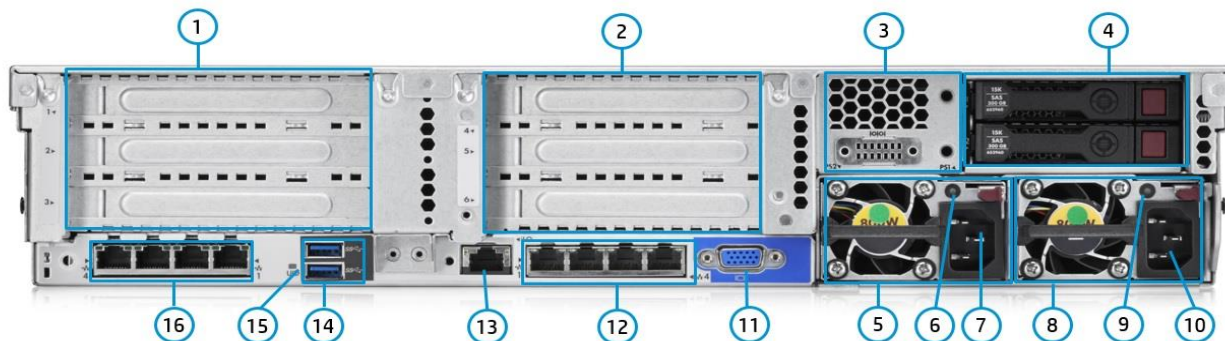


Rear view

1. PCI Slots (Slots 1-3 top to bottom, riser shipped standard)
2. PCI Slots (Slots 4-6 top to bottom, requires second riser card, and second processor)
3. Optional serial port
4. Optional rear 2 SFF HDD (supported in 24 SFF or 12 LFF front end)
5. HP Flexible Slot Power Supply bay 1 (800w shown)

Overview

6. Power supply Power LED
7. Power supply Power connection
8. HP Flexible Slot Power Supply bay 2 (800w shown)
9. Power supply Power LED
10. Power supply Power connection
11. VGA connector
12. Embedded 4 x 1GbE Network Adapter
13. Dedicated iLO connector
14. USB 3.0 connectors (2)
15. Unit ID LED
16. Optional FlexibleLOM ports (Shown: 4 x 1GbE)

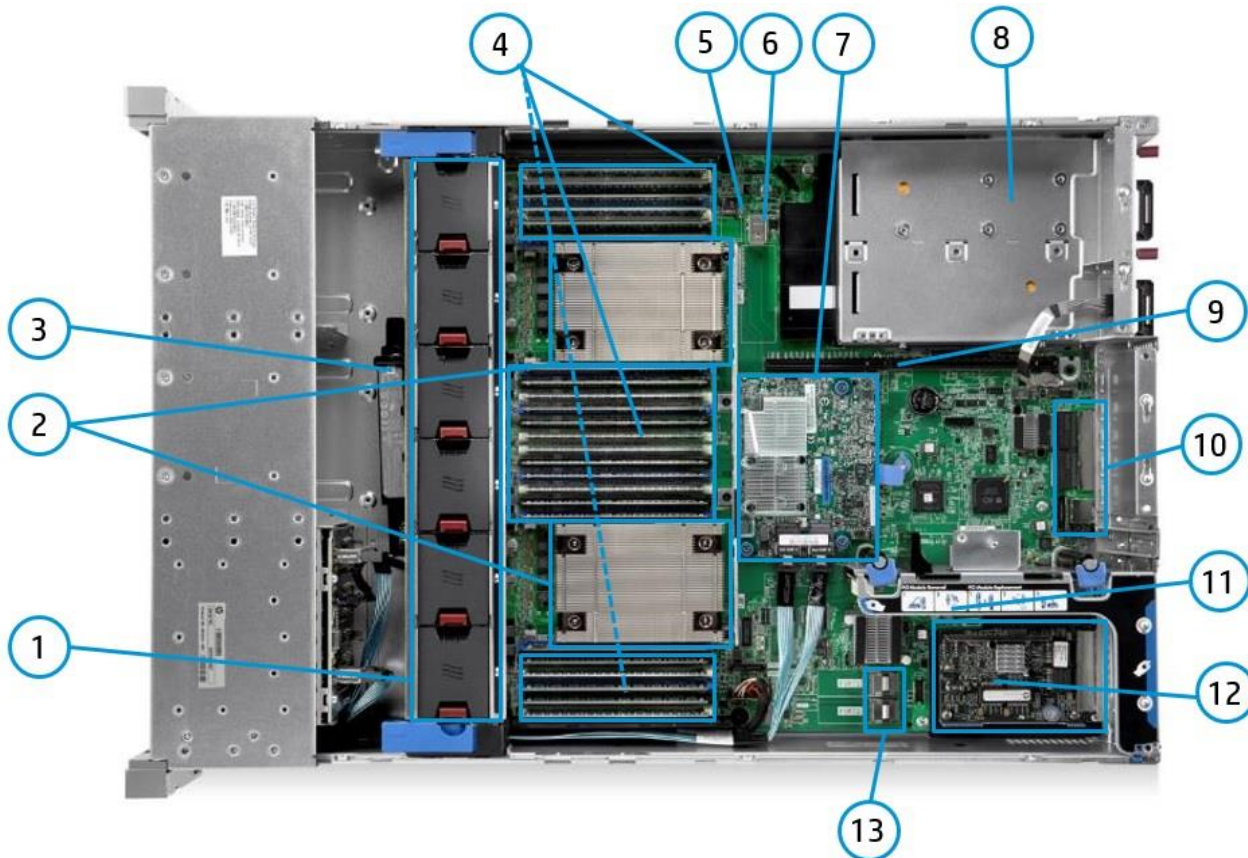

Internal View

1. Fan cage shown with 6 standard Hot-plug fans (High Performance fans optional)
2. 2 Processors, heatsink showing, with HP Smart Socket Guide
3. Optional HP Smart Storage Battery
4. DDR4 DIMM slots. Shown fully populated in 24 slots (12 per processor)
5. MicroSD card slot
6. Internal USB 3.0 connector
7. Optional HP Flexible Smart Array or Smart HBA (H240ar shown)
8. (Under) Hot Plug redundant HP Flexible Slot Power supplies

Overview

9. Connection for second (optional) riser (Required second CPU)
10. Embedded 4x1Gbe NIC
11. Primary PCIe riser, standard (Optional double wide GPU riser)
12. Optional Flexible LOM slot
13. X4 SATA ports (1 and 2)

What's New

- HP OneView 2.0 for HP ProLiant (DL) Rack Gen9 Servers provides converged management that reduces infrastructure complexity with automation simplicity
 - New storage options including HDDs and the H241 Smart Array HBA.
 - Accelerated performance with additional Graphics card offering adding support for NVIDIA GRID K1 and Intel's Xeon Phi 5110p; and new PCIe Workload Accelerator options.
 - Up to 40Gb Networking with new Infiniband options.
-

Standard Features

NOTE: For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Intel® Xeon® processor E5-2600 v3 product family is designed to deliver the best combination of performance, built-in capabilities, and cost-effectiveness. One (or two) of the following Intel® Xeon® E5-2600 v3 processors based on the model.

| Processor | Model | CPU frequency | Cores | L3 Cache | Power | QPI | DDR4 Hz |
|---|------------|---------------|-------|----------|---------|---------|---------|
| Up to two of the following depending on model | E5-2699v3 | 2.3GHz | 18 | 45MB | 145W | 9.6GT/s | 2133 |
| | E5-2698v3 | 2.3GHz | 16 | 40MB | 135W | 9.6GT/s | 2133 |
| | E5-2697v3 | 2.6GHz | 14 | 35MB | 145W | 9.6GT/s | 2133 |
| | E5-2695v3 | 2.3GHz | 14 | 35MB | 120W | 9.6GT/s | 2133 |
| | E5-2690v3 | 2.6GHz | 12 | 30MB | 135W | 9.6GT/s | 2133 |
| | E5-2687Wv3 | 3.1GHz | 10 | 25MB | 160W | 9.6GT/s | 2133 |
| | E5-2683v3 | 2.0GHz | 14 | 35MB | 120W | 9.6GT/s | 2133 |
| | E5-2680v3 | 2.5GHz | 12 | 30MB | 120W | 9.6GT/s | 2133 |
| | E5-2670v3 | 2.3GHz | 12 | 30MB | 120W | 9.6GT/s | 2133 |
| | E5-2667v3 | 3.2GHz | 8 | 20MB | 135W | 9.6GT/s | 2133 |
| | E5-2660v3 | 2.6GHz | 10 | 25MB | 105W | 9.6GT/s | 2133 |
| | E5-2650v3 | 2.3GHz | 10 | 25MB | 105W | 9.6GT/s | 2133 |
| | E5-2650Lv3 | 1.8GHz | 12 | 30MB | 65W | 9.6GT/s | 2133 |
| | E5-2643v3 | 3.4GHz | 6 | 20MB | 135W | 9.6GT/s | 2133 |
| | E5-2640v3 | 2.6GHz | 8 | 20MB | 90W | 8.0GT/s | 1866 |
| | E5-2637v3 | 3.5GHz | 4 | 15MB | 135W | 9.6GT/s | 2133 |
| | E5-2630v3 | 2.4Ghz | 8 | 20MB | 85W | 8.0GT/s | 1866 |
| | E5-2630Lv3 | 1.8GHz | 8 | 20MB | 55W | 8.0GT/s | 1866 |
| | E5-2623v3 | 3.0GHz | 4 | 10MB | 105W | 8.0GT/s | 1866 |
| | E5-2620v3 | 2.4GHz | 6 | 15MB | 85W | 8.0GT/s | 1866 |
| E5-2609v3 | 1.9GHz | 6 | 15MB | 85W | 6.4GT/s | 1600 | |
| E5-2603v3 | 1.6GHz | 6 | 15MB | 85W | 6.4GT/s | 1600 | |

NOTE: All processors above 120W use a high efficiency Heatsink. Doublewide PCIe cards are only supported with this Heatsink. For processors with a standard Heatsink that require double wide cards we would need to leverage the Graphics Enablement kit (719082-B21).

Chipset Intel® C610 Series Chipset
Intel® E5-2600v3 Processor Family
NOTE: For more information regarding Intel chipsets, please see the following URL: <http://www.intel.com/products/server/chipsets/>.

On System Management Chipset HP iLO (Firmware HP iLO4 2.0) 4GB NAND
NOTE: 1GB USB user space configurable via UEFI and accessible via iLO. Read and learn more in the [iLO QuickSpecs](#).

Memory Type:
One of the following depending on model HP SmartMemory
DDR4 Registered (RDIMM) or Load Reduced (LRDIMM)
DIMM Slots Available 24 (12 DIMM slots per processor, 4 channels per processor, 3 DIMMs per channel)
Maximum Capacity (LRDIMM) 1.5TB (24 x 64GB LRDIMM @2133MHz)
Maximum Capacity (RDIMM) 384GB (24 x 16GB RDIMM @2133MHz)
NOTE: 64GB LRDIMMs, feature support to be available early 2015.

Memory Protection Advanced ECC
Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.

Standard Features

Online spare
Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

Expansion Slots

Primary Riser
(Standard)

| Expansion Slots # | Technology | Bus Width | Connector Width | Bus Number | Form Factor | Notes |
|-------------------|------------|-----------|-----------------|------------|-------------------------------|--------|
| 1 | PCIe 3.0 | x8 | x16 | 7 | Full-height, half-length slot | Proc 1 |
| 2 | PCIe 3.0 | x8 | x16 | 10 | Full-height, half-length slot | Proc 1 |
| 3 | PCIe 3.0 | x8 | x8 | 13 | Half length, full height slot | Proc 1 |

* Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number.

** Indicates the number of physical electrical lanes running to the connector.

NOTE: All slots support PCIe cards to 150W or more depending on card, but an additional Power Cord Option is required (PN 669777-B21). See Option Section below for offering.

Slot 2 PCIe Riser
(Optional 3-slot)
719073-B21

| Expansion Slots # | Technology | Bus Width | Connector Width | Bus Number | Device Number | Form Factor | Notes |
|-------------------|------------|-----------|-----------------|------------|---------------|-------------------------------|--------|
| 4 | PCIe 3.0 | x16 | x16 | 16 | | Full height, full length slot | Proc 2 |
| 5 | PCIe 3.0 | x16 | x16 | 20 | | Full height, full length slot | Proc 2 |
| 6 | PCIe 3.0 | x8 | x8 | 23 | | Full-height, half-length slot | Proc 2 |

* Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number.

** Indicates the number of physical electrical lanes running to the connector.

NOTE: When populating the second optional riser slot, the second processor must be installed.

NOTE: All slots support PCIe cards to 150W or more depending on card but an additional Power Cord Option is required (PN 669777-B21). See Option Section below for offering.

Slot 1 PCIe Riser
(Optional 2-slot)
719076-B21

| Expansion Slots # | Technology | Bus Width | Connector Width | Bus Number | Device Number | Form Factor | Notes |
|-------------------|------------|-----------|-----------------|------------|---------------|-------------------------------|--------|
| 2 | PCIe 3.0 | x16 | x16 | 0x05 | | Full height, full length slot | Proc 1 |
| 3 | PCIe 3.0 | x8 | x8 | 0x08 | | Full-height, half-length slot | Proc 1 |

* Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number.

** Indicates the number of physical electrical lanes running to the connector.

NOTE: This will replace the standard primary riser and supports double wide cards.

NOTE: All slots support PCIe cards to 150W or more depending on card, but an additional Power Cord Option is required (PN 669777-B21). See Option Section below for offering.

Storage Controller
One of the following depending on model

Entry Models
HP Dynamic Smart Array B140i Controller
NOTE: The embedded B140i controller will operate in UEFI only mode. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.
NOTE: The B140i defaults to AHCI off the chipset. Smart array needs to be enables on the SATA only models if required.
NOTE: The B140i will not operate in Legacy mode.

Base Models
HP Dynamic Smart Array B140i Controller
HP Flexible Smart Array P440ar/2G FIO Controller
HP Flexible Smart Array P840/4G FIO Controller

Performance Models
HP Dynamic Smart Array B140i Controller
HP Flexible Smart Array P440ar/2GB

Internal Storage Devices

Optical Drive
Ships standard in Performance Models
Optional: DVD-ROM, DVD-RW

Standard Features

| | | |
|---|---|---|
| One of the following depending on model | <p>Hard Drives</p> <p>Hard Drive Bays</p> | <p>None ship standard</p> <p>8 SFF with optional Universal Media bay or 8SFF bay options</p> <p>24 SFF plus optional 2 SFF drives rear</p> <p>12 LFF plus optional 3 LFF drives rear</p> <p>NOTE: The 3 LFF rear drives will consume space for the secondary riser.</p> <p>NOTE: The 12LFF chassis also supports 2SFF rear which allows for the second riser.</p> <p>4 LFF drive bays total</p> <p>NOTE: The Universal Media Bay (724865-B21) not available with the LFF chassis or the 24SFF front end, and can only be populated in Bay1.</p> <p>NOTE: The 8SFF can be upgraded with a drive cage to 16 or 24 SFF with field upgrades. For optimal upgrade Bay2 should be populated second, with Bay 13 the last to be populated for a field upgrade to 24 SFF.</p> <p>NOTE: The 4LFF chassis cannot be upgraded to 12LFF in the field.</p> <p>NOTE: All Pre-configured Chassis come with an embedded 10-Port SATA controller. Optional HP Flexible Smart Array and Smart SAS HBA Controllers can be added.</p> |
|---|---|---|

| Maximum Internal Storage | CAPACITY | CONFIGURATION |
|--------------------------|----------|--|
| Hot Plug SFF SAS | 31.2TB | 24+2 x 1.2TB (with optional rear SFF drive cage) |
| Hot Plug SFF SATA | 26.0TB | 24+2 x 1TB (with optional SFF drive cage) |
| Hot Plug LFF SAS | 90.0TB | 12+3 x 6TB (with optional rear LFF drive cage) |
| Hot Plug LFF SATA | 90.0TB | 12+3 x 6TB (with optional rear LFF drive cage) |
| Hot Plug SFF SAS SSD | 41.6TB | 24+2 x 1.6TB (with optional rear SFF drive cage) |
| Hot Plug LFF SATA SSD | 24.0TB | 12+3 x 1.6TB (with optional rear LFF drive cage) |

Power Supply

HP 500W Flex Slot Platinum Hot Plug Power Supply
 HP 800W Flex Slot Platinum Hot Plug Power Supply
 HP 1400W Flex Slot Platinum Plus Hot Plug Power Supply

HP Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HP ProLiant Gen9 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the HP Power Advisor Tool located at <http://www.hp.com/go/hppoweradvisor>.

Power specifications and technical content for all HP Server power supplies can be found at <http://www.hp.com/go/proliant/powersupply>.

| System Fans | Non-redundant | Redundant |
|---|---|---------------|
| One of the following depending on model | <p>2P model</p> <p>NOTE: 1P models typically ship with 4 standard fans. The second processor option kit contains 2 additional fans.</p> <p>NOTE: The 12LFF and 24SFF chassis ship with 6 High Performance fans as standard.</p> <p>NOTE: High Performance Fan Kit is available to meet ambient temperature environments.</p> <p>NOTE: High Performance Fan Kit is required for Passive GPU support.</p> <p>NOTE: The 8SFF Bay1 kit (719067-B21) will ship with 6 High efficiency fans.</p> | <p>6 fans</p> |

Standard Features

| | | |
|-------------------|---|---|
| Interfaces | Serial | optional |
| | Video | 2 (1 front, optional via Universal Media Bay, 724865-B21), 1 back not active simultaneously |
| | FlexibleLOM Network Ports | 4 x 1Gb ports shipping standard with optional FlexibleLOM |
| | HP iLO Remote Management Network Port | 1 Gb Dedicated |
| | Micro SD Slot | 1 Micro SD |
| | NOTE: The Micro SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered. | |
| | USB 3.0 | Up to 5 total: 1 front, 2 rear, 2 internal (secure), 2 optional USB 2.0 front via Universal Media Bay |
| | SID (Systems Insight Display) | Optional |
| | NOTE: Not shipping as standard. Available as a CTO option or as a field upgrade (768900-B21). | |

| | |
|---|---|
| Operating Systems and Virtualization Software Support for ProLiant Servers | Microsoft Windows Server |
| | Canonical Ubuntu |
| | Red Hat Enterprise Linux (RHEL) |
| | SUSE Linux Enterprise Server (SLES) |
| | Oracle Solaris |
| | VMware |
| | Citrix XenServer |
| NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: http://www.hp.com/go/ossupport and our driver download page: http://www.hp.com/support/DL380Gen9 . | |

| | |
|--|---|
| Upgradeability | Upgradeable to two processors (36 Cores) |
| | NOTE: Processor upgrade available from Intel® Xeon® Processors E5-2600v3. Please contact HP Technology Sales (http://www.hp.com/support), your local HP Re-seller. |
| | Up to 24 DIMM slots available for higher Memory capacity |
| | FlexibleLOM connector for 1 Gigabit or 10 Gigabit networking options |
| | HP Flexible Smart Array or Smart HBA Controllers |
| | Embedded 10-Port SATA, B140i as standard |
| | Optional 3 slot riser (x16, x16, x8), or 2 slot primary riser (x16, x8) |
| | NOTE: To take advantage of the additional 3 PCI slot upgrade, the second processor must be installed. |
| | Redundant Power Supply |
| | Optical Drive supported via Universal Media Bay |
| NOTE: The Universal Media bay provides front VGA and 2xUSB 2.0, plus ability to add 2SFF and Optical. | |
| NOTE: Universal Media bay is only available with 8 or 8+8SFF chassis & can be populated in Bay1 only. | |
| HP Legacy Mode (FIO only, 758959-B22) | |
| NOTE: UEFI is the default mode for CTO and BTO SKUs. Can change default to legacy via CTO. | |

| | |
|-------------------------------------|---|
| Industry Standard Compliance | ACPI 2.0b Compliant |
| | PCIe 3.0 Compliant |
| | PXE Support |
| | WOL Support |
| | Microsoft® Logo certifications |
| | USB 3.0 Support |
| | USB 2.0 Support |
| | NOTE: This support is on the optional Universal Media Bay. |
| | Energy Star |
| | ASHRAE A3/A4 |
| | NOTE: For details on configurations supporting ASHRAE A3/4 please see: http://www.hp.com/servers/ASHRAE . |
| | UEFI (Unified Extensible Firmware Interface Forum) |
| | NOTE: UEFI is the default for the DL380 Gen9. Legacy model can be selected in the field or as a CTO option (758959-B22). |

| | |
|-----------------|---|
| Graphics | Integrated Matrox G200eH2 video standard with 16MB of Video RAM |
|-----------------|---|

Standard Features

- 1280 x 1024 (32 bpp)
- 1920 x 1200 (16 bpp)

HP iLO 4 On System Management Memory

- 16 MB Flash
- 256 MB DDR3 with ECC (112 MB after ECC and video)

HP Server UEFI/Legacy ROM

HP Server UEFI /Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration while interacting with your server at boot time. HP ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

NOTE: The UEFI System Utilities function is analogous to the HP ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hp.com/go/proliantuefi/docs>.

UEFI enables numerous new capabilities specific to HP ProLiant servers such as:

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using HP RESTful API.
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM

For more information please visit <http://www.hp.com/go/proliant/uefi>.

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: HP UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory.

Form Factor

One of the following depending on model

2U Rack form factor

8 SFF & 24SFF Drive Bay Version:

3.44 x 17.54 x 26.75 in (8.73 x 44.55 x 67.94 cm)

4 LFF & 12LFF Drive Bay Version:

3.44 x 17.54 x 28.75 in (8.73 x 44.55 x 73.02 cm)

NOTE: Dimensions without bezel.

Embedded Management

HP Integrated Lights-Out (HP iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with iLO. Learn more at <http://www.hp.com/go/ilo>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hp.com/go/ProLiant/uefi>.

HP RESTful API

RESTful API is an application programming interface. RESTful Web Service API served by iLO's web server. Learn more at <http://www.hp.com/go/restfulapi>.

Intelligent Provisioning

Provision servers by discovering and deploying 1 to few servers with Intelligent Provisioning. Learn more at <http://www.hp.com/go/intelligentprovisioning>.

Embedded Remote Support

HP's embedded remote support, used with Insight Online direct connect or HP Insight Remote Support, allows HP ProLiant servers to transmit hardware events directly to HP or

Standard Features

an HP Authorized Partner for automated phone home support. Learn more at <http://www.hp.com/go/insightonline/info>.

Server utilities

| | |
|--|--|
| HP Smart Update | Optimize firmware and driver updates with HP Smart Update solutions. Learn more at http://www.hp.com/go/smartupdate . |
| HP Systems Insight Manager (HP SIM) | HP SIM allows you to monitor the health of your HP ProLiant Servers and HP Integrity Servers, and also provides you with basic support for non-HP servers. HP SIM also integrates with HP SUM to provide quick and seamless firmware updates. Learn more at http://www.hp.com/go/sim . |
| HP OneView Standard | HP OneView Standard can inventory, monitor, alert, and report on your G6, G7, Gen8, and Gen9 servers, while using the HP OneView user interface. Annual support is optionally available. Learn more at http://www.hp.com/go/oneview . |
| Scripting Tool Kit and Windows PowerShell | Provision 1 to many servers using your own scripts to discover and deploy them with HP Scripting Tool Kit for Windows and Linux or HP Scripting Tools for Windows PowerShell. Learn more at http://www.hp.com/go/ProLiantSTK or http://www.hp.com/go/powershell . |
| HP RESTful Interface Tool | HP RESTful Interface tool is a scripting tool to provision servers using RESTful API Interface to discover and deploy servers at scale. Learn more at http://www.hp.com/go/restfulapi . |
| HP iLO Mobile Application | Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: http://www.hp.com/go/ilo/mobileapp . |
| HP Insight Online | HP Insight Online, available at no additional cost as part of your HP warranty, Care Pack or contractual support agreement with HP, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at http://www.hp.com/go/insightonline/info . |

Security

Power-on password
 Serial interface control
 Administrator's password
 UEFI
 iLO 4 (Integrated Lights-Out 4) has 12 customizable user accounts and SSL encryption
 Integrated Lights-Out can be disabled via a Global Setting
 iLO Advanced supports directory services integration
 TPM 1.2

Warranty

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>.

Optional Features

| | | |
|--------------------------------------|--|---|
| Embedded Management | iLO Advanced | HP iLO Advanced licenses offer smart remote functionality without compromise, for all HP ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HP iLO Advanced at www.hp.com/go/iloadvanced |
| Server Management | HP Insight Control | HP Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see http://www.hp.com/go/insightcontrol . |
| | HP OneView Advanced | HP OneView Advanced is converged management that eliminates infrastructure complexity with automation simplicity. This modern architecture is designed to accelerate your IT operations across servers, storage, and network resources using software-defined approaches and automation, see http://www.hp.com/go/oneview . |
| | HP Insight Cluster Management Utility (CMU) | HP Insight Cluster Management Utility is a hyperscale-optimized management framework that includes software for the provisioning, control, performance management and monitoring of groups of nodes and infrastructure. Learn more at http://www.hp.com/go/cmuc . |
| Rack and Power Infrastructure | HP Rack and Power Infrastructure products and services create highly efficient and intelligent solutions for existing or new IT data centers. HP Rack and Power infrastructure solutions – rack infrastructure, power protection and management, performance optimized data centers (PODs) – are the foundation you are looking for to help secure your long-term IT success. These products are designed to help you react to changes in the industry. They deliver efficient, easy-to-use capabilities to manage, monitor, deploy and provision infrastructure from entry to enterprise. As an industry leader, HP is uniquely positioned to address the key concerns of power, cooling, cable management and system access. Learn more at HP Rack and Power Infrastructure . | |
| High Performance Clusters | HP Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters . NOTE: High Performance Computing (HPC) interconnect technologies are available for this server as part of the HP Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by HP when integrated within an HP cluster. Flexible, validated solutions can be defined with the help of configuration tools. http://www.hp.com/techservers/clusters/ucp/index.html . | |
| HPC Interconnects | NOTE: High Performance Computing (HPC) interconnect technologies are available for this server under the HP Cluster Platform product portfolio. These high-speed interconnects are fully supported by HP when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPC Clusters with InfiniBand Interconnects: http://www.hp.com/techservers/clusters/ucp/index.html . | |
| Storage Software | Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HP storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities. Storage software that gets the job done: | |
| | <ul style="list-style-type: none"> Data Protection and Recovery Software Whether you're a large enterprise or a smaller business, HP data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity. Data Archive and Migration Software HP's storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage. | |

Optional Features

- **Storage Resource Management Software (SRM)**
HP's storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.
- **Data Replication Software**
HP offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.
- **Storage Device Management Software**
Maximize your investment in HP storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.
- **HP StoreVirtual VSA**
With HP StoreVirtual VSA you can use the power of virtualization to create a virtual array within your host server. Manage it as a single pool of shared storage capacity, and scale it to match your evolving needs. HP ProLiant Gen9 servers include a 3-year limited license for HP StoreVirtual VSA software with 1TB of capacity at no extra cost. Simply select to install HP StoreVirtual VSA software during server setup within Intelligent Provisioning. More information, instructional videos, and free console management software are available at <http://www.hp.com/go/vsa1TB>.

NOTE: For more information about Storage Software including QuickSpecs, please see: <http://www.hp.com/go/storage/software>.

One Config Simple (SCE)

SCE is a guided self service tool to help sales and non technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. <http://www.hp.com/products/configurator>.

Service and Support

HP Technology Services

HP Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HP to help prevent problems and solve issues faster. Our support technology lets you tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.

Protect your business beyond warranty with HP Care Pack Services

HP Care Pack Services enable you to order the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement for the term you select.

Optimized Support recommendation

HP Proactive Care - Call to Repair commitment, 24x7 coverage, three year Care Pack Service

Prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to HP. Includes enhanced escalation management and the industry's highest level of hardware support commitment – hardware will be returned to operating conditions within six (6) hours after you open your case. Comes with collaborative software call management with two hour call back to reduce troubleshooting.

As a leading global support provider for Microsoft, Red Hat, VMware, SUSE and other operating systems, HP is able to simplify and shorten your time to resolution with one call for hardware or software questions.

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf>.

HP ProLiant Server Hardware Installation

Help ensure your new HP ProLiant hardware is installed smoothly, efficiently and with minimal disruption to your IT and business operations.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf>.

Standard Support recommendation

HP Proactive Care - 24x7 coverage, three year Care Pack Service

This service helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to HP. Includes four hour response for hardware, and collaborative call management for software with a two hour callback.

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf>.

HP ProLiant Hardware Installation

Help ensure your new HP ProLiant hardware is installed smoothly, efficiently and with minimal disruption to your IT and business operations.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf>.

Related Services

Data Center Platform Consulting Services

These services help modernize key systems and leverage new technology to support a changing business climate and prepare you for the new style of IT. HP understands the needs of the data center of the future and will serve as your guide for the journey. <http://www.hp.com/services/consulting>

Data Privacy Services

Protect your data through better media management. HP Data privacy services help manage and protect sensitive data. <http://www.hp.com/services/dataprivacy>

Factory Express for Servers and storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Choose how your factory solutions are built, tested, integrated, shipped and deployed. <http://www.hp.com/go/factory-express>.

HP Foundation Care

Hardware and software support services provide easy connection to HP to resolve support issues quickly. Includes collaborative call management for industry leading software; full software support may also be purchased, giving you one place to call for help. <http://www.hp.com/services/foundationcare>.

Additional HP Care Pack services can be found at: <http://www.hp.com/go/cpc>.

Parts and Materials

HP will provide HP-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Service and Support

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HP due to malfunction.

Pre-configured Models

For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

1. Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
2. HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.
3. If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.
4. Not all models are available in all regions. Check with your local country HP offices for availability.

NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HP SFF Hard Drive Blank Kit or P/N 666986-B21: HP LFF Hard Drive Blank Kit.

NOTE: All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (AOK02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

Caution: HP recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

| | Entry Models | | Base Models | |
|-----------------------------|--|---|---|---|
| [SKU Number] | 766342-B21 | 752686-B21 | 752688-B21 | 752687-B21 |
| Model Name | HP ProLiant DL380 Gen9 E5-2609v3 1P 8GB-R B140i 4LFF SATA 500W PS Entry Server | HP ProLiant DL380 Gen9 E5-2609v3 1P 8GB-R B140i 8SFF SATA 500W PS Entry Server | HP ProLiant DL380 Gen9 E5-2620v3 2.4GHz 6-core 1P 16GB-R P840/4GB 12LFF 2x800W PS Base Server | HP ProLiant DL380 Gen9 E5-2620v3 1P 16GB-R P440ar/2GB 8SFF 500W PS Base Server |
| Processor | Intel® Xeon® E5-2609v3 | | Intel® Xeon® E5-2620v3 | |
| Number of Processors | One | | | |
| Memory | 8GB (1x8GB Registered DIMMs, 2133 MHz) NOTE: with the E5-2609v3 this memory DIMM will only operate at 1600MHz. | | 16GB (1x16GB Registered DIMMs, 2133 MHz) NOTE: with the E5-2620v3 this memory DIMM will only operate at 1866MHz | |
| Network Controller | HP Embedded 1Gb Ethernet 4-port 331i Adapter | | | |
| Storage Controller | HP Dynamic Smart Array B140i NOTE: Default is AHCI off chipset, Smart Array needs to be enabled on SATA model. | | HP Flexible Smart Array P840/4G Controller | HP Flexible Smart Array P440ar/2GB |
| Hard Drive | None ship standard | | None ship standard; includes 10 LFF hard drive blanks | None ship standard |
| Internal Storage | 4 LFF HDD Bays | 8 SFF HDD Bays | 12 LFF HDD Bays | 8 SFF HDD Bays |
| Optical Drive Bay | Not Available | Optional Universal Media Bay (724865-B21) | Not Available | Optional Universal Media Bay (724865-B21) |
| Optical Drive | Optional via HP Mobile USB DVDRW Drive (701498-B21) | Optional DVD-ROM (726536-B21) or DVD-RW (726537-B21) via the Universal Media Bay (724865-B21) | Optional via HP Mobile USB DVDRW Drive (701498-B21) | Optional DVD-ROM (726536-B21) or DVD-RW (726537-B21) via the Universal Media Bay (724865-B21) |
| PCI-Express Slots | 3 PCIe slots (+3 PCI slots available with upgrade option, second processor required) | | | |
| Power Supply | (1) HP 500W Flex Slot Platinum Power Supply | | (2) HP 800W Flex Slot Platinum Power Supply | (1) HP 500W Flex Slot Platinum Power Supply |
| Fans | 4 hot plug fans, redundant | | 6 hot plug high performance fans, redundant | 4 hot plug fans, redundant |
| Management | iLO Management (standard), Intelligent Provisioning (standard), iLO Advanced (optional), Insight Control (optional), HP OneView (optional) | | | |
| Form Factor | Rack (2U), HP Easy Install Rails | | Rack (2U), HP Easy Install Rails with CMA | |
| Warranty | Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response | | | |

Pre-configured Models

| | Performance Models |
|-----------------------------|--|
| [SKU Number] | 752689-B21 |
| Model Name | HP ProLiant DL380 Gen9 E5-2650v3 2P 32GB-R P440ar/2GB 8SFF 2x10Gb 2x800W Perf Server |
| Processor | Intel® Xeon® E5-2650v3 |
| Number of Processors | Two |
| Memory | 32GB (2x16GB Registered DIMMs, 2133 MHz) |
| Network Controller | HP Embedded 4x1Gb, plus 2x10Gb-T Flexible LOM |
| Storage Controller | HP Flexible Smart Array P440ar/2GB |
| Hard Drive | None ship standard |
| Internal Storage | 8 SFF HDD Bays |
| Optical Drive Bay | Optional Universal Media Bay (724865-B21) |
| Optical Drive | HP Half-Height SATA DVD-RW Optical Drive |
| PCI-Express Slots | 6 PCIe slots (includes second riser slot upgrade option) |
| Power Supply | (2) HP 800W Flex Slot Platinum Power Supply |
| Fans | 6 hot plug fans, redundant |
| Management | iLO Management (standard), Intelligent Provisioning (standard), iLO Advanced (standard), HP OneView (optional) |
| Energy Star | Meets Energy Star requirements |
| Form Factor | Rack (2U), HP Easy Install Rails with CMA |
| Warranty | Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response |

NOTE: UEFI is the standard default for all Predefined models

Country Code Key

xx1 = B21

Worldwide

NOTE: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.

xx1 = 291

Japan

xx1 = AA1

PRC

Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

| | | | | |
|---------------------------|--|--|---|--|
| [Chassis] | HP ProLiant DL380 Gen9 8SFF Configure-to-order Server | HP ProLiant DL380 Gen9 24SFF Configure-to-order Server | HP ProLiant DL380 Gen9 4LFF Configure-to-order Server | HP ProLiant DL380 Gen9 12LFF Configure-to-order Server |
| SKU Number | 719064-B21 | 767032-B21 | 767033-B21 | 719061-B21 |
| Processor | 2 (optional) x HP Smart Socket Guide | | | |
| DIMMSlots | 24 DIMM slots for RDIMM, LRDIMM DDR4 Memory | | | |
| Storage Controller | HP Dynamic Smart Array B140i, plus optional HP Flexible Smart Array or Smart HBA controller | | | |
| PCIe | 3 PCIe slots (+3 PCI slots available with upgrade option, second processor required) | | | |
| Drive Cage | 8SFF Hot Plug | 24SFF Hot Plug | 4LFF Hot Plug | 12LFF Hot Plug |
| Network Controller | HP Embedded 1Gb Ethernet 4-port 331i Adapter, plus optional HP Flexible LOM or stand up card | | | |
| Fans | 4 hot plug fans, redundant | 6 hot plug high performance fans, redundant | 4 hot plug fans, redundant | 6 hot plug high performance fans, redundant |
| Management | iLO Management (standard), Intelligent Provisioning (standard), iLO Advanced (optional), Insight Control (optional), HP OneView (optional) | | | |
| USB | 1 front, 2 internal, 2 rear | | | |
| Ears | HP Quick Release Ears | | | |

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

HP Processors

Select one or two processors from Core options-Processor section below,

- If one processor is desired, select one xxxxxx-L21
- If two processors are desired, select one xxxxxx-L21 and one xxxxxx-B21.
- Up to 2 processors supported. Mixing different processor models is not supported.
- DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

For the Intel® C600 Chipset E5-2600 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x v#, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, x = L for low power SKUs and v# (not yet designated) = version number.

HP Memory

Select one or more memory from Core options-Memory section below,

- LRDIMM, RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support LRDIMM and RDIMM.
- HP memory from previous generation servers are not qualified or warranted with this HP ProLiant Server. HP SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9.
- If only one processor is installed, only half of the total DIMM slots are available. When populating with two processors all DIMM slots are available.
- Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: <http://www.hp.com/go/proliant-energy-efficient>.

Configuration Information - Factory Integrated Models

- Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, 1600MHz or 1333MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: <http://www.hp.com/go/ddr4config>.

HP Power Supplies

Select one or more power supplies from Core Options-Power Supplies section below:

- Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HP Power Advisor tool to determine the right size power supply for your server configuration. The HP Power Advisor is located at: <http://www.hp.com/go/hppoweradvisor>.
- Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

Step 3: Choose Additional Factory Integratable Options

HP Unique Options

Select one or more Unique options from Core options section below.

- This section may contain FIO options, please see the Unique options section below.
- FIO indicates that this option is only available as a factory installable option.

HP I/O Expansion Options Select one or more Riser Kit options from Core options section below.

- To take advantage of the additional PCI slot upgrade, the second processor must be installed.
- This section may contain FIO options, please see HP I/O Expansion Options section below.
- FIO indicates that this option is only available as a factory installable option.

HP Drives

Select one or more drives from Core options-HP Drives section below:

- The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.
- Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.
- The HP ProLiant Gen9 Smart Storage solutions are equipped with re-designed Small Form Factor (SFF 2.5 in) and Large Form Factor (LFF 3.5 in) hot plug carriers for HP Qualified Hard Drives and Solid State Drives. These new carriers provide status and activity indicators as well as caution indicators for "Do Not Remove".

HP FlexibleLOM

Select a FlexibleLOM from Core options-Networking section below,

- Only one FlexibleLOM can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped.
- For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter.
- Please see the QuickSpecs for Technical Specifications and additional information: <http://www.hp.com/go/ProLiantNICs>.

HP Networking

Select a standup NIC adapter from Core options-Networking section below,

- Please see the QuickSpecs for Technical Specifications and additional information: <http://www.hp.com/go/ProLiantNICs>.
- These options are upgradeable and can be changed from the original configuration after the server is shipped.
- For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

HP Storage Controllers

Select one or more Storage options from Additional options section below.

- The embedded B140i controller will operate in UEFI only mode. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22
- This section may contain FIO options, please see HP Storage Controllers section below.

Configuration Information - Factory Integrated Models

- FIO indicates that this option is only available as a factory installable option.

HP Graphics Options

Select one or more graphics adapter from Additional options section below.

- Please see the HP Power Advisor for estimated power consumption of your individual system configuration prior to installing GPUs. The HP Power Advisor is located at: <http://www.hp.com/go/hppoweradvisor>.
- This section may contain FIO options, please see HP Computation & Graphics Accelerators section below.

HP Cooling Options

Select one or more Fan Kits from Core options section below.

- This section may contain FIO options, please see HP Cooling Options section below.
- FIO indicates that this option is only available as a factory installable option.

HP Rail Kits

Select one type of rail kit from Additional options section below.

- Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen9 server.
- To assist in the installation of the server into the rack, an optional installation tool is available by contacting your local services representative (p/n 695539-001).
- See HP Rack Options in Additional Options section of this QuickSpecs for more rack kit choices.

Caution: HP recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

| | |
|--------------------------|--|
| HP Unique Options | <p>HP DL380 Gen9 Universal Media Bay Kit 724865-B21 NOTE: The HP DL380 Gen9 Universal Media bay provides front VGA and 2xUSB 2.0; plus support for 2xSFF front drives (724864-B21) and ODD support (No included); and can only be located in Bay1 in either an 8SFF or 8+8SFF front end.</p> <p>HP DL380 Gen9 Graphics Enablement Kit 719082-B21 NOTE: This kit includes alternative 2 heatsinks plus 6 cables to enable GPU support. Other limitations apply, see Graphic section for more details.</p> <p>HP DL380 Gen9 High Performance Fan Kit 719079-B21 NOTE: This kit is required for specific Ambient temperature environments, more details here: http://www.hp.com/servers/Ashrae. NOTE: This kit is also required to support Passive GPUs.</p> <p>HP DL380 Gen9 2SFF Front/Rear SAS/SATA Kit 724864-B21 NOTE: For 2SFF front the Universal Media Bay (724865-B21) is required. NOTE: 2SFF in the rear is only supported with a 24SFF (CTO chassis or field upgraded) or 12LFF (719061-B21) front end. NOTE: Rear drives are not supported with 160W Processors in a 12LFF front end</p> <p>HP DL380 Gen9 3LFF Rear SAS/SATA Kit 768856-B21 NOTE: This is only supported in the 12LFF chassis (719061-B21). NOTE: 3LFF rear drives will consume the 2nd riser expansion slot.</p> <p>HP DL380 Gen9 Primary 2 Slot GPU Ready Riser Kit 719076-B21 Slot1: 1x Gen3 x16 FH/FL, 1xGen3 x8 FH/HL NOTE: This replaces the standard Primary riser in slot1.</p> <p>HP DL380 Gen9 Secondary 3 Slot GPU Ready Riser Kit 719073-B21 Slot2: 2xGen3 x16 FH/FL, 1xGen3 x8 FH/HL</p> <p>HP DL380 Gen9 8SFF Bay1 Cage/Backplane Kit 719067-B21 NOTE: To add an additional 8SFF drive cage in Bay1. NOTE: To get to 16SFF total please populate bay 2 with 768857-B21 (from an 8SFF starting point). NOTE: This ships with 6 High Efficiency Fans. NOTE: Selecting this option does not allow you to select the Universal Media Bay.</p> <p>HP DL380 Gen9 Additional 8SFF Bay2 Cage/Backplane Kit 768857-B21 NOTE: To add an additional 8SFF drive cage in Bay 2. This is the optimal solution to upgrade to 16SFF total and allows the flexibility to add the Universal Media Bay (724865-B21) for 2 additional SFF or Optical.</p> <p>HP 12Gb SAS Expander Card with Cables for DL380 Gen9 727250-B21 NOTE: SAS expander to enable 24SFF field upgrade.</p> <p>HP DL380 Gen9 Systems Insight Display Kit 768900-B21 NOTE: The Systems Insight Display no longer ships as standard but is available as a Factory Integrated or field upgrade option.</p> <p>HP Legacy FIO Mode Setting 758959-B22 NOTE: UEFI is the default, this FIO part can be used for CTO to enable Legacy mode.</p> |
|--------------------------|--|

HP Processors

Entry Processors - E5-2600v3 series Processors

| |
|--|
| HP DL380 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) FIO Processor Kit 719053-L21 NOTE: FIO indicates factory integrated option via CTO. |
| HP DL380 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) Processor Kit 719053-B21 |
| HP DL380 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) FIO Processor Kit 719052-L21 NOTE: FIO indicates factory integrated option via CTO. |
| HP DL380 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) Processor Kit 719052-B21 |

Base Processors - E5-2600v3 series Processors

| |
|--|
| HP DL380 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) FIO Processor Kit 719051-L21 NOTE: FIO indicates factory integrated option via CTO. |
| HP DL380 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) Processor Kit 719051-B21 |
| HP DL380 Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) FIO Processor Kit 779556-L21 NOTE: FIO indicates factory integrated option via CTO. |

Core Options

| | |
|---|------------|
| HP DL380 Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) Processor Kit | 779556-B21 |
| HP DL380 Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) FIO Processor Kit | 719050-L21 |
| NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) Processor Kit | 719050-B21 |
| HP DL380 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) FIO Processor Kit | 719060-L21 |
| NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) Processor Kit | 719060-B21 |
| HP DL380 Gen9 Intel® Xeon® E5-2637v3 (3.5GHz/4-core/15MB/135W) FIO Processor Kit | 719058-L21 |
| NOTE: Ships with a High Performance Heatsink. | |
| NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2637v3 (3.5GHz/4-core/15MB/135W) Processor Kit | 719058-B21 |
| NOTE: Ships with a High Performance Heatsink. | |
| HP DL380 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) FIO Processor Kit | 719049-L21 |
| NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) Processor Kit | 719049-B21 |
| Performance Processors - E5-2600v3 series Processors | |
| HP DL380 Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W) FIO Processor Kit | 719057-L21 |
| NOTE: Ships with a High Performance Heatsink. | |
| NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W) Processor Kit | 719057-B21 |
| NOTE: Ships with a High Performance Heatsink. | |
| HP DL380 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) FIO Processor Kit | 719048-L21 |
| NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) Processor Kit | 719048-B21 |
| HP DL380 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) FIO Processor Kit | 719059-L21 |
| NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) Processor Kit | 719059-B21 |
| HP DL380 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) FIO Processor Kit | 762764-L21 |
| NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) Processor Kit | 762764-B21 |
| HP DL380 Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W) FIO Processor Kit | 719056-L21 |
| NOTE: Ships with a High Performance Heatsink. | |
| NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W) Processor Kit | 719056-B21 |
| NOTE: Ships with a High Performance Heatsink. | |
| HP DL380 Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W) FIO Processor Kit | 719046-L21 |
| NOTE: Ships with a High Performance Heatsink. | |
| NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W) Processor Kit | 719046-B21 |
| NOTE: Ships with a High Performance Heatsink. | |
| HP DL380 Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W) FIO Processor Kit | 762766-L21 |
| NOTE: Ships with a High Performance Heatsink. | |
| NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W) Processor Kit | 762766-B21 |
| NOTE: Ships with a High Performance Heatsink. | |
| HP DL380 Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W) FIO Processor Kit | 719055-L21 |
| NOTE: Ships with a High Performance Heatsink. | |
| NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W) Processor Kit | 719055-B21 |
| NOTE: Ships with a High Performance Heatsink. | |
| HP DL380 Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W) FIO Processor Kit | 719044-L21 |
| NOTE: Ships with a High Performance Heatsink. | |
| NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W) Processor Kit | 719044-B21 |
| NOTE: Ships with a High Performance Heatsink. | |

Core Options

| | |
|--|------------|
| HP DL380 Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W) FIO Processor Kit | 762760-L21 |
| NOTE: Ships with a High Performance Heatsink. NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W) Processor Kit | 762760-B21 |
| NOTE: Ships with a High Performance Heatsink. | |
| HP DL380 Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W) FIO Processor Kit | 719054-L21 |
| NOTE: Ships with a High Performance Heatsink. NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W) Processor Kit | 719054-B21 |
| NOTE: Ships with a High Performance Heatsink. | |
| HP DL380 Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W) FIO Processor Kit | 781913-L21 |
| NOTE: Ships with a High Performance Heatsink. NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W) Processor Kit | 781913-B21 |
| NOTE: Ships with a High Performance Heatsink. | |
| HP DL380 Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W) FIO Processor Kit | 781915-L21 |
| NOTE: Ships with a High Performance Heatsink. NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W) Processor Kit | 781915-B21 |
| NOTE: Ships with a High Performance Heatsink. | |
| HP DL380 Gen9 Intel® Xeon® E5-2687Wv3 (3.1GHz/10-core/25MB/160W) FIO Processor Kit | 762768-L21 |
| NOTE: 2SFF rear drives are not supported with this processor in a 12LFF front end NOTE: FIO indicates factory integrated option via CTO. | |
| HP DL380 Gen9 Intel® Xeon® E5-2687Wv3 (3.1GHz/10-core/25MB/160W) Processor Kit | 762768-B21 |
| NOTE: 2SFF rear drives are not supported with this processor in a 12LFF front end NOTE: Up to 2 processors supported. Performance and Energy Star Model configurations include two processors. NOTE: HT indicates that the processor model supports Intel® Hyper-Threading Technology. NOTE: Turbo2: Intel® Turbo Boost Technology 2.0 provides more computing power when you need it with performance that adapts to spikes in your workload and delivers more performance upside than then previous generation turbo technology. NOTE: DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed. NOTE: The xxxxxx-L21 is the first processor shipped, the xxxxxx-B21 is the 2nd processor and ships with 2 additional FANs for factory of field installation. NOTE: Double wide PCIe cards are only supported in risers with the Processors leveraging the High Performance Heatsink. For Processors requiring double wide GPU support please order the GPU enablement kit (719082-B21). | |

HP Memory

Registered DIMMs (RDIMMs) for E5-2600v3 Series

NOTE: The following memory is supported by the E5-2600v3 series Processors.

| | |
|--|------------|
| HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726717-B21 |
| HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726718-B21 |
| HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 759934-B21 |
| HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726719-B21 |

NOTE: Depending on Processor selected this memory will run at 1600, 1866 or 2133MHz.

Load Reduced DIMMs (LRDIMMs) for E5-2600v3 Series

NOTE: The following memory is supported by the E5-2600v3 series Processors.

| | |
|--|------------|
| HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit | 726722-B21 |
| HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit | 726720-B21 |

NOTE: Depending on Processor selected this memory will run at 1600, 1866 or 2133MHz.

HP Optical Drives

| | |
|--|------------|
| HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive | 726536-B21 |
| NOTE: The Universal Media Bay (724865-B21) is required for this option. | |
| HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive | 726537-B21 |
| NOTE: The Universal Media Bay (724865-B21) is required for this option. | |

Core Options

HP Mobile USB Non Leaded System DVD RW Drive 701498-B21

HP Drives

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive 718162-B21

HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652589-B21

HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 759212-B21

HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652583-B21

HP 450GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 759210-B21

HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652572-B21

HP 300GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 759208-B21

HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652564-B21

HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652605-B21

SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive 652749-B21

HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive 652745-B21

SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive 765424-B21

HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive 737394-B21

HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive 737261-B21

SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 761477-B21

HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 695510-B21

HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 652766-B21

HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 652757-B21

HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 652753-B21

SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive 655710-B21

HP 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive 655708-B21

SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 753874-B21

HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 693687-B21

HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 628061-B21

HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 658079-B21

HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 657750-B21

HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive 658071-B21

12G SAS Hot Plug SFF (2.5-inch) Enterprise Performance Solid State Drives

HP 800GB 12G SAS High Endurance SFF 2.5-in SC Enterprise Performance 3yr Wty Solid State Drive 741159-B21

HP 400GB 12G SAS High Endurance SFF 2.5-in SC Enterprise Performance 3yr Wty Solid State Drive 741155-B21

HP 200GB 12G SAS High Endurance SFF 2.5-in SC Enterprise Performance 3yr Wty Solid State Drive 741151-B21

12G SAS Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives

HP 800GB 12G SAS Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive 741146-B21

HP 400GB 12G SAS Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive 741142-B21

HP 200GB 12G SAS Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive 741138-B21

12G SAS Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives

Core Options

| | |
|---|------------|
| HP 1.6TB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762263-B21 |
| HP 800GB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762261-B21 |
| 12G SAS Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives | |
| HP 1.6TB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762272-B21 |
| HP 800GB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762270-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 800GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691868-B21 |
| HP 400GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691866-B21 |
| HP 200GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691864-B21 |
| HP 100GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691862-B21 |
| 6G SAS Hot Plug Enterprise Mainstream Solid State Drives | |
| HP 1.6TB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 757339-B21 |
| HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 717973-B21 |
| HP 600GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 739898-B21 |
| HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 717971-B21 |
| HP 300GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 739888-B21 |
| HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 717969-B21 |
| 6G SATA Hot Plug SFF Value Endurance (2.5-inch) Enterprise Value G1 Solid State Drives | |
| HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 Solid State Drive | 756657-B21 |
| HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 Solid State Drive | 756636-B21 |
| HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 Solid State Drive | 756621-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) Enterprise Light G1 Solid State Drives | |
| HP 960GB 6G SATA Light Endurance SFF 2.5-in SC Enterprise Light 3yr Wty G1 Solid State Drive | 756601-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) Enterprise Boot Solid State Drives | |
| HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive | 717965-B21 |
| HP 80GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive | 734360-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691860-B21 |
| HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691856-B21 |
| HP 200GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691854-B21 |
| HP 100GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691852-B21 |
| 6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value G1 Solid State Drives | |

Core Options

HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive 756660-B21

HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive 756639-B21

HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive 756624-B21

6G SATA Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives

HP 1.6TB 6G SATA Value Endurance LFF 3.5-in SC Converter Enterprise Value 3yr Wty Solid State Drive 757342-B21

HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive 718189-B21

HP 600GB 6G SATA Value Endurance LFF 3.5-in SC Converter Enterprise Value 3yr Wty Solid State Drive 739900-B21

HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive 718183-B21

HP 300GB 6G SATA Value Endurance LFF 3.5-in SC Converter Enterprise Value 3yr Wty Solid State Drive 739890-B21

HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive 718177-B21

6G SATA Hot Plug LFF (3.5-inch) Enterprise Light G1 Solid State Drives

HP 960GB 6G SATA Light Endurance LFF 3.5-in SC Converter ENT Light 3yr Wty G1 Solid State Drive 756604-B21

6G SATA Hot Plug LFF (3.5-inch) Enterprise Boot Solid State Drives

HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive 718171-B21

HP 80GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive 734362-B21

Hard Drive Blank Kits

HP Large Form Factor Hard Drive Blank Kit 666986-B21

HP Small Form Factor Hard Drive Blank Kit 666987-B21

Hard Drive Kits

HP DL380 Gen9 8SFF Bay1 Cage/Backplane Kit 719067-B21

HP DL380 Gen9 Additional 8SFF Bay2 Cage/Backplane Kit 768857-B21

HP DL380 Gen9 2SFF Front/Rear SAS/SATA Kit 724864-B21

HP DL380 Gen9 3LFF Rear SAS/SATA Kit 768856-B21

NOTE: For a complete list of the drive, Controller and cable options please check the compatibility matrix: <http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA5-4154ENW&cc=us&lc=en>.

Media Bay Kits

HP DL380 Gen9 Universal Media Bay Kit 724865-B21

NOTE: The Universal Media Bay offers front VGA and 2xUSB 2.0, plus ability to add optional Optical drive, and 2SFF.

NOTE: This is only compatible with the 8SFF or 8+8 SFF front end configurations and can only be populated in Bay1.

HP Networking

1 Gigabit Ethernet adapters

HP Ethernet 1Gb 4-port 331T Adapter 647594-B21

HP Ethernet 1Gb 2-port 361T Adapter 652497-B21

HP Ethernet 1Gb 2-port 332T Adapter 615732-B21

10 Gigabit Ethernet adapters

HP Ethernet 10Gb 2-port 530SFP Adapter 652503-B21

HP Ethernet 10Gb 2-port 530T Adapter 656596-B21

HP Ethernet 10Gb 2-port 560SFP+ Adapter 665249-B21

HP Ethernet 10Gb 2-port 561T Adapter 716591-B21

HP Ethernet 10Gb 2-port 570SFP+ Adapter 718904-B21

NOTE: The DL380 Gen9 chassis ships with 4x1Gb Embedded.

Core Options

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information: <http://www.hp.com/go/ProLiantNICs>.

FlexibleLOM Adapters

| | |
|---|------------|
| HP Ethernet 1Gb 4-port 331FLR Adapter | 629135-B22 |
| HP Ethernet 1Gb 4-port 366FLR Adapter | 665240-B21 |
| HP FlexFabric 10Gb 2-port 533FLR-T Adapter | 700759-B21 |
| HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter | 665243-B21 |
| HP Ethernet 10Gb 2-port 561FLR-T Adapter | 700699-B21 |
| HP FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter | 700751-B21 |
| HP FlexFabric 10Gb 2-port 556FLR-SFP+ Adapter | 727060-B21 |

NOTE: The DL380 Gen9 chassis ships with 4x1Gb Embedded.

NOTE: Only one FlexibleLOM can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information: <http://www.hp.com/go/ProLiantNICs>.

| | | |
|----------------------|---|------------|
| HP InfiniBand | HP InfiniBand FDR 2-port 545QSFP Adapter | 702211-B21 |
| | NOTE: The RHEL6.5 driver is not part of SPP, but may be downloaded here: http://downloads.linux.hp.com/SDR/downloads/MLNX_OFED/ . | |
| | HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter | 764284-B21 |
| | HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR-QSFP Adapter | 764285-B21 |
| | HP InfiniBand QDR/Ethernet 10Gb 2-port 544+FLR-QSFP Adapter | 764286-B21 |

| | | |
|---|---|------------|
| HP I/O Expansion Options | HP DL380 Gen9 Primary 2 Slot GPU Ready Riser Kit | 719076-B21 |
| | NOTE: This is for slot 1 and supports double wide GPGPUs Slot1: 1x Gen3 x16 FH/FL, 1xGen3 x8 FH/HL. | |
| | HP DL380 Gen9 Secondary 3 Slot GPU Ready Riser Kit | 719073-B21 |
| | NOTE: This is for slot 2 and supports double wide GPGPUs Slot2: 2x Gen3 x16 FH/FL, 1xGen3 x8 FH/HL. | |
| NOTE: To support Graphics cards please also order the DL380 Gen9 Graphics Enablement kit, 719082-B21 that ships with 2 Performance Heatsinks and 6 Performance Fans. 1 kit needed for a 2P unit. | | |

| | | |
|--|--|------------|
| HP Power Supplies | HP Flex Slot Platinum Hot-plug Power supplies | |
| | HP 500W Flex Slot Platinum Hot Plug Power Supply Kit | 720478-B21 |
| | HP 800W Flex Slot Platinum Hot Plug Power Supply Kit | 720479-B21 |
| | HP 1400W Flex Slot Platinum Plus Hot Plug Power Supply Kit | 720620-B21 |
| | NOTE: All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server. | |
| | NOTE: Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HP Power Advisor tool to determine the right size power supply for your server configuration. The HP Power Advisor is located at: http://www.hp.com/go/hppoweradvisor . | |
| | NOTE: The above power supply options are all 80Plus Platinum-certified with an efficiency rating of up to 94%. Support for HP Power Discovery Services is included with the 1400W Flex Slot option. Power specifications and technical content for all HP Server power supplies can be found at http://www.hp.com/go/proliant/powersupply . | |
| NOTE: Maximum of 2 Flex Slot PS per platform. | | |

| | | |
|---|--|------------|
| HP Computation and Graphics Accelerators | HP DL380 Gen9 Graphics Enablement Kit | 719082-B21 |
| | NOTE: This GPU enablement kit includes 2 Heatsinks and 6 cables to enable double wide GPUs to be supported. | |
| | NOTE: For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card. | |

Core Options

| | |
|---|------------|
| <p>NOTE: There are limitations on the chassis and processor supported when adding Graphics accelerators.</p> <p>NOTE: Passive cards will require the addition of the High Performance Fan Kit (719079-B21).</p> | |
| <p>NVIDIA GRID K2 Reverse Air Flow Dual GPU PCIe Graphics Accelerator</p> <p>NOTE: For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.</p> <p>NOTE: There are limitations on the chassis and processor supported when adding Graphics accelerators.</p> <p>NOTE: This card will require the addition of the High Performance Fan Kit (719079-B21).</p> | 753958-B21 |
| <p>NVIDIA Tesla K40C 12GB Computational Accelerator</p> <p>NOTE: This is supported in all chassis.</p> <p>NOTE: The Primary GPU riser (719076-B21) is required to support this in slot1.</p> <p>NOTE: The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).</p> <p>NOTE: For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.</p> | 753960-B21 |
| <p>HP NVIDIA Quadro K2200 Graphics Accelerator</p> <p>NOTE: This is supported in all chassis.</p> <p>NOTE: The Primary GPU riser (719076-B21) is required to support this in slot1.</p> <p>NOTE: The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).</p> <p>NOTE: For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.</p> <p>NOTE: This is supported in all chassis.</p> <p>NOTE: The Primary GPU riser (719076-B21) is required to support this in slot1.</p> <p>NOTE: The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).</p> <p>NOTE: For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.</p> | J0G89A |
| <p>HP NVIDIA Quadro K4200 Graphics Accelerator</p> <p>NOTE: This is supported in all chassis.</p> <p>NOTE: The Primary GPU riser (719076-B21) is required to support this in slot1.</p> <p>NOTE: The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).</p> <p>NOTE: For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.</p> <p>NOTE: This is supported in all chassis.</p> <p>NOTE: The Primary GPU riser (719076-B21) is required to support this in slot1.</p> <p>NOTE: The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).</p> <p>NOTE: For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.</p> <p>NOTE: This card requires the addition of the Graphics Enablement Kit (719082-B21).</p> | J0G90A |
| <p>NVIDIA Quadro K6000 PCI-E Graphics Adapter</p> <p>NOTE: This is supported in all chassis.</p> <p>NOTE: The Primary GPU riser (719076-B21) is required to support this in slot1.</p> <p>NOTE: The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).</p> <p>NOTE: For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.</p> | 730874-B21 |
| <p>HP 150W PCI-E Power Cable Kit</p> <p>NOTE: Each DL380 Gen9 server will accommodate up to three single-width or two double width PCIe cards for Computational Graphics support.</p> <p>NOTE: The NVIDIA Tesla, GRID and Quadro modules are supported only on 64-bit versions of Linux and Windows operating systems as well as on Virtual Machine client operating systems. The supported bare metal operating systems are RHEL6, SLES 11 and Windows Server 2012 R2.</p> <p>NOTE: There are limitations on fan types, setting, and chassis support by card.</p> <p>NOTE: Mixing of GPUs is not supported.</p> | 669777-B21 |

Core Options

HP Cooling Options

HP DL380 Gen9 High Performance Fan Kit

719079-B21

NOTE: High Performance Fan kit consists of 6 fans, these will need to replace all the standard Fans in the unit, and fill all 6-Fan cages.

NOTE: The 12LFF and 24SFF chassis (including field upgrades to 24SFF) will already include 6 High Performance Fan kits.

NOTE: The High Performance Fan Kit is needed to support certain Passive GPGPU (Graphics cards) configurations; or ASHRAE operating environments.

NOTE: For elevated ambient temperature support please see: <http://www.hp.com/servers/ASHRAE>.

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

| | | |
|----------------------------|--|----------|
| HP Insight Software | HP Insight Control | |
| | HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License | C6N27A |
| | HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License | C6N28ABE |
| | HP Insight Control Server Provisioning Media Kit | BD883A |
| | HP Insight Management Media Kit | C6N31A |
| | NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key. | |
| | NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service. | |
| | NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates . | |
| | NOTE: For additional license options please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html . | |
| | HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License | C6N36A |
| | HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO Electronic License | C6N36ABE |

| | | |
|----------------------------|--|------------|
| Embedded Management | HP iLO Advanced | |
| | HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License | 512485-B21 |
| | HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates | BD505A |
| | HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU | E6U59ABE |
| | HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU | E6U64ABE |

| | | |
|---|---|----------|
| HP Converged Infrastructure Management Software | HP OneView Advanced (with HP iLO Advanced) | |
| | HP OneView incl 3yr 24x7 Supp Phys 1 Svr Lic | E5Y34A |
| | HP OneView incl 3yr 24x7 Supp Flex Qty E-LTU | E5Y35AAE |
| | HP OneView for ProLiant DL Server incl 3yr 24x7 Supp FIO Bundle Physical 1 Svr Lic | E5Y43A |
| | HP OneView incl 3yr 24x7 Supp Bundle 1 Svr E-LTU | E5Y43AAE |
| | HP OneView with iLO Advanced | |
| | HP OneView w/o iLO Adv incl 3yr 24x7 Supp Phys 1 Svr Lic | E5Y38A |
| | HP OneView w/o iLO Adv inc 3yr 24x7 Supp Flex Qty E-LTU | E5Y39AAE |
| | HP OneView Media Kit Phys No Lic | E5Y37A |
| | NOTE: Full licenses of HP OneView Advanced also provide the right-to-use HP Insight Control without additional charge. | |
| NOTE: Server provisioning (via 'HP Insight Control server provisioning') is licensed as part of HP OneView Advanced and provides multi-server OS and driver provisioning. Media kit #BD883A can be ordered for a physical copy of this software (USB flash drive). | | |
| NOTE: Licenses ship without media. The HP OneView Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/oneview | | |
| NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key. | | |

| | | |
|----------------------------------|--|--------|
| High Performance Clusters | HP Cluster Management Utility | |
| | HP Insight Cluster Management Utility 1yr 24x7 Flexible License | QL803B |
| | HP Insight Cluster Management Utility 3yr 24x7 Flexible License | BD476A |
| | NOTE: These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement. | |
| | HP Insight Cluster Management Utility Media | BD477A |

Additional Options

NOTE: For additional license kits please see the QuickSpecs at:
http://h18004.www1.hp.com/products/quickspecs/12612_div/12612_div.html.

| | | |
|---|--|------------|
| HP Security | HP 2U Security Bezel Kit | 666988-B21 |
| | HP Trusted Platform Module Option | 488069-B21 |
| | <p>NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: http://www.hp.com/go/TPM.</p> <p>NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.</p> <p>NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.</p> | |
| HP Storage Controllers | SAS Controllers | |
| | HP Flexible Smart Array Controllers | |
| | HP Smart Array P440ar/2GB FBWC 12Gb 2-ports Int SAS Controller | 726736-B21 |
| | NOTE: Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot. | |
| | NOTE: Includes the HP Smart Storage Battery. | |
| | HP Smart Array P440ar/2GB FBWC 12Gb 2-ports Int FIO SAS Controller | 749974-B21 |
| | NOTE: Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot. | |
| | NOTE: Includes the HP Smart Storage Battery. | |
| | NOTE: FIO indicates factory integrated option via CTO. | |
| | HP Smart Array Controllers | |
| | HP Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller | 726821-B21 |
| | NOTE: Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot. | |
| | HP Smart Array P840/4GB FBWC 12Gb 2-ports Int SAS Controller | 726897-B21 |
| | HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller | 726825-B21 |
| | HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller | 761872-B21 |
| | NOTE: Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot. | |
| | NOTE: Includes the HP Smart Storage Battery. | |
| | NOTE: FIO indicates factory integrated option via CTO. | |
| | HP Smart Array P840/4GB FBWC 12Gb 2-ports Int FIO SAS Controller | 761874-B21 |
| | NOTE: Includes the HP Smart Storage Battery. | |
| | NOTE: When ordering controllers, please reference the HP Cable Options below for the required cable. | |
| | NOTE: FIO indicates factory integrated option via CTO. | |
| HP Smart Host Bus Adapters | | |
| HP H240 12Gb 2-ports Int Smart Host Bus Adapter | 726907-B21 | |
| HP H240ar 12Gb 2-ports Int Smart Host Bus Adapter | 726757-B21 | |
| NOTE: Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot. | | |
| HP H240ar 12Gb 2-ports Int FIO Smart Host Bus Adapter | 749976-B21 | |
| NOTE: Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot. | | |
| NOTE: FIO indicates factory integrated option via CTO. | | |
| HP Cable Options | | |
| HP DL380 Gen9 12LFF Rear 2SFF or 3LFF P840/440 SAS Cable Kit | 783007-B21 | |
| NOTE: 12LFF port 3 to 2SFF or 3LFF to P440/840 PCIe. | | |
| HP DL380 Gen9 2SFF Front SAS x4 Cable Kit | 783008-B21 | |
| NOTE: For front mount 2SFF to H240/P440ar, H240 or embedded B140i SATA. | | |
| HP DL380 Gen9 8SFF SAS Cable Kit | 783009-B21 | |
| NOTE: 8/16/24 SFF to P840/440 bay 3. | | |
| HP DL380 Gen9 2SFF x8 Front Cable Kit | 785989-B21 | |

Additional Options

NOTE: For front/rear mount 2SFF to P440/840 PCIe).

HP DL380 Gen9 12LFF SAS Cable Kit 785991-B21

NOTE: For 12LFF to P440/840 PCIe cables- ports 1/2/3.

HP DL380 Gen9 8SFF H240 Cable Kit 786092-B21

NOTE: 8/16/24SFF to 240/440ar, H240 PCIe or embedded B140i SATA.

HP DL380 Gen9 12LFF H240 SAS Cable Kit 786215-B21

NOTE: For 12LFF ports 1&2 to H240/P440ar, H240 or embedded B140i SATA.

NOTE: For details on cabling options, additional information available here: [Cabling Matrix](#).

Optional Upgrades

HP 96W Smart Storage Battery with 145mm Cable for DL/ML/SL Servers 727258-B21

NOTE: Provides backup power for multiple HP Smart Array controllers or other devices (up to 16).

NOTE: Ships as standard with some HP Flexible Smart Array Controllers.

HP 12Gb SAS Expander Card with Cables for DL380 Gen9 727250-B21

HP Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hp.com/go/tape>. For hardware and software compatibility of HP tape backup products see: <http://www.hp.com/storage/SPOCK> and <http://www.hp.com/go/ebs>.

Tape Drives

HP StoreEver 1/8 G2 LTO-6 Ultrium 6250 FC Tape Autoloader COH19A

HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit COL99A

HP StoreEver LTO-4 Ultrium 1760 SAS (1) in 1U Rack-mount Kit EH946C

HP StoreEver LTO-5 Ultrium 3000 SAS Tape Drive in 1U Rack-mount EJ014B

HP StoreEver LTO-5 Ultrium 3280 SAS Tape Drive in 3U Rack-mount EJ013B

HP StoreEver 1U SAS Rack-mount Kit AE459B

HP Tape Storage Systems

HP StoreEver MSL6480

HP StoreEver MSL6480 Scaleable Expansion Module QU626A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/14604_div/14604_div.html (Worldwide).

HP StoreEver MSL6480 Scalable Base Module QU625A

HP MSL2024 0-Drive Tape Library AK379A

HP MSL4048 0-Drive Tape Library AK381A

HP MSL Library Extender Kit AQ746A

HP Storage Options

NOTE: For the complete listing of Fibre Channel Host Bus Adapters for Windows 2000, Windows Server 2003 and Linux, please see: <http://h18006.www1.hp.com/storage/saninfra/hba.html>.

Emulex Fibre Channel HBAs

HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter AJ762B

HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter AJ763B

HP StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter C8R38A

HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter C8R39A

QLogic Fibre Channel HBAs

HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter AK344A

HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter AJ764A

HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter QW971A

HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter QW972A

Converged Network Adapter

HP StoreFabric CN1100R Dual Port Converged Network Adapter QW990A

HP StoreFabric CN1200E 10Gb Converged Network Adapter E7Y06A

Additional Options

HP Disk Storage Systems

Disk Enclosures

| | |
|--|--------|
| HP D6000 Dual I/O Module Disk Enclosure | QQ695A |
| HP D6000 w/35 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 140TB Bundle | E7W30A |
| HP D6000 w/70 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 280TB Bundle | E7W31A |
| HP D6000 w/35 2TB 6G SAS 7.2K LFF Dual port MDL HDD 70TB Bundle | QQ697A |
| HP D6000 w/70 2TB 6G SAS 7.2K LFF Dual port MDL HDD 140TB Bundle | QQ698A |
| HP D6000 w/35 3TB 6G SAS 7.2K LFF Dual port MDL HDD 105TB Bundle | QQ699A |
| HP D6000 w/70 3TB 6G SAS 7.2K LFF Dual port MDL HDD 210TB Bundle | QQ700A |

HP Data Center Racks HP 11000 G2 Series Racks

| | |
|--|--------|
| HP 11648 1075mm Pallet Universal Rack | H6J87A |
| HP 11648 1075mm Shock Universal Rack | H6J88A |
| HP 11642 1075mm Pallet Universal Rack | H6J65A |
| HP 11642 1075mm Shock Universal Rack | H6J66A |
| HP 11642 1200mm Pallet Universal Rack | H6J67A |
| HP 11642 1200mm Shock Universal Rack | H6J68A |
| HP 11636 1075mm Pallet Universal Rack | H6J77A |
| HP 11636 1075mm Shock Universal Rack | H6J78A |
| HP 11622 G2 1075mm Pallet Universal Rack | H6J83A |
| HP 11622 G2 1075mm Shock Universal Rack | H6J84A |
| HP 11614 1075mm Shock Universal Rack | H6J82A |

NOTE: Please see the [HP 11000 G2 Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HP Intelligent Series Rack

| | |
|--|--------|
| HP 647 1075mm Pallet Intelligent Series Rack | BW911A |
| HP 647 1075mm Shock Intelligent Series Rack | BW912A |
| HP 647 1200mm Pallet Intelligent Series Rack | BW913A |
| HP 647 1200mm Shock Intelligent Series Rack | BW914A |
| HP 642 1075mm Pallet Intelligent Series Rack | BW903A |
| HP 642 1075mm Shock Intelligent Series Rack | BW904A |
| HP 642 1200mm Pallet Intelligent Series Rack | BW907A |
| HP 642 1200mm Shock Intelligent Series Rack | BW908A |
| HP 636 1075mm Pallet Intelligent Series Rack | BW895A |
| HP 636 1075mm Shock Intelligent Series Rack | BW896A |
| HP 842 1075mm Pallet Intelligent Series Rack | BW917A |
| HP 842 1075mm Shock Intelligent Series Rack | BW918A |

NOTE: Please see the [HP Intelligent Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HP Value Series Rack

| | |
|--|--------|
| HP V142 1075mm deep Pallet 100 series Rack | AF046A |
|--|--------|

NOTE: Please see the [HP Value Series Rack QuickSpecs](#) for information on additional racks options and rack specifications.

HP Power Distribution Units (PDUs)

HP Basic Power Distribution Unit (bPDU)

| | |
|--|--------|
| HP 1.9kVA 120 Volt L5-20 Input (12xNEMA 5-20R) NA/JP Basic PDU | H5M54A |
| HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Basic PDU | H5M56A |
| HP 2.8kVA 120 Volt L5-30 Input (18xNEMA 5-20R) NA/JP Basic PDU | H5M55A |
| HP 3.6kVA 200-240 Volt Detachable C20 Input (18xC13) WW Basic PDU | H5M57A |
| HP 4.9kVA 208 Volt L6-30 Input (20xC13) NA/JP Basic PDU | H5M58A |
| HP 7.3kVA 230 Volt IEC309 32A Input (20xC13) INTL Basic PDU | H5M68A |

Additional Options

| | |
|---|------------|
| HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13) NA/JP Basic PDU | H5M61A |
| HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU | H5M59A |
| HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU | H5M70A |
| HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU | H5M60A |
| HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU | H5M71A |
| HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU | H5M75A |
| HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU | H5M63A |
| HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP Basic PDU | H5M64A |
| HP 8.6kVA 208 Volt L15-30 3-Phase Input (24xC13/6xC19) NA/JP Basic PDU | H5M62A |
| HP 11kVA 400 Volt IEC309 16A 3-Phase Input (30xC13/6xC19) INTL Basic PDU | H5M72A |
| HP 11kVA 400 Volt IEC309 16A 3-Phase Input (36xC13/6xC19) INTL Basic PDU | H5M73A |
| HP 11kVA 400 Volt IEC309 30A 3-Phase Input (36xC13/6xC19) NA Basic PDU | H5M67A |
| HP 13.2kVA 480 Volt IEC309 30A 3-Phase Input (15 Outlet) NA Basic PDU | H3X07A |
| HP 19.9kVA 480 Volt IEC309 30A 3-Phase Input (30 Outlet) NA Basic PDU | H3X08A |
| HP 800VA - 277V Input / 230V Output NA Rack Mount Transformer | H3X09A |
| HP 2.8kVA 24A Low Voltage NA/JP Modular Power Distribution Unit | 252663-D71 |
| HP 4.9kVA 24A High Voltage NA/JP Core Modular Power Distribution Unit | 252663-D74 |
| HP 8.3kVA 40A High Voltage NA/JP Core Modular Power Distribution Unit | 252663-D75 |
| HP 7.3kVA 32A High Voltage INTL Core Modular Power Distribution Unit | 252663-B33 |
| HP 9.2kVA 40A High Voltage INTL Core Modular Power Distribution Unit | 252663-B34 |
| HP 8.6kVA 24A Three Phase NA/JP Modular Power Distribution Unit | AF512A |
| HP 11kVA 16A Three Phase INTL Modular Power Distribution Unit | AF513A |
| HP 14.4kVA 40A Three Phase NA/JP Modular Power Distribution Unit | AF519A |
| HP 17.3kVA 48A Three Phase NA/JP Modular Power Distribution Unit | AF511A |
| HP 22kVA 32A Three Phase INTL Core Modular Power Distribution Unit | AF518A |
| NOTE: To learn more about HP Basic Power Distribution Units (bPDU), please visit the HP website at http://www.hp.com/go/pdu . | |
| HP Monitored Power Distribution Units (mPDU) | |
| HP 2.8kVA 120 Volt L5-30 Input (12xNEMA 5-20R)NA/JP Monitored PDU | D9N43A |
| HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Monitored PDU | D9N46A |
| HP 4.9kVA 208 Volt L6-30 Input (12xC13) NA/JP Monitored PDU | D9N44A |
| HP 3.6kVA 200-240 Volt Detachable C20 Input (16xC13) WW Monitored PDU | D9N45A |
| HP 4.9kVA 208 Volt L6-30 Input (12xC13) NA/JP Monitored PDU | G9Z05A |
| HP 7.3kVA 230 Volt IEC309 32A Input (12xC13) INTL Monitored PDU | G9Z06A |
| HP 4.9kVA 208 Volt L6-30 Input (20xC13/4xC19) NA/JP Monitored PDU | D9N47A |
| HP 7.3kVA 230 Volt IEC309 32A Input (20xC13/4xC19) INTL Monitored PDU | D9N48A |
| HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13/3xC19) NA/JP Monitored PDU | D9N51A |
| HP 5.7kVA 208 Volt L21-20 3-Phase Input (18xC13/3xNEMA 5-20R) NA/JP Monitored PDU | D9N52A |
| HP 8.6kVA 208 Volt L21-30 3-Phase Input (20xC13/3xC19/3xNEMA 5-20R) NA/JP Monitored PDU | D9N53A |
| HP 11kVA 400 Volt IEC309 16A 3-Phase Input (18xC13/3xC19) INTL Monitored PDU | D9N55A |
| HP 8.3kVA 208 Volt CS8265C Input (30xC13/3xC19) NA Monitored PDU | D9N49A |
| HP 7.3kVA 230 Volt IEC309 32A Input (32xC13/4xC19) INTL Monitored PDU | D9N50A |
| HP 11kVA 400 Volt IEC309 16A 3-Phase Input (30xC13/3xC19) INTL Monitored PDU | D9N57A |
| HP 14.4kVA 208 Volt CS8365C 3-Phase Input (12xC13/12xC19)NA Monitored PDU | D9N58A |
| HP 16.6kVA 400 Volt IEC309 30A 3-Phase Input (30xC13/3xC19) NA Monitored PDU | D9N61A |
| HP 16.6kVA 400 Volt IEC309 30A 3-Phase Input (12xC13/12xC19) NA Monitored PDU | D9N62A |
| HP 17.3kVA 208 Volt IEC309 60A 3-Phase Input (24xC13/3xC19) NA/JP Monitored PDU | D9N54A |

Additional Options

| | |
|---|--------|
| HP 17.3kVA 208 Volt IEC309 60A 3-Phase Input (12xC13/12xC19) NA/JP Monitored PDU | D9N59A |
| HP 17.3kVA 208 Volt IEC309 60A 3-Phase Watertight Input (12xC13/12xC19) NA/JP Monitored PDU | G9Z07A |
| HP 19.9kVA 480 Volt 3-Phase (30 Outlet) NA Monitored PDU | D9N63A |
| HP 22kVA 400 Volt IEC309 32A 3-Phase Input (30xC13/3xC19) INTL Monitored PDU | D9N56A |
| HP 22kVA 400 Volt IEC309 32A 3-Phase Input (12xC13/12xC19) INTL Monitored PDU | D9N60A |
| HP 22kVA 400 Volt IEC309 32A 3-Phase Watertight Input (12xC13/12xC19) INTL Monitored PDU | G9Z08A |
| HP Environmental Sensor for Remote Monitored PDUs | E2D53A |

NOTE: Please see the [HP Monitored Power Distribution Units QuickSpecs](#) for information on additional options and product specifications.

HP Intelligent Power Distribution Units (iPDU)

| | |
|--|--------|
| HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF520A |
| HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF521A |
| HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF522A |
| HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF523A |
| HP 11.4kVA 16A 415V Three Phase L22-20 NA Core Intelligent Power Distribution Unit | AF900A |
| HP 17.3kVA 24A 415V Three Phase IEC309 NA Core Intelligent Power Distribution Unit | AF901A |
| HP 7.3kVA 32A Single Phase INTL Core Intelligent Modular Power Distribution Unit | AF525A |
| HP 11kVA 16A Three Phase INTL Core Intelligent Modular Power Distribution Unit | AF526A |
| HP 22kVA 32A Three Phase INTL Core Intelligent Modular Power Distribution Unit | AF527A |
| HP 17.3kVA 48A 208V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit | AF535A |
| HP 17.3kVA 24A 415V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit | AF537A |
| HP 22kVA 32A 400V Three Phase 12 Outlet Core INTL Intelligent Power Distribution Unit | AF538A |
| HP 4.9kVA 24A Single Phase NA/JP Intelligent Modular Power Distribution Kit | AF531A |
| HP 8.6kVA 24A Three Phase NA/JP Intelligent Modular Power Distribution Kit | AF532A |
| HP 14.4kVA 40A Three Phase NA/JP Intelligent Modular Power Distribution Unit | AF533A |
| HP 7.3kVA 32A Single Phase INTL Intelligent Modular Power Distribution Kit | AF534A |
| HP 5xC13 Intelligent PDU Extension Bar G2 Kit | AF547A |
| HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar | AF528A |

NOTE: Please see the [HP Intelligent Power Distribution Units QuickSpecs](#) for information on additional options and product specifications.

HP Managed Power Distribution Units (maPDU)

| | |
|---|--------|
| HP 2.8kVA 120 Volt L5-30 Input (24x NEMA 5-20) NA/JP Managed PDU | H8B48A |
| HP 3.6kVA 200-240 Volt Detachable C20 Input (7xC13/1xC19) WW Managed PDU | H8B49A |
| HP 4.9kVA 208 Volt L6-30 Input (20xC13/4xC19) NA/JP Managed PDU | H8B50A |
| HP 7.3kVA 200-240 Volt IEC309 32A Input (20xC13/4xC19) INTL Managed PDU | H8B51A |
| HP 8.6kVA 208 Volt L15-30 3 Phase Input (18xC13/6xC19) NA/JP Managed PDU | H8B52A |
| HP 8.6kVA 208 Volt L21-30 3 Phase Input (20xC13/3xC19/1x NEMA 5-20) NA/JP Managed PDU | H8B53A |
| HP 11kVA 400 Volt IEC309 16A 3 Phase Input (21xC13/3xC19) INTL Managed PDU | H8B54A |
| HP 14.4kVA 208V CS8365C 3 Phase Input (12xC13/12xC19) NA/JP Managed PDU | H8B55A |
| HP 17.3kVA 208V IEC309 60A 3 Phase Input (12xC13/12xC19) NA/JP Managed PDU | H8B56A |

NOTE: Please see the [QuickSpecs for Technical Specifications and additional information: <http://www8.hp.com/h20195/v2/GetHtml.aspx?docname=c04376673>](#) (Worldwide).

NOTE: To learn more, please visit the [HP Uninterruptible Power Systems \(UPS\) web page](#).

HP Rack Mount Consoles, KVM Switches, and Keyboards

HP Location Discovery Services

| | |
|-------------------------------|--------|
| HP 36U Location Discovery Kit | BW945A |
| HP 42U Location Discovery Kit | BW946A |

Additional Options

| | |
|---|------------|
| HP 47U Location Discovery Kit | BW947A |
| HP DL380 Gen9 Location Discovery Services Ear Kit | 768884-B21 |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/14429_div/14429_div.html (Worldwide) | |
| HP Rack Mount Consoles | |
| HP TFT7600 G2 KVM Console Rackmount Keyboard US Monitor | AZ870A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard UK Monitor | AZ871A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard DE Monitor | AZ872A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard FR Monitor | AZ873A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard IT Monitor | AZ874A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard ES Monitor | AZ875A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard DK Monitor | AZ876A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard NO Monitor | AZ877A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard SE/FI Monitor | AZ878A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard CH Monitor | AZ879A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard PT Monitor | AZ880A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard BE Monitor | AZ881A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard JP Monitor | AZ882A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard RU Monitor | AZ883A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard Intl Monitor | AZ884A |
| HP TFT7600 G2 KVM Console Rackmount Keyboard US TAA Monitor | AZ885A |
| NOTE: Please see the HP Rack Console QuickSpecs for information on additional options and product specifications. | |
| HP KVM Switches | |
| HP Server Console 0x2x8 Port Analog Switch | AF616A |
| HP Server Console 0x2x16 Port Analog Switch | AF617A |
| HP TAA 0x2x16xKVM Server Console G2 Switch | AF626A |
| HP KVM Console USB Interface Adapter | AF628A |
| HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software | AF618A |
| HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software | AF619A |
| HP KVM Console USB 2.0 Virtual Media CAC Interface Adapter | AF629A |
| HP 1x4 USB/PS2 KVM Console Switch | AF611A |
| HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software | AF620A |
| HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software | AF621A |
| HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software | AF622A |
| NOTE: To learn more, please visit the HP KVM Switches web page . | |
| HP USB Keyboard and Mouse | |
| HP USB BFR with PVC Free US Keyboard/Mouse Kit | 631341-B21 |
| HP USB BFR with PVC Free UK Keyboard/Mouse Kit | 631344-B21 |
| HP USB BFR with PVC Free FR Keyboard/Mouse Kit | 631346-B21 |
| HP USB BFR with PVC Free ES Keyboard/Mouse Kit | 631348-B21 |
| HP USB BFR with PVC Free DE Keyboard/Mouse Kit | 631358-B21 |
| HP USB BFR with PVC Free JP Keyboard/Mouse Kit | 631360-B21 |
| HP USB BFR with PVC Free IT Keyboard/Mouse Kit | 631362-B21 |
| HP USB BFR with PVC Free CN Keyboard/Mouse Kit | 631364-B21 |
| HP USB BFR with PVC Free AE Keyboard/Mouse Kit | 638212-B21 |
| HP USB BFR with PVC Free RU Keyboard/Mouse Kit | 638214-B21 |
| HP USB BFR with PVC Free IN Keyboard/Mouse Kit | 672097-D63 |
| HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit | 672097-373 |

Additional Options

| | |
|--|------------|
| HP USB BFR with PVC Free Intl Keyboard/Mouse Kit | 672097-B33 |
| HP USB BFR with PVC Free PT Keyboard/Mouse Kit | 672097-133 |
| HP USB BFR with PVC Free TR Keyboard/Mouse Kit | 672097-143 |
| HP USB BFR with PVC Free CZ Keyboard/Mouse Kit | 672097-223 |
| HP USB BFR with PVC Free FI Keyboard/Mouse Kit | 672097-353 |
| HP USB BFR with PVC Free SE Keyboard/Mouse Kit | 672097-103 |
| HP USB BFR with PVC Free CH Keyboard/Mouse Kit | 672097-113 |
| HP USB BFR with PVC Free KR Keyboard/Mouse Kit | 672097-KD3 |

NOTE: Please see the [HP USB Keyboard and Mouse QuickSpecs](#) for information on additional options and product specifications.

Rail Kits

NOTE: Gen9 rail kits have changed significantly from prior generation rail kits. Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen9 server.

NOTE: Rail kits are optional for DL380 Gen9 and are no longer included standard with the server. Customers have the option to purchase their server without a rail kit.

NOTE: Ball bearing and Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.

NOTE: To assist in the installation of the server into the rack an optional installation tool is available by contacting your local services representative (p/n 695539-001).

Caution: HP recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

| | |
|--|------------|
| HP 2U Small Form Factor Easy Install Rail Kit | 733660-B21 |
| NOTE: Does not include CMA (733664-B21). | |
| HP 2U Large Form Factor Easy Install Rail Kit | 733662-B21 |
| NOTE: Does not include CMA (733664-B21). | |
| HP 2U Cable Management Arm for Easy Install Rail Kit | 733664-B21 |
| HP 2U Small Form Factor Ball Bearing Rail Kit | 720863-B21 |
| NOTE: Does not include CMA (720865-B21). | |
| HP 2U Large Form Factor Ball Bearing Rail Kit | 720864-B21 |
| NOTE: Does not include CMA (720865-B21). | |
| HP 2U Cable Management Arm for Ball Bearing Rail Kit | 720865-B21 |

HP Uninterruptible Power Systems (UPS)

HP Rack-mountable UPS

| | |
|---|--------|
| HP R1500 G3 Uninterruptible Power Supply (UPS) | |
| HP R1.5kVA G3 1U INTL Uninterruptible Power System | AF471A |
| HP R1.5kVA G3 1U JP/TW Uninterruptible Power System | AF470A |
| HP R1.5kVA G3 1U NA Uninterruptible Power System | AF469A |

HP R/T3000 Uninterruptible Power System (UPS)

| | |
|---|--------|
| HP R/T3000 G2 2U L530 Low Voltage NA/JP Uninterruptible Power System | AF466A |
| HP R/T3000 G2 2U L620 High Voltage NA/JP Uninterruptible Power System | AF467A |
| HP R/T3000 G2 2U Detachable Cord High Voltage INTL Uninterruptible Power System | AF468A |

R5000 Uninterruptible Power System (UPS)

| | |
|---|--------|
| HP R5KVA 3U IEC309-32A High Voltage INTL Uninterruptible Power System | AF461A |
| HP R5KVA 3U L630 High Voltage NA/JP Uninterruptible Power System | AF460A |

R7000 Uninterruptible Power System (UPS)

| | |
|--|--------|
| HP R7KVA 4U IEC-32A High Voltage INTL Uninterruptible Power System | AF463A |
| HP R7KVA 4U 50A High Voltage NA/JP Uninterruptible Power System | AF462A |

HP T750 G2 UPS Models

| | |
|--|--------|
| HP T750 G2 750VA NA Tower Uninterruptible Power System | AF446A |
| HP T750 G2 750VA INTL Tower Uninterruptible Power System | AF447A |
| HP T750J JP Uninterruptible Power System | AF456A |

HP T1000 G3 UPS Models

| | |
|--|--------|
| HP T1000 G3 1000VA INTL Tower Uninterruptible Power System | AF449A |
|--|--------|

Additional Options

HP T1500 G3 UPS Models

| | |
|--|--------|
| HP T1500 G3 1400VA NA Tower Uninterruptible Power System | AF450A |
| HP T1500 G3 1400VA INTL Tower Uninterruptible Power System | AF451A |

NOTE: To learn more, please visit the [HP Uninterruptible Power Systems \(UPS\) web page](#).

HP USB and SD Options

HP Enterprise Mainstream Flash Media Kits for Memory Cards

| | |
|--|------------|
| HP 32GB microSD Enterprise Mainstream Flash Media Kit | 700139-B21 |
| HP 8GB microSD Enterprise Mainstream Flash Media Kit | 726116-B21 |
| HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit | 737953-B21 |

HP Care Pack Services

Installation & Start-up Services

| | |
|--------------------------------------|--------|
| HP Install ProLiant DL38x(p) Service | U4554E |
| HP Startup ProLiant DL38x(p) Service | U4555E |


Proactive Care

| | |
|--|--------|
| HP 3 year 24x7 DL380 Gen9 w/IC Proactive Care Service | U5HW1E |
| HP 3 year 24x7 with Defective Media Retention DL380 Gen9 w/IC Proactive Care Service | U5HW2E |
| HP 3 year 24x7 w/ Comprehensive Defective Material Retention DL380 Gen9 w/IC Proactive Care Service | U5HW3E |
| HP 3 year Call to Repair DL380 Gen9 w/IC Proactive Care Service | U5HX0E |
| HP 3 year Call to Repair with Defective Media Retention DL380 Gen9 w/IC Proactive Care Service | U5HX1E |
| HP 3 year CTR with Comprehensive Defective Material Retention DL380 Gen9 w/IC Proactive Care Service | U5HX2E |
| HP 3 year 24x7 DL380 Gen9 Proactive Care Service | U7AE8E |
| HP 3 year 24x7 with Defective Media Retention DL380 Gen9 Proactive Care Service | U7AE9E |
| HP 3 year 24x7 with Comprehensive Defective Material Retention DL380 Gen9 Proactive Care Service | U7AF0E |
| HP 3 year Call to Repair DL380 Gen9 Proactive Care Service | U7AF4E |
| HP 3 year Call to Repair with Defective Media Retention DL380 Gen9 Proactive Care Service | U7AF5E |
| HP 3 year CTR with Comprehensive Defective Material Retention DL380 Gen9 Proactive Care Service | U7AF6E |

Memory

Memory Subsystem Architecture Each Intel® Xeon® E5-2600v3 family processor socket contains four memory channels per installed processor with three DIMMs per channel for a total of twelve (12) DIMMs or a grand total of twenty-four (24) DIMMs for the server.

Memory Population guidelines

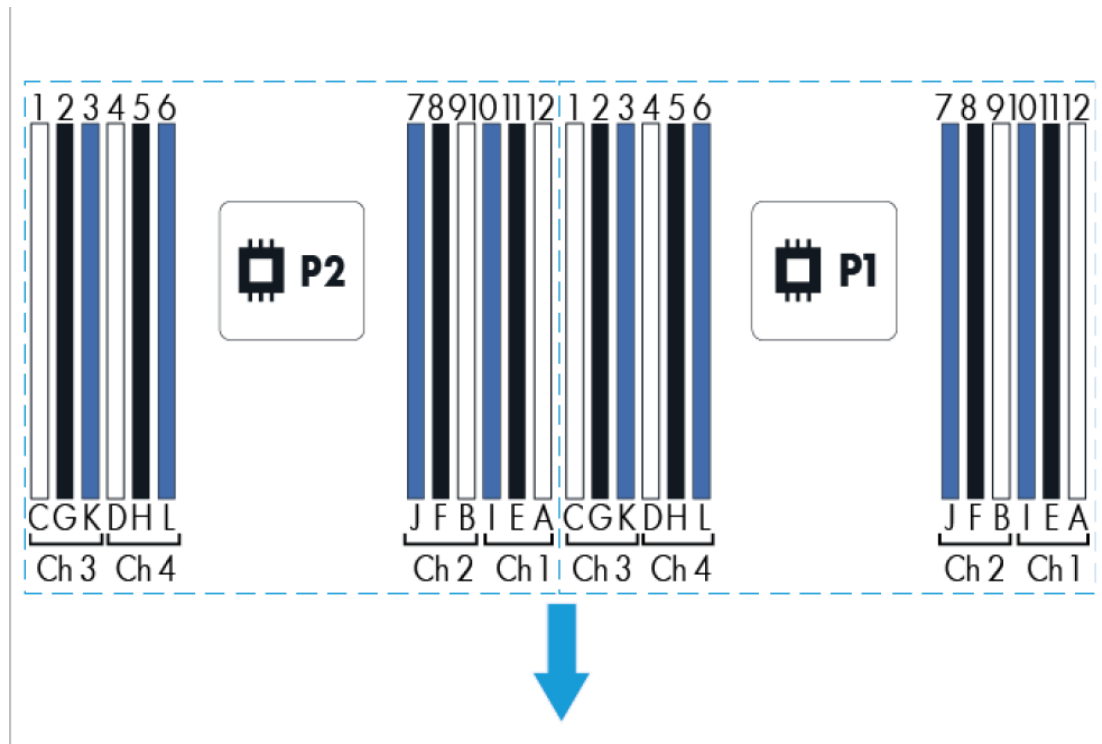

| DIMM population order | | | | | | | | | | | | |
|----------------------------|---------------------|---|---|---------------------|---|---|---------------------|---|---|---|---|---|
| | 1st slot of channel | | | 2nd slot of channel | | | 3rd slot of channel | | | | | |
| | A | B | C | D | E | F | G | H | I | J | K | L |
| Number of DIMMs to install | 4 | | | | | | | | | | | |
| | 8 | | | | | | | | | | | |
| | 12 | | | | | | | | | | | |

General Memory Population Rules and Guidelines:

- White DIMM slots denote the first slot of a channel. For 1 DPC (DIMM per channel) populate white slots only.
- A minimum of one DIMM is required per server.
- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors and to load the channels similarly whenever possible.
- When two processors are installed, balance the DIMMs across the two processors.
- Populate DIMMs from heaviest load (quad-rank) to lightest load (single-rank) within a channel. Heaviest load (DIMM with most ranks) within a channel goes furthest from the processor.
- Do not mix RDIMMs or LRDIMMs.
- LRDIMMs are supported up to 3 DIMMs per channel.
- DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the memory type and number of installed processors.

Memory

- HP memory from previous generation servers is not compatible with the DL380 Gen9 Server. Certain HP SmartMemory features such as memory authentication and enhanced performance may not be supported. To realize the performance memory capabilities listed in this document, HP SmartMemory is required. For additional information, please see the HP SmartMemory QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/14225_div/14225_div.html (Worldwide).
- For memory population rules and additional memory guidelines, please see the DL380 Gen9 user guide at <http://www.hp.com/support>.
- There are four (4) Memory channels per processor; eight (8) channels per 2 processor server.
- There are three (3) DIMM slots for each memory channel; twenty four (24) total slots for 2 processor server.
- Memory channels 1 and 3 consists of the three (3) DIMMs that are furthest from the processor.
- Memory channel 2 and 4 consists of the three (3) DIMMs that are closest to the processor.

Intel Gen9 Supported Memory Bandwidth for HP ProLiant Gen9 Intel® Xeon® E5-2600v3 Series Processor Family

| Memory Bandwidth and Capacity | | | | | |
|------------------------------------|---------------------------|------|-----------|------------------------|------------------------------------|
| [DIMM Type] | Registered Dimms (RDIMMs) | | | Load Reduced (LRDIMMs) | Unbuffered with ECC DIMMs (UDIMMs) |
| DIMM Rank | Single Rank | | Dual Rank | | Quad Rank |
| DIMM Capacity | 4GB | 8GB | 16GB | | 32GB |
| Voltage | Std Voltage 1.2V | | | | |
| SLOTS THAT CAN BE POPULATED | | | | | |
| 24 slot servers | 24 | | | | |
| MAXIMUM CAPACITY (GB) | | | | | |
| | 96 | 192 | 384 | | 768 |
| 1 DIMM Per Channel | 2133 | | | | |
| 2 DIMM Per Channel | 2133 | | | | |
| 3 DIMM Per Channel | 1600 | 1600 | | 1600 | 1600 |

| Memory Speed by Processor Model | Processor Models | Supported Memory Speeds |
|---------------------------------|--|-------------------------|
| | E5-2603v3, E5-2609v3, | 1600MHz |
| | E5-2620v3, E5-2623v3, E5-2630v3, E5-2630Lv3, E5-2640v3, | 1866MHz |
| | E5-2637v3, E5-2643v3, E5-2650v3, E5-2650Lv3, E5-2660v3, E5-2667v3, E5-2670v3, E5-2680v3, E5-2683v3, E5-2690v3, E5-2695v3, E5-2697v3, E5-2698v3, E5-2699v3, E5-2687Wv3, | 2133MHz |


| Standard and Maximum Memory Capacity (Pre-configured Models) | Pre-Configured Models | Standard Memory | Maximum Memory Plus Optional Memory | Standard Memory Replaced with Optional Memory |
|--|-----------------------|-----------------|-------------------------------------|---|
| | E5-2609v3, | 8GB (1x8GB) | 376GB (23x16GB, 1x8GB) | 768GB (24x32GB) |
| | E5-2620v3, | 16GB (1x16GB) | 384GB (23x16GB, 1x16GB) | 768GB (24x32GB) |
| | E5-2650v3, | 32GB (2x16GB) | 384GB (22x16GB, 2x16GB) | 768GB (24x32GB) |

Memory

DDR4 memory options part number decoder


NOTE: Capacity references are rounded to the common gigabyte (GB) values.

- 2GB = 2,048MB
- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB
- 64GB = 65,536MB

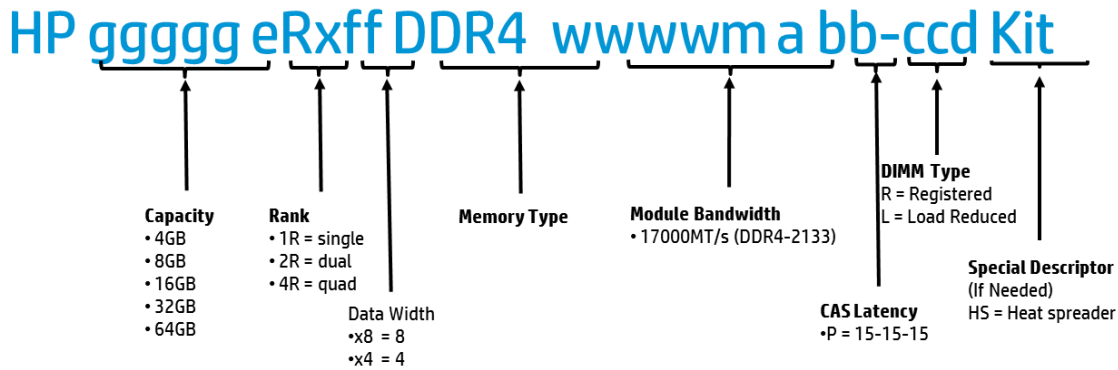


Storage

4LFF hot-plug drive model




1-4 4 x LFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays

12 LFF + 3 rear LFF hot-plug drive model

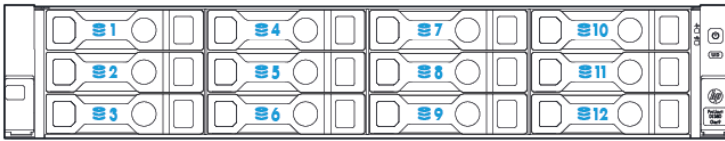


1-12 12 x LFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays

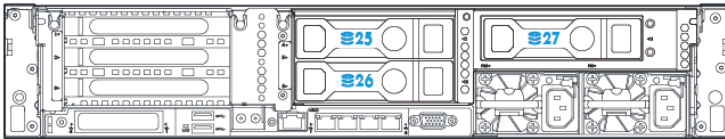


25-27 3 x LFF SATA/SAS/SSD Hot Pluggable Rear Hard Drive Bays

12 LFF + 2 rear SFF hot-plug drive model




1-12 12 x LFF SATA/SAS/SDD Hot Pluggable Hard Drive Bays



25-26 2 x SFF SATA/SAS/SSD Hot Pluggable Rear Hard Drive Bays

8 SFF (+2 SFF) hot-plug drive model with Universal Media Bay




1-8 8 x SFF SATA/SAS/SDD Hot Pluggable Hard drive bays

1-2 2 x SFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays


Storage

16 SFF (+2 SFF) hot-plug drive model with Universal Media Bay

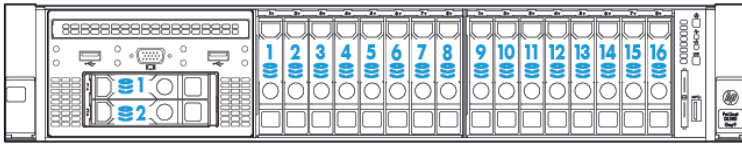

- 1-16 16 x SFF SATA/SAS/SDD Hot Pluggable Hard drive bays
- 1-2 2 x SFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays

24 SFF + rear 2 SFF hot-plug drive model

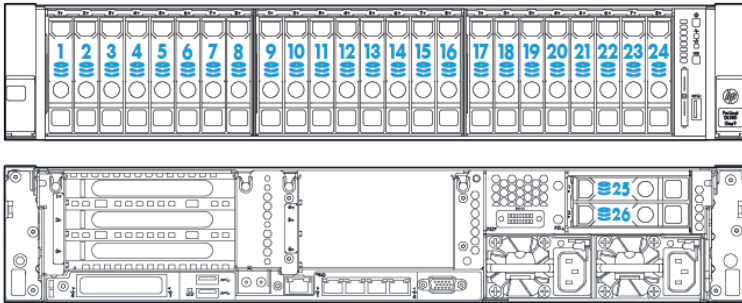

- 1-24 24 x SFF SATA/SAS/SDD Hot Pluggable Hard drive bays
- 25-26 2 x SFF SATA/SAS/SSD Hot Pluggable Rear Hard Drive Bays

Technical Specifications

| System Unit | Dimensions | |
|-------------|--|---|
| | | SFF Drives: 3.44 x 17.54 x 26.75 in (8.73 x 44.55 x 67.94 cm) LFF Drives: 3.44 x 17.54 x 28.75 in (8.73 x 44.55 x 73.02 cm) NOTE: Dimensions without Bezel. |
| | Weight (approximate) | Minimum: 32.6 lb (14.759 kg) (Minimum - 8SFF chassis with 1xSFF HDD and 7 HDD blanks, 1x processor, 1x power supply (plus blank), 1x Flexible Smart Array, 1x Riser installed) Maximum: 51.5 lb (23.6 kg) (Maximum - 12 LFF hard drives (No rear drives), 2x processors, 2x power supplies, 1x Flexible Smart Array, 2x Risers installed) |
| | Input Requirements (per power supply) | Range Line Voltage 100 to 120 VAC 200 to 240 VAC |
| | BTU Rating | Maximum For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at 200 VAC), 3112 BTU/hr (at 240 VAC) for China Only For 500W Power Supply: 1979 BTU/hr (at 100 VAC), 1911 BTU/hr (at 200 VAC), 1965 BTU/hr (at 240 VAC) for China Only |
| | Power Supply Output (per power supply) | Rated Steady-State Power For 1400W Power Supply: 1400W (at 100 VAC), 1400W (at 240 VAC), 1400W (at 240 VAC) For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VAC) input for China only For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VAC) input for China only Maximum Peak Power For 1400W Power Supply: 1400W (at 100 to 127 VAC), 1400W (at 200 to 240 1VAC), 1400W (at 240 VAC) input for China only For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to 240 1VAC), 800W (at 240 VAC) input for China only For 500W Power Supply: 500W (at 100 to 127 VAC), 500W (at 200 to 240 VAC), 500W (at 240 VAC) input for China only |
| | System Inlet Temperature | Standard Operating Support 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System Performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F) Extended Ambient Operating Support For approved hardware configurations, the supported system inlet range is extended to be: 35° to 40°C (41° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/Ashrae . For approved hardware configurations, the supported system inlet range is extended to be: 5° to 45°C (41° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/Ashrae |

Technical Specifications

| | | |
|---------------------------------------|--|--|
| | Non-operating | -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr). |
| Relative Humidity | Operating | Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity. |
| (non-condensing) | Non-operating | 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing. |
| Altitude | Operating | 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| | Non-operating | 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| Acoustic Noise | Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). | |
| | Idle | |
| | L WAd | 4.0 B Entry LFF 4.1 B Entry 4.2 B Base 5.7 B Base LFF 4.3 B Perf |
| | L pAm | 23 dBA Entry LFF 24 dBA Entry 24 dBA Base 39 dBA Base LFF 25 dBA Perf |
| | Operating | |
| | L WAd | 4.3 B Entry LFF 4.6 B Entry 4.8 B Base 5.9 B Base LFF 5.6 B Perf |
| | L pAm | 25 dBA Entry LFF 29 dBA Entry 30 dBA Base 31 dBA Base LFF 39 dBA Perf |
| | NOTE: The Listed sound levels apply to standard shipping configurations (Entry LFF, Entry, Base, Base LFF and Performance models) Additional options may result in increased sound levels. The Base LFF model leverages our High Efficiency Fans, other models are shipping with standard fan options. | |
| Emissions Classification (EMC) | FCC Rating | Class A |
| | Normative Standards | CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1 |
| | NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements. | |
| | NOTE: The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. | |

| | | |
|--|---------------------------------|--------|
| HP Dynamic Smart Array B140i Controller | Number of PCI links | Four |
| | PCI link rate | 4 Gb/s |
| | Storage protocol support | SATA |

Technical Specifications

| | |
|---|--------------------------------|
| SAS/SATA peak data transfer rate | 6 Gb/s |
| Number of SAS/SATA links | 10 links |
| SAS/SATA connectivity | 2x4 connectors; 2x1 connectors |
| Expander support | No |
| Drives supported (max) | Up to 10 Internal Drives |
| RAID support | 0, 1, 10, 5 SATA |
| Software management | HP SSA, SMH, SIM |
| Warranty | Server warranty |
| HP Secure Encryption license | Not Supported |
| HP SmartCache License | Not Supported |
| HP Smart Storage Administrator | Supported |

| | | | |
|--|------------------------------|--|---------------------------------------|
| HP Ethernet 1Gb 4-port 331i Adapter | Network Interface | 10Base-T/100Base-TX/1000Base-TX | |
| | Compatibility | IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX | |
| | Data Transfer Method | PCI Express, two lanes (x2) | |
| | Controller | BCM5719 | |
| | Network Transfer Rate | 10Base-T (Half-Duplex) | 10 Mb/s per port, 40 Mb/s combined |
| | | 10Base-T (Full-Duplex) | 20 Mb/s per port, 80 Mb/s combined |
| | | 100Base-TX (Half-Duplex) | 100 Mb/s per port, 400 Mb/s combined |
| | | 100Base-TX (Full-Duplex) | 200 Mb/s per port, 800 Mb/s combined |
| | | 1000Base-TX (Half and Full-Duplex) | 1000Mb/s per port, 4000 Mb/s combined |
| | | 1000Base-TX (Full-Duplex) | 2000Mb/s per port, 8000 Mb/s combined |
| Connector | Four RJ-45 | | |
| Cable Support | 10 Base-T | Categories 3, 4 or 5 UTP; up to 328 ft (100 m) | |
| | 10/100/1000 Base-TX | Category 5 or higher UTP; up to 328 ft (100 m) | |

Environment-friendly Products and Approach End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.



hp.com/qref/dl380gen9

Summary of Changes

| Date | Version History | Action | Description of Change |
|------------|---------------------|---------|---|
| 12/01/2014 | From Version 4 to 5 | Changed | Changes made throughout the entire QuickSpecs. |
| 10/13/2014 | From Version 3 to 4 | Changed | Corrected inconsistencies between Product Bulletin and Concentra versions. |
| 10/13/2014 | From Version 2 to 3 | Added | 6G SATA Enterprise Value G1 Solid State Drives were added to Core Option section. HP PCIe Workload Accelerator Options, HP USB and SD options, and HP Care Pack Services were added to the Additional Options section. |
| | | Changed | Standard Features, Optional Features, Pre-Configured Models, Configuration Information - Factory Integrated Models, Core Options, Additional Options, and Memory sections were revised. |
| 9/19/2014 | From Version 1 to 2 | Changed | Changes made throughout the entire QuickSpecs. |

© Copyright 2014 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less