



Lenovo ThinkSystem SR250 Server Product Guide

Lenovo ThinkSystem SR250 is an affordable, single-socket 1U rack server for small and medium businesses that need optimized performance and flexibility for future growth, along with enterprise-class reliability, management, and security.

The SR250 server offers a wide range of processors — from Intel Celeron to Intel Xeon E Series. With support for a memory capacity of up to 64 GB and internal storage of up to 32 TB, the SR250 server is an ideal choice for small- to medium-sized business, workgroups, distributed locations, and web-scale workloads.

Flexible and scalable internal storage configurations include up to ten 2.5-inch or four 3.5-inch drives with affordable software RAID or advanced hardware RAID protection and a wide selection of drive sizes and types, including NVMe PCIe SSDs, SAS/SATA SSDs, and SAS/SATA HDDs. Also, it features integrated dual-port 1 Gb Ethernet NIC and additional PCIe expansion slots for hardware RAID protection, network scalability, and external storage connectivity.

The next-generation Lenovo XClarity Controller, which is built into the SR250 server, provides advanced service processor control, monitoring, and alerting functions.

The following figure shows the Lenovo ThinkSystem SR250.



Figure 1 Lenovo ThinkSystem SR250

Did you know?

The SR250 server offers enterprise-class reliability features such as error correcting code (ECC), hot-swap components, and advanced RAID protection with flexible storage options at an affordable price.

The SR250 server has a mere 19.6-inch (498 mm) deep chassis, helping customers reduce their business footprint.

The SR250 server offers performance, energy efficiency, and serviceability features, such as NVMe PCIe SSDs, 80 PLUS Gold and Platinum certified power supplies, and easy access to upgrades and serviceable parts (such as memory DIMMs and adapter cards), which is not typically found in the single-socket value servers.

The SR250 server offers easy-to-use, enterprise-class manageability to monitor server availability and perform remote management with the built-in Lenovo XClarity Controller.

Key features

The SR250 server is a compact, cost-effective, single-processor 1U rack server that has been optimized to provide enterprise-class features to small-to-medium-sized businesses, retail stores, or distributed enterprises.

Scalability and performance

The SR250 server offers numerous features to boost performance, improve scalability, and reduce costs:

- Improves productivity by offering superior system performance with the Intel Xeon E Processor family with up to 6-core processors and up to 3.8 GHz core speeds, up to 12 MB of last level cache (LLC), up to 2666 MHz memory speeds, and up to 8 GT/s bus speed.
 - Choice of processors with up to six cores and up to 12 threads to enable the effective use of multithreaded applications.
 - Intelligent and adaptive system performance with energy efficient Intel Turbo Boost 2.0 Technology allows CPU cores to run at maximum speeds during peak workloads by temporarily going beyond processor thermal design power (TDP).
 - Intel Hyper-Threading Technology boosts performance for multithreaded applications by enabling simultaneous multithreading within each processor core, up to two threads per core.
 - Intel Virtualization Technology integrates hardware-level virtualization hooks that allow operating system vendors to better utilize the hardware for virtualization workloads.
 - Intel Advanced Vector Extensions (AVX) enable acceleration of enterprise-class and high performance computing (HPC) workloads.
- Provides memory speed, availability, and capacity of up to 64 GB memory with up to four 2666 MHz DDR4 ECC UDIMMs.
- Offers flexible and scalable internal storage in a 1U rack form factor with up to 10x 2.5-inch drives for performance-optimized configurations or up to 4x 3.5-inch drives for capacity-optimized configurations, providing a wide selection of SAS/SATA HDD/SSD and PCIe NVMe SSD types and capacities.
- Provides I/O scalability with the onboard LOM interface and up to three PCI Express (PCIe) 3.0 I/O expansion slots in a 1U rack form factor.
- Reduces I/O latency and increases overall system performance with Intel Integrated I/O Technology that embeds the PCI Express 3.0 controller into the Intel processors.

Availability and serviceability

The SR250 server provides many features to simplify serviceability and increase system uptime:

- Offers ECC protection which provides error correction not available in PC-class "servers" that use parity memory.
- Provides easy access to upgrades and serviceable parts (such as memory DIMMs and adapter cards) with tool-less cover removal.
- Offers data protection and greater system uptime with a choice of affordable onboard SATA RAID or advanced hardware RAID redundancy, along with hot-swap drives (select models).
- Provides availability for business-critical applications with redundant hot-swap power supplies (select models).
- Allows preventive actions in advance of possible failure, thereby increasing server uptime and application availability with Proactive Platform Alerts (including PFA and SMART alerts) for memory, internal storage (SAS/SATA HDDs and SSDs, NVMe SSDs, M.2 SSDs), RAID controllers, and server ambient and sub-component temperatures.
- Continuously monitors system parameters, triggers alerts, and performs recovery actions in case of failure to minimize downtime with Built-in XClarity Controller (XCC).
- Provides quick access to system status, firmware, network, health, and alerts information via Virtual Operator Panel from the XClarity Mobile App running on the Android or iOS mobile device that is connected to the front USB port with XClarity Controller access.
- Speeds up troubleshooting tasks to reduce service time with diagnostics built into the XClarity Provisioning Manager.

Manageability and security

Powerful systems management features simplify local and remote management of the SR250 server and deliver enterprise-class data protection:

- Provides advanced service processor control, monitoring, and alerting functions with XClarity Controller, a next generation service processor.
- Improves Unified Extensible Firmware Interface (UEFI) system setup, configuration, updates, simplified error handling, and operating system deployment with the embedded XClarity Provisioning Manager.
- Offers XClarity Essentials software tools that can help customers set up, use, and maintain the server.
- Increases uptime, reduces costs, and improves productivity through advanced server management capabilities with Lenovo XClarity Administrator that provides comprehensive hardware management.
- Provides on-the-go monitoring and management of devices in XClarity Administrator from anywhere with the Lenovo XClarity mobile app, which can help improve efficiency and reduce downtime risks.
- Centralizes infrastructure resource management with Lenovo XClarity Integrators for VMware vCenter and Microsoft System Center, extending XClarity Administrator features to virtualization management software tools and enabling users to deploy and manage infrastructure end-to-end.
- Offers advanced cryptographic functionality (such as digital signatures and remote attestation) with an integrated Trusted Platform Module (TPM) or optional Nationz TPM (available only in PRC).
- Keeps user data safe with Lenovo Business Vantage, a security software tool suite designed to work with the Nationz Trusted Platform Module (available only in PRC).
- Offers enterprise-class data protection with advanced RAID and optional self-encrypting drives.
- Provides faster, stronger encryption with industry-standard AES NI support.
- Helps prevent certain classes of malicious buffer overflow attacks with Intel Execute Disable Bit functionality, when combined with a supporting operating system.
- Enhances security through hardware-based resistance to malicious software attacks with Intel Trusted Execution Technology, allowing an application to run in its own isolated space, protected from all other software running on a system.
- Protects application code and data from disclosure or modification with Intel Software Guard Extensions (SGX), enabling high-assurance security use cases, such as blockchain, identity and records privacy, secure browsing, and digital rights management (DRM).

Energy efficiency

The SR250 server offers the following energy-efficiency features to save energy, reduce operational costs, increase energy availability, and contribute to the green environment:

- Delivers optimized compute power per watt, featuring 80 PLUS Gold (fixed) and Platinum (hot-swap) AC power supplies.
- Reduces power drawn with Intel Intelligent Power Capability that powers individual processor elements on and off as needed.
- Helps reduce power consumption with variable speed fans.
- Helps achieve lower heat output and reduced cooling needs with Lenovo XClarity Energy Manager that provides advanced data center power notification, analysis, and policy-based management.

Components and connectors

The following figure shows the front of the SR250 server with four 3.5-inch drive bays.

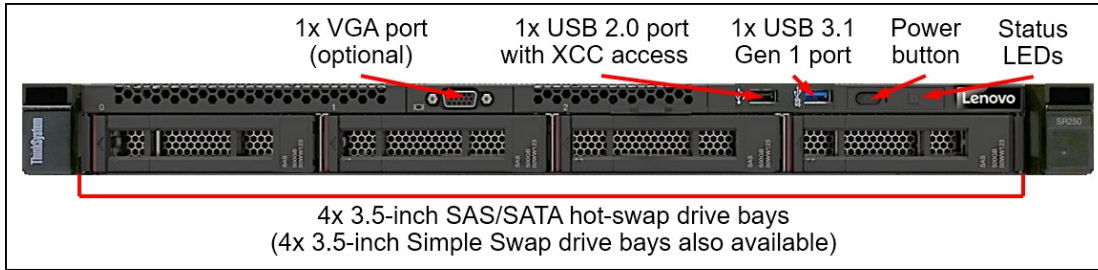


Figure 2. Front view of the SR250: 4x 3.5-inch drive bays

The following figure shows the front of the SR250 server with eight 2.5-inch drive bays.

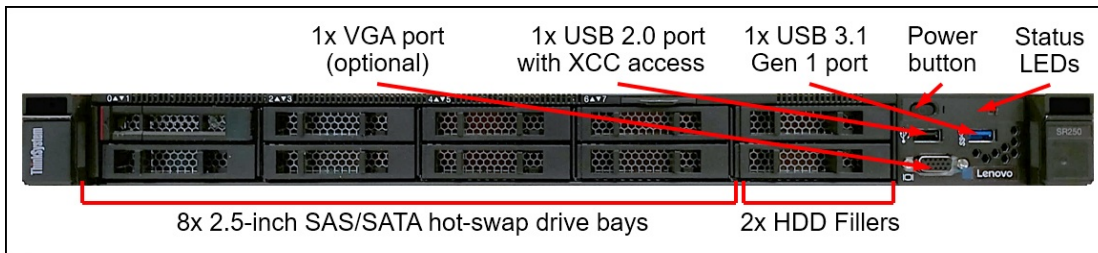


Figure 3. Front view of the SR250: 8x 2.5-inch drive bays

The following figure shows the front of the SR250 server with ten 2.5-inch drive bays.

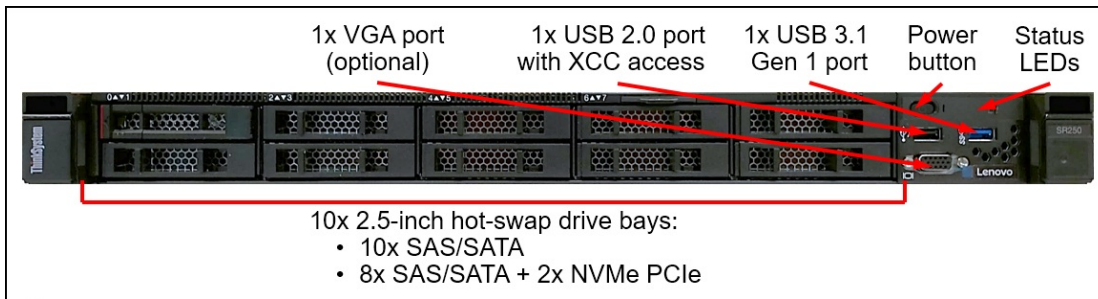


Figure 4. Front view of the SR250: 10x 2.5-inch drive bays

The front of the SR250 server includes the following components:

- Drive bays:
 - 4x 3.5-inch (Large Form Factor [LFF]) SATA simple-swap; or
 - 4x 3.5-inch SAS/SATA hot-swap; or
 - 8x 2.5-inch (Small Form Factor [SFF]) SAS/SATA hot-swap; or
 - 10x 2.5-inch hot-swap drive bays:
 - 10x SAS/SATA
 - 8x SAS/SATA and 2x NVMe PCIe
- One VGA port (optional)
- One USB 2.0 port with XClarity Controller access
- One USB 3.1 Gen 1 port
- A Power button
- Status LEDs

The following figure shows the rear of the SR250 server.

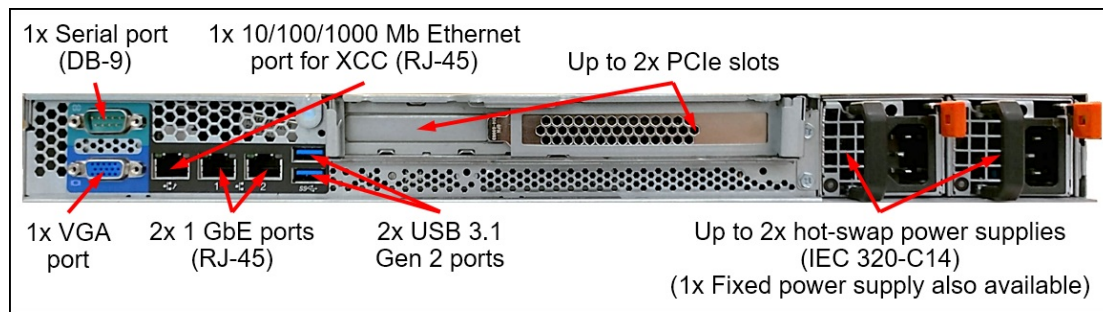


Figure 5. Rear view of the SR250

The rear of the SR250 server includes the following components:

- Up to two PCIe expansion slots (depending on the riser cards selected)
- One 1 GbE port for XClarity Controller
- One RS-232 serial port
- One VGA port
- Two 1 GbE data network ports
- Two USB 3.1 Gen 2 ports
- Power supplies
 - Up to two hot-swap power supplies; or
 - One fixed power supply

The following figure shows the locations of key components inside the SR250 server.

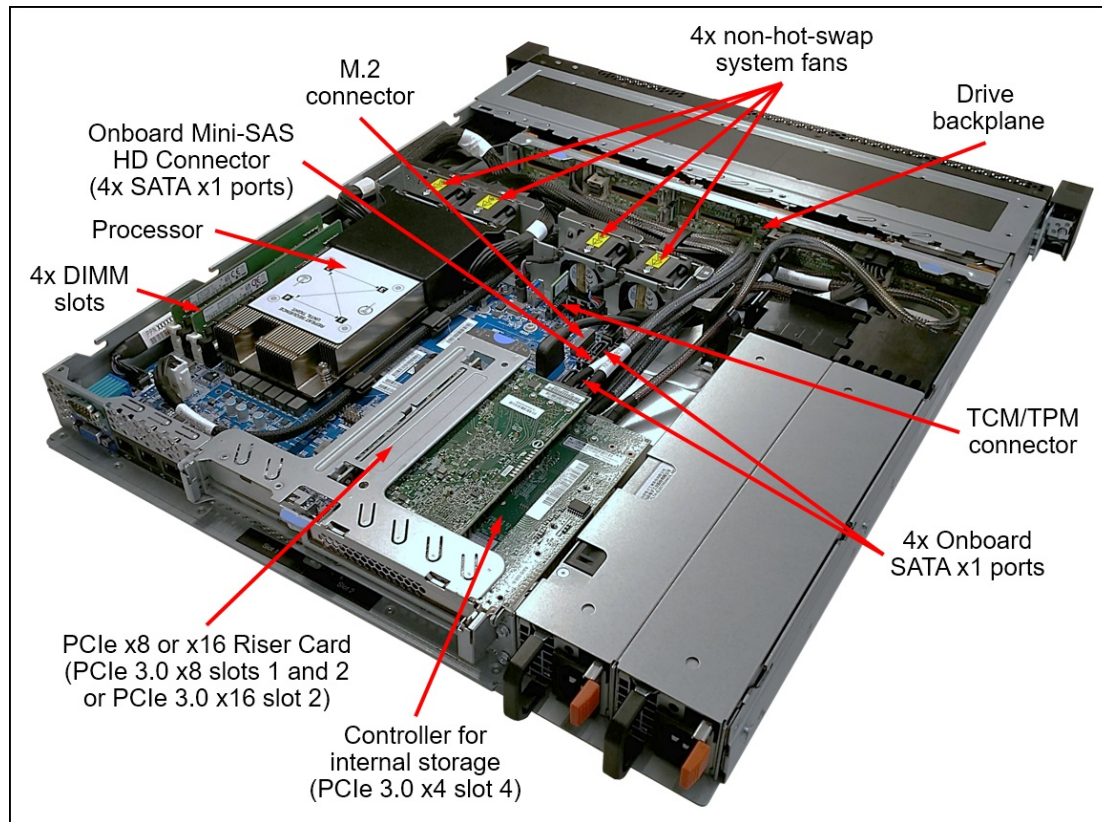


Figure 6. Internal view of the SR250

The SR250 server includes the following internal components:

- One processor
- Four DIMM slots
- Up to three PCIe 3.0 slots:
 - Slot 1: PCIe 3.0 x8 (not present if the Slot 2 is PCIe x16)
 - Slot 2: PCIe 3.0 x8 or x16
 - Slot 4: PCIe 3.0 x4 (only supports a controller for internal storage)
- Eight onboard SATA ports:
 - One Mini-SAS HD connector (4x SATA x1 ports)
 - Four SATA connectors (each connector provides the SATA x1 port)
- One TCM/TPM connector (supports Nationz TPM available in PRC only)
- Drive backplanes:
 - 4x LFF SATA simple-swap bracket; or
 - 4x LFF SAS/SATA hot-swap; or
 - 8x SFF SAS/SATA hot-swap; or
 - 8x SFF SAS/SATA and 2x SFF AnyBay hot-swap
- Four non-hot-swap system fans
- One M.2 connector

System specifications

The following table lists the system specifications for the SR250 server.

Table 1. SR250 system specifications

| Attribute | Specification |
|---------------------------|---|
| Form factor | 1U rack-mount. |
| Processor | One Intel Xeon E, Core i3, Pentium Gold, or Celeron processor. |
| Chipset | Intel C246. |
| Memory | 4 DIMM sockets (two memory channels with two DIMMs per channel). Support for ECC UDIMMs. Memory speed up to 2666 MHz. |
| Memory capacity | Up to 64 GB (4x 16 GB UDIMMs). |
| Memory protection | Error correction code (ECC). |
| Drive bays | <ul style="list-style-type: none"> • 4 LFF (3.5-inch) SATA Simple Swap drive bays. • 4 LFF (3.5-inch) SAS/SATA hot-swap drive bays. • 8 SFF (2.5-inch) SAS/SATA hot-swap drive bays. • 10 SFF (2.5-inch) hot-swap drive bays: <ul style="list-style-type: none"> ◦ 10x 2.5" SAS/SATA. ◦ 8x 2.5" SAS/SATA & 2x 2.5" NVMe PCIe. |
| Drive types | <p>3.5-inch simple-swap drives:</p> <ul style="list-style-type: none"> • 6 Gbps Nearline (NL) SATA HDDs up to 8 TB • 6 Gbps SATA SSDs up to 960 GB (2.5" SSD in a 3.5" tray) <p>3.5-inch hot-swap drives:</p> <ul style="list-style-type: none"> • 12 Gbps SAS HDDs up to 900 GB (2.5" HDD in a 3.5" tray) • 12 Gbps NL SAS HDDs up to 8 TB • 6 Gbps NL SATA HDDs up to 8 TB • 6 Gbps SATA SSDs up to 960 GB (2.5" SSD in a 3.5" tray) <p>2.5-inch hot-swap drives:</p> <ul style="list-style-type: none"> • 12 Gbps SAS HDDs up to 2.4 TB • 12 Gbps SAS HDD SEDs up to 300 GB • 12 Gbps NL SAS HDDs up to 2 TB • 6 Gbps NL SATA HDDs up to 2 TB • 6 Gbps SATA SSDs up to 960 GB • U.2 NVMe PCIe 3.0 x4 SSDs up to 1 TB <p>Internal M.2 SSDs:</p> <ul style="list-style-type: none"> • 6 Gbps SATA up to 480 GB <p>Note: Intermix of SAS, SATA, and NVMe PCIe drives is supported within a system, but not within a RAID array. NVMe PCIe SSDs do not support RAID controllers.</p> |
| Internal storage capacity | <ul style="list-style-type: none"> • LFF models: Up to 32 TB with 4x 8 TB SAS/SATA HDDs. • SFF models: Up to 24 TB with 10x 2.4 TB SAS HDDs. |
| Storage controller | <ul style="list-style-type: none"> • Onboard 6 Gbps SATA: <ul style="list-style-type: none"> ◦ AHCI non-RAID. ◦ RAID 0/1/10/5 with Intel RSTe. • 12 Gbps SAS/6 Gbps SATA RAID: <ul style="list-style-type: none"> ◦ RAID 0/1/10/5/50 with RAID 530-8i or RAID 730-8i 1GB Cache. ◦ RAID 0/1/10/5/50/6/60 with RAID 730-8i 2GB Flash, RAID 930-8i 2GB Flash, or RAID 930-16i 4GB Flash. • 12 Gbps SAS/6 Gbps SATA non-RAID: 430-8i or 16i HBA. • NVMe PCIe non-RAID: 1610-4P NVMe Switch Adapter. |

| Attribute | Specification |
|---------------------|--|
| Optical drive bays | None. Support for an external USB DVD RW Optical Disk Drive (See Optical drives). |
| Network interfaces | 2x Onboard 10/100/1000 Mb Ethernet RJ-45 ports (BCM5720 NIC). |
| I/O expansion slots | Up to three slots. Slot 4 is the fixed slot on the system planar, and the remaining slots depend on the riser cards installed. The slots are as follows: <ul style="list-style-type: none"> Slot 1: PCIe 3.0 x8; low profile (not present if the Slot 2 is x16) Slot 2: PCIe 3.0 x8 (x16 physical connector) or x16; full-height, half-length Slot 4: PCIe 3.0 x4 (supports an internal storage controller) |
| Ports | <ul style="list-style-type: none"> Front: <ul style="list-style-type: none"> 1x USB 2.0 port with XClarity Controller access. 1x USB 3.1 Gen 1 port. 1x VGA port (optional). Rear: <ul style="list-style-type: none"> 2x USB 3.1 Gen 2 ports. 1x VGA port. 1x DB-9 serial port. 1x RJ-45 10/100/1000 Mb Ethernet systems management port. |
| Cooling | Four non-hot-swap system fans. |
| Power supply | One fixed 300 W Gold, or up to two redundant hot-swap 450 W Platinum AC power supplies. |
| Video | Matrox G200 with 16 MB memory integrated into the XClarity Controller. Maximum resolution is 1920x1200 at 60 Hz with 32 bits per pixel. |
| Hot-swap parts | Drives (select models) and power supplies (select models). |
| Systems management | XClarity Controller (XCC) Standard, Advanced, or Enterprise (Pilot 4 chip), proactive platform alerts, XClarity Provisioning Manager, XClarity Essentials, XClarity Administrator, XClarity Integrators for VMware vCenter and Microsoft System Center, XClarity Energy Manager, Capacity Planner. |
| Security features | Power-on password, administrator's password, secure firmware updates, Trusted Platform Module (TPM) 1.2 or 2.0 (configurable UEFI setting). Optional lockable front bezel. Optional Nationz TPM (available only in PRC). Optional Lenovo Business Vantage security software (available only in PRC). |
| Operating systems | Microsoft Windows Server 2016 and 2019; Red Hat Enterprise Linux 7 and 8; SUSE Linux Enterprise Server 12 and 15; VMware vSphere (ESXi) 6.5 and 6.7. |
| Warranty | One-year (7Y52) or three-year (7Y51, 7Y72, and 7Y73) customer-replaceable unit (CRU) and onsite limited warranty with 9x5 Next Business Day Parts Delivered. |
| Service and support | Optional service upgrades are available through Lenovo Services: 2-hour or 4-hour response time, 6-hour or 24-hour committed service repair (select areas), warranty extension up to 5 years, 1-year or 2-year post-warranty extensions, Premier Support, YourDrive Your Data, Enterprise Software Support, and Basic Hardware Installation Services. |
| Dimensions | Height: 43 mm (1.7 in), width: 434 mm (17.1 in), depth: 498 mm (19.6 in) |
| Weight | Base configuration: 9.1 kg (20.1 lb), maximum: 12.3 kg (27.1 lb) |

Models

SR250 server models are region-specific; that is, each region may define their own server models, and not all server models are available in every region. For a complete list of the SR250 models, contact a Lenovo or Lenovo Business Partner representative in your region. Information on the SR250 models is also available on the PSREF website:

<http://psref.lenovo.com>

Configure-to-order (CTO) models can also be created for factory-integrated server customization. The following table lists the base CTO models of the ThinkSystem SR250 server.

Table 2. Base CTO models

| Description | Machine Type/Model |
|--|--------------------|
| ThinkSystem SR250 (3-Year Warranty) | 7Y51CTO1WW |
| ThinkSystem SR250 (1-Year Warranty) | 7Y52CTO1WW |
| ThinkSystem SR250 India with RDN PSU (3-Year Warranty) | 7Y72CTO1WW |
| ThinkSystem SR250 India with Fixed PSU (3-Year Warranty) | 7Y73CTO1WW |

The following table lists the base chassis for CTO models of the SR250 server.

Table 3. Base chassis for CTO models

| Description | Feature code |
|--|--------------|
| ThinkSystem SR250/SR150 4x3.5" Chassis | B403 |
| ThinkSystem SR250 2.5" Chassis | B404 |

All models of the SR250 server are shipped with the *Electronic Publications Flyer*.

Models table conventions: The model tables shown in this section use the following conventions:

- Drive bays:
 - If the number is shown as "x", it represents the quantity of the SAS/SATA drive bays.
 - If the number is shown as "x+y", it represents the quantity of the SAS/SATA + NVMe drive bays.
- XClarity Controller: "S" = Standard, "A" = Advanced, "E" = Enterprise.
- Front VGA port: "Y" = Included; "N" = Not included, optional.
- Tool-less 4-Post Rail Kit: "Y" = Included; "N" = Not included, optional.
- Power cord:
 - "R2" = 2.8 m C13-C14 rack power cable.
 - "R4" = 4.3 m C13-C14 rack power cable.
 - "N" = Not included; see [Power supplies and cables](#) for the ordering information.

The following tables list the models of the SR250 server for the following regions:

- [North America](#)
- [Brazil](#)
- [Latin America \(except Brazil\)](#)
- [Europe, Middle East, and Africa \(EMEA\)](#)
- [Hong Kong, Taiwan, Korea](#)
- [Japan](#)
- [Association of Southeast Asian Nations \(ASEAN\)](#)
- [Australia and New Zealand](#)

Table 4. SR250 server models (1-year warranty): North America

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|-------------------------------------|--------------------------|----------------------|--------------------|------------------------|------------------|----------|--------------------------|---------------|---------------------|----------------|--------------------|------------|
| Relationship models - North America | | | | | | | | | | | | |
| 7Y52A00ENA | 1x E-2104G 4C 65W 3.2GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | E | Y | Y | R2 |
| 7Y52A00CNA | 1x E-2104G 4C 65W 3.2GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | E | Y | Y | R2 |
| 7Y51A04MNA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | E | N | Y | R2 |
| 7Y52A00YNA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | E | Y | Y | R2 |
| 7Y51A04PNA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | 2x 1TB SATA HDD§ | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | N | Y | R2 |
| 7Y52A00UNA | 1x E-2124G 4C 71W 3.4GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A00TNA | 1x E-2124G 4C 71W 3.4GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A00KNA | 1x E-2126G 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A00FNA | 1x E-2126G 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A00HNA | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A00QNA | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y51A04QNA | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | N | Y | R2 |
| 7Y52A00DNA | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y51A04KNA | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | 2x 2TB SATA HDD§ | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | N | Y | R2 |
| 7Y52A00MNA | 1x E-2144G 4C 71W 3.6GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A00NNA | 1x E-2144G 4C 71W 3.6GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A00JNA | 1x E-2146G 6C 80W 3.5GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A00LNA | 1x E-2146G 6C 80W 3.5GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A00WNA | 1x E-2174G 4C 71W 3.8GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y51A04NNA | 1x E-2174G 4C 71W 3.8GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | N | Y | R2 |
| 7Y51A04LNA | 1x E-2174G 4C 71W 3.8GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 4 / 4 HS LFF | 2x 480GB S4510§ | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | N | Y | R2 |
| 7Y52A010NA | 1x E-2176G 6C 80W 3.7GHz | 1x 16GB (2Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A00XNA | 1x E-2176G 6C 80W 3.7GHz | 1x 16GB (2Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A012NA | 1x E-2176G 6C 80W 3.7GHz | 1x 16GB (2Rx8) | 1x 430-16i HBA | 10 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|----------------------------------|--------------------------|----------------------|--------------------|------------------------|------------------|----------|--------------------------|---------------|---------------------|----------------|--------------------|------------|
| 7Y52A00SNA | 1x E-2186G 6C 95W 3.8GHz | 1x 16GB (2R84) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A00RNA | 1x E-2186G 6C 95W 3.8GHz | 1x 16GB (2Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A013NA | 1x E-2186G 6C 95W 3.8GHz | 1x 16GB (2Rx8) | 1x 430-16i HBA | 10 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| TopSeller models - North America | | | | | | | | | | | | |
| 7Y52A011NA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | E | Y | Y | R2 |
| 7Y52A01BNA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | 2x 1TB SATA HDD† | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | Y | R2 |
| 7Y52A00PNA | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A01CNA | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | 2x 2TB SATA HDD‡ | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y52A00GNA | 1x E-2174G 4C 71W 3.8GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y52A01ANA | 1x E-2174G 4C 71W 3.8GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 4 / 4 HS LFF | 2x 480GB S4510‡ | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |

* Processor details: Processor quantity and model, cores, thermal design power (TDP), and core speed.

^ The server supports one fixed power supply or up to two hot-swap (HS) power supplies.

‡ Configured in a RAID-1 drive group; ships with the Windows Server 2019 Standard (16 core) - English factory preload.

† Configured in a RAID-1 drive group; ships with the Windows Server 2019 Essentials - English factory preload and Windows Server 2019 to 2016 Downgrade Kit - Multilanguage.

‡ Configured in a RAID-1 drive group; ships with the Windows Server 2019 Standard (16 core) - English factory preload and Windows Server 2019 to 2016 Downgrade Kit - Multilanguage.

Table 5. SR250 server models (1-year warranty): Brazil

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|---------------------------|--------------------------|----------------------|--------------------|------------------------|----------|----------|--------------------------|---------------|---------------------|----------------|--------------------|------------|
| TopSeller models - Brazil | | | | | | | | | | | | |
| 7Y52A006BR | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | Y | Y | R2 |
| 7Y52A009BR | 1x E-2124 4C 71W 3.3GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | Y | Y | R2 |
| 7Y52A007BR | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | Y | Y | R2 |
| 7Y52A003BR | 1x E-2136 6C 80W 3.3GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | Y | Y | R2 |
| 7Y52A008BR | 1x E-2146G 6C 80W 3.5GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | Y | Y | R2 |
| 7Y52A004BR | 1x E-2146G 6C 80W 3.5GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | Y | Y | R2 |

* Processor details: Processor quantity and model, cores, thermal design power (TDP), and core speed.

^ The server supports one fixed power supply or up to two hot-swap (HS) power supplies.

Table 6. SR250 server models (1-year warranty): Latin America (except Brazil)

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|--|--------------------------|----------------------|--------------------|------------------------|----------|----------|-----------------------|---------------|---------------------|----------------|--------------------|------------|
| TopSeller models - Latin America (except Brazil) | | | | | | | | | | | | |
| 7Y52A00BLA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | Y | Y | R2 |
| 7Y52A001LA | 1x E-2124 4C 71W 3.3GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | Y | Y | R2 |
| 7Y52A000LA | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | Y | Y | R2 |
| 7Y52A00ALA | 1x E-2136 6C 80W 3.3GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | Y | Y | R2 |
| 7Y52A002LA | 1x E-2146G 6C 80W 3.5GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | Y | Y | R2 |
| 7Y52A005LA | 1x E-2146G 6C 80W 3.5GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | Y | Y | R2 |

* Processor details: Processor quantity and model, cores, thermal design power (TDP), and core speed.

^ The server supports one fixed power supply or up to two hot-swap (HS) power supplies.

Table 7. SR250 server models (3-year warranty): EMEA

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|----------------------------|-------------------------|----------------------|--------------------|------------------------|-----------------|----------|-----------------------|---------------|---------------------|----------------|--------------------|------------|
| Relationship models - EMEA | | | | | | | | | | | | |
| 7Y51A02MEA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | Y | R2 |
| 7Y51A02SEA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 SS LFF | 2x 1TB SATA HDD | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | Y | R2 |
| 7Y51A02ZEA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | Y | R2 |
| 7Y51A02XEA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | 2x 1TB SATA HDD | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | Y | R2 |
| 7Y51A026EA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y51A02NEA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | Y | R2 |
| 7Y51A025EA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y51A02QEA | 1x E-2124 4C 71W 3.3GHz | 1x 16GB (2Rx8) | 1x SATA RAID | 4 / 4 SS LFF | 2x 2TB SATA HDD | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | Y | R2 |
| 7Y51A02WEA | 1x E-2124 4C 71W 3.3GHz | 1x 16GB (2Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | Y | R2 |
| 7Y51A02YEA | 1x E-2124 4C 71W 3.3GHz | 1x 16GB (2Rx8) | 1x SATA RAID | 4 / 4 HS LFF | 2x 2TB SATA HDD | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | Y | R2 |
| 7Y51A02FEA | 1x E-2124 4C 71W 3.3GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 4 / 4 HS LFF | 2x 1TB SATA HDD | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|--------------|--------------------------|----------------------|--------------------|------------------------|----------------|----------|--------------------------|---------------|---------------------|----------------|--------------------|------------|
| 7Y51A024EA | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | Y | R2 |
| 7Y51A02GEA | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | Y | R2 |
| 7Y51A027EA | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y51A02LEA | 1x E-2134 4C 71W 3.5GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y51A02DEA | 1x E-2144G 4C 71W 3.6GHz | 1x 16GB (2Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y51A02VEA | 1x E-2144G 4C 71W 3.6GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y51A02TEA | 1x E-2144G 4C 71W 3.6GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y51A02HEA | 1x E-2146G 6C 80W 3.5GHz | 1x 16GB (2Rx8) | 1x SATA RAID | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | Y | R2 |
| 7Y51A029EA | 1x E-2146G 6C 80W 3.5GHz | 1x 16GB (2Rx8) | 1x SATA RAID | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y51A02PEA | 1x E-2174G 4C 71W 3.8GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y51A031EA | 1x E-2176G 6C 80W 3.7GHz | 1x 16GB (2Rx8) | 1x SATA RAID | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y51A02UEA | 1x E-2176G 6C 80W 3.7GHz | 1x 16GB (2Rx8) | 1x RAID 530-8i | 4 / 4 HS LFF | 2x 2TB SAS HDD | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y51A030EA | 1x E-2186G 6C 95W 3.8GHz | 1x 16GB (2Rx8) | 1x SATA RAID | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |

* Processor details: Processor quantity and model, cores, thermal design power (TDP), and core speed.

^ The server supports one fixed power supply or up to two hot-swap (HS) power supplies.

Table 8. SR250 server models (1-year warranty): EMEA

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|----------------------------|-------------------------|----------------------|--------------------|------------------------|----------|----------|--------------------------|---------------|---------------------|----------------|--------------------|------------|
| Relationship models - EMEA | | | | | | | | | | | | |
| 7Y52A00VEA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y52A00ZEA | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |

* Processor details: Processor quantity and model, cores, thermal design power (TDP), and core speed.

^ The server supports one fixed power supply or up to two hot-swap (HS) power supplies.

Table 9. SR250 server models (3-year warranty): Hong Kong, Taiwan, Korea

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|---|-----------------------------|----------------------|--------------------|------------------------|-------------|----------|---------------------------|------------------|---------------------|----------------|--------------------|------------|
| TopSeller models - Hong Kong, Taiwan, Korea | | | | | | | | | | | | |
| 7Y51A02CCN | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | N | N |
| 7Y51A02ECN | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A040CN | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A028CN | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | N | N |
| 7Y51A02KCN | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | N | N |
| 7Y51A03WCN | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A02BCN | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | S | N | N | N |
| 7Y51A02ACN | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A03XCN | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A02RCN | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A02JCN | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A03YCN | 1x E-2144G 4C 71W 3.6GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A041CN | 1x E-2146G 6C 80W 3.5GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A03ZCN | 1x E-2174G 4C 71W 3.8GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A023CN | 1x E-2174G 4C 71W 3.8GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | S | N | N | N |

* Processor details: Processor quantity and model, cores, thermal design power (TDP), and core speed.

^ The server supports one fixed power supply or up to two hot-swap (HS) power supplies.

Table 10. SR250 server models (3-year warranty): Japan

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|-----------------------------|----------------------------|----------------------|--------------------|------------------------|-------------|----------|--------------------------|---------------|---------------------|----------------|--------------------|------------|
| Relationship models - Japan | | | | | | | | | | | | |
| 7Y51A01RJP | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A036JP | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|--------------------------|-----------------------------|----------------------|--------------------|------------------------|-------------|----------|--------------------------|---------------|---------------------|----------------|--------------------|------------|
| 7Y51A01HJP | 1x E-2124G 4C 71W 3.4GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01WJP | 1x E-2126G 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01JJP | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A037JP | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A015JP | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A017JP | 1x E-2144G 4C 71W 3.6GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A038JP | 1x E-2144G 4C 71W 3.6GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01QJP | 1x E-2146G 6C 80W 3.5GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A00QJP | 1x E-2174G 4C 71W 3.8GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A039JP | 1x E-2174G 4C 71W 3.8GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01CJP | 1x E-2176G 6C 80W 3.7GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01PJP | 1x E-2186G 6C 95W 3.8GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A00UJP | 1x G5400 2C 54W 3.7GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01TJP | 1x G5400T 2C 35W 3.1GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01NJP | 1x G5500 2C 54W 3.8GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01KJP | 1x G5500T 2C 35W 3.2GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01FJP | 1x G5600 2C 54W 3.9GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A00MJP | 1x i3-8100 4C 65W 3.6GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A00PJP | 1x i3-8300 4C 62W 3.7GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A00SJP | 1x i3-8350K 4C 91W 4GHz | 1x 8GB (1Rx8) | 1x SATA RAID | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| TopSeller models - Japan | | | | | | | | | | | | |
| 7Y51A00RJP | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A00NJP | 1x E-2124G 4C 71W 3.4GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01BJP | 1x E-2126G 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A00VJP | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A00XJP | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|--------------|--------------------------|----------------------|--------------------|------------------------|----------|----------|--------------------------|---------------|---------------------|----------------|--------------------|------------|
| 7Y51A016JP | 1x E-2144G 4C 71W 3.6GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01ZJP | 1x E-2146G 6C 80W 3.5GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01VJP | 1x E-2174G 4C 71W 3.8GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A014JP | 1x E-2176G 6C 80W 3.7GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01AJP | 1x E-2186G 6C 95W 3.8GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01DJP | 1x G5400 2C 54W 3.7GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01SJP | 1x G5400T 2C 35W 3.1GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01MJP | 1x G5500 2C 54W 3.8GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01YJP | 1x G5500T 2C 35W 3.2GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A00YJP | 1x G5600 2C 54W 3.9GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A011JP | 1x i3-8100 4C 65W 3.6GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A00ZJP | 1x i3-8300 4C 62W 3.7GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |
| 7Y51A01XJP | 1x i3-8350K 4C 91W 4GHz | 1x 8GB (1Rx8) | 1x RAID 930-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | A | N | Y | N |

* Processor details: Processor quantity and model, cores, thermal design power (TDP), and core speed.

^ The server supports one fixed power supply or up to two hot-swap (HS) power supplies.

Table 11. SR250 server models (3-year warranty): ASEAN

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|-----------------------------|--------------------------|----------------------|--------------------|------------------------|----------|----------|---------------------------|---------------|---------------------|----------------|--------------------|------------|
| Relationship models - ASEAN | | | | | | | | | | | | |
| 7Y51A03QSG | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | Y | N | N |
| 7Y51A03MSG | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | Y | N | N |
| 7Y51A03USG | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | Y | Y | N |
| 7Y51A03PSG | 1x E-2174G 4C 71W 3.8GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | Y | N | N |
| 7Y51A03NSG | 1x E-2174G 4C 71W 3.8GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | Y | N | N |
| 7Y51A03TSG | 1x E-2174G 4C 71W 3.8GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | Y | Y | N |

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|--------------------------|-----------------------------|----------------------|--------------------|------------------------|-------------|----------|---------------------------|---------------|---------------------|----------------|--------------------|------------|
| TopSeller models - ASEAN | | | | | | | | | | | | |
| 7Y51A03CSG | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A045SG | 1x E-2124 4C 71W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A03DSG | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A042SG | 1x E-2134 4C 71W 3.5GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A03ESG | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A044SG | 1x E-2136 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A03FSG | 1x E-2144G 4C 71W 3.6GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A043SG | 1x E-2144G 4C 71W 3.6GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A03GSG | 1x E-2146G 6C 80W 3.5GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A03VSG | 1x E-2146G 6C 80W 3.5GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A03HSG | 1x E-2174G 4C 71W 3.8GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |
| 7Y51A03SSG | 1x E-2174G 4C 71W 3.8GHz | 1x 8GB (1Rx8) | 1x RAID 530-8i | 4 / 4 SS LFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | N |

* Processor details: Processor quantity and model, cores, thermal design power (TDP), and core speed.

^ The server supports one fixed power supply or up to two hot-swap (HS) power supplies.

Table 12. SR250 server models (3-year warranty): Australia and New Zealand

| Model number | Intel processor* | Memory UDIMM (4 max) | Storage controller | Drive bays (std / max) | Drives | Eth. LOM | I/O slots | Power supply^ | XClarity Controller | Front VGA port | Tool-less Rail Kit | Power cord |
|---|--------------------------|----------------------|--------------------|------------------------|----------|----------|---------------------------|---------------|---------------------|----------------|--------------------|------------|
| Relationship models - Australia and New Zealand | | | | | | | | | | | | |
| 7Y51A01UAU | 1x E-2104G 4C 65W 3.2GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y51A046AU | 1x E-2104G 4C 65W 3.2GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | N | R4 |
| 7Y51A047AU | 1x E-2104G 4C 65W 3.2GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 1x PCIe x16 1x PCIe x4 | 1x 450W HS | S | N | Y | R2 |
| 7Y51A018AU | 1x E-2104G 4C 65W 3.2GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y51A013AU | 1x E-2124G 4C 71W 3.4GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y51A01LAU | 1x E-2126G 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y51A010AU | 1x E-2126G 6C 80W 3.3GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y51A00TAU | 1x E-2144G 4C 71W 3.6GHz | 1x 16GB (2Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y51A00WAU | 1x E-2144G 4C 71W 3.6GHz | 1x 16GB (2Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y51A012AU | 1x E-2174G 4C 71W 3.8GHz | 1x 16GB (2Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y51A01EAU | 1x E-2186G 6C 95W 3.8GHz | 1x 16GB (2Rx8) | 1x SATA AHCI | 8 / 10 HS SFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 450W HS | E | Y | Y | R2 |
| 7Y51A01GAU | 1x G5600 2C 54W 3.9GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | E | Y | Y | R2 |
| 7Y51A019AU | 1x i3-8300 4C 62W 3.7GHz | 1x 8GB (1Rx8) | 1x SATA AHCI | 4 / 4 HS LFF | Open bay | 2x 1 GbE | 2x PCIe x8 1x PCIe x4 | 1x 300W Fixed | E | Y | Y | R2 |

* Processor details: Processor quantity and model, cores, thermal design power (TDP), and core speed.

^ The server supports one fixed power supply or up to two hot-swap (HS) power supplies.

Processors

The SR250 server supports one Intel Xeon E, Core i3, Pentium Gold, or Celeron G processor. The following table lists the specifications of the processors.

Table 13. Processor specifications (HT = Hyper-Threading, TB = Turbo Boost, VT = Virtualization Technology)

| CPU model | Core frequency (Base / TB Max) | Number of cores / threads | Cache | Max DDR4 frequency | Max memory capacity | Bus speed | TDP | ECC | HT | TB | VT-x | VT-d | SGX* |
|--------------------------------------|--------------------------------|---------------------------|-------|--------------------|---------------------|-----------|------|-----|-----|-----|------|------|------|
| Intel Xeon E processors | | | | | | | | | | | | | |
| E-2104G | 3.20 GHz | 4 / 4 | 8 MB | 2666 MHz | 64 GB | 8 GT/s | 65 W | Yes | No | No | Yes | Yes | No |
| E-2124 | 3.30 / 4.30 GHz | 4 / 4 | 8 MB | 2666 MHz | 64 GB | 8 GT/s | 71 W | Yes | No | Yes | Yes | Yes | No |
| E-2124G | 3.40 / 4.50 GHz | 4 / 4 | 8 MB | 2666 MHz | 64 GB | 8 GT/s | 71 W | Yes | No | Yes | Yes | Yes | No |
| E-2126G | 3.30 / 4.50 GHz | 6 / 6 | 12 MB | 2666 MHz | 64 GB | 8 GT/s | 80 W | Yes | No | Yes | Yes | Yes | No |
| E-2134 | 3.50 / 4.50 GHz | 4 / 8 | 8 MB | 2666 MHz | 64 GB | 8 GT/s | 71 W | Yes | Yes | Yes | Yes | Yes | No |
| E-2136 | 3.30 / 4.50 GHz | 6 / 12 | 12 MB | 2666 MHz | 64 GB | 8 GT/s | 80 W | Yes | Yes | Yes | Yes | Yes | No |
| E-2144G | 3.60 / 4.50 GHz | 4 / 8 | 8 MB | 2666 MHz | 64 GB | 8 GT/s | 71 W | Yes | Yes | Yes | Yes | Yes | No |
| E-2146G | 3.50 / 4.50 GHz | 6 / 12 | 12 MB | 2666 MHz | 64 GB | 8 GT/s | 80 W | Yes | Yes | Yes | Yes | Yes | No |
| E-2174G | 3.80 / 4.70 GHz | 4 / 8 | 8 MB | 2666 MHz | 64 GB | 8 GT/s | 71 W | Yes | Yes | Yes | Yes | Yes | Yes |
| E-2176G | 3.70 / 4.70 GHz | 6 / 12 | 12 MB | 2666 MHz | 64 GB | 8 GT/s | 80 W | Yes | Yes | Yes | Yes | Yes | Yes |
| E-2186G | 3.80 / 4.70 GHz | 6 / 12 | 12 MB | 2666 MHz | 64 GB | 8 GT/s | 95 W | Yes | Yes | Yes | Yes | Yes | Yes |
| Intel Core i3 processors | | | | | | | | | | | | | |
| i3-8100 | 3.60 GHz | 4 / 4 | 6 MB | 2400 MHz | 64 GB | 8 GT/s | 65 W | Yes | No | No | Yes | Yes | No |
| i3-8100T | 3.10 GHz | 4 / 4 | 6 MB | 2400 MHz | 64 GB | 8 GT/s | 35 W | Yes | No | No | Yes | Yes | No |
| i3-8300 | 3.70 GHz | 4 / 4 | 8 MB | 2400 MHz | 64 GB | 8 GT/s | 62 W | Yes | No | No | Yes | Yes | No |
| i3-8300T | 3.20 GHz | 4 / 4 | 8 MB | 2400 MHz | 64 GB | 8 GT/s | 35 W | Yes | No | No | Yes | Yes | No |
| i3-8350K | 4.00 GHz | 4 / 4 | 8 MB | 2400 MHz | 64 GB | 8 GT/s | 91 W | Yes | No | No | Yes | Yes | No |
| Intel Pentium Gold processors | | | | | | | | | | | | | |
| G5400 | 3.70 GHz | 2 / 4 | 4 MB | 2400 MHz | 64 GB | 8 GT/s | 58 W | Yes | Yes | No | Yes | Yes | No |
| G5400T | 3.10 GHz | 2 / 4 | 4 MB | 2400 MHz | 64 GB | 8 GT/s | 35 W | Yes | Yes | No | Yes | Yes | No |
| G5500 | 3.80 GHz | 2 / 4 | 4 MB | 2400 MHz | 64 GB | 8 GT/s | 54 W | Yes | Yes | No | Yes | Yes | No |
| G5500T | 3.20 GHz | 2 / 4 | 4 MB | 2400 MHz | 64 GB | 8 GT/s | 35 W | Yes | Yes | No | Yes | Yes | No |
| G5600 | 3.90 GHz | 2 / 4 | 4 MB | 2400 MHz | 64 GB | 8 GT/s | 54 W | Yes | Yes | No | Yes | Yes | No |
| Intel Celeron processors | | | | | | | | | | | | | |
| G4900 | 3.10 GHz | 2 / 2 | 2 MB | 2400 MHz | 64 GB | 8 GT/s | 54 W | Yes | No | No | Yes | Yes | No |
| G4900T | 2.90 GHz | 2 / 2 | 2 MB | 2400 MHz | 64 GB | 8 GT/s | 35 W | Yes | No | No | Yes | Yes | No |
| G4920 | 3.20 GHz | 2 / 2 | 2 MB | 2400 MHz | 64 GB | 8 GT/s | 54 W | Yes | No | No | Yes | Yes | No |

* Intel SGX support requires UEFI V1.03 (ISE110C) or later.

The following table lists feature codes for the processors that are available for the SR250 server.

Table 14. Processor feature codes

| Description | Feature code |
|--|--------------|
| Intel Xeon E processors | |
| Intel Xeon E-2104G 4C 65W 3.2GHz Processor | B354 |
| Intel Xeon E-2124 4C 71W 3.3GHz Processor | B353 |
| Intel Xeon E-2124G 4C 71W 3.4GHz Processor | B352 |
| Intel Xeon E-2126G 6C 80W 3.3GHz Processor | B351 |
| Intel Xeon E-2134 4C 71W 3.5GHz Processor | B350 |
| Intel Xeon E-2136 6C 80W 3.3GHz Processor | B34Z |

| Description | Feature code |
|---|--------------|
| Intel Xeon E-2144G 4C 71W 3.6GHz Processor | B34Y |
| Intel Xeon E-2146G 6C 80W 3.5GHz Processor | B34X |
| Intel Xeon E-2174G 4C 71W 3.8GHz Processor | B34W |
| Intel Xeon E-2176G 6C 80W 3.7GHz Processor | B34V |
| Intel Xeon E-2186G 6C 95W 3.8GHz Processor | B34U |
| Intel Core i3 processors | |
| Intel Core i3-8100 4C 65W 3.6GHz Processor | B357 |
| Intel Core i3-8100T 4C 35W 3.1GHz Processor | B359 |
| Intel Core i3-8300 4C 62W 3.7GHz Processor | B356 |
| Intel Core i3-8300T 4C 35W 3.2GHz Processor | B358 |
| Intel Core i3-8350K 4C 91W 4GHz Processor | B355 |
| Intel Pentium Gold processors | |
| Intel Pentium Gold G5400 2C 54W 3.7GHz Processor | B35C |
| Intel Pentium Gold G5400T 2C 35W 3.1GHz Processor | B35G |
| Intel Pentium Gold G5500 2C 54W 3.8GHz Processor | B35B |
| Intel Pentium Gold G5500T 2C 35W 3.2GHz Processor | B35F |
| Intel Pentium Gold G5600 2C 54W 3.9GHz Processor | B35A |
| Intel Celeron G processors | |
| Intel Celeron G4900 2C 54W 3.1GHz Processor | B35E |
| Intel Celeron G4900T 2C 35W 2.9GHz Processor | B35H |
| Intel Celeron G4920 2C 54W 3.2GHz Processor | B35D |

Memory

The SR250 server supports up to 4 TruDDR4 memory UDIMMs with ECC protection. The processor has two memory channels with two DIMMs per channel.

Lenovo TruDDR4 memory uses the highest-quality components sourced from Tier 1 DRAM suppliers and only memory that meets strict requirements is selected. It is compatibility tested and tuned on every ThinkSystem server to maximize performance and reliability.

TruDDR4 memory has a unique signature programmed into the DIMM, which enables Lenovo servers to verify whether the memory installed is qualified and supported. Lenovo qualified and supported TruDDR4 memory is covered by Lenovo warranty, and service and support provided worldwide.

The following rules apply when selecting the memory configuration:

- The server supports memory configurations with 1, 2, 3, or 4 UDIMMs.
- Mixing UDIMMs of different capacity is *not* supported.
- All DIMMs in the server operate at the same speed up to 2666 MHz, which is determined by the maximum memory speed supported by the specific processor (see [Processors](#) for details).
Note: Maximum memory speed can be achieved when Max performance mode is enabled in UEFI.
- The server supports up to 64 GB of memory.

The following table lists memory options available for the SR250 server.

Table 15. Memory options

| Description | Part number | Feature code | Maximum quantity |
|---|-------------|--------------|------------------|
| ThinkSystem 8GB TruDDR4 2666MHz (1Rx8, 1.2V) ECC UDIMM | 4ZC7A08696 | B35J | 4 |
| ThinkSystem 16GB TruDDR4 2666MHz (2Rx8, 1.2V) ECC UDIMM | 4ZC7A08699 | B35K | 4 |

Internal storage

The SR250 server supports the following internal drive bay configurations:

1. 4 LFF SATA Simple Swap drive bays
2. 4 LFF SAS/SATA hot-swap drive bays
3. 8 SFF SAS/SATA hot-swap drive bays
4. 10 SFF hot-swap drive bays:
 - a. 10x 2.5" SAS/SATA
 - b. 8x 2.5" SAS/SATA & 2x 2.5" NVMe PCIe

In addition, the SR250 server models can be configured with one internal M.2 SATA non-hot-swap SSD.

The following figure shows the internal drive bay configurations.

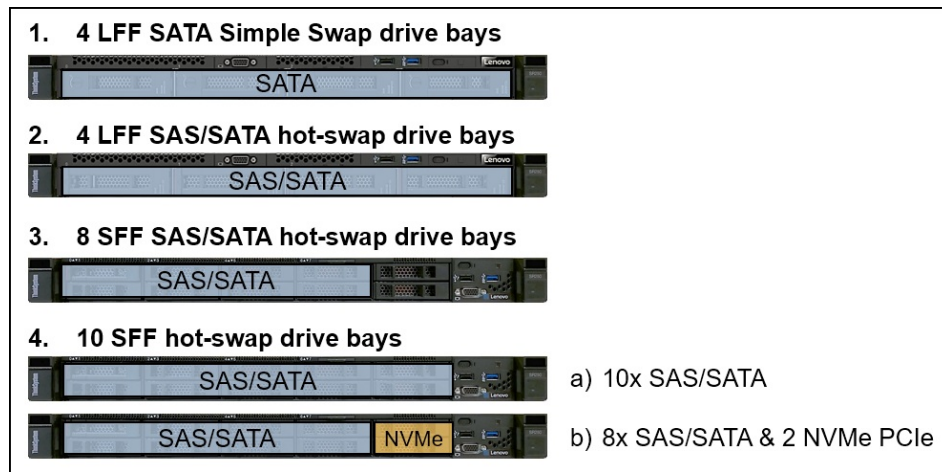


Figure 7. Internal drive bay configurations

The following table lists the internal storage options for the SR250 server.

Table 16. Internal storage options

| Description | Part number | Feature code | Maximum quantity |
|---|-------------|--------------|------------------|
| Simple-swap (SS) backplane kits | | | |
| ThinkSystem SR250 4x3.5" SS Backplane Bracket Kit for SW RAID/AHCI | None* | B407 | 1 |
| ThinkSystem SR250/SR150 4x3.5" SS Backplane Bracket Kit for HW RAID/HBA | 4M17A14200 | B408 | 1 |
| Hot-swap (HS) backplanes and kits | | | |
| ThinkSystem SR250 3.5" HS SATA/SAS 4-Bay Backplane Cable Kit | 4M17A13565 | B412 | 1 |
| ThinkSystem SR250 2.5" HS SATA/SAS 8-Bay Backplane | None* | B413 | 1 |
| ThinkSystem SR250 2.5" HS AnyBay 10-Bay Backplane | 4C57A12112 | B414 | 1 |
| Cables for hot-swap backplanes | | | |
| ThinkSystem SR250 4x3.5" HS SATA x4 Cable for SW RAID/AHCI | None* | B405 | 1 |

| Description | Part number | Feature code | Maximum quantity |
|--|-------------|--------------|------------------|
| ThinkSystem SR250 8x2.5" HS SATA 2x4 Cable for SW RAID/AHCI | None* | B406 | 1 |
| ThinkSystem SR250 3.5"/2.5" HS SAS/SATA x4 Cable for HW RAID/HBA | 4Z57A12652 | B415 | 3 |
| ThinkSystem SR250 10x2.5" HS NVMe Cable | 4Z57A12651 | B416 | 2 |

* Factory-installed only, no field upgrade.

Configuration notes:

- The AnyBay backplane allows either SAS/SATA drives or NVMe PCIe drives in the drive bays 8 and 9.
- Configurations with NVMe PCIe drives are supported only for Machine Types 7Y51, 7Y52, and 7Y72; Machine Type 7Y73 does not support configurations with NVMe PCIe drives.
- Field upgrades for models with 3.5-inch drive bays:
 - Models with 4x 3.5" SS drive bays and an onboard SATA controller can be upgraded to support a hardware RAID controller or HBA by using the 4x3.5" SS Backplane Bracket Kit for HW RAID/HBA (4M17A14200).
 - Models with 4x 3.5" SS drive bays can be upgraded to support 4x 3.5" HS drive bays and a hardware RAID controller or HBA by using the 3.5" HS SATA/SAS 4-Bay Backplane Cable Kit (4M17A13565). The kit includes the hot-swap backplane (B412) and the SAS/SATA cable for HW RAID/HBA (B415).
 - Models with 4x 3.5" HS drive bays and an onboard SATA controller can be upgraded to support a hardware RAID controller or HBA by using the 3.5"/2.5" HS SAS/SATA x4 Cable for HW RAID/HBA (4Z57A12652).
- Field upgrades for models with 2.5-inch drive bays:
 - Models with 8x 2.5" HS drive bays and an onboard SATA controller can be upgraded to support a hardware RAID controller or HBA by using two 3.5"/2.5" HS SAS/SATA x4 Cables for HW RAID/HBA (4Z57A12652).
 - Models with 8x 2.5" HS drive bays and an onboard SATA controller can be upgraded to support 10x 2.5" HS drive bays and a hardware RAID controller or HBA by using the 2.5" HS AnyBay 10-Bay Backplane (4C57A12112). The following additional cables are needed:
 - NVMe support: Two 3.5"/2.5" HS SAS/SATA x4 Cables for HW RAID/HBA (4Z57A12652) and two 10x2.5" HS NVMe Cables (4Z57A12651).
 - No NVMe support: Three 3.5"/2.5" HS SAS/SATA x4 Cables for HW RAID/HBA (4Z57A12652).
 - Models with 8x 2.5" HS drive bays and a hardware RAID controller or HBA can be upgraded to support 10x 2.5" HS drive bays by using the 2.5" HS AnyBay 10-Bay Backplane (4C57A12112). The following additional cables are needed:
 - NVMe support: Two 10x2.5" HS NVMe Cables (4Z57A12651).
 - No NVMe support: One 3.5"/2.5" HS SAS/SATA x4 Cable for HW RAID/HBA (4Z57A12652).
 - Models with 10x 2.5" HS drive bays and an NVMe Switch Adapter can be upgraded to support a hardware RAID controller or HBA by using two 3.5"/2.5" HS SAS/SATA x4 Cables for HW RAID/HBA (4Z57A12652).
- Controllers for internal storage are not included with the field upgrade options.
- The M.2 SSD cannot be used in the configurations with eight drives that are connected to the onboard SATA controller (the SATA port 7 is shared between the drive bay 7 and the M.2 connector).

The following table lists supported internal storage configurations with the SAS/SATA and AnyBay backplanes.

Table 17. Internal storage configurations

| Drive bay configuration | Backplane and cable type and quantity | | | | | | | | | | Storage controller quantity and type* |
|---|---------------------------------------|-------------------------|----------------------|----------------------|-----------------------|------------------------------|-------------------------------|---------------------------------|-------------------------------|---|---|
| | 4x 3.5" SS BP SW (B407) | 4x 3.5" SS BP HW (B408) | 4x 3.5" HS BP (B412) | 8x 2.5" HS BP (B413) | 10x 2.5" HS BP (B414) | 4x3.5" HS x4 Cable SW (B405) | 8x2.5" HS 2x4 Cable SW (B406) | 3.5"/2.5" HS x4 Cable HW (B415) | 10x 2.5" HS NVMe Cable (B416) | | |
| 3.5" chassis (Feature code B403) | | | | | | | | | | | |
| 4x 3.5-in. SATA simple-swap | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1x Onboard AHCI / RSTe (4) |
| | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1x RAID 530/730/930-8i/930-16i (4) |
| | | | | | | | | | | | |
| 4x 3.5-in. SAS/SATA hot-swap | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1x Onboard AHCI / RSTe (4) |
| | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1x RAID 530/730/930-8i/930-16i (4) |
| | | | | | | | | | | | |
| 2.5" chassis (Feature code B404) | | | | | | | | | | | |
| 8x 2.5-in. SAS/SATA hot-swap | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 1x Onboard AHCI / RSTe (8) |
| | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 2 | 0 | 0 | 1x RAID 530/730/930-8i/930-16i (8) |
| | | | | | | | | | | | |
| 10x 2.5-in. SAS/SATA hot-swap | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 3 | 0 | 0 | 1x RAID 930-16i (10) |
| | | | | | | | | | | | |
| 8x 2.5-in. SAS/SATA + 2x 2.5-in. NVMe hot-swap | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 2 | 2 | 0 | 1x RAID 530/730/930-8i/930-16i (8) + 1x 1610-4P (2) |
| | | | | | | | | | | | |
| 2x 2.5-in. NVMe hot-swap | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 2 | 0 | 1x 1610-4P (2) |

* The number in brackets (x) specifies the quantity of drive bays connected to each of the controllers.

Controllers for internal storage

The following table lists the storage controllers and options for internal storage of the SR250 server.

Table 18. RAID controllers and HBAs for internal storage

| Description | Part number | Feature code | Maximum quantity | I/O slots supported |
|--|-------------|--------------|------------------|---------------------|
| 6 Gbps SATA controllers | | | | |
| Onboard AHCI (non-RAID) / Intel RSTe (RAID) | None* | None* | 1 | - |
| 12 Gb SAS/SATA RAID controllers | | | | |
| ThinkSystem RAID 530-8i PCIe 12Gb Adapter | 7Y37A01082 | AUNG | 1 | 2, 4 |
| ThinkSystem RAID 730-8i 1GB Cache PCIe 12Gb Adapter | 7Y37A01083 | AUNH | 1 | 2, 4 |
| ThinkSystem RAID 730-8i 2GB Flash PCIe 12Gb Adapter | 4Y37A09722 | B4RQ | 1 | 2, 4 |
| ThinkSystem RAID 930-8i 2GB Flash PCIe 12Gb Adapter | 7Y37A01084 | AUNJ | 1 | 2, 4 |
| ThinkSystem RAID 930-16i 4GB Flash PCIe 12Gb Adapter | 7Y37A01085 | AUNK | 1 | 2, 4 |
| 12 Gb SAS/SATA HBAs (non-RAID) | | | | |
| ThinkSystem 430-8i SAS/SATA 12Gb HBA | 7Y37A01088 | AUNL | 1 | 2, 4 |
| ThinkSystem 430-16i SAS/SATA 12Gb HBA | 7Y37A01089 | AUNM | 1 | 2, 4 |
| NVMe PCIe adapters (non-RAID) | | | | |
| ThinkSystem 1610-4P NVMe Switch Adapter | 7Y37A01081 | AUV2 | 1 | 2 |

* The onboard SATA controller integrated into the Intel C246 Platform Controller Hub (PCH) supports non-RAID (JBOD) AHCI mode or a hardware-assist, software RAID feature (Intel Rapid Storage Technology Enterprise [RSTe]).

Configuration notes:

- The onboard SATA controller does not consume a PCIe slot.
- SAS RAID controllers and HBAs for internal storage are supported in the following PCIe slots:
 - PCIe slot 2 on the PCIe x8/x8 Riser Card (feature code B418):
 - No additional PCIe adapters are installed
 - One additional PCIe adapter is installed in the server in the PCIe slot 1
 - PCIe slot 4 on the system board:
 - Two additional PCIe adapters are installed in the server in the PCIe slots 1 and 2
 - A GPU adapter is installed in the server in the PCIe slot 2
 - The PCIe x16 Riser Card (feature code B417) is installed in the server
- The total quantity of the RAID 730-8i 2GB, 930-8i, 930-16i, and 930-8e controllers in the server must not exceed 1 (up to 1 supercapacitor can be mounted in the server).
- The 1610-4P NVMe Switch Adapter is supported in the PCIe slot 2 supplied by the PCIe x8 or x16 riser card.
- The 1610-4P NVMe Switch Adapter provides two PCIe 3.0 x4 ports for JBOD (non-RAID) connectivity to U.2 NVMe PCIe SSDs in the drive bays 8 and 9.

The following table summarizes features of supported SAS/SATA storage controllers.

Table 19. Storage controller features and specifications (LP = Low profile)

| Feature | Intel RSTe | RAID 530-8i | RAID 730-8i 1GB | RAID 730-8i 2GB | RAID 930-8i | RAID 930-16i | 430-8i HBA | 430-16i HBA |
|-----------------|------------|-------------|-----------------|-----------------|-------------|--------------|-------------|-------------|
| Form factor | Onboard | PCIe LP | PCIe LP | PCIe LP | PCIe LP | PCIe LP | PCIe LP | PCIe LP |
| SAS controller | None | SAS3408 | SAS3108 | SAS3108 | SAS3508 | SAS3516 | SAS3408 | SAS3416 |
| Host interface | PCH | PCIe 3.0 x8 | PCIe 3.0 x8 | PCIe 3.0 x8 | PCIe 3.0 x8 | PCIe 3.0 x8 | PCIe 3.0 x8 | PCIe 3.0 x8 |
| Port interface | 6 Gb SATA | 12 Gb SAS | 12 Gb SAS | 12 Gb SAS | 12 Gb SAS | 12 Gb SAS | 12 Gb SAS | 12 Gb SAS |
| Number of ports | 8 | 8 | 8 | 8 | 8 | 16 | 8 | 16 |

| Feature | Intel RSTe | RAID 530-8i | RAID 730-8i 1GB | RAID 730-8i 2GB | RAID 930-8i | RAID 930-16i | 430-8i HBA | 430-16i HBA |
|---------------------------------|------------------------|---------------|-----------------|-------------------------|-------------------------|-------------------------|----------------|----------------|
| Connector type | 1x SATA x4, 4x SATA x1 | SFF-8643 x4 | SFF-8643 x4 | SFF-8643 x4 | SFF-8643 x4 | SFF-8643 x4 | SFF-8643 x4 | SFF-8643 x4 |
| Number of connectors | 5 | 2 | 2 | 2 | 2 | 4 | 2 | 4 |
| Drive interface | SATA | SAS, SATA | SAS, SATA | SAS, SATA | SAS, SATA | SAS, SATA | SAS, SATA | SAS, SATA |
| Drive type | HDD, SSD | HDD, SSD, SED | HDD, SSD | HDD, SSD, SED | HDD, SSD, SED | HDD, SSD, SED | HDD, SSD, SED* | HDD, SSD, SED* |
| Hot-swap drive support | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Number of drives | 8 | 8 | 8 | 8 | 8 | 16 | 8 | 16 |
| RAID levels | 0/1/10/5 | 0/1/10/5/50 | 0/1/10/5/50 | 0/1/10/5/50/6/60 | 0/1/10/5/50/6/60 | 0/1/10/5/50/6/60 | None | None |
| JBOD mode | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Cache | None | None | 1 GB | 2 GB | 2 GB | 4 GB; 8 GB | None | None |
| Cache protection | None | None | None | Flash backup (Included) | Flash backup (Included) | Flash backup (Included) | None | None |
| SED key management (SafeStore) | No | Yes | No | Yes | Yes | Yes | No | No |
| SSD I/O acceleration (FastPath) | No | Yes | No | Yes | Yes | Yes | No | No |
| SSD Caching (CacheCade Pro 2.0) | No | No | No | No | No** | No** | No | No |
| Consistency check | Yes | Yes | Yes | Yes | Yes | Yes | No | No |
| Patrol read | Yes | Yes | Yes | Yes | Yes | Yes | No | No |
| Online capacity expansion | Yes | Yes | Yes | Yes | Yes | Yes | No | No |
| Online RAID level migration | Yes | Yes | Yes | Yes | Yes | Yes | No | No |
| Global Hot Spare | Yes | Yes | Yes | Yes | Yes | Yes | No | No |
| Auto-rebuild | Yes | Yes | Yes | Yes | Yes | Yes | No | No |

* HBAs do not support key management for SEDs; third-party host software is responsible for managing the keys.

** The SSD caching feature has been phased out in the new generation of advanced RAID controllers.

Important:

- The onboard Intel RSTe is not supported by virtualization hypervisors, including VMware vSphere (ESXi), Linux KVM, Xen, and Microsoft Hyper-V.
- The onboard Intel RSTe supports up to eight drives in a RAID-0 or RAID-5 array, two drives in a RAID-1 array, and four drives in a RAID-10 array. In a Windows Server-based environment, the onboard Intel RSTe supports up to six drives in a RAID-0 or RAID-5 array.

For more information, see the list of Product Guides in the following categories:

- RAID adapters
<http://lenovopress.com/servers/options/raid#rt=product-guide>
- Host bus adapters
<http://lenovopress.com/servers/options/hba#rt=product-guide>

Drives for internal storage

The following tables list drive options for the SR250 server.

Table 20. Drive options for internal storage: 3.5-inch non-hot-swap drives

| Description | Part number | Feature code | Maximum quantity |
|--|-------------|--------------|------------------|
| 3.5-inch non-hot-swap HDDs - 6 Gbps SATA | | | |
| ThinkSystem 3.5" 1TB 7.2K SATA 6Gb Simple Swap 512n HDD | 7XB7A00055 | AUZS | 4 |
| ThinkSystem 3.5" 2TB 7.2K SATA 6Gb Simple Swap 512n HDD | 7XB7A00056 | AUZT | 4 |
| ThinkSystem 3.5" 4TB 7.2K SATA 6Gb Simple Swap 512n HDD | 7XB7A00057 | AUZU | 4 |
| ThinkSystem 3.5" 6TB 7.2K SATA 6Gb Simple Swap 512e HDD | 7XB7A00058 | AXC7 | 4 |
| ThinkSystem 3.5" 8TB 7.2K SATA 6Gb Simple Swap 512e HDD | 7XB7A00059 | AXC6 | 4 |
| 3.5-inch non-hot-swap SSDs - 5200 Mainstream 6 Gbps SATA | | | |
| ThinkSystem 3.5" 5200 240GB Mainstream SATA 6Gb Simple Swap SSD | 4XB7A14052 | B5Y8 | 4 |
| ThinkSystem 3.5" 5200 480GB Mainstream SATA 6Gb Simple Swap SSD | 4XB7A14053 | B5Y9 | 4 |
| ThinkSystem 3.5" 5200 960GB Mainstream SATA 6Gb Simple Swap SSD | 4XB7A14054 | B5YA | 4 |
| 3.5-inch non-hot-swap SSDs - S4610 Mainstream 6 Gbps SATA | | | |
| ThinkSystem 3.5" Intel S4610 240GB Mainstream SATA 6Gb Simple Swap SSD | 4XB7A13960 | B5Y5 | 4 |
| ThinkSystem 3.5" Intel S4610 480GB Mainstream SATA 6Gb Simple Swap SSD | 4XB7A13961 | B5Y6 | 4 |
| ThinkSystem 3.5" Intel S4610 960GB Mainstream SATA 6Gb Simple Swap SSD | 4XB7A13962 | B5Y7 | 4 |
| 3.5-inch non-hot-swap SSDs - 5200 Entry 6 Gbps SATA | | | |
| ThinkSystem 3.5" 5200 480GB Entry SATA 6Gb Simple Swap SSD | 4XB7A08515 | B5Y3 | 4 |
| ThinkSystem 3.5" 5200 960GB Entry SATA 6Gb Simple Swap SSD | 4XB7A10151 | B5Y4 | 4 |
| 3.5-inch non-hot-swap SSDs - S4510 Entry 6 Gbps SATA | | | |
| ThinkSystem 3.5" Intel S4510 240GB Entry SATA 6Gb Simple Swap SSD | 4XB7A13951 | B4KE | 4 |
| ThinkSystem 3.5" Intel S4510 480GB Entry SATA 6Gb Simple Swap SSD | 4XB7A13952 | B4KC | 4 |
| ThinkSystem 3.5" Intel S4510 960GB Entry SATA 6Gb Simple Swap SSD | 4XB7A13953 | B4KD | 4 |

Table 21. Drive options for internal storage: 3.5-inch hot-swap drives

| Description | Part number | Feature code | Maximum quantity |
|---|-------------|--------------|------------------|
| 3.5-inch hot-swap HDDs - 12 Gbps SAS | | | |
| ThinkSystem 3.5" 300GB 15K SAS 12Gb Hot Swap 512n HDD | 7XB7A00038 | AUU2 | 4 |
| ThinkSystem 3.5" 600GB 15K SAS 12Gb Hot Swap 512n HDD | 7XB7A00039 | AUU3 | 4 |
| ThinkSystem 3.5" 900GB 15K SAS 12Gb Hot Swap 512e HDD | 7XB7A00040 | AUUC | 4 |
| 3.5-inch hot-swap HDDs - 12 Gbps NL SAS | | | |
| ThinkSystem 3.5" 1TB 7.2K SAS 12Gb Hot Swap 512n HDD | 7XB7A00041 | AUU4 | 4 |
| ThinkSystem 3.5" 2TB 7.2K SAS 12Gb Hot Swap 512n HDD | 7XB7A00042 | AUU5 | 4 |
| ThinkSystem 3.5" 4TB 7.2K SAS 12Gb Hot Swap 512n HDD | 7XB7A00043 | AUU6 | 4 |
| ThinkSystem 3.5" 6TB 7.2K SAS 12Gb Hot Swap 512e HDD | 7XB7A00044 | AUU7 | 4 |
| ThinkSystem 3.5" 8TB 7.2K SAS 12Gb Hot Swap 512e HDD | 7XB7A00045 | B0YR | 4 |
| 3.5-inch hot-swap HDDs - 6 Gbps NL SATA | | | |
| ThinkSystem 3.5" 1TB 7.2K SATA 6Gb Hot Swap 512n HDD | 7XB7A00049 | AUUF | 4 |
| ThinkSystem 3.5" 2TB 7.2K SATA 6Gb Hot Swap 512n HDD | 7XB7A00050 | AUUD | 4 |
| ThinkSystem 3.5" 4TB 7.2K SATA 6Gb Hot Swap 512n HDD | 7XB7A00051 | AUU8 | 4 |

| Description | Part number | Feature code | Maximum quantity |
|---|-------------|--------------|------------------|
| ThinkSystem 3.5" 6TB 7.2K SATA 6Gb Hot Swap 512e HDD | 7XB7A00052 | AUUA | 4 |
| ThinkSystem 3.5" 8TB 7.2K SATA 6Gb Hot Swap 512e HDD | 7XB7A00053 | AUU9 | 4 |
| 3.5-inch hot-swap SSDs - 5200 Mainstream 6 Gbps SATA | | | |
| ThinkSystem 3.5" 5200 240GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A10242 | B48D | 4 |
| ThinkSystem 3.5" 5200 480GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A10243 | B48E | 4 |
| ThinkSystem 3.5" 5200 960GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A10244 | B48F | 4 |
| 3.5-inch hot-swap SSDs - 5300 Mainstream 6 Gbps SATA | | | |
| ThinkSystem 3.5" 5300 240GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A17096 | B8JL | 4 |
| ThinkSystem 3.5" 5300 480GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A17097 | B8JF | 4 |
| ThinkSystem 3.5" 5300 960GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A17098 | B8J0 | 4 |
| ThinkSystem 3.5" 5300 1.92TB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A17099 | B8HR | 4 |
| 3.5-inch hot-swap SSDs - S4610 Mainstream 6 Gbps SATA | | | |
| ThinkSystem 3.5" Intel S4610 240GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A13639 | B49R | 4 |
| ThinkSystem 3.5" Intel S4610 480GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A13640 | B49S | 4 |
| ThinkSystem 3.5" Intel S4610 960GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A13641 | B49T | 4 |
| 3.5-inch hot-swap SSDs - 5200 Entry 6 Gbps SATA | | | |
| ThinkSystem 3.5" 5200 480GB Entry SATA 6Gb Hot Swap SSD | 4XB7A10158 | B2X7 | 4 |
| ThinkSystem 3.5" 5200 960GB Entry SATA 6Gb Hot Swap SSD | 4XB7A10159 | B2X8 | 4 |
| 3.5-inch hot-swap SSDs - 5300 Entry 6 Gbps SATA | | | |
| ThinkSystem 3.5" 5300 240GB Entry SATA 6Gb Hot Swap SSD | 4XB7A17081 | B8JB | 4 |
| ThinkSystem 3.5" 5300 480GB Entry SATA 6Gb Hot Swap SSD | 4XB7A17082 | B8J9 | 4 |
| ThinkSystem 3.5" 5300 960GB Entry SATA 6Gb Hot Swap SSD | 4XB7A17083 | B8JC | 4 |
| ThinkSystem 3.5" 5300 1.92TB Entry SATA 6Gb Hot Swap SSD | 4XB7A17084 | B8HZ | 4 |
| 3.5-inch hot-swap SSDs - PM883 Entry 6 Gbps SATA | | | |
| ThinkSystem 3.5" PM883 240GB Entry SATA 6Gb Hot Swap SSD | 4XB7A17176 | B6TM | 4 |
| ThinkSystem 3.5" PM883 480GB Entry SATA 6Gb Hot Swap SSD | 4XB7A17177 | B6TN | 4 |
| ThinkSystem 3.5" PM883 1.92TB Entry SATA 6Gb Hot Swap SSD | 4XB7A17179 | B6JY | 4 |
| 3.5-inch hot-swap SSDs - S4510 Entry 6 Gbps SATA | | | |
| ThinkSystem 3.5" Intel S4510 240GB Entry SATA 6Gb Hot Swap SSD | 4XB7A13625 | B49D | 4 |
| ThinkSystem 3.5" Intel S4510 480GB Entry SATA 6Gb Hot Swap SSD | 4XB7A13626 | B49E | 4 |
| ThinkSystem 3.5" Intel S4510 960GB Entry SATA 6Gb Hot Swap SSD | 4XB7A13627 | B49F | 4 |

Table 22. Drive options for internal storage: 2.5-inch hot-swap drives

| Description | Part number | Feature code | Maximum quantity |
|---|-------------|--------------|------------------|
| 2.5-inch hot-swap HDDs - 12 Gbps SAS | | | |
| ThinkSystem 2.5" 300GB 10K SAS 12Gb Hot Swap 512n HDD | 7XB7A00024 | AULY | 10 |
| ThinkSystem 2.5" 300GB 15K SAS 12Gb Hot Swap 512n HDD | 7XB7A00021 | AULV | 10 |
| ThinkSystem 2.5" 600GB 10K SAS 12Gb Hot Swap 512n HDD | 7XB7A00025 | AULZ | 10 |
| ThinkSystem 2.5" 600GB 15K SAS 12Gb Hot Swap 512n HDD | 7XB7A00022 | AULW | 10 |
| ThinkSystem 2.5" 900GB 10K SAS 12Gb Hot Swap 512n HDD | 7XB7A00026 | AUM0 | 10 |
| ThinkSystem 2.5" 900GB 15K SAS 12Gb Hot Swap 512e HDD | 7XB7A00023 | AULX | 10 |
| ThinkSystem 2.5" 1.2TB 10K SAS 12Gb Hot Swap 512n HDD | 7XB7A00027 | AUM1 | 10 |

| Description | Part number | Feature code | Maximum quantity |
|---|-------------|--------------|------------------|
| ThinkSystem 2.5" 1.8TB 10K SAS 12Gb Hot Swap 512e HDD | 7XB7A00028 | AUM2 | 10 |
| ThinkSystem 2.5" 2.4TB 10K SAS 12Gb Hot Swap 512e HDD | 7XB7A00069 | B0YS | 10 |
| 2.5-inch hot-swap HDDs - 12 Gbps NL SAS | | | |
| ThinkSystem 2.5" 1TB 7.2K SAS 12Gb Hot Swap 512n HDD | 7XB7A00034 | AUM6 | 10 |
| ThinkSystem 2.5" 2TB 7.2K SAS 12Gb Hot Swap 512n HDD | 7XB7A00035 | AUM7 | 10 |
| 2.5-inch hot-swap HDDs - 6 Gbps NL SATA | | | |
| ThinkSystem 2.5" 1TB 7.2K SATA 6Gb Hot Swap 512n HDD | 7XB7A00036 | AUUE | 10 |
| ThinkSystem 2.5" 2TB 7.2K SATA 6Gb Hot Swap 512e HDD | 7XB7A00037 | AUUJ | 10 |
| 2.5-inch hot-swap HDD SEDs - 12 Gbps SAS | | | |
| ThinkSystem 2.5" 300GB 10K SAS 12Gb Hot Swap 512n HDD SED | 7XB7A00030 | AUM4 | 10 |
| 2.5-inch hot-swap SSDs - 5200 Mainstream 6 Gbps SATA | | | |
| ThinkSystem 2.5" 5200 240GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A10237 | B488 | 10 |
| ThinkSystem 2.5" 5200 480GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A10238 | B489 | 10 |
| ThinkSystem 2.5" 5200 960GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A10239 | B48A | 10 |
| 2.5-inch hot-swap SSDs - 5300 Mainstream 6 Gbps SATA | | | |
| ThinkSystem 2.5" 5300 240GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A17087 | B8J1 | 10 |
| ThinkSystem 2.5" 5300 480GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A17088 | B8HY | 10 |
| ThinkSystem 2.5" 5300 960GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A17089 | B8J6 | 10 |
| ThinkSystem 2.5" 5300 1.92TB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A17090 | B8JE | 10 |
| 2.5-inch hot-swap SSDs - S4610 Mainstream 6 Gbps SATA | | | |
| ThinkSystem 2.5" Intel S4610 240GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A13633 | B49L | 10 |
| ThinkSystem 2.5" Intel S4610 480GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A13634 | B49M | 10 |
| ThinkSystem 2.5" Intel S4610 960GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A13635 | B49N | 10 |
| 2.5-inch hot-swap SSDs - 5200 Entry 6 Gbps SATA | | | |
| ThinkSystem 2.5" 5200 480GB Entry SATA 6Gb Hot Swap SSD | 4XB7A10153 | B2X2 | 10 |
| ThinkSystem 2.5" 5200 960GB Entry SATA 6Gb Hot Swap SSD | 4XB7A10154 | B2X3 | 10 |
| 2.5-inch hot-swap SSDs - 5210 Entry 6 Gbps SATA | | | |
| ThinkSystem 2.5" 5210 960GB Entry SATA 6Gb Hot Swap QLC SSD | 4XB7A38185 | B9AC | 10 |
| 2.5-inch hot-swap SSDs - 5300 Entry 6 Gbps SATA | | | |
| ThinkSystem 2.5" 5300 240GB Entry SATA 6Gb Hot Swap SSD | 4XB7A17075 | B8HV | 10 |
| ThinkSystem 2.5" 5300 480GB Entry SATA 6Gb Hot Swap SSD | 4XB7A17076 | B8JM | 10 |
| ThinkSystem 2.5" 5300 960GB Entry SATA 6Gb Hot Swap SSD | 4XB7A17077 | B8HP | 10 |
| ThinkSystem 2.5" 5300 1.92TB Entry SATA 6Gb Hot Swap SSD | 4XB7A17078 | B8J5 | 10 |
| 2.5-inch hot-swap SSDs - PM883 Entry 6 Gbps SATA | | | |
| ThinkSystem 2.5" PM883 240GB Entry SATA 6Gb Hot Swap SSD | 4XB7A10195 | B34H | 10 |
| ThinkSystem 2.5" PM883 480GB Entry SATA 6Gb Hot Swap SSD | 4XB7A10196 | B34J | 10 |
| ThinkSystem 2.5" PM883 960GB Entry SATA 6Gb Hot Swap SSD | 4XB7A10197 | B34K | 10 |
| 2.5-inch hot-swap SSDs - S4510 Entry 6 Gbps SATA | | | |
| ThinkSystem 2.5" Intel S4510 240GB Entry SATA 6Gb Hot Swap SSD | 4XB7A10247 | B498 | 10 |
| ThinkSystem 2.5" Intel S4510 480GB Entry SATA 6Gb Hot Swap SSD | 4XB7A10248 | B499 | 10 |
| ThinkSystem 2.5" Intel S4510 960GB Entry SATA 6Gb Hot Swap SSD | 4XB7A10249 | B49A | 10 |
| 2.5-inch hot-swap SSDs - P4510 Entry U.2 NVMe PCIe* | | | |
| ThinkSystem U.2 Intel P4510 1.0TB Entry NVMe PCIe 3.0 x4 HS SSD | 4XB7A10202 | B58F | 2 |

* NVMe PCIe SSDs support informed hot removal and hot insertion, provided the operating system supports PCIe SSD hot-swap.

Table 23. Drive options for internal storage: M.2 non-hot-swap drives

| Description | Part number | Feature code | Maximum quantity |
|--|-------------|--------------|------------------|
| ThinkSystem M.2 32GB SATA 6Gbps Non-Hot-Swap SSD | 7N47A00129 | AUUL | 1 |
| ThinkSystem M.2 128GB SATA 6Gbps Non-Hot-Swap SSD | 7N47A00130 | AUUV | 1 |
| ThinkSystem M.2 5100 240GB SATA 6Gbps Non-Hot Swap SSD | 4XB7A14049 | B5S4 | 1 |
| ThinkSystem M.2 5300 240GB SATA 6Gbps Non-Hot Swap SSD | 4XB7A17071 | B8HS | 1 |
| ThinkSystem M.2 5100 480GB SATA 6Gbps Non-Hot Swap SSD | 7SD7A05703 | B11V | 1 |
| ThinkSystem M.2 5300 480GB SATA 6Gbps Non-Hot Swap SSD | 4XB7A17073 | B919 | 1 |

For general portable storage needs, the SR250 server also supports the USB memory key option that is listed in the following table.

Table 24. USB memory key

| Description | Part number | Feature code | Maximum quantity |
|--------------------------------------|-------------|--------------|------------------|
| 32GB Enterprise Value USB Memory Key | 00ML200 | None* | 1 |

* Field upgrade only.

Optical drives

The SR250 server supports the external USB optical drive option listed in the following table.

Table 25. Optical drive

| Description | Part number | Feature code | Maximum quantity |
|--|-------------|--------------|------------------|
| ThinkSystem External USB DVD RW Optical Disk Drive | 7XA7A05926 | AVV8 | 1 |

The External USB DVD RW Optical Disk Drive supports the following types of media: CD-ROM, CD-R, CD-RW, DVD-R, DVD+R, DVD-ROM, DVD-RW, and DVD+RW.

I/O expansion

The SR250 server supports up to three PCIe slots: one slot on the system planar that supports an internal storage controller and up to two PCIe slots on a riser card.

The slot form factors are as follows:

- Slot 1: PCIe 3.0 x8; low profile (not present if the Slot 2 is x16)
- Slot 2: PCIe 3.0 x8 (x16 physical connector) or x16; full-height, half-length
- Slot 4: PCIe 3.0 x4 (x8 physical connector; supports an internal storage controller)

The locations of the PCIe slots are shown in the following figure.

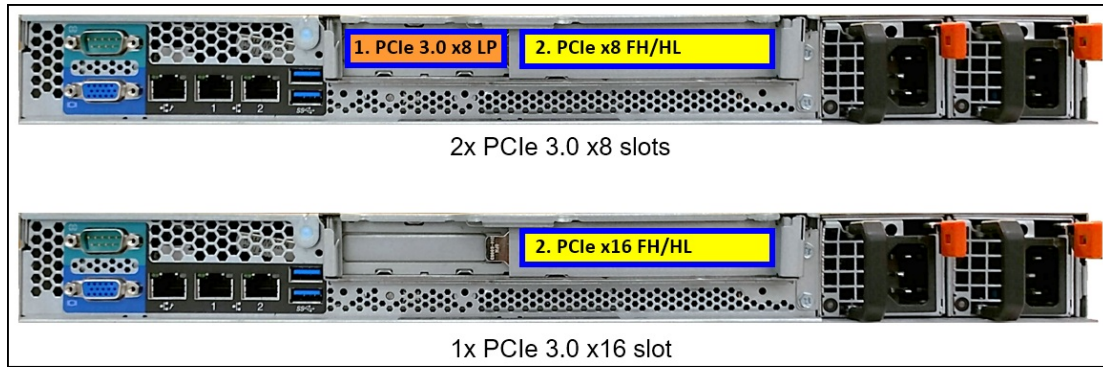


Figure 8. Slot locations

The following table lists available PCIe riser card options.

Table 26. PCIe riser cards

| Description | Part number | Feature code | Maximum quantity |
|--|-------------|--------------|------------------|
| ThinkSystem SR250/SR150 x8/x8 PCIe Riser | 4C57A12111 | B418 | 1 |
| ThinkSystem SR250 x16 PCIe Riser | 4C57A12110 | B417 | 1 |

Configuration notes:

- A riser card is required.
- The PCIe x8 riser card supplies slots 1 and 2, and the PCIe x16 riser card supplies slot 2.

The following adapter types are supported:

- [Controllers for internal storage](#)
- [Network adapters](#)
- [SAS adapters for external storage](#)
- [Fibre Channel host bus adapters](#)
- [GPU adapters](#)

Network adapters

The SR250 server supports two onboard Gigabit Ethernet network ports that are based on the Broadcom BCM5720 network interface controller (NIC) chip.

The integrated NIC has the following features:

- Two 10/100/1000 Mb Ethernet RJ-45 ports
- NIC Teaming (load balancing and failover)
- IEEE 802.3ad Link Aggregation
- I/O Virtualization (IOV) for VMWare NetQueue and Microsoft VMQ
- IEEE 802.1Q Virtual Local Area Networks (VLANs)
- IEEE 802.3x flow control
- TCP, IP, and UDP checksum offload
- Large Send Offload (LSO) and TCP Segmentation Offload (TSO)
- Receive Side Scaling (RSS) and Transmit Side Scaling (TSS)
- Jumbo frames up to 9600 bytes
- IEEE 802.3az-2010 Energy Efficient Ethernet (EEE) compliant
- Hardware assist for IEEE 1588 and IEEE 802.1AS time synchronization implementations
- Preboot eXecution Environment (PXE) and iSCSI remote boot options

The following table lists the network adapters that are supported with the SR250 server.

Table 27. Network adapters

| Description | Part number | Feature code | Maximum quantity | I/O slots supported |
|--|-------------|--------------|------------------|---------------------|
| PCIe Low Profile adapters - 1 Gb Ethernet | | | | |
| Broadcom 5720 1GbE RJ45 2-Port PCIe Ethernet Adapter | 7ZT7A00482 | AUZX | 2 | 1, 2 |
| Broadcom 5719 1GbE RJ45 4-Port PCIe Ethernet Adapter | 7ZT7A00484^ | AUZV^ | 2 | 1, 2 |
| ThinkSystem I350-F1 PCIe 1Gb 1-Port SFP Ethernet Adapter | 7ZT7A00533 | AUZZ | 2 | 1, 2 |
| ThinkSystem I350-T2 PCIe 1Gb 2-Port RJ45 Ethernet Adapter | 7ZT7A00534 | AUZY | 2 | 1, 2 |
| ThinkSystem I350-T4 PCIe 1Gb 4-Port RJ45 Ethernet Adapter | 7ZT7A00535 | AUZW | 2 | 1, 2 |
| PCIe Low Profile adapters - 10 Gb Ethernet | | | | |
| Broadcom 57416 10GBASE-T 2-Port PCIe Ethernet Adapter | 7ZT7A00496 | AUKP | 2 | 1, 2 |
| Emulex VFA5.2 2x10 GbE SFP+ PCIe Adapter | 00AG570 | AT7S | 2* | 1, 2 |
| Emulex VFA5.2 2x10 GbE SFP+ Adapter and FCoE/iSCSI SW | 00AG580 | AT7T | 2* | 1, 2 |
| Intel X550-T1 Single Port 10GBase-T Adapter | 00MM850 | ATRY | 2 | 1, 2 |
| Intel X550-T2 Dual Port 10GBase-T Adapter | 00MM860 | ATPX | 2 | 1, 2 |
| Intel X710-DA2 PCIe 10Gb 2-Port SFP+ Ethernet Adapter | 7ZT7A00537 | AUKX | 2* | 1, 2 |
| Intel X710-T4 PCIe 10Gb 4-Port Base-T Adapter | 7XC7A05927 | B0X1 | 2 | 1, 2 |
| QLogic QL41134 PCIe 10Gb 4-Port Base-T Ethernet Adapter | 4XC7A08225 | B31G | 2 | 1, 2 |
| PCIe Full Height adapters - 10 Gb Ethernet | | | | |
| Emulex OCe14104B-NX PCIe 10Gb 4-Port SFP+ Ethernet Adapter | 7ZT7A00493 | AUKN | 1* | 2 |
| Intel X710-DA4 PCIe 10Gb 4-Port SFP+ Ethernet Adapter | 7XC7A05525 | B0YL | 1* | 2 |
| PCIe Low Profile adapters - 25 Gb Ethernet | | | | |
| Broadcom 57412 10/25GbE SFP28 1-Port PCIe Ethernet Adapter | 7ZT7A00505 | AUKS | 2* | 1, 2 |
| Intel XXV710-DA2 10/25GbE SFP28 2-Port PCIe Ethernet Adapter | 7XC7A05523 | B0WY | 2* | 1, 2 |
| Mellanox ConnectX-4 Lx 10/25GbE SFP28 2-Port PCIe Eth. Adapter | 01GR250 | AUAJ | 2* | 1, 2 |
| QLogic QL41262 10/25GbE SFP28 2-Port PCIe Ethernet Adapter | 4XC7A08228 | B21R | 2* | 1, 2 |

^ Field upgrade option only; no factory installation.

* The adapter comes without transceivers or cables; for ordering information, see the configuration notes below the table.

Configuration notes:

- PCIe full-height network adapters are supported in the full-height PCIe slot 2 supplied by the PCIe x8 or x16 riser card.
- PCIe Low Profile network adapters are supported in the full-height and low profile slots supplied by the PCIe x8 or x16 riser card.
- Supported transceivers or DAC cables should be purchased for the SFP+ and SFP28 adapters, and UTP Category 6 or Category 5e cables should be purchased for the 10 GbE (Cat6) or 1 GbE (Cat5e or Cat6) RJ-45 adapters. The maximum number of transceivers or cables that are supported per adapter equals the quantity of the adapter ports, and all adapter ports must have the same type of the transceiver or cable selected.

The following transceiver and cables can be purchased:

- [UTP cables for 10 GbE and 1 GbE RJ-45 adapters](#)
- [Transceivers and cables for 10 GbE SFP+ adapters](#)
- [Transceivers and cables for 25 GbE SFP28 adapters](#)

The following table lists cables for the 10 GbE and 1 GbE RJ-45 adapters.

Table 28. Cables for 10 GbE and 1 GbE RJ-45 adapters

| Description | Part number | Feature code |
|---|-------------|--------------|
| UTP Category 6 cables (Green) for 10 GbE and 1 GbE RJ-45 adapters | | |
| 0.75m Cat6 Green Cable | 00WE123 | AVFW |
| 1.0m Cat6 Green Cable | 00WE127 | AVFX |
| 1.25m Cat6 Green Cable | 00WE131 | AVFY |
| 1.5m Cat6 Green Cable | 00WE135 | AVFZ |
| 3m Cat6 Green Cable | 00WE139 | AVG0 |
| 10m Cat6 Green Cable | 90Y3718 | A1MT |
| 25m Cat6 Green Cable | 90Y3727 | A1MW |
| UTP Category 5e cables (Blue) for 1 GbE RJ-45 adapters | | |
| 0.75m Blue Cat5e Cable | 00WE111 | AVFT |
| 1.0m Blue Cat5e Cable | 00WE115 | AVFU |
| 1.25m Blue Cat5e Cable | 00WE119 | AVFV |
| 1.5m Blue Cat5e Cable | 40K8785 | 3802 |
| 3m Blue Cat5e Cable | 40K5581 | 3803 |
| 10m Blue Cat5e Cable | 40K8927 | 3804 |
| 25m Blue Cat5e Cable | 40K8930 | 3805 |
| UTP Category 5e cables (Green) for 1 GbE RJ-45 adapters | | |
| 0.75m Green Cat5e Cable | 00WE099 | AVFQ |
| 1.0m Green Cat5e Cable | 00WE103 | AVFR |
| 1.25m Green Cat5e Cable | 00WE107 | AVFS |
| 1.5m Green Cat5e Cable | 40K5643 | 3797 |
| 3m Green Cat5e Cable | 40K5793 | 3798 |
| 10m Green Cat5e Cable | 40K5794 | 3799 |
| 25m Green Cat5e Cable | 40K8869 | 3800 |

The following table lists transceivers and cables for the 10 GbE SFP+ adapters.

Table 29. Transceivers and cables for 10 GbE SFP+ adapters

| Description | Part number | Feature code |
|---|-------------|--------------|
| 10 GbE SFP+ SR transceivers for 10 GbE SFP+ adapters | | |
| Lenovo 10GBASE-SR SFP+ Transceiver | 46C3447 | 5053 |
| Lenovo 10GBASE-LR SFP+ Transceiver | 00FE331* | B0RJ* |
| Optical cables for 10 GbE SFP+ SR transceivers | | |
| Lenovo 0.5m LC-LC OM3 MMF Cable | 00MN499 | ASR5 |
| Lenovo 1m LC-LC OM3 MMF Cable | 00MN502 | ASR6 |
| Lenovo 3m LC-LC OM3 MMF Cable | 00MN505 | ASR7 |
| Lenovo 5m LC-LC OM3 MMF Cable | 00MN508 | ASR8 |
| Lenovo 10m LC-LC OM3 MMF Cable | 00MN511 | ASR9 |
| Lenovo 15m LC-LC OM3 MMF Cable | 00MN514 | ASRA |
| Lenovo 25m LC-LC OM3 MMF Cable | 00MN517 | ASRB |
| Lenovo 30m LC-LC OM3 MMF Cable | 00MN520 | ASRC |
| Passive SFP+ DAC cables for 10 GbE SFP+ adapters | | |
| Lenovo 0.5m Passive SFP+ DAC Cable | 00D6288 | A3RG |
| Lenovo 1m Passive SFP+ DAC Cable | 90Y9427 | A1PH |
| Lenovo 1.5m Passive SFP+ DAC Cable | 00AY764 | A51N |
| Lenovo 2m Passive SFP+ DAC Cable | 00AY765 | A51P |
| Lenovo 3m Passive SFP+ DAC Cable | 90Y9430 | A1PJ |
| Lenovo 5m Passive SFP+ DAC Cable | 90Y9433 | A1PK |
| Lenovo 7m Passive SFP+ DAC Cable | 00D6151 | A3RH |
| Active SFP+ DAC cables for 10 GbE SFP+ adapters** | | |
| Lenovo 1m Active DAC SFP+ Cable | 00VX111 | AT2R |
| Lenovo 3m Active DAC SFP+ Cable | 00VX114 | AT2S |
| Lenovo 5m Active DAC SFP+ Cable | 00VX117 | AT2T |
| SFP+ active optical cables for 10 GbE SFP+ adapters | | |
| Lenovo 1m SFP+ to SFP+ Active Optical Cable | 00YL634 | ATYX |
| Lenovo 3m SFP+ to SFP+ Active Optical Cable | 00YL637 | ATYY |
| Lenovo 5m SFP+ to SFP+ Active Optical Cable | 00YL640 | ATYZ |
| Lenovo 7m SFP+ to SFP+ Active Optical Cable | 00YL643 | ATZ0 |
| Lenovo 15m SFP+ to SFP+ Active Optical Cable | 00YL646 | ATZ1 |
| Lenovo 20m SFP+ to SFP+ Active Optical Cable | 00YL649 | ATZ2 |

* Not supported with the Intel X710-DA4 network adapter (7XC7A05525).

** The Emulex VFA5.2 PCIe network adapters (00AG570 and 00AG580) do not support active SFP+ DAC cables.

The following table lists transceivers and cables for the 25 GbE SFP28 adapters.

Table 30. Transceivers and cables for 25 GbE SFP28 adapters

| Description | Part number | Feature code |
|---|-------------|--------------|
| 25 GbE SFP28 SR transceivers for 25 GbE SFP28 adapters | | |
| Lenovo 25GBase-SR SFP28 Transceiver | 7G17A03537 | AV1B |
| Optical cables for 25 GbE SFP28 SR transceivers | | |
| Lenovo 0.5m LC-LC OM3 MMF Cable | 00MN499 | ASR5 |
| Lenovo 1m LC-LC OM3 MMF Cable | 00MN502 | ASR6 |
| Lenovo 3m LC-LC OM3 MMF Cable | 00MN505 | ASR7 |
| Lenovo 5m LC-LC OM3 MMF Cable | 00MN508 | ASR8 |
| Lenovo 10m LC-LC OM3 MMF Cable | 00MN511 | ASR9 |
| Lenovo 15m LC-LC OM3 MMF Cable | 00MN514 | ASRA |
| Lenovo 25m LC-LC OM3 MMF Cable | 00MN517 | ASRB |
| Lenovo 30m LC-LC OM3 MMF Cable | 00MN520* | ASRC* |
| Passive copper cables for 25 GbE SFP28 network adapters | | |
| Lenovo 1m Passive 25G SFP28 DAC Cable | 7Z57A03557* | AV1W* |
| Lenovo 3m Passive 25G SFP28 DAC Cable | 7Z57A03558 | AV1X |
| Lenovo 5m Passive 25G SFP28 DAC Cable | 7Z57A03559 | AV1Y |
| Active optical cables for 25 GbE SFP28 network adapters* | | |
| Lenovo 3m 25G SFP28 Active Optical Cable | 7Z57A03541 | AV1F |
| Lenovo 5m 25G SFP28 Active Optical Cable | 7Z57A03542 | AV1G |
| Lenovo 10m 25G SFP28 Active Optical Cable | 7Z57A03543 | AV1H |
| Lenovo 15m 25G SFP28 Active Optical Cable | 7Z57A03544 | AV1J |
| Lenovo 20m 25G SFP28 Active Optical Cable | 7Z57A03545 | AV1K |

* Not supported with the Intel XXV710-DA2 PCIe 25Gb 2-Port SFP28 Ethernet Adapter (7XC7A05523).

For more information, see the list of Product Guides in the Ethernet Adapters category:

<http://lenovopress.com/servers/options/ethernet#rt=product-guide>

SAS adapters for external storage

The following table lists SAS RAID controllers and HBAs for external storage attachments that are supported by the SR250 server.

Table 31. SAS RAID adapters and HBAs for external storage

| Description | Part number | Feature code | Maximum quantity | I/O slots supported |
|---|-------------|--------------|------------------|---------------------|
| 12 Gbps SAS RAID adapters | | | | |
| ThinkSystem RAID 930-8e 4GB Flash PCIe 12Gb Adapter | 7Y37A01087 | AUNQ | 1 | 1, 2 |
| 12 Gbps SAS HBAs | | | | |
| ThinkSystem 430-8e SAS/SATA 12Gb HBA | 7Y37A01090 | AUNR | 1 | 1, 2 |
| ThinkSystem 430-16e SAS/SATA 12Gb HBA | 7Y37A01091 | AUNN | 1 | 1, 2 |

Configuration notes:

- Low profile SAS RAID controllers and HBAs for external storage are supported in the low profile and full-high PCIe slots supplied by the x8 or x16 riser card.
- The total quantity of the RAID 730-8i 2GB, 930-8i, 930-16i, and 930-8e controllers in the server must not exceed 1 (up to 1 supercapacitor can be mounted in the server).

The following table summarizes features of supported RAID controllers and HBAs for external storage.

Table 32. Features and specifications of the RAID controllers and HBAs for external storage

| Feature | RAID 930-8e | 430-8e HBA | 430-16e HBA |
|---------------------------------|-------------------------|----------------|----------------|
| Form factor | PCIe LP | PCIe LP | PCIe LP |
| SAS controller chip | SAS3516 | SAS3408 | SAS3416 |
| Host interface | PCIe 3.0 x8 | PCIe 3.0 x8 | PCIe 3.0 x8 |
| Port interface | 12 Gb SAS | 12 Gb SAS | 12 Gb SAS |
| Number of ports | 8 | 8 | 16 |
| Connector type | SFF-8644 x4 | SFF-8644 x4 | SFF-8644 x4 |
| Number of connectors | 2 | 2 | 4 |
| Drive interface | SAS, SATA | SAS, SATA | SAS, SATA |
| Drive type | HDD, SSD, SED | HDD, SSD, SED* | HDD, SSD, SED* |
| Hot-swap drive support | Yes | Yes | Yes |
| Number of devices | 240 | 1024 | 1024 |
| RAID levels | 0/1/10/5/50/6/60 | None | None |
| JBOD mode | Yes | Yes | Yes |
| Cache | 4 GB | None | None |
| Cache protection | Flash backup (Included) | None | None |
| SED key management (SafeStore) | Yes | No | No |
| SSD I/O acceleration (FastPath) | Yes | No | No |
| SSD Caching (CacheCade Pro 2.0) | No** | No | No |
| Consistency check | Yes | No | No |
| Patrol read | Yes | No | No |
| Online capacity expansion | Yes | No | No |
| Online RAID level migration | Yes | No | No |
| Global Hot Spare | Yes | No | No |
| Auto-rebuild | Yes | No | No |

* HBAs do not support key management for SEDs; third-party host software is responsible for managing the keys.

** The SSD caching feature has been phased out in the new generation of advanced RAID controllers.

For more information, see the list of Product Guides in the following categories:

- RAID adapters
<http://lenovopress.com/servers/options/raid#rt=product-guide>
- Host bus adapters
<http://lenovopress.com/servers/options/hba#rt=product-guide>

Fibre Channel host bus adapters

The following table lists Fibre Channel HBAs supported by the SR250 server.

Table 33. Fibre Channel HBAs

| Description | Part number | Feature code | Maximum quantity | I/O slots supported |
|-------------------------------------|-------------|--------------|------------------|---------------------|
| Emulex 16Gb Gen6 FC Single-port HBA | 01CV830 | ATZU | 2 | 1, 2 |
| Emulex 16Gb Gen6 FC Dual-port HBA | 01CV840 | ATZV | 2 | 1, 2 |

Configuration note: FC HBAs are supported in the low profile and full-high PCIe slots supplied by the PCIe x8 or x16 riser card.

For more information, see the list of Product Guides in the Host bus adapters category:
<http://lenovopress.com/servers/options/hba#rt=product-guide>

GPU adapters

The SR250 server supports graphics processing unit (GPU) adapters listed in the following table.

Table 34. GPU adapters

| Description | Part number | Feature code | Maximum quantity | I/O slots supported |
|---|-------------|--------------|------------------|---------------------|
| ThinkSystem NVIDIA Quadro P620 2GB PCIe Active GPU (PCIe 3.0 x16) | 4X67A11584 | B31D | 1 | 2 |

Configuration notes:

- The GPU adapters are supported only in the configurations with 450 W hot-swap power supplies.
- The GPU adapters are supported in the PCIe slot 2 supplied by the PCIe x8 or x16 riser card.

Cooling

The SR250 server ships with four non-hot-swap system fans.

Configuration note: The server performance might be impacted in case of a system fan failure.

Power supplies and cables

The SR250 server supports one fixed power supply or up to two redundant hot-swap power supplies. With two power supplies, the server is capable of N+N redundancy depending on the configuration. A second power supply can be added to the models that come with one hot-swap power supply.

The following table lists the power supply options.

Table 35. Power supplies

| Description | Part number | Feature code | Maximum quantity |
|---|-------------|--------------|------------------|
| ThinkSystem SR250/SR150 Fixed 300W Power Supply | None* | B40Q | 1 |
| ThinkSystem 450W (230V/115V) Platinum Hot-Swap Power Supply | 4P57A12649 | B40R | 2 |
| ThinkSystem 450W (230V/115V) Platinum Hot-Swap Power Supply India | 4P57A16264 | B5LC | 2 |

* Factory-installed only.

Configuration notes:

- Configurations with 300 W fixed power supplies (feature code B40Q) are supported only for Machine Types 7Y51, 7Y52, and 7Y73.
- Configurations with 450 W hot-swap power supplies (4P57A12649) that are available worldwide (except India) are supported only for Machine Types 7Y51 and 7Y52.
- Configurations with 450 W hot-swap power supplies for India (4P57A16264) are supported only for Machine Type 7Y72.
- To ensure that the properly sized power supply is chosen for optimal performance, it is highly recommended to validate system configuration for specific power requirements by using the latest version of the Lenovo Capacity Planner:
<http://datacentersupport.lenovo.com/us/en/solutions/Invo-lcp>

The SR250 server ship standard with or without a power cord (model dependent). A hot-swap power supply option ships without a power cord.

The following table lists the line cords and rack power cables that can be ordered for the SR250 server. One or two power cables can be ordered, depending on the quantity of power supplies in the server.

Table 36. Power cables

| Description | Part number | Feature code |
|--|-------------|--------------|
| Rack power cables | | |
| 1.0m, 10A/100-250V, C13 to IEC 320-C14 Rack Power Cable | 00Y3043 | A4VP |
| 1.5m, 10A/100-250V, C13 to IEC 320-C14 Rack Power Cable | 39Y7937 | 6201 |
| 2.0m, 10A/100-250V, C13 to IEC 320-C14 Rack Power Cable | 4L67A08365 | B0N4 |
| 2.0m, 13A/125V-10A/250V, C13 to IEC 320-C14 Rack Power Cable | 4L67A08369 | 6570 |
| 2.8m, 10A/100-250V, C13 to IEC 320-C14 Rack Power Cable | 4L67A08366 | 6311 |
| 2.8m, 13A/125V-10A/250V, C13 to IEC 320-C14 Rack Power Cable | 4L67A08370 | 6400 |
| 2.8m, 10A/100-250V, C13 to IEC 320-C20 Rack Power Cable | 39Y7938 | 6204 |
| 4.3m, 10A/100-250V, C13 to IEC 320-C14 Rack Power Cable | 39Y7932 | 6263 |
| 4.3m, 13A/125V-10A/250V, C13 to IEC 320-C14 Rack Power Cable | 4L67A08371 | 6583 |
| Line cords | | |
| Argentina 2.8m, 10A/250V, C13 to IRAM 2073 Line Cord | 39Y7930 | 6222 |
| Argentina 4.3m, 10A/250V, C13 to IRAM 2073 Line Cord | 81Y2384 | 6492 |
| Australia/New Zealand 2.8m, 10A/250V, C13 to AS/NZS 3112 Line Cord | 39Y7924 | 6211 |
| Australia/New Zealand 4.3m, 10A/250V, C13 to AS/NZS 3112 Line Cord | 81Y2383 | 6574 |

| Description | Part number | Feature code |
|--|--------------------|---------------------|
| Brazil 2.8m, 10A/250V, C13 to NBR 14136 Line Cord | 69Y1988 | 6532 |
| Brazil 4.3m, 10A/250V, C13 to NBR14136 Line Cord | 81Y2387 | 6404 |
| China 2.8m, 10A/250V, C13 to GB 2099.1 Line Cord | 39Y7928 | 6210 |
| China 4.3m, 10A/250V, C13 to GB 2099.1 Line Cord | 81Y2378 | 6580 |
| Denmark 2.8m, 10A/250V, C13 to DK2-5a Line Cord | 39Y7918 | 6213 |
| Denmark 4.3m, 10A/250V, C13 to DK2-5a Line Cord | 81Y2382 | 6575 |
| Europe 2.8m, 10A/250V, C13 to CEE7-VII Line Cord | 39Y7917 | 6212 |
| Europe 4.3m, 10A/250V, C13 to CEE7-VII Line Cord | 81Y2376 | 6572 |
| India 2.8m, 10A/250V, C13 to IS 6538 Line Cord | 39Y7927 | 6269 |
| India 4.3m, 10A/250V, C13 to IS 6538 Line Cord | 81Y2386 | 6567 |
| Israel 2.8m, 10A/250V, C13 to SI 32 Line Cord | 39Y7920 | 6218 |
| Israel 4.3m, 10A/250V, C13 to SI 32 Line Cord | 81Y2381 | 6579 |
| Italy 2.8m, 10A/250V, C13 to CEI 23-16 Line Cord | 39Y7921 | 6217 |
| Italy 4.3m, 10A/250V, C13 to CEI 23-16 Line Cord | 81Y2380 | 6493 |
| Japan 2.8m, 12A/125V, C13 to JIS C-8303 Line cord | 46M2593 | A1RE |
| Japan 2.8m, 12A/250V, C13 to JIS C-8303 Line Cord | 4L67A08357 | 6533 |
| Japan 4.3m, 12A/125V, C13 to JIS C-8303 Line Cord | 39Y7926 | 6335 |
| Japan 4.3m, 12A/250V, C13 to JIS C-8303 Line Cord | 4L67A08362 | 6495 |
| Korea 2.8m, 12A/250V, C13 to KS C8305 Line Cord | 39Y7925 | 6219 |
| Korea 4.3m, 12A/250V, C13 to KS C8305 Line Cord | 81Y2385 | 6494 |
| South Africa 2.8m, 10A/250V, C13 to SABS 164 Line Cord | 39Y7922 | 6214 |
| South Africa 4.3m, 10A/250V, C13 to SABS 164 Line Cord | 81Y2379 | 6576 |
| Switzerland 2.8m, 10A/250V, C13 to SEV 1011-S24507 Line Cord | 39Y7919 | 6216 |
| Switzerland 4.3m, 10A/250V, C13 to SEV 1011-S24507 Line Cord | 81Y2390 | 6578 |
| Taiwan 2.8m, 10A/125V, C13 to CNS 10917-3 Line Cord | 23R7158 | 6386 |
| Taiwan 2.8m, 10A/250V, C13 to CNS 10917-3 Line Cord | 81Y2375 | 6317 |
| Taiwan 4.3m, 10A/125V, C13 to CNS 10917-3 Line Cord | 4L67A08363 | AX8B |
| Taiwan 4.3m, 10A/250V, C13 to CNS 10917-3 Line Cord | 81Y2389 | 6531 |
| United Kingdom 2.8m, 10A/250V, C13 to BS 1363/A Line Cord | 39Y7923 | 6215 |
| United Kingdom 4.3m, 10A/250V, C13 to BS 1363/A Line Cord | 81Y2377 | 6577 |
| United States 2.8m, 10A/125V, C13 to NEMA 5-15P Line Cord | 90Y3016 | 6313 |
| United States 2.8m, 10A/250V, C13 to NEMA 6-15P Line Cord | 46M2592 | A1RF |
| United States 4.3m, 10A/125V, C13 to NEMA 5-15P Line Cord | 4L67A08359 | 6370 |
| United States 4.3m, 10A/250V, C13 to NEMA 6-15P Line Cord | 4L67A08361 | 6373 |

Systems management

The SR250 supports the following systems management tools:

- Lenovo XClarity Controller
- Lenovo XClarity Provisioning Manager
- Lenovo XClarity Essentials
- Lenovo XClarity Administrator
- Lenovo XClarity Integrators
- Lenovo XClarity Energy Manager
- Lenovo Capacity Planner

Lenovo XClarity Controller

The SR250 server contains Lenovo XClarity Controller (XCC), which provides advanced service-processor control, monitoring, and alerting functions. XClarity Controller offers three functional levels: Standard, Advanced, and Enterprise.

By default, the SR250 server includes XClarity Controller Standard features, and it can be upgraded to Advanced or Enterprise functionality by using the Features on Demand (FoD) upgrades.

XClarity Controller Standard offers the following capabilities:

- Gathering and viewing system information and inventory
- Monitoring system status and health
- Alerting and notifications
- Event logging
- Configuring network connectivity
- Configuring security
- Updating system firmware
- Configuring server settings and devices
- Real-time power usage monitoring
- Remotely controlling server power (Power on, Power off, Restart)
- Managing FoD activation keys
- Redirecting serial console via IPMI
- Capturing the video display contents when an operating system hang condition is detected

XClarity Controller Advanced Upgrade adds the following functionality to the Standard features:

- Remotely viewing video with the following graphics resolutions:
 - Up to 1600x1200 with up to 23 bits per pixel; or
 - Up to 1920x1200 with up to 15 bits per pixel
- Remotely accessing the server using the keyboard and mouse from a remote client
- Remotely deploying an operating system
- Syslog alerting
- Redirecting serial console via SSH
- Displaying graphics for real-time and historical power usage data and temperature

XClarity Controller Enterprise Upgrade adds the following functionality to the Advanced features:

- Capping power usage
- Mapping the ISO and image files located on the local client as virtual drives for use by the server
- Mounting the remote ISO and image files via HTTPS, SFTP, CIFS, and NFS
- Collaborating across up to six users of the virtual console
- Controlling quality and bandwidth usage

The XClarity Controller provides remote server management through industry-standard interfaces:

- Intelligent Platform Management Interface (IPMI) Version 2.0
- Simple Network Management Protocol (SNMP) Version 3
- Common Information Model (CIM)
- Data Center Manageability Interface (DCMI) Version 1.5
- Redfish REpresentational State Transfer (REST) API
- Web browser with HTML5 support
- Command-line interface
- Virtual Operator Panel with XClarity Mobile App via the front USB port with XClarity Controller access

Virtual Operator Panel provides quick access to system status, firmware, network, health, and alerts information. With proper authentication, it also allows to configure systems management and network settings and to control system power (Power on, Power off, Restart). The Virtual Operator Panel can be accessed from the XClarity Mobile App running on the Android or iOS mobile device that is connected to the front USB port with XClarity Controller access (See [Components and connectors](#)).

Note: Depending on the system settings, the front USB port can be assigned to XClarity Controller for management functions, or to the system as a regular USB 2.0 port, or switched between two functions by using the system ID button.

The following table lists the XClarity Controller FoD upgrades.

Table 37. XClarity Controller FoD upgrades

| Description | Part number | Feature code | Maximum quantity |
|--|-------------|--------------|------------------|
| ThinkSystem XClarity Controller Standard to Advanced Upgrade | 4L47A09132 | AVUT | 1 |
| ThinkSystem XClarity Controller Standard to Enterprise Upgrade | None* | AUPW | 1 |
| ThinkSystem XClarity Controller Advanced to Enterprise Upgrade | 4L47A09133 | None** | 1 |

* Factory-installed only.

** Field-upgrade only.

Configuration notes:

- For factory-installed upgrades, either Standard to Advanced Upgrade (feature AVUT) or Standard to Enterprise Upgrade (feature AUPW) can be selected, but not both.
- For field upgrades, the Advanced to Enterprise Upgrade (4L47A09133) requires the Standard to Advanced Upgrade to be activated on the server previously with either the factory-installed feature AVUT or field upgrade 4L47A09132.

Lenovo XClarity Provisioning Manager

Lenovo XClarity Provisioning Manager is a UEFI-embedded GUI application that combines the functions of configuring system setup settings, configuring RAID, and updating applications and firmware. It also enables you to install the supported operating systems and associated device drivers, run diagnostics, and collect service data.

Lenovo XClarity Provisioning Manager has the following features:

- Automatic hardware detection
- Collecting and viewing system inventory information
- Configuring UEFI system setup settings
- Updating the system firmware
- Configuring RAID by using the RAID Setup Wizard or Advanced mode
- Installing an operating system and device drivers automatically or manually
- Running diagnostics and collecting service data

Lenovo XClarity Essentials

Lenovo offers the following XClarity Essentials software tools that can help you set up, use, and maintain the server at no additional cost:

- **Lenovo XClarity Essentials OneCLI**
OneCLI is a collection of server management tools that utilize a command line interface program to manage firmware, hardware, and operating systems. It provides functions to collect full system health information (including health status), configure system setting, and update system firmware and drivers.
- **Lenovo XClarity Essentials UpdateXpress**
The UpdateXpress tool is a standalone GUI application for firmware and device driver updates that enables you to maintain your server firmware and device drivers up-to-date and help you avoid unnecessary server outages. The tool acquires and deploys individual updates and UpdateXpress System Packs (UXSPs) which are integration-tested bundles.
- **Lenovo XClarity Essentials Bootable Media Creator**
The Bootable Media Creator (BOMC) tool is used to create bootable media for offline firmware update.

For more information and downloads, visit the Lenovo XClarity Essentials web page:

<http://support.lenovo.com/us/en/documents/LNVO-center>

Lenovo XClarity Administrator

Lenovo XClarity is a centralized systems management solution that helps administrators deliver infrastructure faster. This solution integrates easily with Lenovo x86 servers, certified nodes, appliances, RackSwitch switches, and select Lenovo storage, providing automated agent-less discovery, monitoring, firmware updates, configuration management, and bare metal deployment of operating systems and hypervisors across multiple servers.

Lenovo XClarity Administrator is an optional software component for the SR250 server which can be downloaded and used at no charge to discover and monitor the SR250 and manage firmware upgrades for them.

If software support is required for Lenovo XClarity Administrator, or Lenovo XClarity Administrator premium features (such as configuration management and operating system deployment) are required, or both, Lenovo XClarity Pro software subscription should be ordered. Lenovo XClarity Pro is licensed on a per managed system basis, that is, each managed Lenovo system requires a license.

The following table lists the geo-specific Lenovo XClarity software license options.

Table 38. Lenovo XClarity software options

| Description | Part number (NA, AP, Japan)* | Part number (EMEA, LA)** | Quantity |
|---|------------------------------|--------------------------|----------|
| Lenovo XClarity Pro, per Managed Endpoint w/1 Yr SW S&S | 00MT201 | 00MT207 | 1 |
| Lenovo XClarity Pro, per Managed Endpoint w/3 Yr SW S&S | 00MT202 | 00MT208 | 1 |
| Lenovo XClarity Pro, per Managed Endpoint w/5 Yr SW S&S | 00MT203 | 00MT209 | 1 |

* NA = North America; AP = Asia Pacific

** EMEA = Europe, Middle East, Africa; LA = Latin America

Lenovo XClarity Administrator offers the following standard features that are available at no charge:

- Auto-discovery and monitoring of Lenovo x86 servers, appliances, certified nodes, RackSwitch switches, Flex System chassis, and select Lenovo storage systems
- Firmware updates and compliance enforcement
- External alerts and notifications via SNMP traps, syslog remote logging, and e-mail
- Secure connections to managed endpoints
- NIST 800-131A or FIPS 140-2 compliant cryptographic standards between the management solution and managed endpoints
- Integration into existing higher level management systems such as cloud automation and orchestration tools through REST APIs, providing extensive external visibility and control over hardware resources
- An intuitive, easy-to-use GUI
- Scripting with Windows PowerShell, providing command-line visibility and control over hardware resources

Lenovo XClarity Administrator offers the following premium features that require an optional Pro license:

- Pattern-based configuration management that allows to define configurations once and apply repeatedly without errors when deploying new servers or redeploying existing servers without disrupting the fabric
- Bare-metal deployment of operating systems and hypervisors to streamline infrastructure provisioning

For more information, refer to the Lenovo XClarity Administrator Product Guide:

<http://lenovopress.com/tips1200>

Lenovo XClarity Integrators

Lenovo offers at no charge (if software support is required, a Lenovo XClarity Pro software subscription license should be ordered) two software plug-in modules, Lenovo XClarity Integrators, to manage physical infrastructure from leading external virtualization management software tools from Microsoft and VMware:

- Lenovo XClarity Integrator for Microsoft System Center
- Lenovo XClarity Integrator for VMware vCenter

Lenovo XClarity Integrators offer the following additional features:

- Ability to discover, manage, and monitor Lenovo server hardware from VMware vCenter or Microsoft System Center
- Deployment of firmware updates and configuration patterns to Lenovo x86 rack servers and Flex System from the virtualization management tool
- Non-disruptive server maintenance in clustered environments that reduces workload downtime by dynamically migrating workloads from affected hosts during rolling server updates or reboots
- Greater service level uptime and assurance in clustered environments during unplanned hardware events by dynamically triggering workload migration from impacted hosts when impending hardware failures are predicted

For more information, refer to the Lenovo XClarity Integrators web page:

<http://www3.lenovo.com/us/en/data-center/software/systems-management/xclarity-integrators>

Lenovo XClarity Energy Manager

Lenovo XClarity Energy Manager provides a stand-alone, web-based agent-less power management console that provides real time data and enables you to observe, plan and manage power and cooling for Lenovo servers. Using built-in intelligence, it identifies server power consumption trends and ideal power settings and performs cooling analysis so that you can define and optimize power-saving policies.

Lenovo XClarity Energy Manager offers the following capabilities:

- Monitors room, row, rack, and device levels in the data center
- Reports vital server information, such as power, temperature and resource utilization
- Monitors inlet temperature to locate hot spots, reducing the risk of data or device damage
- Provides finely-grained controls to limit platform power in compliance with IT policy
- Generates alerts when a user-defined threshold is reached

Lenovo XClarity Energy Manager is an optional software component for the SR250 server that is licensed on a per managed node basis, that is, each managed server requires a license. The 1-node Energy Manager license is included in the XClarity Controller Enterprise upgrade.

To manage systems without XClarity Controller Enterprise licenses, a node license pack should be purchased. The following table lists the geo-specific Lenovo XClarity Energy Manager software license options.

Table 39. Lenovo XClarity Energy Manager software options

| Description | Part number (NA, AP, Japan)* | Part number (EMEA, LA)** | Quantity |
|--|------------------------------|--------------------------|----------|
| Lenovo XClarity Energy Manager, 1 Node w/ 1 Yr S&S | 01DA225 | 01DA228 | 1 |

* NA = North America; AP = Asia Pacific.

** EMEA = Europe, Middle East, Africa; LA = Latin America.

For more information, refer to the Lenovo XClarity Energy Manager web page:

<http://datacentersupport.lenovo.com/us/en/solutions/Invo-lxem>

Lenovo Capacity Planner

Lenovo Capacity Planner is a power consumption evaluation tool that enhances data center planning by enabling IT administrators and pre-sales professionals to understand various power characteristics of racks, servers, and other devices. Capacity Planner can dynamically calculate the power consumption, current, British Thermal Unit (BTU), and volt-ampere (VA) rating at the rack level, improving the planning efficiency for large scale deployments.

For more information, refer to the Capacity Planner web page:

<http://datacentersupport.lenovo.com/us/en/solutions/Invo-lcp>

Security

The SR250 server offers the following security features:

- Power-on password
- Administrator's password
- Secure firmware updates
- Onboard Trusted Platform Module (TPM) version 1.2 or 2.0 (configurable UEFI system setting)
- Nationz Trusted Platform Module v2.0 (optional; PRC only)
- Lockable front bezel (optional)
- Lenovo Business Vantage security software (optional; PRC only)

The following table lists the security options that are available for the SR250 server.

Table 40. Security options

| Description | Part number | Feature code | Maximum quantity |
|--|-------------|--------------|------------------|
| Lockable front bezel | | | |
| ThinkSystem 1U Security Bezel | 7Z17A02581 | AUWR | 1 |
| Trusted Platform Module (PRC only) | | | |
| ThinkSystem Nationz Trusted Platform Module v2.0 | None* | B22N | 1 |

* Factory-installed only; no field upgrade.

Lenovo Business Vantage is a security software tool suite (available only in PRC) designed to work with the Nationz TPM for enhanced security, to keep user data safe, and to erase confidential data completely from a hard disk drive.

Lenovo Business Vantage provides the following features:

- Encrypts files to ensure data safety by using the Nationz TPM.
- Erases confidential data from a hard disk.
- Prohibits unauthorized access to the USB port of devices.
- Encrypts files to ensure data security on a USB storage device.

For more information, refer to the Lenovo Business Vantage web page:

<http://support.lenovo.com.cn/lenovo/wsi/es/es.html>

Rack installation

The following table lists the rack installation options that are available for the SR250 server.

Table 41. Rack installation options

| Description | Part number | Feature code | Maximum quantity |
|---|-------------|--------------|------------------|
| 4-post rail kits | | | |
| ThinkSystem Tool-less Friction Rail v2 | 4M17A13564 | B42B | 1 |
| ThinkSystem Short Rack Rail Kit | 4M17A37605 | B7L3 | 1 |
| 2-post rail kits | | | |
| ThinkSystem Friction 2-Post Screw-in Rail Kit | 4M17A37105 | B6H2 | 1 |
| Front VGA port | | | |
| ThinkSystem SR250/SR150 Front VGA Connector Kit | 4Z57A12653 | B419 | 1 |

The following table summarizes the rail kit features and specifications.

Table 42. Rail kit features and specifications summary

| Feature | 4-Post Tool-less Rail Kit | 4-Post Short Rail Kit | 2-Post Screw-in Rail Kit |
|----------------------------|---------------------------|---------------------------|---------------------------|
| Part number | 4M17A13564 | 4M17A37605 | 4M17A37105 |
| CMA | None | None | None |
| Rail length | 751.2 mm (29.6 in.) | 484.0 mm (19.1 in.) | 486.2 mm (19.2 in.) |
| Rail type | Half-out slide (friction) | Half-out slide (friction) | Half-out slide (friction) |
| Tool-less installation | Yes | Yes | No |
| In-rack server maintenance | No | No | No |
| 1U PDU support | Yes | Yes | Yes |
| 0U PDU support | Limited* | Yes | Not applicable |

| Feature | 4-Post Tool-less Rail Kit | 4-Post Short Rail Kit | 2-Post Screw-in Rail Kit |
|---|--|---------------------------------------|-------------------------------------|
| Rack type | IBM or Lenovo 4-post, EIA standard-compliant | 4-post, EIA standard-compliant | 2-post, EIA standard-compliant |
| Mounting holes | Square or round | Square or round | Square, round, or threaded |
| Mounting flange thickness | 2 mm (0.08 in.) – 3.3 mm (0.13 in.) | 2 mm (0.08 in.) – 3.3 mm (0.13 in.) | 2 mm (0.08 in.) – 3.3 mm (0.13 in.) |
| Distance between front and rear mounting flanges [^] | 609.6 mm (24 in.) – 863.6 mm (34 in.) | 355.6 mm (14 in.) – 609.6 mm (24 in.) | Not applicable |

* If a 0U PDU used, the rack cabinet must be at least 1000 mm (39.37 in.) deep.

[^] Measured when mounted on the rack cabinet, from the front surface of the front mounting flange to the rear most point of the rail.

Operating systems

The SR250 server supports the following operating systems:

- Microsoft:
 - Microsoft Windows Server 2019
 - Microsoft Windows Server 2016
- Red Hat:
 - Red Hat Enterprise Linux 8.1
 - Red Hat Enterprise Linux 8
 - Red Hat Enterprise Linux 7.7
 - Red Hat Enterprise Linux 7.5
- SUSE:
 - SUSE Linux Enterprise Server 15 SP1
 - SUSE Linux Enterprise Server 15
 - SUSE Linux Enterprise Server 12 SP3
- VMware:
 - VMware vSphere 6.7 (ESXi) Update 3
 - VMware vSphere 6.7 (ESXi) Update 2
 - VMware vSphere 6.7 (ESXi)
 - VMware vSphere 6.5 (ESXi) Update 3
 - VMware vSphere 6.5 (ESXi) Update 2

For the latest information about the specific versions and service levels that are supported and any other prerequisites, see the Operating System Interoperability Guide: <http://lenovopress.com/redposig>.

Physical specifications

The SR250 server has the following dimensions and weight (approximate):

- Height: 43 mm (1.7 in)
- Width: 434 mm (17.1 in)
- Depth: 498 mm (19.6 in)
- Weight:
 - Base configuration: 9.1 kg (20.1 lb)
 - Maximum configuration: 12.3 kg (27.1 lb)

Operating environment

The SR250 server complies with ASHRAE class A2 specifications. The server performance might be impacted when the operating temperature is outside the ASHRAE A2 specifications or in case of a system fan failure. Depending on the hardware configuration, some server models comply with ASHRAE class A3 specifications. To comply with ASHRAE class A3 specifications, the SR250 server models must be configured with 8x 2.5-inch hot-swap drive bays and a processor with up to 80 W TDP.

The SR250 server is supported in the following environment:

- Air temperature:
 - Operating:
 - ASHRAE Class A3: 5 °C - 40 °C (41 °F - 104 °F); for altitudes above 900 m (2,953 ft), decrease the maximum ambient temperature by 1 °C for every 175-m (574-ft) increase in altitude
 - ASHRAE Class A2: 10 °C - 35 °C (50 °F - 95 °F); for altitudes above 900 m (2,953 ft), decrease the maximum ambient temperature by 1 °C for every 300-m (984-ft) increase in altitude
 - Non-operating: 5 °C - 45 °C (41 °F - 113 °F)
 - Storage: -40 °C - +60 °C (-40 °F - 140 °F)
- Maximum altitude: 3050 m (10,000 ft)
- Humidity:
 - Operating:
 - ASHRAE Class A3: 8% - 85% (non-condensing); maximum dew point: 24 °C (75 °F)
 - ASHRAE Class A2: 8% - 80% (non-condensing); maximum dew point: 21 °C (70 °F)
 - Storage: 8% - 90% (non-condensing)
- Electrical:
 - 100 - 127 (nominal) V AC; 50 Hz / 60 Hz
 - 200 - 240 (nominal) V AC; 50 Hz / 60 Hz
- Acoustics:
 - Minimum configuration:
 - Operating: 5.3 bels
 - Idle: 4.9 bels
 - Maximum configuration:
 - Operating: 5.7 bels
 - Idle: 5.4 bels
- Vibration:
 - Operating: 0.21 G rms at 5 Hz to 500 Hz for 15 minutes across 3 axes
 - Non-operating: 1.04 G rms at 2 Hz to 200 Hz for 15 minutes across 6 surfaces
- Shock:
 - Operating: 15 G for 3 milliseconds in each direction (positive and negative X, Y, and Z axes)
 - Non-operating: 50 G for 152 in./sec velocity change across 6 surfaces

The following table lists the maximum system power load, rated inlet current, and system heat output based on the power supply and source voltage.

Table 43. Rated system power, inlet current, and system heat output

| Power supply | Source voltage | Maximum power load per system | Rated current per inlet | System heat output |
|--|----------------|-------------------------------|-------------------------|--------------------|
| 300 W Gold (One power supply) | 100 - 127 V AC | 334 W | 4 A | 1139 BTU/hour |
| | 200 - 240 V AC | 326 W | 2 A | 1111 BTU/hour |
| 450 W Platinum (Two power supplies) | 100 - 127 V AC | 503 W | 5.8 A | 1717 BTU/hour |
| | 200 - 240 V AC | 484 W | 2.9 A | 1650 BTU/hour |

Warranty and support

The SR250 server comes with a three-year (Machine Type 7Y51) or one-year (Machine Type 7Y52) customer-replaceable unit (CRU) and onsite limited (for field-replaceable units [FRUs] only) warranty with standard call center support during normal business hours and 9x5 Next Business Day Parts Delivered.

Lenovo's additional support services provide a sophisticated, unified support structure for a customer's data center, with an experience consistently ranked number one in customer satisfaction worldwide. The following Lenovo support services are available:

- **Premier Support** provides a Lenovo-owned customer experience and delivers direct access to technicians skilled in hardware, software, and advanced troubleshooting, in addition to the following capabilities:
 - Direct technician-to-technician access through a dedicated phone line.
 - 24x7x365 remote support.
 - Single point of contact service.
 - End to end case management.
 - 3rd Party collaborative software support.
 - Online case tools and live chat support.
 - On-demand remote system analysis.
- **Warranty Upgrades (Preconfigured Support)** are available to meet the on-site response time targets that match the criticality of customer's systems:
 - 3, 4, or 5 years of service coverage.
 - 1-year or 2-year post-warranty extensions.
 - **Foundation Service:** 9x5 service coverage with next business day onsite response, with optional YourDrive YourData.
 - **Essential Service:** 24x7 service coverage with 4-hour onsite response or 24-hour committed repair (available only in select regions), bundled with YourDrive YourData.
 - **Advanced Service:** 24x7 service coverage with 2-hour onsite response or 6-hour committed repair (available only in select regions), bundled with YourDrive YourData.
- **Managed Services**

Lenovo Managed Services provide continuous 24x7 remote monitoring (plus 24x7 call center availability) and proactive management of a customer's data center using state of the art tools, systems, and practices by a team of highly skilled and experienced Lenovo services professionals.

Quarterly reviews check error logs, verify firmware and operating system device driver levels, and software as needed. Lenovo will also maintain records of latest patches, critical updates, and firmware levels, to ensure customer's systems are providing business value through optimized performance.
- **Technical Account Management (TAM)**

A Lenovo Technical Account Manager helps customers optimize operations of their data centers based on a deep understanding of customer's business. Customers gain direct access to a Lenovo TAM, who serves as their single point of contact to expedite service requests, provide status updates, and furnish reports to track incidents over time. Also, a TAM helps proactively make service recommendations and manage service relationship with Lenovo to make certain that customer's needs are met.
- **Enterprise Software Support**

Lenovo Enterprise Software Support is an additional support service that provides customers with software support on Microsoft, Red Hat, SUSE, and VMWare applications and systems. Around the clock availability for critical problems plus unlimited calls and incidents helps customers address challenges fast, without incremental costs. Support staff can answer troubleshooting and diagnostic questions, address product compatibility and interoperability issues, isolate causes of problems, report defects to software vendors, and more.
- **YourDrive YourData**

Lenovo's YourDrive YourData service is a multi-drive retention offering that ensures that customer's data is always under their control, regardless of the number of drives that are installed in their Lenovo server. In the unlikely event of a drive failure, customers retain possession of their drive while Lenovo replaces the failed drive part. Customer's data stays safely on customer premises, in their hands. The YourDrive YourData service can be purchased in convenient bundles with Foundation, Essential, or Advanced Service upgrades and extensions.

- **Health Check**

Having a trusted partner who can perform regular and detailed health checks is central to maintaining efficiency and ensuring that customer systems and business are always running at their best. Health Check supports Lenovo-branded server, storage, and networking devices, as well as select Lenovo-supported products from other vendors that are sold by Lenovo or a Lenovo-Authorized Reseller.

Some regions might have different warranty terms and conditions than the standard warranty. This is due to local business practices or laws in the specific region. Local service teams can assist in explaining region-specific terms when needed. Examples of region-specific warranty terms are second or longer business day parts delivery or parts-only base warranty.

If warranty terms and conditions include onsite labor for repair or replacement of parts, Lenovo will dispatch a service technician to the customer site to perform the replacement. Onsite labor under base warranty is limited to labor for replacement of parts that have been determined to be field-replaceable units (FRUs). Parts that are determined to be customer-replaceable units (CRUs) do not include onsite labor under base warranty.

If warranty terms include parts-only base warranty, Lenovo is responsible for delivering only replacement parts that are under base warranty (including FRUs) that will be sent to a requested location for self-service. Parts-only service does not include a service technician being dispatched onsite. Parts must be changed at customer's own cost and labor and defective parts must be returned following the instructions supplied with the spare parts.

Lenovo support services are region-specific. Not all support services are available in every region. For information about Lenovo support services that are available in a specific region, refer to the following resources:

- Service part numbers in Data Center Solution Configurator (DCSC):
<http://dcsc.lenovo.com/#/services>
- Lenovo Services Availability Locator
<https://lenovocator.com/>

For service definitions, region-specific details, and service limitations, refer to the following documents:

- Lenovo Statement of Limited Warranty for Data Center Group (DCG) Servers and System Storage
<http://pcsupport.lenovo.com/us/en/solutions/ht503310>
- Lenovo Data Center Services Agreement
<http://support.lenovo.com/us/en/solutions/ht116628>

Services

Lenovo Services is a dedicated partner to customer success. Lenovo's goal for customers is to reduce capital outlays, mitigate IT risks, and accelerate time to productivity.

Here is a more in-depth look at what Lenovo can do for their customers:

- **Asset Recovery Services**

Asset Recovery Services (ARS) helps customers recover the maximum value from their end-of-life equipment in a cost-effective and secure way. On top of simplifying the transition from old to new equipment, ARS mitigates environmental and data security risks associated with data center equipment disposal. Lenovo ARS is a cash-back solution for equipment based on its remaining market value, yielding maximum value from aging assets and lowering total cost of ownership for customers. For more information, see the ARS page, <http://lenovopress.com/lp1266>.

- **Assessment Services**

An assessment helps solve customer IT challenges through an onsite, multi-day session with a Lenovo technology expert. Lenovo performs a tools-based assessment which provides a comprehensive and thorough review of a company's environment and technology systems. In addition to the technology-based functional requirements, the consultant also discusses and records the non-functional business requirements, challenges, and constraints. Assessments help organizations, no matter how large or small, get a better return on their IT investment and overcome challenges in the ever-changing technology landscape.

- **Design Services**

Professional Services consultants perform infrastructure design and implementation planning to support customer's strategy. The high-level architectures provided by the assessment service are turned into low level designs and wiring diagrams, which are reviewed and approved prior to implementation. The implementation plan will demonstrate an outcome-based proposal to provide business capabilities through infrastructure with a risk-mitigated project plan.

- **Basic Hardware Installation**

Lenovo experts can seamlessly manage the physical installation of customer's server, storage, or networking hardware. Working at a time convenient for the customer (business hours or off shift), the technician will unpack and inspect the systems on customer site, install options, mount in a rack cabinet, connect to power and network, check and update firmware to the latest levels, verify operation, and dispose of the packaging, allowing customers to focus on other priorities.

- **Deployment Services**

When investing in new IT infrastructures, customers need to ensure that their business will see quick time to value with little to no disruption. Lenovo deployments are designed by development and engineering teams who know Lenovo products and solutions better than anyone else, and Lenovo technicians own the process from delivery to completion. Lenovo will conduct remote preparation and planning, configure and integrate systems, validate systems, verify and update appliance firmware, train on administrative tasks, and provide post-deployment documentation. Customer's IT teams leverage Lenovo skills to enable IT staff to transform with higher level roles and tasks.

- **Integration, Migration, and Expansion Services**

Integration, Migration, and Expansion Services allow to move existing physical and virtual workloads easily, or to determine technical requirements to support increased workloads while maximizing performance. These services include tuning, validation, and documenting ongoing run processes, and they leverage migration assessment planning documents to perform necessary migrations.

Some service options may not be available in every region. For more information about Lenovo service offerings that are available in a specific region, contact a local Lenovo sales representative or business partner.

Regulatory compliance

The SR250 server conforms to the following regulations:

- United States FCC Title 47 CFR Part 15 Subpart B
- Canada ICES-003/NMB-03, Class A
- UL62368-1
- Mexico NOM-019
- Argentina IEC60950-1
- Japan VCCI, Class A
- Australia/New Zealand AS/NZS CISPR 32, Class A
- China CCC GB4943.1, GB9254 Class A, GB17625.1, CECP, CELP
- Taiwan BSMI CNS13438, Class A; CNS14336-1; CNS15663
- Korea KN32, Class A; KN35
- India BIS
- Russia, Belorussia, and Kazakhstan TR CU 020/2011 and TR CU 004/2011
- IEC 60950-1, IEC 62368-1 (CB Certificate and CB Test Report)
- Europe CE Mark (EN55032 Class A, EN60950-1, EN55024, EN50581, EN61000-3-2, EN61000-3-3, EN62368-1)
- CISPR 32, Class A
- Germany TUV-GS (EK1-ITB2000, EN62368-1)
- Reduction of Hazardous Substances (ROHS)

External drive enclosures

The following table lists the 12 Gbps SAS external drive enclosures that are offered by Lenovo that can be used with the SR250 for storage expansion.

Note: Information provided in this section is for ordering reference purposes only. For the operating system and adapter support details, refer to the interoperability matrix for a particular storage enclosure that can be found on the Lenovo Data Center Support web site:

<http://datacentersupport.lenovo.com>

Table 44. External drive enclosures

| Description | Part number | | |
|--|-------------|---------|---------|
| | Worldwide | Japan | PRC |
| Lenovo Storage D1212 LFF Disk Expansion with Dual SAS IO Modules | 4587A11 | 4587A1J | 4587A1C |
| Lenovo Storage D1224 SFF Disk Expansion with Dual SAS IO Modules | 4587A31 | 4587A3J | 4587A3C |
| Lenovo Storage D3284 4TB x 84 HD Expansion Enclosure | 641311F | | |
| Lenovo Storage D3284 6TB x 84 HD Expansion Enclosure | 641312F | | |
| Lenovo Storage D3284 8TB x 84 HD Expansion Enclosure | 641313F | | |
| Lenovo Storage D3284 10TB x 84 HD Expansion Enclosure | 641314F | | |

For details about supported drives, adapters, and cables, see the following Lenovo Press Product Guides:

- Lenovo Storage D1212 and D1224
<http://lenovopress.com/lp0512>
- Lenovo Storage D3284
<http://lenovopress.com/lp0513>

External storage systems

The following table lists the external storage systems that are currently offered by Lenovo that can be used with the ThinkSystem SR250 server for external NAS, SAS, iSCSI, or FC storage connectivity.

Note: Information provided in this section is for ordering reference purposes only. End-to-end storage configuration support *must* be verified through the interoperability matrix for a particular storage system that can be found on the Lenovo Data Center Support web site:

<http://datacentersupport.lenovo.com>

Table 45. External storage systems: DE Series

| Description | Part number | |
|--|-------------|------------|
| | Worldwide | Japan |
| Lenovo ThinkSystem DE Series Storage (SAS connectivity) | | |
| Lenovo ThinkSystem DE2000H SAS Hybrid Flash Array LFF (16 GB cache) | 7Y70A000WW | 7Y701003JP |
| Lenovo ThinkSystem DE2000H SAS Hybrid Flash Array SFF (16 GB cache) | 7Y71A000WW | 7Y711003JP |
| Lenovo ThinkSystem DE4000H SAS Hybrid Flash Array 4U60 (16 GB cache) | 7Y77A002WW | 7Y771000JP |
| Lenovo ThinkSystem DE4000H SAS Hybrid Flash Array LFF (16 GB cache) | 7Y74A000WW | 7Y74A000JP |
| Lenovo ThinkSystem DE4000H SAS Hybrid Flash Array SFF (16 GB cache) | 7Y75A000WW | 7Y75A000JP |
| Lenovo ThinkSystem DE4000F SAS All Flash Array SFF (16 GB cache) | 7Y76A000WW | 7Y76A000JP |
| Lenovo ThinkSystem DE4000F SAS All Flash Array SFF (64 GB cache) | 7Y76A005WW | 7Y76A008JP |
| Lenovo ThinkSystem DE6000H SAS Hybrid Flash Array 4U60 (32 GB cache) | 7Y80A000WW | 7Y801002JP |
| Lenovo ThinkSystem DE6000H SAS Hybrid Flash Array SFF (32 GB cache) | 7Y78A000WW | 7Y781002JP |
| Lenovo ThinkSystem DE6000F SAS All Flash Array SFF (128 GB cache) | 7Y79A000WW | 7Y79A000JP |

| Description | Part number | |
|---|-------------|------------|
| | Worldwide | Japan |
| Lenovo ThinkSystem DE Series Storage (iSCSI connectivity) | | |
| Lenovo ThinkSystem DE2000H 10GBASE-T Hybrid Flash Array LFF (16 GB cache) | 7Y70A003WW | 7Y701001JP |
| Lenovo ThinkSystem DE2000H 10GBASE-T Hybrid Flash Array SFF (16 GB cache) | 7Y71A002WW | 7Y711005JP |
| Lenovo ThinkSystem DE2000H iSCSI Hybrid Flash Array LFF (16 GB cache) | 7Y70A004WW | 7Y701000JP |
| Lenovo ThinkSystem DE2000H iSCSI Hybrid Flash Array SFF (16 GB cache) | 7Y71A003WW | 7Y711006JP |
| Lenovo ThinkSystem DE4000H iSCSI Hybrid Flash Array 4U60 (16 GB cache) | 7Y77A000WW | 7Y771002JP |
| Lenovo ThinkSystem DE4000H iSCSI Hybrid Flash Array LFF (16 GB cache) | 7Y74A002WW | 7Y74A002JP |
| Lenovo ThinkSystem DE4000H iSCSI Hybrid Flash Array SFF (16 GB cache) | 7Y75A001WW | 7Y75A001JP |
| Lenovo ThinkSystem DE4000F iSCSI All Flash Array SFF (16 GB cache) | 7Y76A002WW | 7Y76A002JP |
| Lenovo ThinkSystem DE4000F iSCSI All Flash Array SFF (64 GB cache) | 7Y76A007WW | 7Y76A00AJP |
| Lenovo ThinkSystem DE6000H iSCSI Hybrid Flash Array 4U60 (32 GB cache) | 7Y80A002WW | 7Y801000JP |
| Lenovo ThinkSystem DE6000H iSCSI Hybrid Flash Array SFF (32 GB cache) | 7Y78A002WW | 7Y781000JP |
| Lenovo ThinkSystem DE6000F iSCSI All Flash Array SFF (128 GB cache) | 7Y79A002WW | 7Y79A002JP |
| Lenovo ThinkSystem DE Series Storage (FC connectivity) | | |
| Lenovo ThinkSystem DE2000H FC Hybrid Flash Array LFF (16 GB cache) | 7Y70A002WW | 7Y701002JP |
| Lenovo ThinkSystem DE2000H FC Hybrid Flash Array SFF (16 GB cache) | 7Y71A001WW | 7Y711004JP |
| Lenovo ThinkSystem DE4000H FC Hybrid Flash Array 4U60 (16 GB cache) | 7Y77A001WW | 7Y771001JP |
| Lenovo ThinkSystem DE4000H FC Hybrid Flash Array LFF (16 GB cache) | 7Y74A001WW | 7Y74A001JP |
| Lenovo ThinkSystem DE4000H FC Hybrid Flash Array SFF (16 GB cache) | 7Y75A002WW | 7Y75A002JP |
| Lenovo ThinkSystem DE4000F FC All Flash Array SFF (16 GB cache) | 7Y76A001WW | 7Y76A001JP |
| Lenovo ThinkSystem DE4000F FC All Flash Array SFF (64 GB cache) | 7Y76A006WW | 7Y76A009JP |
| Lenovo ThinkSystem DE6000H FC Hybrid Flash Array 4U60 (32 GB cache) | 7Y80A001WW | 7Y801001JP |
| Lenovo ThinkSystem DE6000H FC Hybrid Flash Array SFF (32 GB cache) | 7Y78A001WW | 7Y781001JP |
| Lenovo ThinkSystem DE6000F FC All Flash Array SFF (128 GB cache) | 7Y79A001WW | 7Y79A001JP |

Table 46. External storage systems: DM Series

| Description | Part number |
|---|-------------|
| Lenovo ThinkSystem DM Series Storage (NAS or iSCSI connectivity) | |
| ThinkSystem DM3000H, 48TB (12x 4TB HDDs), 10GBASE-T, ONTAP 9.5 Fundamentals | 7Y421003EA* |
| ThinkSystem DM3000H, 48TB (12x 4TB HDDs), 10GBASE-T, ONTAP 9.5 | 7Y421007EA* |
| ThinkSystem DM3000H, 96TB (12x 8TB HDDs), 10GBASE-T, ONTAP 9.5 Fundamentals | 7Y421005EA* |
| ThinkSystem DM3000H, 96TB (12x 8TB HDDs), 10GBASE-T, ONTAP 9.5 | 7Y421001EA* |
| ThinkSystem DM5000H, 11.5TB (12x 960GB SSDs), 10GBASE-T, ONTAP 9.5 Fundamentals | 7Y571004EA* |
| ThinkSystem DM5000H, 11.5TB (12x 960GB SSDs), 10GBASE-T, ONTAP 9.5 | 7Y57100LEA* |
| ThinkSystem DM5000H, 14.4TB (12x 1.2TB HDDs), 10GBASE-T, ONTAP 9.5 Fundamentals | 7Y57100CEA* |
| ThinkSystem DM5000H, 21.6TB (12x 1.8TB HDDs), 10GBASE-T, ONTAP 9.5 Fundamentals | 7Y57100GEA* |
| ThinkSystem DM5000H, 23TB (24x 960GB SSDs), 10GBASE-T, ONTAP 9.5 Fundamentals | 7Y571006EA* |
| ThinkSystem DM5000H, 23TB (24x 960GB SSDs), 10GBASE-T, ONTAP 9.5 | 7Y57100NEA* |
| ThinkSystem DM5000H, 28.8TB (24x 1.2TB HDDs), 10GBASE-T, ONTAP 9.5 Fundamentals | 7Y57100EEA* |
| ThinkSystem DM5000H, 28.8TB (24x 1.2TB HDDs), 10GBASE-T, ONTAP 9.5 | 7Y57100VEA* |
| ThinkSystem DM5000H, 43.2TB (24x 1.8TB HDDs), 10GBASE-T, ONTAP 9.5 Fundamentals | 7Y57100JEA* |
| ThinkSystem DM5000H, 43.2TB (24x 1.8TB HDDs), 10GBASE-T, ONTAP 9.5 | 7Y571002EA* |
| ThinkSystem DM5000H, 46TB (12x 3.84TB SSDs), 10GBASE-T, ONTAP 9.5 Fundamentals | 7Y571008EA* |

| Description | Part number |
|--|-------------|
| ThinkSystem DM5000H, 46TB (12x 3.84TB SSDs), 10GBASE-T, ONTAP 9.5 | 7Y57100QEA* |
| ThinkSystem DM5000H, 92TB (24x 3.84TB SSDs), 10GBASE-T, ONTAP 9.5 Fundamentals | 7Y57100AEA* |
| ThinkSystem DM5000H, 92TB (24x 3.84TB SSDs), 10GBASE-T, ONTAP 9.5 | 7Y57100REA* |
| ThinkSystem DM5000F, 11.5TB (12x 960GB SSDs), 10GBASE-T, ONTAP 9.5 | 7Y411002EA* |
| ThinkSystem DM5000F, 23TB (24x 960GB SSDs), 10GBASE-T, ONTAP 9.5 | 7Y411004EA* |
| ThinkSystem DM5000F, 46TB (12x 3.84TB SSDs), 10GBASE-T, ONTAP 9.5 | 7Y411006EA* |
| ThinkSystem DM5000F, 92TB (24x 3.84TB SSDs), 10GBASE-T, ONTAP 9.5 | 7Y411007EA* |
| Lenovo ThinkSystem DM Series Storage (NAS, iSCSI, or FC connectivity) | |
| ThinkSystem DM3000H Hybrid Storage Array (2U12 LFF, CTO only) | 7Y42CTO1WW |
| ThinkSystem DM3000H, 48TB (12x 4TB HDDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 Fundamentals | 7Y421009NA* |
| ThinkSystem DM3000H, 48TB (12x 4TB HDDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 Fundamentals | 7Y421002EA* |
| ThinkSystem DM3000H, 48TB (12x 4TB HDDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 | 7Y421006EA* |
| ThinkSystem DM3000H, 96TB (12x 8TB HDDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 Fundamentals | 7Y421004EA* |
| ThinkSystem DM3000H, 96TB (12x 8TB HDDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 | 7Y421008EA* |
| ThinkSystem DM5000H Hybrid Storage Array (2U24 SFF, CTO only) | 7Y57CTO1WW |
| ThinkSystem DM5000H, 11.5TB (12x 960GB SSDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 Fundamentals | 7Y571011NA* |
| ThinkSystem DM5000H, 11.5TB (12x 960GB SSDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 Fundamentals | 7Y571003EA* |
| ThinkSystem DM5000H, 11.5TB (12x 960GB SSDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 | 7Y57100KEA* |
| ThinkSystem DM5000H, 14.4TB (12x 1.2TB HDDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 Fundamentals | 7Y57100BEA* |
| ThinkSystem DM5000H, 21.6TB (12x 1.8TB HDDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 Fundamentals | 7Y57100FEA* |
| ThinkSystem DM5000H, 23TB (24x 960GB SSDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 Fundamentals | 7Y571005EA* |
| ThinkSystem DM5000H, 23TB (24x 960GB SSDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 | 7Y57100MEA* |
| ThinkSystem DM5000H, 28.8TB (24x 1.2TB HDDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 Fundamentals | 7Y57100DEA* |
| ThinkSystem DM5000H, 43.2TB (24x 1.8TB HDDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 Fundamentals | 7Y571010NA* |
| ThinkSystem DM5000H, 43.2TB (24x 1.8TB HDDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 Fundamentals | 7Y57100HEA* |
| ThinkSystem DM5000H, 43.2TB (24x 1.8TB HDDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 | 7Y57100ZEA* |
| ThinkSystem DM5000H, 46TB (12x 3.84TB SSDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 Fundamentals | 7Y571007EA* |
| ThinkSystem DM5000H, 46TB (12x 3.84TB SSDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 | 7Y57100PEA* |
| ThinkSystem DM5000H, 92TB (24x 3.84TB SSDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 Fundamentals | 7Y571009EA* |
| ThinkSystem DM5000H, 92TB (24x 3.84TB SSDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 | 7Y57100SEA* |
| ThinkSystem DM5000F Flash Storage Array (2U24 SFF, CTO only) | 7Y41CTO1WW |
| ThinkSystem DM5000F, 11.5TB (12x 960GB SSDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 | 7Y411001EA* |
| ThinkSystem DM5000F, 23TB (24x 960GB SSDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 | 7Y411003EA* |
| ThinkSystem DM5000F, 46TB (12x 3.84TB SSDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 | 7Y411005EA* |
| ThinkSystem DM5000F, 92TB (24x 3.84TB SSDs), 16Gb FC / 10GbE SFP+, ONTAP 9.5 | 7Y411000EA* |
| ThinkSystem DM7000H Hybrid Storage Array (3U, CTO only) | 7Y56CTO1WW |
| ThinkSystem DM7000F Flash Storage Array (3U, CTO only) | 7Y40CTO1WW |

* Preconfigured models that are available only in North America (part numbers that have NA at the end) or EMEA (part numbers that have EA at the end) and require Preconfigured support to be purchased with the storage system (See the respective product guide for details).

For more information, see the list of Product Guides in the Lenovo Storage category:
<http://lenovopress.com/storage/san/lenovo#rt=product-guide>

External backup units

The following table lists the external backup options that are offered by Lenovo that can be used with the SR250 in IT solutions.

Note: Information provided in this section is for ordering reference purposes only. End-to-end LTO Ultrium configuration support for a particular tape backup unit *must* be verified through the System Storage Interoperation Center (SSIC):

<http://www.ibm.com/systems/support/storage/ssic>

Table 47. External backup options

| Description | Part number |
|---|-------------|
| External RDX USB drives | |
| ThinkSystem RDX External USB 3.0 Dock | 4T27A10725 |
| External SAS tape backup drives | |
| IBM TS2260 Tape Drive Model H6S | 6160S6E |
| IBM TS2270 Tape Drive Model H7S | 6160S7E |
| IBM TS2280 Tape Drive Model H8S | 6160S8E |
| External SAS tape backup autoloaders | |
| IBM TS2900 Tape Autoloader w/LTO6 HH SAS | 6171S6R |
| IBM TS2900 Tape Autoloader w/LTO7 HH SAS | 6171S7R |
| IBM TS2900 Tape Autoloader w/LTO8 HH SAS | 6171S8R |
| External tape backup libraries | |
| IBM TS4300 3U Tape Library-Base Unit | 6741A1F |
| SAS backup drives for TS4300 Tape Library | |
| LTO 6 HH SAS Drive | 01KP934 |
| LTO 7 HH SAS Drive | 01KP937 |
| LTO 8 HH SAS Drive | 01KP953 |
| Fibre Channel backup drives for TS4300 Tape Library | |
| LTO 6 FH Fibre Channel Drive | 01KP935 |
| LTO 6 HH Fibre Channel Drive | 01KP933 |
| LTO 7 FH Fibre Channel Drive | 01KP938 |
| LTO 7 HH Fibre Channel Drive | 01KP936 |
| LTO 8 FH Fibre Channel Drive | 01KP954 |
| LTO 8 HH Fibre Channel Drive | 01KP952 |

For more information, see the list of Product Guides in the Backup units category:

<http://lenovopress.com/servers/options/backup#rt=product-guide>

Ethernet LAN switches

The following table lists the Ethernet LAN switches that are offered by Lenovo that can be used with the SR250 server in IT solutions.

Table 48. Ethernet LAN switches

| Description | Part number |
|--|-------------|
| 1 Gb Ethernet switches | |
| Lenovo ThinkSystem NE0152T RackSwitch (Rear to Front) | 7Y810011WW |
| Lenovo ThinkSystem NE0152TO RackSwitch (Rear to Front, ONIE) | 7Z320O11WW |
| Lenovo RackSwitch G7028 (Rear to Front) | 7159BAX |
| Lenovo RackSwitch G7052 (Rear to Front) | 7159CAX |
| Lenovo CE0128TB Switch (3-Year Warranty) | 7Z340011WW |
| Lenovo CE0128TB Switch (Limited Lifetime Warranty) | 7Z360011WW |
| Lenovo CE0128PB Switch (3-Year Warranty) | 7Z340012WW |
| Lenovo CE0128PB Switch (Limited Lifetime Warranty) | 7Z360012WW |
| Lenovo CE0152TB Switch (3-Year Warranty) | 7Z350021WW |
| Lenovo CE0152TB Switch (Limited Lifetime Warranty) | 7Z370021WW |
| Lenovo CE0152PB Switch (3-Year Warranty) | 7Z350022WW |
| Lenovo CE0152PB Switch (Limited Lifetime Warranty) | 7Z370022WW |
| 10 Gb Ethernet switches | |
| Lenovo ThinkSystem NE1032 RackSwitch (Rear to Front) | 7159A1X |
| Lenovo ThinkSystem NE1032T RackSwitch (Rear to Front) | 7159B1X |
| Lenovo ThinkSystem NE1072T RackSwitch (Rear to Front) | 7159C1X |
| Lenovo RackSwitch G8272 (Rear to Front) | 7159CRW |
| 25 Gb Ethernet switches | |
| Lenovo ThinkSystem NE2572 RackSwitch (Rear to Front) | 7159E1X |
| Lenovo ThinkSystem NE2572O RackSwitch (Rear to Front, ONIE) | 7Z210O21WW |
| 100 Gb Ethernet switches | |
| Lenovo ThinkSystem NE10032 RackSwitch (Rear to Front) | 7159D1X |
| Lenovo ThinkSystem NE10032O RackSwitch (Rear to Front, ONIE) | 7Z210O11WW |

For more information, see the list of Product Guides in the Top-of-rack Switches category:
<http://lenovopress.com/servers/options/switches#rt=product-guide>

Fibre Channel SAN switches

The following table lists currently available Fibre Channel SAN switches that are offered by Lenovo that can be used with the SR250 in IT solutions.

Table 49. Fibre Channel SAN switches

| Description | Part number |
|---|-------------|
| 8 Gb FC | |
| Lenovo B300, E_Port License, 8 ports licensed, 8x 8Gb SWL SFPs, 1 PS, Rail Kit, 1Yr FW | 3873AR6 |
| 16 Gb FC | |
| Lenovo ThinkSystem DB610S, 8 ports licensed, 8x 16Gb SWL SFPs, 1 PS, Rail Kit, 1Yr FW | 6559F2A |
| Lenovo ThinkSystem DB610S, ENT., 24 ports licensed, 24x 16Gb SWL SFPs, 1 PS, Rail Kit, 1Yr FW | 6559F1A |
| Lenovo ThinkSystem DB620S, 24 ports licensed, 24x 16Gb SWL SFPs, 2 PS, Rail Kit, 1Yr FW | 6415J1A |
| Lenovo B6505, 12 ports licensed, 12x 16Gb SWL SFPs, 1 PS, Rail Kit, 1Yr FW | 3873ER1 |
| Lenovo B6510, 24 ports licensed, 24x 16Gb SWL SFPs, 2 PS, Rail Kit, 1Yr FW | 3873IR1 |
| Lenovo B6510, 24 ports licensed, 24x 16Gb SWL SFPs, 2 PS, Rail Kit, 3Yr FW | 3873BR3 |
| 32 Gb FC | |
| Lenovo ThinkSystem DB610S, 8 ports licensed, No SFPs, 1 PS, Rail Kit, 1Yr FW | 6559F3A |
| Lenovo ThinkSystem DB620S, 24 ports licensed, No SFPs, 2 PS, Rail Kit, 1Yr FW | 6415G3A |
| Lenovo ThinkSystem DB620S, 24 ports licensed, 24x 32Gb SWL SFPs, 2 PS, Rail Kit, 1Yr FW | 6415H11 |
| Lenovo ThinkSystem DB620S, ENT., 48 ports licensed, 48x 32Gb SWL SFPs, 2 PS, Rail Kit, 1Yr FW | 6415H2A |
| Lenovo ThinkSystem DB630S, 48 ports licensed, No SFPs, 2 PS, Rail Kit, 1Yr FW | 7D1SA001WW |
| Lenovo ThinkSystem DB630S, 48 ports licensed, 48x 32Gb SWL SFPs, 2 PS, Rail Kit, 1Yr FW | 7D1SA002WW |
| Lenovo ThinkSystem DB630S, ENT., 96 ports licensed, 96x 32Gb SWL SFPs, 2 PS, Rail Kit, 1Yr FW | 7D1SA003WW |
| Lenovo ThinkSystem DB400D 32Gb FC Director, ENT., 4 Blade slots, 8U, 1Yr FW | 6684D2A |
| Lenovo ThinkSystem DB400D 32Gb FC Director, ENT., 4 Blade slots, 8U, 3Yr FW | 6684B2A |
| Lenovo ThinkSystem DB800D 32Gb FC Director, ENT., 8 Blade slots, 14U, 1Yr FW | 6682D1A |

For more information, see the list of Product Guides in the Rack SAN Switches category:

<http://lenovopress.com/storage/switches/rack#rt=product-guide>

Rack cabinets

The following table lists the rack cabinets that are offered by Lenovo that can be used with the SR250 server in IT solutions.

Table 50. Rack cabinets

| Description | Part number |
|---|-------------|
| 25U S2 Standard Rack (1000 mm deep; 2 sidewall compartments) | 93072RX |
| 25U Static S2 Standard Rack (1000 mm deep; 2 sidewall compartments) | 93072PX |
| 42U S2 Standard Rack (1000 mm deep; 6 sidewall compartments) | 93074RX |
| 42U 1100mm Enterprise V2 Dynamic Rack (6 sidewall compartments) | 93634PX |
| 42U 1100mm Enterprise V2 Dynamic Expansion Rack (6 sidewall compartments) | 93634EX |
| 42U 1200mm Deep Dynamic Rack (6 sidewall compartments) | 93604PX |
| 42U 1200mm Deep Static Rack (6 sidewall compartments) | 93614PX |
| 42U Enterprise Rack (1105 mm deep; 4 sidewall compartments) | 93084PX |
| 42U Enterprise Expansion Rack (1105 mm deep; 4 sidewall compartments) | 93084EX |

For more information, see the list of Product Guides in the Rack cabinets category:
<http://lenovopress.com/servers/options/racks#rt=product-guide>

KVM switches and consoles

The following table lists the KVM switches and consoles that are offered by Lenovo that can be used with the SR250 server in IT solutions.

Table 51. KVM switch and console options

| Description | Part number |
|--|-------------|
| Consoles | |
| 1U 18.5" Standard Console (without keyboard) | 17238BX |
| Console keyboards | |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Arabic 253 RoHS v2 | 7ZB7A05469 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Belg/UK 120 RoHS v2 | 7ZB7A05468 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Czech 489 RoHS v2 | 7ZB7A05206 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Danish 159 RoHS v2 | 7ZB7A05207 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Dutch 143 RoHS v2 | 7ZB7A05208 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Fr/Canada 445 RoHS v2 | 7ZB7A05210 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - French 189 RoHS v2 | 7ZB7A05209 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - German 129 RoHS v2 | 7ZB7A05211 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Greek 219 RoHS v2 | 7ZB7A05212 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Hebrew 212 RoHS v2 | 7ZB7A05213 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Hungarian 208 RoHS v2 | 7ZB7A05214 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Italian 141 RoHS v2 | 7ZB7A05215 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Japanese 194 RoHS v2 | 7ZB7A05216 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Korean 413 RoHS v2 | 7ZB7A05217 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - LA Span 171 RoHS v2 | 7ZB7A05218 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Norwegian 155 RoHS v2 | 7ZB7A05219 |

| Description | Part number |
|--|--------------------|
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Polish 214 RoHS v2 | 7ZB7A05220 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Portugese 163 RoHS v2 | 7ZB7A05221 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Russian 441 RoHS v2 | 7ZB7A05222 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Slovak 245 RoHS v2 | 7ZB7A05223 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Slovenian 234 RoHS v2 | 7ZB7A05231 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Spanish 172 RoHS v2 | 7ZB7A05224 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Swed/Finn 153 RoHS v2 | 7ZB7A05225 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Swiss F/G 150 RoHS v2 | 7ZB7A05226 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Thai 191 RoHS v2 | 7ZB7A05227 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Trad Chinese/US 467 RoHS v2 | 7ZB7A05467 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - Turkish 179 RoHS v2 | 7ZB7A05228 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - UK Eng 166 RoHS v2 | 7ZB7A05229 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - US Eng 103P RoHS v2 | 7ZB7A05470 |
| ThinkSystem Keyboard w/ Int. Pointing Device USB - US Euro 103P RoHS v2 | 7ZB7A05230 |
| Console switches and cables - ThinkSystem Digital KVM | |
| ThinkSystem Digital 2x1x16 KVM Switch (DVI video output port) | 1754D1T |
| ThinkSystem VGA to DVI Conversion Cable | 4X97A11108 |
| ThinkSystem Single-USB Conversion Cable for Digital KVM | 4X97A11109 |
| ThinkSystem Dual-USB Conversion Cable for Digital KVM | 4X97A11107 |
| Console switches and cables - ThinkSystem Analog KVM | |
| ThinkSystem Analog 1x8 KVM Switch (DVI video output port) | 1754A1T |
| ThinkSystem VGA to DVI Conversion Cable | 4X97A11108 |
| ThinkSystem USB Conversion Cable for Analog KVM | 4X97A11106 |
| Console switches and cables - Global Console Managers | |
| Global 2x2x16 Console Manager (GCM16) (VGA video output port) | 1754D1X |
| Global 4x2x32 Console Manager (GCM32) (VGA video output port) | 1754D2X |
| Virtual Media Conversion Option Gen2 (VCO2) | 46M5383 |
| Serial Conversion Option (SCO) | 46M5382 |
| Console switches and cables - Local Console Managers | |
| Local 1x8 Console Manager (LCM8) (VGA video output port) | 1754A1X |
| Local 2x16 Console Manager (LCM16) (VGA video output port) | 1754A2X |
| Virtual Media Conversion Option Gen2 (VCO2) | 46M5383 |

For more information, see the list of Product Guides in the KVM Switches and Consoles category:
<http://lenovopress.com/servers/options/kvm#rt=product-guide>

Power distribution units

The following table lists the power distribution units (PDUs) that are offered by Lenovo that can be used with the SR250 server in IT solutions.

Table 52. Power distribution units

| Description | Part number |
|---|-------------|
| 0U Basic PDUs | |
| 0U 36 C13/6 C19 24A/200-240V 1 Phase PDU with NEMA L6-30P line cord | 00YJ776 |
| 0U 36 C13/6 C19 32A/200-240V 1 Phase PDU with IEC60309 332P6 line cord | 00YJ777 |
| 0U 21 C13/12 C19 32A/200-240V/346-415V 3 Phase PDU with IEC60309 532P6 line cord | 00YJ778 |
| 0U 21 C13/12 C19 48A/200-240V 3 Phase PDU with IEC60309 460P9 line cord | 00YJ779 |
| Switched and Monitored PDUs | |
| 0U 20 C13/4 C19 Switched and Monitored 24A/200-240V/1Ph PDU w/ NEMA L6-30P line cord | 00YJ781 |
| 0U 20 C13/4 C19 Switched and Monitored 32A/200-240V/1Ph PDU w/ IEC60309 332P6 line cord | 00YJ780 |
| 0U 18 C13/6 C19 Switched / Monitored 32A/200-240V/346-415V/3Ph PDU w/ IEC60309 532P6 cord | 00YJ782 |
| 0U 12 C13/12 C19 Switched and Monitored 48A/200-240V/3Ph PDU w/ IEC60309 460P9 line cord | 00YJ783 |
| 1U 9 C19/3 C13 Switched and Monitored DPI PDU (without line cord) | 46M4002 |
| 1U 9 C19/3 C13 Switched and Monitored 60A 3Ph PDU with IEC 309 3P+Gnd cord | 46M4003 |
| 1U 12 C13 Switched and Monitored DPI PDU (without line cord) | 46M4004 |
| 1U 12 C13 Switched and Monitored 60A 3 Phase PDU with IEC 309 3P+Gnd line cord | 46M4005 |
| Ultra Density Enterprise PDUs (9x IEC 320 C13 + 3x IEC 320 C19 outlets) | |
| Ultra Density Enterprise C19/C13 PDU Module (without line cord) | 71762NX |
| Ultra Density Enterprise C19/C13 PDU 60A/208V/3ph with IEC 309 3P+Gnd line cord | 71763NU |
| C13 Enterprise PDUs (12x IEC 320 C13 outlets) | |
| DPI C13 Enterprise PDU+ (without line cord) | 39M2816 |
| DPI Single Phase C13 Enterprise PDU (without line cord) | 39Y8941 |
| C19 Enterprise PDUs (6x IEC 320 C19 outlets) | |
| DPI Single Phase C19 Enterprise PDU (without line cord) | 39Y8948 |
| DPI 60A 3 Phase C19 Enterprise PDU with IEC 309 3P+G (208 V) fixed line cord | 39Y8923 |
| Front-end PDUs (3x IEC 320 C19 outlets) | |
| DPI 30amp/125V Front-end PDU with NEMA L5-30P line cord | 39Y8938 |
| DPI 30amp/250V Front-end PDU with NEMA L6-30P line cord | 39Y8939 |
| DPI 32amp/250V Front-end PDU with IEC 309 2P+Gnd line cord | 39Y8934 |
| DPI 60amp/250V Front-end PDU with IEC 309 2P+Gnd line cord | 39Y8940 |
| DPI 63amp/250V Front-end PDU with IEC 309 2P+Gnd line cord | 39Y8935 |
| Universal PDUs (7x IEC 320 C13 outlets) | |
| DPI Universal 7 C13 PDU (with 2 m IEC 320-C19 to C20 rack power cord) | 00YE443 |
| NEMA PDUs (6x NEMA 5-15R outlets) | |
| DPI 100-127V PDU with fixed NEMA L5-15P line cord | 39Y8905 |
| Line cords for PDUs that ship without a line cord | |
| DPI 30a Line Cord (NEMA L6-30P) | 40K9614 |
| DPI 32a Line Cord (IEC 309 P+N+G) | 40K9612 |
| DPI 32a Line Cord (IEC 309 3P+N+G) | 40K9611 |
| DPI 60a Cord (IEC 309 2P+G) | 40K9615 |
| DPI 63a Cord (IEC 309 P+N+G) | 40K9613 |

| Description | Part number |
|--|-------------|
| DPI Australian/NZ 3112 Line Cord (32A) | 40K9617 |
| DPI Korean 8305 Line Cord (30A) | 40K9618 |

For more information, see the list of Product Guides in the Power infrastructure category:

<http://lenovopress.com/servers/options/pdu#rt=product-guide>

Uninterruptible power supply units

The following table list the uninterruptible power supply (UPS) units that are currently offered by Lenovo that can be used with the SR250 in IT solutions.

Table 53. Uninterruptible power supply units

| Description | Part number |
|--|-------------|
| Worldwide models | |
| RT1.5kVA 2U Rack or Tower UPS (100-125VAC) (8x NEMA5-15R 12A outlets) | 55941AX |
| RT1.5kVA 2U Rack or Tower UPS (200-240VAC) (8x IEC 320 C13 10A outlets) | 55941KX |
| RT2.2kVA 2U Rack or Tower UPS (100-125VAC) (8x NEMA 5-20R 16A outlets) | 55942AX |
| RT2.2kVA 2U Rack or Tower UPS (200-240VAC) (8x IEC 320 C13 10A, 1x IEC 320 C19 16A outlets) | 55942KX |
| RT3kVA 2U Rack or Tower UPS (100-125VAC) (6x NEMA5-20R 16A, 1x NEMA L5-30R 24A outlets) | 55943AX |
| RT3kVA 2U Rack or Tower UPS (200-240VAC) (8x IEC 320 C13 10A, 1x IEC 320 C19 16A outlets) | 55943KX |
| RT5kVA 3U Rack or Tower UPS (200-240VAC) (8x IEC 320 C13 10A, 2x IEC 320 C19 16A outlets) | 55945KX |
| RT6kVA 3U Rack or Tower UPS (200-240VAC) (8x IEC 320 C13 10A, 2x IEC 320 C19 16A outlets) | 55946KX |
| RT8kVA 6U Rack or Tower UPS (200-240VAC) (4x IEC 320-C19 16A outlets) | 55948KX |
| RT11kVA 6U Rack or Tower UPS (200-240VAC) (4x IEC 320-C19 16A outlets) | 55949KX |
| RT8kVA 6U 3:1 Phase Rack or Tower UPS (380-415VAC) (4x IEC 320-C19 16A outlets) | 55948PX |
| RT11kVA 6U 3:1 Phase Rack or Tower UPS (380-415VAC) (4x IEC 320-C19 16A outlets) | 55949PX |
| ASEAN, HTK, INDIA, and PRC models | |
| ThinkSystem RT3kVA 2U Standard UPS (200-230VAC) (2x C13 10A, 2x GB 10A, 1x C19 16A outlets) | 55943KT |
| ThinkSystem RT3kVA 2U Long Backup UPS (200-230VAC) (2x C13 10A, 2x GB 10A, 1x C19 16A outlets) | 55943LT |
| ThinkSystem RT6kVA 5U UPS (200-230VAC) (2x C13 10A outlets, 1x Terminal Block output) | 55946KT |
| ThinkSystem RT10kVA 5U UPS (200-230VAC) (2x C13 10A outlets, 1x Terminal Block output) | 5594XKT |

For more information, see the list of Product Guides in the Uninterruptible Power Supply Units category:

<http://lenovopress.com/servers/options/ups#rt=product-guide>

Lenovo Financial Services

Lenovo Financial Services reinforces Lenovo's commitment to deliver pioneering products and services that are recognized for their quality, excellence, and trustworthiness. Lenovo Financial Services offers financing solutions and services that complement your technology solution anywhere in the world.

We are dedicated to delivering a positive finance experience for customers like you who want to maximize your purchase power by obtaining the technology you need today, protect against technology obsolescence, and preserve your capital for other uses.

We work with businesses, non-profit organizations, governments and educational institutions to finance their entire technology solution. We focus on making it easy to do business with us. Our highly experienced team of finance professionals operates in a work culture that emphasizes the importance of providing outstanding customer service. Our systems, processes and flexible policies support our goal of providing customers with a positive experience.

We finance your entire solution. Unlike others, we allow you to bundle everything you need from hardware and software to service contracts, installation costs, training fees, and sales tax. If you decide weeks or months later to add to your solution, we can consolidate everything into a single invoice.

Our Premier Client services provide large accounts with special handling services to ensure these complex transactions are serviced properly. As a premier client, you have a dedicated finance specialist who manages your account through its life, from first invoice through asset return or purchase. This specialist develops an in-depth understanding of your invoice and payment requirements. For you, this dedication provides a high-quality, easy, and positive financing experience.

For your region specific offers please ask your Lenovo sales representative or your technology provider about the use of Lenovo Financial Services. For more information, see the following Lenovo website:

<http://www.lenovo.com/us/en/landingpage/lenovo-financial-services>

Related publications and links

For more information, see the following resources:

- Lenovo ThinkSystem Rack Servers product page
<http://www.lenovo.com/us/en/c/racks>
- Lenovo Data Center Solution Configurator (DCSC):
<http://dcsc.lenovo.com>
- *PSREF: Product Specifications Reference*
<http://psref.lenovo.com>
- Lenovo Data Center Support
<http://datacentersupport.lenovo.com>

Related product families

Product families related to this document are the following:

- [1-Socket Rack Servers](#)
- [ThinkSystem SR250 Server](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
1009 Think Place - Building One
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2020. All rights reserved.

This document, LP0963, was created or updated on January 22, 2020.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<http://lenovopress.com/LP0963>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <http://lenovopress.com/LP0963>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

AnyBay®
Bootable Media Creator
Flex System
Lenovo Services
Lenovo®
RackSwitch
ThinkSystem
TopSeller
TruDDR4
UpdateXpress System Packs
XClarity®

The following terms are trademarks of other companies:

Celeron®, Intel Core™, Intel®, Pentium®, and Xeon® are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Linux® is a trademark of Linus Torvalds in the United States, other countries, or both.

Hyper-V®, Microsoft®, PowerShell, Windows PowerShell®, Windows Server®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.