


### Overview

### HPE ProLiant DL180 Gen10 Server


Adaptable for diverse workloads and environments, the secure 2P 2U HPE ProLiant DL180 Gen10 delivers world-class compelling performance with the right balance of expandability and scalability. Designed for supreme versatility and resiliency with the right balance of reliability, manageability and performance, while being backed by a comprehensive warranty make it ideal for multiple environments from Containers to Cloud to Big Data. Standardize on the industry's most trusted compute platform. SMBs and enterprises running application.

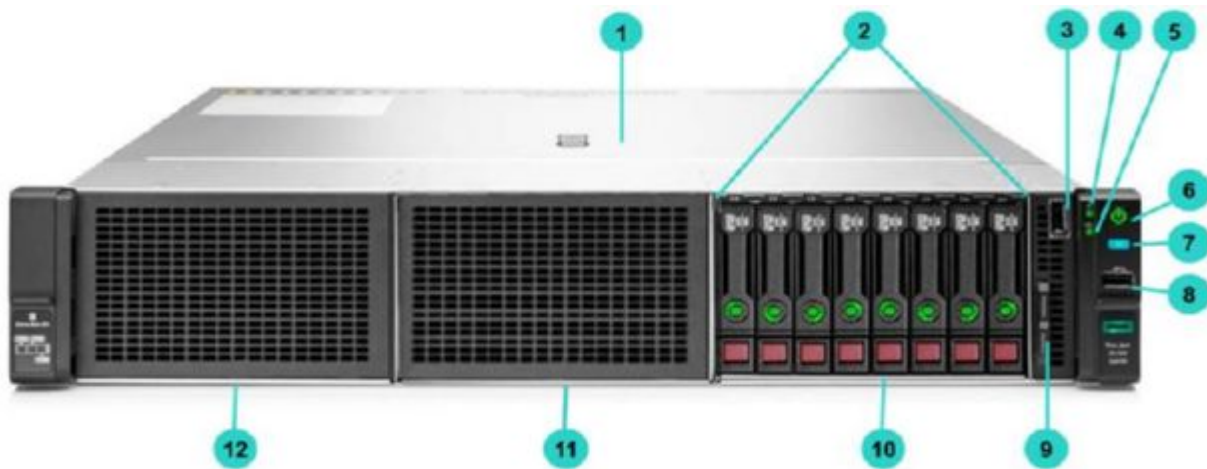

#### 8SFF Chassis - Front View

- |  |  |
|--|--|
| 1. Quick removal access panel                          | 7. UID button  |
| 2. 8 SFF Drive Cage                                    | 8. USB 3.0   |
| 3. iLO Front Service Port                              | 9. Serial label pull tag                                 |
| 4. Health LED  | 10. Box 3  |
| 5. NIC status  | 11. Box 2 (Optional 8 SFF, blank shown)                  |
| 6. Power On/Standby button and system power LED button | 12. Box 1 (Optional 8 SFF or Optical Drive, blank shown) |

### Overview

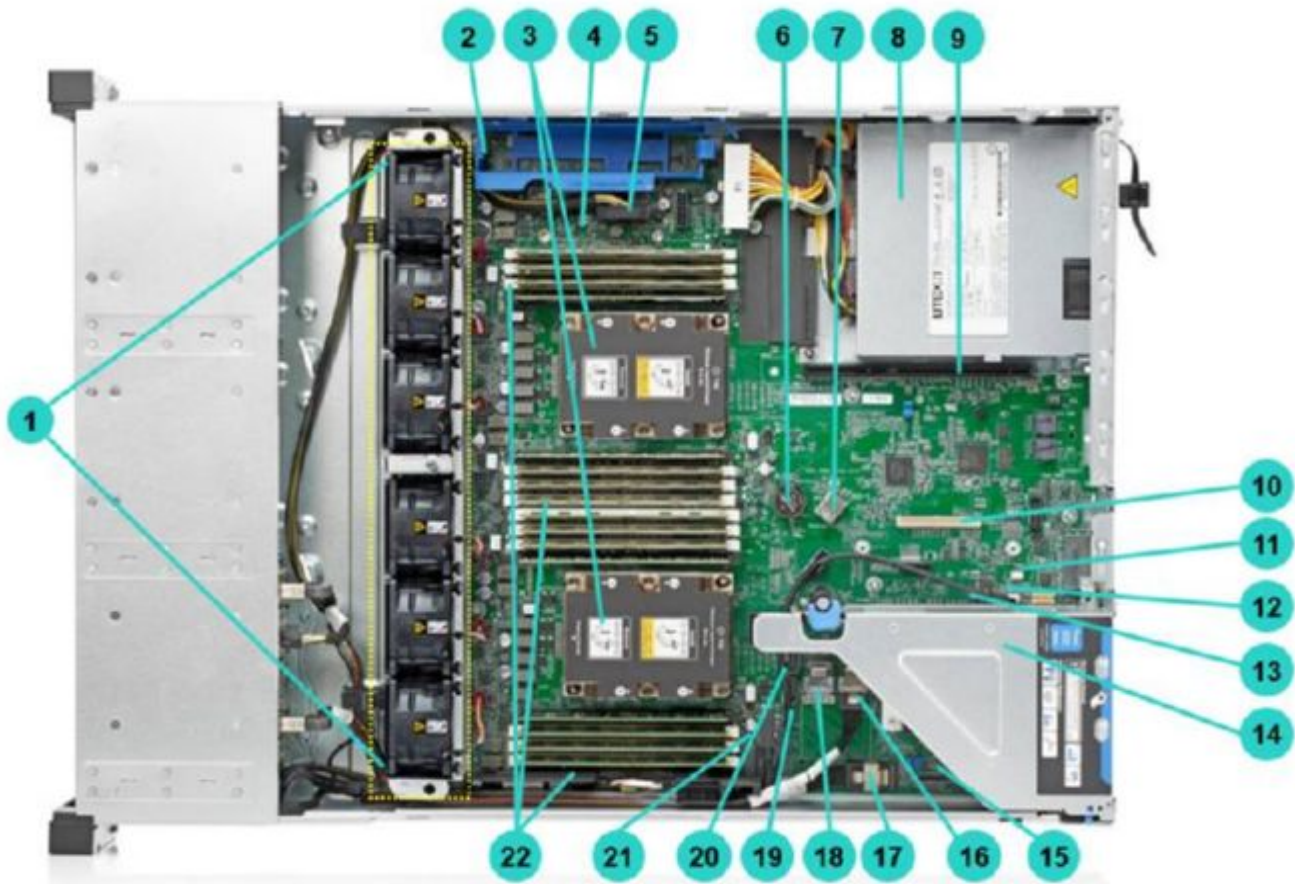


### 8SFF Chassis - with optional 2<sup>nd</sup> CPU - Internal View

- |   |                                   |
|---|-----------------------------------|
| 1. Standard single rotor hot swap fans<br>1 CPU - 3 standard fans | 12. MicroSD card slot             |
| 2 CPUs - 5 standard fans (1 redundant fan shown)*                 |                                   |
| 2. Smart Storage Battery (No battery shown) *                     | 13. iLO Service Port Connector    |
| 3. Up to 2 processors (shown with standard heat sinks)            | 14. Primary PCIe Riser: 8x8x8     |
| 4. Chassis Intrusion Detection connector *                        | 15. Media Module Connector        |
| 5. Hard Drive backplane power connector                           | 16. Mini-SAS port 1               |
| 6. System Battery   | 17. Mini-SAS port 2               |
| 7. Internal USB 3.0 connector                                     | 18. Mini-SAS port 3               |
| 8. Power supply (non-redundant power supply shown)                | 19. SATA port 4                   |
| 9. Secondary (CPU2) PCIe 3.0 riser                                | 20. SATA port 5                   |
| 10. Flexible Smart Array Controller Connector                     | 21. Front Power USB 3.0 connector |
| 11. TPM 2.0*  | 22. DDR4 DIMM slots               |

(Fully populated 16 DIMMs shown)

**Notes:** \*Optional

### Overview

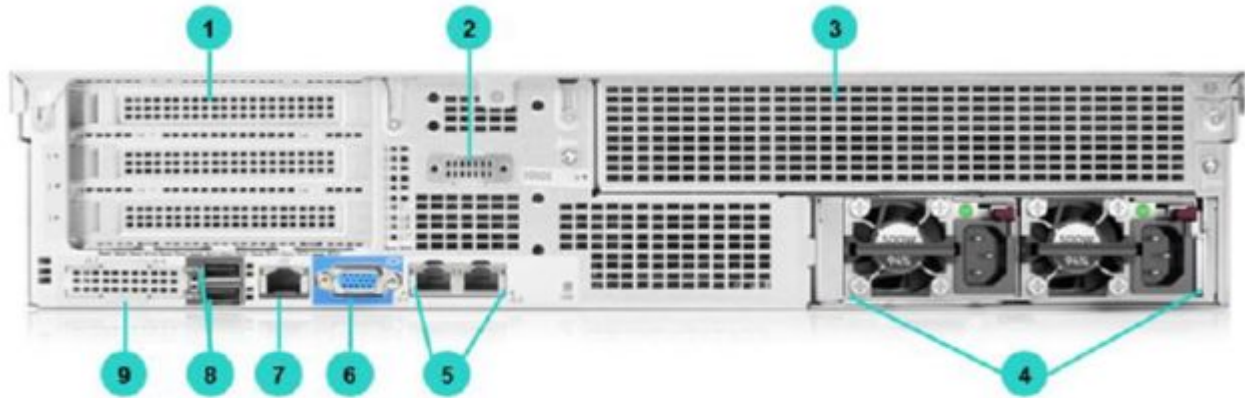

#### Rear View

- |   |                                  |
|---|----------------------------------|
| 1. Primary Riser. PCI Slots (Slots 1-3 top to bottom)   | 6. VGA Port                      |
| 2. Serial Port *  | 7. Dedicated iLO management port |
| 3. Secondary Riser. PCI Slots (Slots 4-6 top to bottom, requires second riser card and second processor). | 8. USB connectors 3.0 (2)        |
| 4. Power Supply (Redundant Hot plug shown)  | 9. Media Module*                 |
| 5. Embedded 2 x 1GbE Network Adapter  |                                  |


Notes: \*Optional



#### 8LFF Chassis - Front View

- |  |                   |
|--|-------------------|
| 1. Quick removal access panel                          | 7. UID button     |
| 2. Optional: Optical drive (Blank Shown)               | 8. USB 3.0        |
| 3. iLO Front Service Port                              | 9. LFF Drive cage |
| 4. Health LED  | 10. Box 3         |
| 5. NIC Status  | 11. Box 2         |
| 6. Power On/Standby button and system power LED button | 12. Box 1         |

### Overview

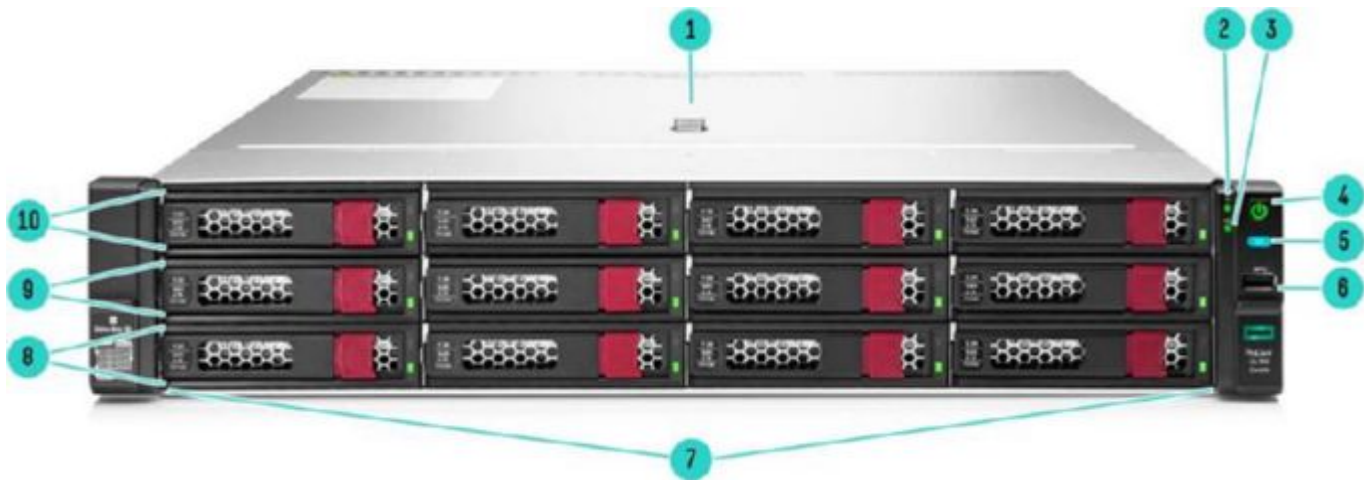

#### 12LFF Chassis - Front View

- |    |   |     |                |
|----|---|-----|----------------|
| 1. | Quick removal access panel                          | 6.  | USB 3.0        |
| 2. | Health LED  | 7.  | LFF Drive cage |
| 3. | NIC Status  | 8.  | Box 3          |
| 4. | Power On/Standby button and system power LED button | 9.  | Box 2          |
| 5. | UID button  | 10. | Box 1          |

### What's New

- New 2<sup>nd</sup> generation Intel® Xeon® Scalable Processors with improved price/performance
- Pre-configured servers with new 2<sup>nd</sup> generation Intel® Xeon® Scalable Processors
- Factory integrated models (CTO) available to all customers

### Platform Information

#### Form Factor

- 2U rack

#### Chassis Types

- 8 SFF (upgradeable to 24SFF)
- 8 LFF
- 12 LFF

**Notes:** All models come with the S100i Smart Array Controller with embedded software RAID support for 14 drives. However this needs to be enabled using Enable SW RAID option (784308-B21) while configuring.

#### System Fans

- Standard - fan types (without rear drives)

Overview

Model	Non-Redundant	Redundant
1P Model	3 fans	4 fans
2P Model	5 fans	6 fans

---



### Standard Features

**Processors** - Up to 2 of the following depending on model.

**Notes:**

- The 2nd digit of the processor model number "x1xx" and "x2xx" is used to denote the processor generation (i.e. 1=1st generation and 2=2nd generation)
- Field upgrades from 1st generation processors (x1xx) to 2nd generation processors (x2xx) not supported.
- "U" processors (i.e. 6209U) only supported in single socket configurations
- This table covers the public Intel offering only.
- For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

2 <sup>nd</sup> Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Platinum 8256 Processor	3.8 GHz	4	16.50 MB	105W	3 @ 10.4 GT/s	2933 MT/s	1TB
Platinum 8253 Processor	2.2 GHz	16	22.00 MB	125W	3 @ 10.4 GT/s	2933 MT/s	1TB

**Notes:**

- 6-Channel DDR4 @ 2933 MT/s with 1TB memory capacity per socket
- 2 and 4 socket capable, 2S - 2UPI, 2S - 3UPI, 4S - 3UPI @ 10.4 GT/s.
- Support for: Vector Neural Network Instructions (VNNI) for inference acceleration, Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA), advanced RAS
- 48 lanes PCIe 3.0

2 <sup>nd</sup> Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Gold 6252 Processor	2.1 GHz	24	35.75 MB	150W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6248 Processor	2.5 GHz	20	27.5 MB	150W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6244 Processor	3.6 GHz	8	24.75 MB	150W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6242 Processor	2.8 GHz	16	22 MB	150W	3 @ 10.4 GT/s	2933 MT/s	1TB

### Standard Features

Gold 6240 Processor	2.6 GHz	18	24.75 MB	150W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6238 Processor	2.1 GHz	22	30.25 MB	140W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6234 Processor	3.3 GHz	8	24.75 MB	130W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6230R Processor	2.1 GHz	26	35.75 MB	150W	2 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6230 Processor	2.1 GHz	20	27.5 MB	125W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6226R Processor	2.9 GHz	16	22 MB	150W	2 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6226 Processor	2.7 GHz	12	19.25 MB	125W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6210U Processor	2.5 GHz	20	27.50 MB	150W	N/A	2933 MT/s	1TB
Gold 6209U Processor	2.1 GHz	20	27.50 MB	125W	N/A	2933 MT/s	1TB
Gold 6208U Processor	2.9 GHz	16	22 MB	150W	N/A	2933 MT/s	1TB
Gold 5222 Processor	3.8 GHz	4	16.5 MB	105W	2 @ 10.4 GT/s	2933 MT/s	1TB
Gold 5220R Processor	2.2 GHz	24	35.75 MB	150W	2 @ 10.4 GT/s	2933 MT/s	1TB
Gold 5220 Processor	2.2 GHz	18	24.75 MB	125W	2 @ 10.4 GT/s	2666 MT/s	1TB
Gold 5218R Processor	2.1 GHz	20	27.50 MB	125W	2 @ 10.4 GT/s	2666 MT/s	1TB
Gold 5218 Processor	2.3 GHz	16	22 MB	125W	2 @ 10.4 GT/s	2666 MT/s	1TB
Gold 5217 Processor	3.0 GHz	8	11 MB	115W	2 @ 10.4 GT/s	2666 MT/s	1TB
Gold 5215 Processor	2.5 GHz	10	13.75 MB	85W	2 @ 10.4 GT/s	2666 MT/s	1TB

### Notes:

–6-Channel DDR4 @ 2933 MT/s (Gold 6200 & 5222 skus only), 2666 MT/s on all Gold 5200 skus (except 5222 @ 2933)

### Standard Features

- MT/s) with 1TB memory capacity per socket
- 2 and 4 socket capable, 2S - 2UPI, 2S - 3UPI, 4S-2UPI, 4S - 3UPI @ 10.4 GT/s.
- Support for: Vector Neural Network Instructions (VNNI) for inference acceleration, Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512 (1x 512-bit FMA) (Gold 6200 and SKU 5222 - supports 2x 512 bit FMA), advanced RAS
- 48 lanes PCIe 3.0

1 <sup>st</sup> Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Gold 6152 Processor	2.1 GHz	22	30.25 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6148 Processor	2.4 GHz	20	27.50 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6144 Processor	3.5 GHz	8	24.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6142 Processor	2.6 GHz	16	22.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6140 Processor	2.3 GHz	18	24.75 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6138 Processor	2.0 GHz	20	27.50 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6136 Processor	3.0 GHz	12	24.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6134 Processor	3.2 GHz	8	24.75 MB	130W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6132 Processor	2.6 GHz	14	19.25 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6130 Processor	2.1 GHz	16	22.00 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6128 Processor	3.4 GHz	6	19.25 MB	115W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6126 Processor	2.6 GHz	12	19.25 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 5122 Processor	3.6 GHz	4	16.50 MB	105W	2 @ 10.4 GT/s	2666 MT/s	768GB
Gold 5120 Processor	2.2 GHz	14	19.25 MB	105W	2 @ 10.4 GT/s	2400 MT/s	768GB



### Standard Features

Gold 5118 Processor	2.3 GHz	12	16.50 MB	105W	2 @ 10.4 GT/s	2400 MT/s	768GB
Gold 5115 Processor	2.4 GHz	10	13.75 MB	85W	2 @ 10.4 GT/s	2400 MT/s	768GB

#### Notes:

- 6-Channel 1DPC DDR4 @ 2666 MT/s (Gold 6100 skus), 2400 MT/s on all Gold 5100 skus (SKU 5122 - supports 2666 MT/s), with 768GB memory capacity per socket
- 2 and 4 socket capable, 2S - 2UPI, 2S-3UPI, 4S - 3UPI @ 10.4 GT/s.
- Support for: Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512 (1x 512-bit FMA) (Gold 6100 and SKU 5122 - supports 2x 512 bit FMA), advanced RAS
- 48 lanes PCIe 3.0

2 <sup>nd</sup> Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Silver 4216 Processor	2.1 GHz	16	22 MB	100W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4215R Processor	3.2 GHz	8	11 MB	130W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4215 Processor	2.5 GHz	8	11 MB	85W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4214R Processor	2.4 GHz	12	16.5 MB	100W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4214 Processor	2.2 GHz	12	16.5 MB	85W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4210R Processor	2.4 GHz	10	13.75 MB	100W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4210 Processor	2.2 GHz	10	13.75 MB	85W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4208 Processor	2.1 GHz	8	11 MB	85W	2 @ 9.6 GT/s	2400 MT/s	1TB

#### Notes:

- 6-Channel DDR4 @ 2400 MT/s with 1TB memory capacity per socket
- 2 socket supports 2UPI @ 9.6 GT/s.
- Support for: Intel® Vector Neural Network Instructions (VNNI) for inference acceleration, Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512 (1x 512-bit FMA), standard RAS
- 48 lanes PCIe 3.0

### Standard Features

1 <sup>st</sup> Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Silver 4116 Processor	2.1 GHz	12	16.50 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768GB
Silver 4114 Processor	2.2 GHz	10	13.75 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768GB
Silver 4112 Processor	2.6 GHz	4	8.25 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768GB
Silver 4110 Processor	2.1 GHz	8	11.00 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768GB
Silver 4108 Processor	1.8 GHz	8	11.00 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768GB

#### Notes:

- 6-Channel DDR4 @ 2400 MT/s providing with 768GB memory capacity per socket
- 2 Socket supports 2UPI @ 9.6 GT/s
- Support for: Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512(1x 512-bit FMA), standard RAS
- 48 lanes PCIe 3.0

2 <sup>nd</sup> Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Bronze 3206R	1.9 GHz	8	11 MB	85W	2 @ 9.6 GT/s	2133 MT/s	1 TB
Bronze 3204 Processor	1.9 GHz	6	8.25 MB	85W	2 @ 9.6 GT/s	2133 MT/s	1 TB

#### Notes:

- 6-Channel DDR4 @ 2133 MT/s with 1TB memory capacity per socket
- 2 Socket supports 2UPI @ 9.6 GT/s
- Support for: Intel® Vector Neural Network Instructions (VNNI) for inference acceleration., Intel AVX-512 (1x 512-bit FMA), standard RAS
- 48 lanes PCIe 3.0

### Standard Features

1 <sup>st</sup> Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Bronze 3106 Processor	1.7 GHz	8	11.00 MB	85W	2 @ 9.6 GT/s	2133 MT/s	768GB
Bronze 3104 Processor	1.7 GHz	6	8.25 MB	85W	2 @ 9.6 GT/s	2133 MT/s	768GB

#### Notes:

- 6-Channel DDR4 @ 2133 MT/s with 768GB memory capacity per socket
- 2 Socket supports 2UPI @ 9.6 GT/s
- Support for: Intel AVX-512(1x 512-bit FMA), standard RAS
- 48 lanes PCIe 3.0

### Chipset

Intel C622 Chipset

**Notes:** For more information regarding Intel® chipsets, please see the following URL:

<http://www.intel.com/products/server/chipsets/>

### On System Management Chipset

HPE iLO 5 ASIC

**Notes:** Read and learn more in the [iLO QuickSpecs](#).

### Memory

Type	HPE DDR4 SmartMemory Registered (RDIMM), Load Reduced (LRDIMM)
DIMM Slots Available	16 8 DIMM slots per processor, 6 channels per processor, 2 channels @ 2 DIMMs per channel, 4 channels @ 1 DIMM per channel
Maximum capacity (LRDIMM)	1.0 TB 16 x 64 GB LRDIMM @ 2933 MT/s
Maximum capacity (RDIMM)	1.0 TB 16 x 64 GB RDIMM @ 2933 MT/s

### Standard Features

#### Notes:

- Mixing of RDIMM and LRDIMM memory is not supported.
- For General Server Memory Population Rules and Guidelines for Gen10 see details here: <http://www.hpe.com/docs/memory-population-rules>

### Memory Protection

#### Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.

#### Online Spare

Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

**Notes:** For more information see our [Memory RAS feature technical whitepaper](#)

### Expansion Slots

CPU1 x8x8x8 riser					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 3.0	X8	X8	Full-height, full-length slot	Proc 1
2	PCIe 3.0	X8	X8	Full-height, half-length slot	Proc 1
3	PCIe 3.0	X8	X8	Full-height, half-length slot	Proc 1

**Notes:** Bus Width Indicates the number of physical electrical lanes running to the connector.

### FlexibleLOM

Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 3.0	X8	X8	Full-height, full-length slot	Proc 1
2	PCIe 3.0	X8	X8	Full-height, half-length slot	Proc 1
3	PCIe 3.0	X8	X8	FlexibleLOM	Proc 1

### Standard Features

**Notes:**

- Bus Width Indicates the number of physical electrical lanes running to the connector.
- This riser is necessary to install FlexibleLOM adapters

CPU1 x16x8 riser					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 3.0	X16	X16	Full-height, full-length slot	Proc 1
2	PCIe 3.0	X8	X8	Full-height, half-length slot	Proc 1

**Notes:** Bus Width Indicates the number of physical electrical lanes running to the connector.

CPU2 x8x8x8 riser					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 3.0	X8	X8	Full-height,full-length slot	Proc 2
2	PCIe 3.0	X8	X8	Full-height,half-length slot	Proc 2
3	PCIe 3.0	X8	X8	Low profile	Proc 2

**Notes:**

- Bus Width Indicates the number of physical electrical lanes running to the connector.
- When populating the second optional riser slot, the second processor must be installed.

CPU2 x16x8 riser					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 3.0	X16	X16	Full-height, full-length slot	Proc 2
2	PCIe 3.0	X8	X8	Low profile	Proc 2

**Notes:**

- Bus Width Indicates the number of physical electrical lanes running to the connector.
- When populating the second optional riser slot, the second processor must be installed.
- Includes GPU cable kit

### Storage Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#). One of the following depending on model

### Software RAID

### Standard Features

HPE Smart Array S100i SR Gen10 SW RAID

#### Notes:

- HPE Smart Array S100i SR Gen10 SW RAID will operate in UEFI mode only. For legacy support an additional controller will be needed-
- HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled.
- HPE Smart Array S100i SR Gen10 SW RAID only supports Windows and does not support Linux. For Linux users, HPE offers a solution that uses in-distro open-source software to create a two-disk RAID 1 boot volume. For more information visit: <https://downloads.linux.hpe.com/SDR/project/lsrrb/>

### Essential RAID Controller

- HPE Smart Array E208i-p SR Gen10 Controller
- HPE Smart Array E208e-p SR Gen10 Controller
- HPE Smart Array E208i-a SR Gen10 Controller

### Performance RAID Controller

- HPE Smart Array P408i-a SR G10 LH Controller
- HPE Smart Array P408i-p SR Gen10 Controller
- HPE Smart Array P408e-p SR Gen10 Controller

#### Notes:

- Performance RAID Controllers require the HPE Smart Storage Battery (P01366-B21) which is sold separately.
- For additional details, please see [HPE Smart Array Gen10 Controllers Data Sheet](#)

### Internal Storage Devices

- **Optical Drive**

Optional: DVD-ROM or DVD-RW

- **Hard Drives**

None ship standard

### Maximum Internal Storage

Drive	Capacity	Configuration
Hot Plug SFF SAS HDD	62.4 TB	24 + 2 X 2.4 TB (with dual SFF rear drive option)
Hot Plug LFF SAS HDD	144 TB	12 X 12 TB
Hot Plug SFF SATA HDD	52 TB	24 + 2 X 2 TB (with dual SFF rear drive option)
Hot Plug LFF SATA HDD	144 TB	12 X 12 TB
Hot Plug SFF SAS SSD	100 TB	24 + 2 X 3.84 TB (with dual SFF rear drive option)
Hot Plug LFF SAS SSD	46.1 TB	12 X 3.84 TB
Hot Plug SFF SATA SSD	200 TB	24 + 2 X 7.68 TB (with dual SFF rear drive option)
Hot Plug LFF SATA SSD	23 TB	12 X 1.92 TB



### Standard Features

---

#### Interfaces

<b>Video</b>	1 rear - VGA Port (standard )
<b>Network Ports</b>	2 x 1 GbE ports embedded on board with optional Media Module, FlexibleLOM or stand up card
<b>Management Network Port</b>	1 Gb Dedicated
<b>Front iLO Service Port</b>	1 standard
<b>Micro SD Slot</b>	1 Micro SD  <b>Notes:</b> The Micro SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered.
<b>USB 3.0</b>	Up to 4 total: 1 front, 2 rear, 1 internal (secure),

---

### Operating Systems and Virtualization Software Support for ProLiant Servers

#### 2<sup>nd</sup> Generation Intel® Xeon® Scalable Processor Family

- **Windows Server 2016\***, 2019
- **VMware ESXi 6.5 U3\***, 6.7 U3, 7.0
- **Red Hat Enterprise Linux (RHEL)** 7.6 with Kbase\*, 8.0
- **SUSE Linux Enterprise Server (SLES)** 12 SP4\*, 15 SP1

#### 1<sup>st</sup> Generation Intel® Xeon® Scalable Processor Family

- Windows Server 2012R2\*, 2016, 2019
- **VMware ESXi 6.0 U3\***, **6.5 U3**, 6.7 U3, 7.0
- **Red Hat Enterprise Linux (RHEL)** 6.9\*, 7.3, 7.6 (with Kbase), 8.0
- **SUSE Linux Enterprise Server (SLES)** 12 SP2\*, 12 SP3-SP4, 15 SP1
- CentOS

#### Notes:

– \*Minimum required OS

– For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server <http://www.hpe.com/info/ossupport>

---

### Industry Standard Compliance

- ACPI 6.1 Compliant
- PCIe 3.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- USB 3.0 Compliant (internal)

### Standard Features

- SMBIOS 3.1
- UEFI 2.6
- Redfish API
- IPMI 2.0
- Secure Digital 2.0
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP)
- Active Directory v1.0
- ASHRAE A3/A4

**Notes:** For additional technical thermal details regarding ambient temperatures, humidity and features support please visit: <http://www.hpe.com/servers/ashrae>.

- UEFI (Unified Extensible Firmware Interface Forum)

**Notes:** UEFI is the default for the HPE ProLiant DL160 Gen10. Legacy mode can be selected in the field.

European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot9 requirements. For more information regarding HPE Lot 9 conformance, please visit:

- <https://www.hpe.com/us/en/about/environment/msds-specs-more.html>

---

### Power Supply

- HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit  
**Notes:** Available in 94% efficiency.

- HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit  
**Notes:**
  - Available in 94% and 96% efficiency.
  - Also available in -48VDC power input.

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

For information on power specifications and technical content visit [HPE Server power supplies](#).

### Standard Features

---

## Graphics

### Integrated Video Standard

- Video modes up to 1920 x 1200@60Hz (32 bpp)
- 16MB Video Memory

### HPE iLO 5 on system management memory

- 32 MB Flash
  - 4 Gbit DDR 3 with ECC protection
- 

## HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 servers have a UEFI Class 2 implementation and support both UEFI Mode (default) and Legacy BIOS Mode.

**Notes:** The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

- UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:
  - Secure Boot and Secure Start enable for enhanced security
  - Operating system specific functionality
  - Support for > 2.2 TB (using GPT) boot drives
  - USB 3.0 Stack
  - Embedded UEFI Shell
  - Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
  - PXE boot support for IPv6 networks
  - Workload Profiles for simple performance optimization
  - UEFI Boot Mode only:
    - NVMe Boot Support
    - iSCSI Software Initiator Support.
    - HTTP/HTTPs Boot support as a PXE alternative.
  - Boot support for option cards that only support a UEFI option ROM

**Notes:** For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

---

## Security

- UEFI Secure Boot and Secure Start support
  - Immutable Silicon Root of Trust
  - FIPS 140-2 validation
  - Common Criteria certification
  - Configurable for PCI DSS compliance
-

### Standard Features

- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
  - Support for Commercial National Security Algorithms (CNSA)
  - iLO Security Modes
  - Granular control over iLO interfaces
  - Tamper-free updates - components digitally signed and verified
  - Secure Recovery - recover critical firmware to known good state on detection of compromised firmware
  - Ability to rollback firmware
  - Secure erase of NAND/User data
  - TPM (Trusted Platform Module) 2.0 option
  - Bezel Locking Kit
  - Chassis Intrusion detection option
- 

### Embedded Management

#### UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI).

Learn more at <http://www.hpe.com/servers/uefi>.

#### Intelligent Provisioning

Hassle free server and OS provisioning for 1 or more servers with Intelligent Provisioning.

Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

#### iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at

<http://www.hpe.com/info/restfulapi>.

---

### Server Utilities

#### iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9 and Gen10 HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities.

Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.

#### HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit:

<http://www.hpe.com/info/ilo/mobileapp>.

---

### Standard Features

#### RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.

#### Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at or <http://www.hpe.com/servers/powershell>.

#### HPE OneView Standard

HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at <http://www.hpe.com/info/oneview>

#### HPE Systems Insight Manager (HPE SIM)

Ideal for environments already using HPE SIM, it allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers. Also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <http://www.hpe.com/info/hpesim>.

#### Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.

#### Service Pack for ProLiant (SPP)

The Service Pack for ProLiant (SPP) is a comprehensive collection of server firmware, drivers, and system software tested as a single solution stack, which is delivered as a single ISO image. Learn more at <http://www.hpe.com/servers/spp>

---

### Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

**Notes:** Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/>.

## Standard Features

---



### Optional Features

#### Server Management

##### HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at <http://www.hpe.com/servers/iloadvanced..>

##### HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9 and Gen10 servers. To learn more visit <http://www.hpe.com/info/oneview>

##### HPE InfoSight for Servers

HPE InfoSight for Servers combines the cloud-based machine learning of InfoSight with the health and performance monitoring of Active Health System (AHS) and iLO to optimize performance and predict and prevent problems. The end result is an intelligent environment that modernizes IT operations and enhances the support experience by predicting and preventing the infrastructure issues that lead to application disruptions, wasted IT staff time and missed business opportunities.

Learn more at <https://www.hpe.com/servers/infosight>

##### HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hpe.com/info/cmu>.

---

#### Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go - and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

## Optional Features

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

---

## One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>

---

### Service and Support

#### HPE Pointnext - Service and Support

##### Protect your business beyond warranty with HPE Support Services

HPE Pointnext provides a comprehensive portfolio including Advisory and Transformational, Professional, and Operational Services to help accelerate your digital transformation. From the onset of your transformation journey, Advisory and Transformational Services focus on designing the transformation and creating a solution roadmap. Professional Services specializes in creative configurations with flawless and on-time implementation, and on-budget execution. Finally, operational services provides innovative new approaches like Flexible Capacity and Datacenter Care, to keep your business at peak performance. Hewlett Packard Enterprise is ready to bring together all the pieces of the puzzle for you, with an eye on the future, and make the complex simple.

##### Connect your devices:

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%<sup>1</sup> reduction in down time, near 100%<sup>2</sup> diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to HPE support.

##### Notes:

–<sup>1</sup> IDC

–<sup>2</sup> HPE CSC reports 2014 - 2015

Learn more about getting connected at <http://www.hpe.com/services/getconnected>

---

#### Recommended Services

##### HPE Proactive Care\* with 6 hour call-to-repair commitment, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This Service combines three years' proactive reporting and advice with our highest level of hardware support - HPE's 24x7, six hour hardware call-to-repair. HPE is the only leading manufacturer who makes this level of coverage available as a standard service offering for your most valuable servers. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

##### HPE Proactive Care\* with 24x7 coverage, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice This Service combines three years proactive reporting and

### Service and Support

advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

#### **HPE Proactive Care\* - Next Business Day service, three year Support Service**

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years of Hardware Support where an HPE authorized representative will arrive at the Customer's site during the onsite coverage window to begin hardware maintenance service the next coverage day after the service request has been logged. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

**Notes:** \*HPE Proactive Care and HPE Proactive Care Advanced require that the customer connect their devices to make the most of these services and receive all the deliverables.

---

### Other related Services

#### **HPE Server Hardware Installation**

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://h20195.www2.hpe.com/v2/Getdocument.aspx?docname=5981-9356enw>

#### **HPE Installation and Startup Service**

Provides for the installation of your HPE hardware according to product specifications including options. The HPE service delivery technician will connect the product to a LAN as appropriate and enable remote support to allow for automatic case creation for hardware failures. Installation and start up services also includes the installation of one supported operating system type (Windows® or Linux).

#### **HPE Datacenter Care service**

HPE Datacenter Care helps improve IT stability and security, increase the value of IT, and enable agility and innovation. It is a structured framework of repeatable, tested, and globally available services "building blocks." You can deploy, operate, and evolve your datacenter wherever you are on your IT journey. With HPE Datacenter Care, you benefit from a personalized relationship with HPE via a single point of accountability for HPE and others' products. For more information, visit

<http://www.hpe.com/services/datacentercare>

#### **HPE Factory Express for Servers and storage**

### Service and Support

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAXxxx3PAR suite, XP, rackable tape libraries and configurable network switches.

#### HPE Service Credits

HPE Service Credits offers flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

#### HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment.

<http://www.hpe.com/ww/learn>

---

### Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

---

### Service and Support

#### HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>.

The HPE Support Center Mobile App\* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

**Notes:**\*HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>.

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS batteries over 12KVA. See the specific high value options that require additional support [here](#).

---



### Pre- Configured Models

- Pre- Configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
- Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.
- If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot9 requirements. For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more.html>

Powered by 2nd Generation Intel Xeon Processors		
<b>SKU Number</b>	P35519-xx1	P35520-xx1
<b>Model Name</b>	HPE ProLiant DL180 Gen10 4210R 2.4GHz 10-core 1P 16GB-R S100i 8SFF 500W PS Server	HPE ProLiant DL180 Gen10 5218 2.3GHz 16-core 1P 16GB-R S100i 8SFF 500W PS Server
<b>Chassis</b>	8SFF	8SFF
<b>Processor</b>	4210R (2.4GHz/10-core/100W)	5218 (2.3GHz/16-core/125W)
<b>Number of Processors</b>	One processor with Standard heatsink	One processor with Standard heatsink
<b>Memory</b>	HPE 16GB 1Rx4 PC4-2933Y-R Smart Kit	HPE 16GB 1Rx4 PC4-2933Y-R Smart Kit
<b>Network Controller</b>	Embedded 2-Port 1GbE	Embedded 2-Port 1GbE
<b>Storage Controller</b>	Embedded 14Port S100i	Embedded 14Port S100i
<b>Cables</b>	1x Box3 MB/-p cable (879752-B21) to connect 8 drive bays in box3 to S100i (can also be used to connect to -p controller).	1x Box3 MB/-p cable (879752-B21) to connect 8 drive bays in box3 to S100i (can also be used to connect to -p controller).
<b>Hard Drive</b>	None included	None included
<b>Optical Drive</b>	None included	None included
<b>PCIe Slots</b>	3 PCIe: 1x8 FHFL, 1x8 FHHL, 1x8 FHHL	
<b>Power Supply</b>	1x 500W Hot Plug; RPS ready	1x 500W Hot Plug; RPS ready
<b>Fans</b>	3 Fans	3 Fans
<b>Management</b>	HPE iLO5, Infosight	
<b>Rail Kit</b>	SFF Easy Install	SFF Easy Install
<b>Form Factor</b>	2U Rack	
<b>Warranty</b>	3-year parts, 3-year labor, 3-year onsite support with next business day response	
<b>Localizations Available</b>	-B21, -291	-B21, -291

### Pre-Configured Models

Powered by 2nd Generation Intel Xeon Processors			
<b>SKU Number</b>	P19562-xx1	P19564-xx1	P19563-xx1
<b>Model Name</b>	HPE ProLiant DL180 Gen10 3204 1.9GHz 6-core 1P 16GB-R S100i 8LFF 500W PS Server	HPE ProLiant DL180 Gen10 4208 2.1GHz 8-core 1P 16GB-R S100i 8SFF 500W PS Server	HPE ProLiant DL180 Gen10 4208 2.1GHz 8-core 1P 16GB-R P408i-a 12LFF 500W PS Server
<b>Chassis</b>	8LFF	8SFF	12LFF
<b>Processor</b>	3204 (1.9GHz/6-core/85W)	4208 (2.1GHz/8-core/85W)	4208 (2.1GHz/8-core/85W)
<b>Number of Processors</b>	One processor with Standard heatsink	One processor with Standard heatsink	One processor with Standard heatsink
<b>Memory</b>	HPE 16GB 1Rx4 PC4-2933Y-R Smart Kit	HPE 16GB 1Rx4 PC4-2933Y-R Smart Kit	HPE 16GB 1Rx4 PC4-2933Y-R Smart Kit
<b>Network Controller</b>	Embedded 2-Port 1GbE	Embedded 2-Port 1GbE	Embedded 2-Port 1GbE
<b>Storage Controller</b>	Embedded 14Port S100i  <b>Notes:</b> SATA only	Embedded 14Port S100i  <b>Notes:</b> SATA only	P408i-a with Smart Storage Battery included  <b>Notes:</b> P408i-p must be added to support all 12 drive bays with SAS drives (Cable included in base BTO. See below)
<b>Cables</b>	2x LFF MB/-p cables (875170-B21) to connect 8 drive bays to S100i (can also be used to connect to -p controller).	1x Box3 MB/-p cable (879752-B21) to connect 8 drive bays in box3 to S100i (can also be used to connect to -p controller).	2x LFF/-a cables (875172-B21) to connect 8 drive bays to included P408i-a and 1x LFF MB/-p cable (875170-B21) to connect 4 drive bays to S100i (can also be used to connect to -p controller).
<b>Hard Drive</b>	None included	None included	None included
<b>Optical Drive</b>	None included	None included	None included
<b>PCIe Slots</b>	3 PCIe: 1x8 FHFL, 1x8 FHHL, 1x8 FHHL		
<b>Power Supply</b>	1x 500W Hot Plug; RPS ready	1x 500W Hot Plug; RPS ready	1x 500W Hot Plug; RPS ready
<b>Fans</b>	3 Fans	3 Fans	3 Fans
<b>Management</b>	HPE iLO5, Infosight		
<b>Rail Kit</b>	LFF Easy Install	SFF Easy Install	LFF Easy Install
<b>Form Factor</b>	2U Rack		
<b>Warranty</b>	3-year parts, 3-year labor, 3-year onsite support with next business day response		
<b>Localizations Available</b>	-B21, -291	-B21, -291	-B21, -291

**Notes:** UEFI is the standard default for all pre-configured models

### Pre-Configured Models

Powered by 1 <sup>st</sup> Generation Intel Xeon Processors		
<b>SKU Number</b>	879514-B21	879512-B21
<b>Model Name</b>	HPE ProLiant DL180 Gen10 4110 2.1GHz 8-core 1P 16GB-R S100i 8SFF 1x500W PS Server	HPE ProLiant DL180 Gen10 4110 2.1GHz 8-core 1P 16GB-R S100i 8LFF 1x500W
<b>Chassis</b>	8SFF	8LFF
<b>Processor</b>	4110 (2.1GHz/8-core/85W)	4110 (2.1GHz/8-core/85W)
<b>Number of Processors</b>	One processor with Standard heatsink	One processor with Standard heatsink
<b>Memory</b>	HPE 16GB 1Rx4 PC4-2666V-R Smart Kit	HPE 16GB 1Rx4 PC4-2666V-R Smart Kit
<b>Network Controller</b>	Embedded 2-Port 1GbE	Embedded 2-Port 1GbE
<b>Storage Controller</b>	Embedded 14Port S100i  <b>Notes:</b> SATA only	Embedded 14Port S100i  <b>Notes:</b> SATA
<b>Cables</b>	1x Box3 MB/-p cable (879752-B21) to connect 8 drive bays in box3 to S100i (can also be used to connect to -p controller).	2x LFF MB/-p cables (875170-B21) to connect 8 drive bays to S100i (can also be used to connect to -p controller).
<b>Hard Drive</b>	None included	
<b>Optical Drive</b>	None included	
<b>PCIe Slots</b>	3 PCIe: 1x8 FHFL, 1x8 FHHL, 1x8 FHHL	
<b>Power Supply</b>	1x 500W Hot Plug; RPS ready	1x 500W Hot Plug; RPS ready
<b>Fans</b>	3 Fans	3 Fans
<b>Management</b>	HPE iLO5	
<b>Rail Kit</b>	SFF Easy Install	LFF Easy Install
<b>Form Factor</b>	2U Rack	
<b>Warranty</b>	3-year parts, 3-year labor, 3-year onsite support with next business day response	
<b>Localizations Available</b>	-B21	-B21

**Notes:** UEFI is the standard default for all pre-configured models

### Configuration Information

#### Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information.

European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot9 requirements. For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more.html>

#### Step 1: Base Configuration (choose one of the following configurable models)

<b>CTO Server</b>	HPE DL180 Gen10 8SFF CTO Server	HPE DL180 Gen10 8LFF CTO Server	HPE DL180 Gen10 12LFF CTO Server
<b>SKU Number</b>	879517-B21	879515-B21	879516-B21
<b>Processor</b>	Not included as standard		
<b>DIMM Slots</b>	16-DIMM Slots		
<b>Storage Controller</b>	Embedded SW RAID with 14 SATA ports, choice of HPE modular Smart Array and PCIe plug-in controller		
<b>PCIe</b>	None Standard. Risers need to be added		
<b>Drive Cage - included</b>	8SFF	8LFF	12LFF
<b>Network Controller</b>	Embedded 2x1GbE with optional, Media Module, HPE FlexibleLOM on riser and optional Standup card		
<b>Fans</b>	1 CPU- 3 Standard Fans  2 CPU- 5 Standard Fans		
<b>Management</b>	HPE iLO with Intelligent Provisioning (standard), iLO Advanced and OneView (optional)		
<b>USB</b>	Front: 1 USB 3.0 + iLO service port  Rear: 2 USB 3.0  Internal: 1 USB 3.0		
<b>Included Drive Cage</b>	8 SFF	8LFF	12 LFF
<b>Additional drive cages</b>	8-16 SFF SAS/SATA  16-24 SFF SAS/SATA	8-12 LFF SAS/SATA	-
<b>ODD - 2SFF Rear</b>	Optional	Optional	2SFF rear- Optional

### Configuration Information

---

#### Step 2: Choose Required Options (only one of the following unless otherwise noted)

Please select one -L21 processor required below.

For second processor, please select the same processor model with -B21 from Core Options - HPE Processors section.

For example: first processor, select P12007-L21 then for second processor, select P12007-B21.

#### Notes:

- Mixing of 2 different processor models is not supported.
- For first processor, -L21 will include 3 fans, For second processor, -B21 will add 2 additional fans
- When 2<sup>nd</sup> Generation Intel Xeon Scalable Processor is selected, then only DDR4-2933 Memory Kit can be selected; When 1<sup>st</sup> Generation Intel Xeon Scalable Processor is selected, then only DDR4-2666 Memory Kit can be selected

#### Step 2a: Choose Processors

##### Processor Option Kits (Required Processor)

##### 2<sup>nd</sup> Generation Intel Xeon- Platinum

Intel Xeon-Platinum 8256 (3.8GHz/4-core/105W) FIO Processor Kit for HPE ProLiant DL180 Gen10 P12007-L21

Intel Xeon-Platinum 8253 (2.2GHz/16-core/125W) FIO Processor Kit for HPE ProLiant DL180 Gen10 P12006-L21

##### 2<sup>nd</sup> Generation Intel Xeon-Gold

Intel Xeon-Gold 6252 (2.1GHz/24-core/150W) FIO Processor Kit for HPE ProLiant DL180 Gen10 P11161-L21

Intel Xeon-Gold 6248 (2.5GHz/20-core/150W) FIO Processor Kit for HPE ProLiant DL180 Gen10 P11160-L21

Intel Xeon-Gold 6244 (3.6GHz/8-core/150W) FIO Processor Kit for HPE ProLiant DL180 Gen10 P11159-L21

Intel Xeon-Gold 6242 (2.8GHz/16-core/150W) FIO Processor Kit for HPE ProLiant DL180 Gen10 P11158-L21

Intel Xeon-Gold 6240 (2.6GHz/18-core/150W) FIO Processor Kit for HPE ProLiant DL180 Gen10 P11157-L21

Intel Xeon-Gold 6238 (2.1GHz/22-core/140W) FIO Processor Kit for HPE ProLiant DL180 Gen10 P11167-L21

Intel Xeon-Gold 6234 (3.3GHz/8-core/130W) FIO Processor Kit for HPE ProLiant DL180 Gen10 P11166-L21

Intel Xeon-Gold 6230R (2.1GHz/26-core/150W) FIO Processor Kit for HPE ProLiant DL180 Gen10 P24214-L21

Intel Xeon-Gold 6230 (2.1GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL180 Gen10 P11156-L21

## Configuration Information

Intel Xeon-Gold 6226R (2.9GHz/16-core/150W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P21201-L21
Intel Xeon-Gold 6226 (2.7GHz/12-core/125W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P11165-L21
Intel Xeon-Gold 6210U (2.5GHz/20-core/150W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P11163-L21
<b>Notes:</b> Only supported in single socket configurations	
Intel Xeon-Gold 6209U (2.1GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P11162-L21
<b>Notes:</b> Only supported in single socket configurations	
Intel Xeon-Gold 6208U (2.9GHz/16-core/150W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P21197-L21
<b>Notes:</b> Only supported in single socket configurations	
Intel Xeon-Gold 5222 (3.8GHz/4-core/105W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P11164-L21
Intel Xeon-Gold 5220R (2.2GHz/24-core/150W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P21202-L21
Intel Xeon-Gold 5220 (2.2GHz/18-core/125W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P11155-L21
Intel Xeon-Gold 5218R (2.1GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P24213-L21
Intel Xeon-Gold 5218 (2.3GHz/16-core/125W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P11154-L21
Intel Xeon-Gold 5217 (3.0GHz/8-core/115W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P11153-L21
Intel Xeon-Gold 5215 (2.5GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P11152-L21
<b>1<sup>st</sup> Generation Intel Xeon-Gold</b>	
Intel Xeon-Gold 6152 (2.1GHz/22-core/140W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879749-L21
Intel Xeon-Gold 6148 (2.4GHz/20-core/150W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879748-L21
Intel Xeon-Gold 6142 (2.6GHz/16-core/150W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879747-L21
Intel Xeon-Gold 6140 (2.3GHz/18-core/140W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879746-L21
Intel Xeon-Gold 6138 (2.0GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879745-L21
Intel Xeon-Gold 6136 (3.0GHz/12-core/150W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879744-L21
Intel Xeon-Gold 6134 (3.2GHz/8-core/130W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879743-L21
Intel Xeon-Gold 6132 (2.6GHz/14-core/140W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879742-L21

## Configuration Information

Intel Xeon-Gold 6130 (2.1GHz/16-core/125W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879741-L21
Intel Xeon-Gold 6128 (3.4GHz/6-core/115W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879740-L21
Intel Xeon-Gold 6126 (2.6GHz/12-core/125W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879739-L21
Intel Xeon-Gold 5122 (3.6GHz/4-core/105W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879738-L21
Intel Xeon-Gold 5120 (2.2GHz/14-core/105W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879737-L21
Intel Xeon-Gold 5118 (2.3GHz/12-core/105W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879736-L21
Intel Xeon-Gold 5115 (2.4GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879735-L21
<b>2<sup>nd</sup> Generation Intel Xeon- Silver</b>	
Intel Xeon-Silver 4216 (2.1GHz/16-core/100W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P11151-L21
Intel Xeon-Silver 4215R (3.2GHz/8-core/130W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P24215-L21
Intel Xeon-Silver 4215 (2.5GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P11150-L21
Intel Xeon-Silver 4214R (2.4GHz/12-core/100W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P21199-L21
Intel Xeon-Silver 4214 (2.2GHz/12-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P11149-L21
Intel Xeon-Silver 4210R (2.4GHz/10-core/100W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P21198-L21
Intel Xeon-Silver 4210 (2.2GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P11148-L21
Intel Xeon-Silver 4208 (2.1GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P11147-L21
<b>1<sup>st</sup> Generation Intel Xeon-Silver</b>	
Intel Xeon-Silver 4116 (2.1GHz/12-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879734-L21
Intel Xeon-Silver 4114 (2.2GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879733-L21
Intel Xeon-Silver 4112 (2.6GHz/4-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879732-L21
Intel Xeon-Silver 4110 (2.1GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879731-L21
Intel Xeon-Silver 4108 (1.8GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10	879730-L21
<b>2<sup>nd</sup> Generation Intel Xeon- Bronze</b>	
Intel Xeon-Bronze 3206R (1.9GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10	P21196-L21



### Configuration Information

Intel Xeon-Bronze 3204 (1.9GHz/6-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10 P11146-L21

#### 1<sup>st</sup> Generation Intel Xeon- Bronze

Intel Xeon-Bronze 3106 (1.7GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10 879729-L21

Intel Xeon-Bronze 3104 (1.7GHz/6-core/85W) FIO Processor Kit for HPE ProLiant DL180 Gen10 879728-L21

#### Step 2b: Choose Memory Options

Please select one or more memory from below.

For new Gen10 memory population rule whitepaper and optimal memory performance guidelines, please go to:

<https://www.hpe.com/docs/memory-population-rules>

For Gen10 memory speed table, please go to: <https://www.hpe.com/docs/memory-speed-table>

For memory Reliability, Accessibility, Serviceability (RAS) features whitepaper like Gen10 Fast Fault Tolerance and legacy mirrored memory feature etc. please go to: <http://www.hpe.com/docs/memory-ras-feature>

#### Notes:

- Maximum memory capacity and speed per processor is dependent on processor model selection or limitation.
- DDR4-2933 Memory Kits are only supported with 2<sup>nd</sup> Generation Intel Xeon Scalable Series Processors and DDR4-2666 Memory Kits are only supported with 1<sup>st</sup> Generation Intel Xeon Scalable Series Processors.

#### Registered DIMMs (RDIMMs) for 2<sup>nd</sup> Generation Intel Xeon Scalable Series

HPE 64GB (1x64GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit P00930-B21

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit P00924-B21

HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit P00922-B21

HPE 16GB (1x16GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit P00920-B21

HPE 8GB (1x8GB) Single Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit P00918-B21

#### Registered DIMMs (RDIMMs) for 1<sup>st</sup> Generation Intel Xeon Scalable Series

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 815100-B21

HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 835955-B21

HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 815098-B21

HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit 815097-B21

#### Load Reduced DIMMs (LRDIMMs) for 2<sup>nd</sup> Generation Intel Xeon Scalable Series

HPE 64GB (1x64GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit P00926-B21

#### Load Reduced DIMMs (LRDIMMs) for 1<sup>st</sup> Generation Intel Xeon Scalable Series

HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit 815101-B21

#### Step 2c: Choose Power Supplies

Please select one or two power supplies from below.



### Configuration Information

#### Notes:

- Mixing of 2 different power supplies is NOT supported.
- HPE DL160/180 Gen10 Redundant Power Supply Enablement Kit (866442-B21) required with selection of power supply.

#### HPE Flex Slot Power Supplies

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865408-B21
HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit	865438-B21
HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit	865428-B21
HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865414-B21
HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit	865434-B21
HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	830272-B21
HPE DL160/180 Gen10 Redundant Power Supply Enablement Kit	866442-B21

**Notes:** This enablement kit is required with the selection of a Flex Slot power supply

### Step 3: Choose Additional Factory Integratable Options

One of the following from each list may be selected if desired at time of factory integration

HPE Legacy FIO Mode Setting	758959-B22
HPE FIO Enable Smart Array SW RAID	784308-B21
HPE Gen10 TPM 1.2 FIO Setting	872108-B21

#### Cable Kits (factory integrated only)

HPE DL180 Gen10 8 to 16SFF Smart Array S100i/E208i-p/P408i-p FIO Cable Kit	875154-B21
--	------------

**Notes:** This will be used to connect Box2 to Smart Array S100i/E208i-p/P408i-p

HPE DL180 Gen10 8 to 16SFF Smart Array E208i-a/P408i-a SAS FIO Cable Kit	875156-B21
--	------------

**Notes:** This will be used to connect Box2 to Smart Array E208i-a/P408i-a

HPE DL180 Gen10 16 to 24SFF Smart Array S100i/E208i-p/P408i-p FIO Cable Kit	875160-B21
---	------------

**Notes:** This will be used to connect Box1 to Smart Array S100i/E208i-p/P408i-p

HPE DL180 Gen10 16 to 24SFF Smart Array E208i-a/P408i-a SAS FIO Cable Kit	875162-B21
---	------------

**Notes:** This will be used to connect Box1 to Smart Array E208i-a/P408i-a

HPE DL180 Gen10 LFF Smart Array S100i/E208i-p/P408i-p FIO Cable Kit	875170-B21
---	------------

**Notes:** This will be used to connect to Smart Array S100i/E208i-p/P408i-p

HPE DL180 Gen10 LFF Smart Array E208i-a/P408i-a SAS FIO Cable Kit	875172-B21
---	------------

**Notes:** This will be used to connect to Smart Array E208i-a/P408i-a

HPE DL180 Gen10 Rear 2SFF to Smart Array S100i/E208i-p/P408i-p FIO Cable Kit	879410-B21
--	------------

**Notes:** This will be used to connect the rear 2SFF to Smart Array E208i-p/P408i-p

HPE DL180 Gen10 Rear 2SFF to Smart Array E208i-a/P408i-a SAS FIO Cable Kit	875181-B21
--	------------

**Notes:** This will be used to connect the rear 2SFF to Smart Array E208i-a/P408i-a

HPE DL180 Gen10 Rear 2SFF to Smart Array S100i SATA FIO Cable Kit	875183-B21
---	------------

**Notes:** This will be used to connect the rear 2SFF to Smart Array S100i

### Configuration Information

HPE DL180 Gen10 Rear 2SFF to SAS Expander FIO Cable Kit 875179-B21

**Notes:** Connects SAS Expander to the rear 2SFF drive cage

HPE DL180 Gen10 SFF Box3 to Smart Array S100i/E208i-p/P408i-p FIO Cable Kit 879752-B21

**Notes:** This will be used to connect the default Box3 in 8SFF Chassis to Smart Array S100i/E208i-p/P408i-p

HPE DL180 Gen10 SFF Box3 to Smart Array E208i-a/P408i-a SAS FIO Cable Kit 879754-B21

**Notes:** This will be used to connect the default Box3 in 8SFF Chassis to Smart Array E208i-a/P408i-a

#### HPE Unique Options (factory integrated only)

HPE DL180 Gen10 8 to 16SFF FIO Upgrade Kit 875151-B21

HPE DL180 Gen10 16 to 24SFF FIO Upgrade Kit 875158-B21

HPE DL180 Gen10 Rear 2SFF FIO Enablement Kit 875176-B21

---

**Step 4: Choose additional options for Factory Integration from Core and Additional Options sections below:**

---

### Core Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU	E5Y43A
HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU	P8B31A

---

### Risers

**Notes:** This server ships with no riser installed by default. If you want to use any PCIe cards, one of the below risers must be selected.

HPE DL180 Gen10 CPU1 x8x8x8 PCIe Riser Kit	878484-B21
HPE DL180 Gen10 CPU1 FlexibleLOM Riser Kit	866941-B21
<b>Notes:</b> This riser is required to use FlexibleLOM adapters	
HPE DL180 Gen10 CPU1 x16/x8 PCIe Riser Kit	866939-B21
HPE DL180 Gen10 CPU2 x8/x8/x8 PCIe Riser Kit	866945-B21
HPE DL180 Gen10 CPU2 x16/x8 PCIe Riser and GPU Enablement Kit	866943-B21
<b>Notes:</b> Includes GPU cable kit	

---

### Cable Kits

HPE DL360 Gen9 Rear Serial Port and Enablement Kit	764646-B21
--	------------

---

### Cooling Options

HPE DL180 Gen10 Redundant Fan Kit	866947-B21
<b>Notes:</b> This kit contains one additional fan.	

---

### Optical Drive Options

HPE 9.5mm SATA DVD-ROM Optical Drive	726536-B21
<b>Notes:</b> The ODD Enablement kit (866951-B21) is required for this option on a SFF model.	
HPE 9.5mm SATA DVD-RW Optical Drive	726537-B21
<b>Notes:</b> The ODD Enablement kit (866951-B21) is required for this option on a SFF model.	
HPE DL180 Gen10 SFF Optical Drive Enablement Kit	866951-B21
<b>Notes:</b> Cannot be selected with 24SFF configuration	
HPE Mobile USB DVD-RW Optical Drive	701498-B21
<b>Notes:</b> This option is only supported on USB 3.0 ports.	

---

### Security

## Core Options

HPE Gen10 Chassis Intrusion Detection Kit	867824-B21
HPE Bezel Lock Kit	875519-B21
HPE Gen10 2U Bezel Kit	867809-B21
HPE Trusted Platform Module 2.0 Gen10 Option	864279-B21

---

## Field Upgrade Kits

HPE DL180 Gen10 8 to 16SFF Upgrade Kit	866957-B21
<b>Notes:</b> Includes cables needed to connect to S100i or Smart Array controller	
HPE DL180 Gen10 16 to 24SFF Upgrade Kit	875144-B21
<b>Notes:</b> Includes cables needed to connect to S100i or Smart Array controller	
HPE DL180 Gen10 8 to 12LFF Upgrade Kit	866963-B21
<b>Notes:</b> Includes cables needed to connect to S100i or Smart Array controller	
HPE DL180 Gen10 Rear 2SFF Enablement Kit	866961-B21
<b>Notes:</b> Includes cables needed to connect to S100i, Smart Array controller, or expander.	
HPE DL180 Gen10 SFF Optical Drive Enablement Kit	866951-B21

---

## Cable Field Upgrade Kits

HPE DL180 Gen10 SFF Box3 to Smart Array E208i-a/P408i-a Cable Kit	882011-B21
<b>Notes:</b> Includes cables to connect 8 SFF drive bays to Flexible Smart Array controller (P408i-a/E208i-a)	
HPE DL180 Gen10 LFF to Smart Array E208i-a/P408i-a Cable Kit	882015-B21
<b>Notes:</b> Includes cables to connect 8 LFF drive bays to Flexible Smart Array controller (P408i-a/E208i-a)	

---

## HPE Processors

Please select one -L21 processor required above.

For second processor, please select the same processor model with -B21 from Core Options - HPE Processors section below.

For example: first processor, select P11161-L21 then for second processor, select P11161-B21.

### Notes:

- Field upgrades from 1<sup>st</sup> generation processors (x1xx) to 2<sup>nd</sup> generation processors (x2xx) not supported.
- Mixing of 2 different processor models is not supported.
- For first processor, -L21 will include 3 fans, For second processor, -B21 will add 2 additional fans
- When 2<sup>nd</sup> Generation Intel Xeon Scalable Processor is selected, then only DDR4-2933 Memory Kit can be selected; When 1<sup>st</sup> Generation Intel Xeon Scalable Processor is selected, then only DDR4-2666 Memory Kit can be selected.

### 2<sup>nd</sup> Generation Intel Xeon- Platinum

## Core Options

Intel Xeon-Platinum 8256 (3.8GHz/4-core/105W) Processor Kit for HPE ProLiant DL180 Gen10.	P12007-B21
Intel Xeon-Platinum 8253 (2.2GHz/16-core/125W) Processor Kit for HPE ProLiant DL180 Gen10.	P12006-B21
<b>2<sup>nd</sup> Generation Intel Xeon-Gold</b>	
Intel Xeon-Gold 6252 (2.1GHz/24-core/150W) Processor Kit for HPE ProLiant DL180 Gen10.	P11161-B21
Intel Xeon-Gold 6248 (2.5GHz/20-core/150W) Processor Kit for HPE ProLiant DL180 Gen10.	P11160-B21
Intel Xeon-Gold 6244 (3.6GHz/8-core/150W) Processor Kit for HPE ProLiant DL180 Gen10	P11159-B21
Intel Xeon-Gold 6242 (2.8GHz/16-core/150W) Processor Kit for HPE ProLiant DL180 Gen10	P11158-B21
Intel Xeon-Gold 6240 (2.6GHz/18-core/150W) Processor Kit for HPE ProLiant DL180 Gen10.	P11157-B21
Intel Xeon-Gold 6238 (2.1GHz/22-core/140W) Processor Kit for HPE ProLiant DL180 Gen10	P11167-B21
Intel Xeon-Gold 6234 (3.3GHz/8-core/130W) Processor Kit for HPE ProLiant DL180 Gen10.	P11166-B21
Intel Xeon-Gold 6230R (2.1GHz/26-core/150W) Processor Kit for HPE ProLiant DL180 Gen10	P24214-B21
Intel Xeon-Gold 6230 (2.1GHz/20-core/125W) Processor Kit for HPE ProLiant DL180 Gen10	P11156-B21
Intel Xeon-Gold 6226R (2.9GHz/16-core/150W) Processor Kit for HPE ProLiant DL180 Gen10	P21201-B21
Intel Xeon-Gold 6226 (2.7GHz/12-core/125W) Processor Kit for HPE ProLiant DL180 Gen10.	P11165-B21
Intel Xeon-Gold 5222 (3.8GHz/4-core/105W) Processor Kit for HPE ProLiant DL180 Gen10.	P11164-B21
Intel Xeon-Gold 5220R (2.2GHz/24-core/150W) Processor Kit for HPE ProLiant DL180 Gen10	P21202-B21
Intel Xeon-Gold 5220 (2.2GHz/18-core/125W) Processor Kit for HPE ProLiant DL180 Gen10.	P11155-B21
Intel Xeon-Gold 5218R (2.1GHz/20-core/125W) Processor Kit for HPE ProLiant DL180 Gen10	P24213-B21
Intel Xeon-Gold 5218 (2.3GHz/16-core/125W) Processor Kit for HPE ProLiant DL180 Gen10.	P11154-B21
Intel Xeon-Gold 5217 (3.0GHz/8-core/115W) Processor Kit for HPE ProLiant DL180 Gen10.	P11153-B21
Intel Xeon-Gold 5215 (2.5GHz/10-core/85W) Processor Kit for HPE ProLiant DL180 Gen10.	P11152-B21
<b>1<sup>st</sup> Generation Intel Xeon-Gold</b>	
Intel Xeon-Gold 6152 (2.1GHz/22-core/140W) Processor Kit for HPE ProLiant DL180 Gen10.	879749-B21
Intel Xeon-Gold 6148 (2.4GHz/20-core/150W) Processor Kit for HPE ProLiant DL180 Gen10.	879748-B21
Intel Xeon-Gold 6142 (2.6GHz/16-core/150W) Processor Kit for HPE ProLiant DL180 Gen10.	879747-B21
Intel Xeon-Gold 6140 (2.3GHz/18-core/140W) Processor Kit for HPE ProLiant DL180 Gen10.	879746-B21
Intel Xeon-Gold 6138 (2.0GHz/20-core/125W) Processor Kit for HPE ProLiant DL180 Gen10.	879745-B21
Intel Xeon-Gold 6136 (3.0GHz/12-core/150W) Processor Kit for HPE ProLiant DL180 Gen10.	879744-B21
Intel Xeon-Gold 6134 (3.2GHz/8-core/130W) Processor Kit for HPE ProLiant DL180 Gen10.	879743-B21
Intel Xeon-Gold 6132 (2.6GHz/14-core/140W) Processor Kit for HPE ProLiant DL180 Gen10.	879742-B21
Intel Xeon-Gold 6130 (2.1GHz/16-core/125W) Processor Kit for HPE ProLiant DL180 Gen10.	879741-B21
Intel Xeon-Gold 6128 (3.4GHz/6-core/115W) Processor Kit for HPE ProLiant DL180 Gen10.	879740-B21
Intel Xeon-Gold 6126 (2.6GHz/12-core/125W) Processor Kit for HPE ProLiant DL180 Gen10.	879739-B21
Intel Xeon-Gold 5122 (3.6GHz/4-core/105W) Processor Kit for HPE ProLiant DL180 Gen10.	879738-B21
Intel Xeon-Gold 5120 (2.2GHz/14-core/105W) Processor Kit for HPE ProLiant DL180 Gen10.	879737-B21
Intel Xeon-Gold 5118 (2.3GHz/12-core/105W) Processor Kit for HPE ProLiant DL180 Gen10.	879736-B21
Intel Xeon-Gold 5115 (2.4GHz/10-core/85W) Processor Kit for HPE ProLiant DL180 Gen10.	879735-B21
<b>2<sup>nd</sup> Generation Intel Xeon- Silver</b>	
Intel Xeon-Silver 4216 (2.1GHz/16-core/100W) Processor Kit for HPE ProLiant DL180 Gen10.	P11151-B21
Intel Xeon-Silver 4215R (3.2GHz/8-core/130W) Processor Kit for HPE ProLiant DL180 Gen10	P24215-B21
Intel Xeon-Silver 4215 (2.5GHz/8-core/85W) Processor Kit for HPE ProLiant DL180 Gen10	P11150-B21
Intel Xeon-Silver 4214R (2.4GHz/12-core/100W) Processor Kit for HPE ProLiant DL180 Gen10	P21199-B21
Intel Xeon-Silver 4214 (2.2GHz/12-core/85W) Processor Kit for HPE ProLiant DL180 Gen10.	P11149-B21
Intel Xeon-Silver 4210R (2.4GHz/10-core/100W) Processor Kit for HPE ProLiant DL180 Gen10	P21198-B21

### Core Options

Intel Xeon-Silver 4210 (2.2GHz/10-core/85W) Processor Kit for HPE ProLiant DL180 Gen10.	P11148-B21
Intel Xeon-Silver 4208 (2.1GHz/8-core/85W) Processor Kit for HPE ProLiant DL180 Gen10	P11147-B21
<b>1<sup>st</sup> Generation Intel Xeon-Silver</b>	
Intel Xeon-Silver 4116 (2.1GHz/12-core/85W) Processor Kit for HPE ProLiant DL180 Gen10.	879734-B21
Intel Xeon-Silver 4114 (2.2GHz/10-core/85W) Processor Kit for HPE ProLiant DL180 Gen10.	879733-B21
Intel Xeon-Silver 4112 (2.6GHz/4-core/85W) Processor Kit for HPE ProLiant DL180 Gen10.	879732-B21
Intel Xeon-Silver 4110 (2.1GHz/8-core/85W) Processor Kit for HPE ProLiant DL180 Gen10	879731-B21
Intel Xeon-Silver 4108 (1.8GHz/8-core/85W) Processor Kit for HPE ProLiant DL180 Gen10	879730-B21
<b>2<sup>nd</sup> Generation Intel Xeon- Bronze</b>	
Intel Xeon-Bronze 3206R (1.9GHz/8-core/85W) Processor Kit for HPE ProLiant DL180 Gen10	P21196-B21
Intel Xeon-Bronze 3204 (1.9GHz/6-core/85W) Processor Kit for HPE ProLiant DL180 Gen10.	P11146-B21
<b>1<sup>st</sup> Generation Intel Xeon- Bronze</b>	
Intel Xeon-Bronze 3106 (1.7GHz/8-core/85W) Processor Kit for HPE ProLiant DL180 Gen10	879729-B21
Intel Xeon-Bronze 3104 (1.7GHz/6-core/85W) Processor Kit for HPE ProLiant DL180 Gen10	879728-B21

### HPE Memory

For new Gen10 memory population rule whitepaper and optimal memory performance guidelines, please go to:

<https://www.hpe.com/docs/memory-population-rules>

For Gen10 memory speed table, please go to: <https://www.hpe.com/docs/memory-speed-table>

For memory Reliability, Accessibility, Serviceability (RAS) features whitepaper like Gen10 Fast Fault Tolerance and legacy mirrored memory feature etc. please go to: <http://www.hpe.com/docs/memory-ras-feature>

#### Notes:

- Maximum memory capacity and speed per processor is dependent on processor model selection or limitation.
- DDR4-2933 Memory Kits are only supported with 2nd Generation Intel Xeon Scalable Series Processors and DDR4-2666 Memory Kits are only supported with 1st Generation Intel Xeon Scalable Series Processors.

### HPE DDR4 Memory

#### Registered DIMMs (RDIMMs) for 2<sup>nd</sup> Generation Intel Xeon Scalable Series

HPE 64GB (1x64GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00930-B21
HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00924-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00922-B21
HPE 16GB (1x16GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00920-B21
HPE 8GB (1x8GB) Single Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00918-B21

#### Registered DIMMs (RDIMMs) for 1<sup>st</sup> Generation Intel Xeon Scalable Series

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit	815100-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit	835955-B21


### Core Options

HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit	815098-B21
HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit	815097-B21
<b>Load Reduced DIMMs (LRDIMMs) for 2<sup>nd</sup> Generation Intel Xeon Scalable Series</b>	
HPE 64GB (1x64GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit	P00926-B21
<b>Load Reduced DIMMs (LRDIMMs) for 1<sup>st</sup> Generation Intel Xeon Scalable Series</b>	
HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit	815101-B21

**Notes:** The maximum memory speed is a function of the memory type, memory configuration, and processor model.

### HPE Smart Array Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#).

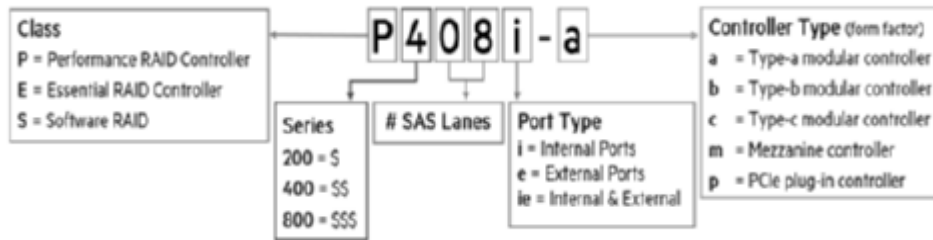

#### Essential RAID Controllers

**Notes:** E208i-p and E208e-p PCIe plug-in controllers use a PCIe slot.

HPE Smart Array E208i-p SR Gen10 (8 Internal Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804394-B21
HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804398-B21
HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular Controller	804326-B21

**Notes:** 'SFF Box3 to Smart Array E208i-a/P408i-a Cable Kit' (882011-B21) is required for the installation of the controllers E208i-a or P408i-a

#### Performance RAID Controller

HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular Controller	804331-B21
HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller	804405-B21
HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller	830824-B21

**Notes:** 'SFF Box3 to Smart Array E208i-a/P408i-a Cable Kit' (882011-B21) is required for the installation of the controllers E208i-a or P408i-a



## Core Options

**SAS Expander**

HPE DL180 Gen10 12Gb SFF SAS Expander Card FIO Kit with Cables	875132-B21
--	------------

**Notes:**

- Connects more than 8 drives to a single controller
  - This option comes with the necessary cables to connect to the corresponding controller and to the drive backplane
  - This option can only be used in Slot 1 on 8SFF CTO model (879517-B21)
- 

**HPE Cable Options**

HPE Smart Storage Hybrid Capacitor with 145mm Cable Kit	P02377-B21
---	------------

**Notes:** Supports up to 3 P-class Smart Array controllers

HPE 96W Smart Storage Lithium-ion Battery with 145mm Cable Kit	P01366-B21
--	------------

**Notes:** Supports up to 6 P-class Smart Array controllers

HPE DL180 Gen10 SFF Box3 to Smart Array E208i-a/P408i-a Cable Kit	882011-B21
---	------------

**Graphics Cable Kits**

HPE DL180 Gen10 CPU2 GPU Power Cable Kit	875141-B21
--	------------

---

**Optional Software**

HPE Smart Array SR Secure Encryption (Data at Rest Encryption/per Server Entitlement) E-LTU	Q2F26AAE
---	----------

HPE Smart Array SR SmartCache (Single Key/Single Server) LTU	D7S26A
--	--------

HPE Smart Array SR SmartCache (Single Key/Multiple Servers) LTU	D7S27A
---	--------

HPE Smart Array SR SmartCache (Single Key/Multiple Servers) E-LTU	D7S27AAE
---	----------

**Notes:** Smart Cache is offered on HPE Smart Array performance RAID controllers

---

**HPE Drives****Enterprise - 12G SAS - SFF Drives**

HPE 2.4TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	881457-B21
--	------------

HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	872481-B21
--	------------

HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872479-B21
---	------------

HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872477-B21
---	------------

HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872475-B21
---	------------

HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870759-B21
---	------------

HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870757-B21
---	------------

HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870753-B21
---	------------

**Midline - 12G SAS- SFF Drives**

HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765466-B21
--	------------

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD	832514-B21
---	------------

**Midline - 12G SAS - LFF Drives**



### Core Options

HPE 12TB SAS 12G Midline 7.2K LFF (3.5in) LP 1yr Wty Helium 512e Digitally Signed Firmware HDD	881781-B21
HPE 8TB SAS 12G Midline 7.2K LFF (3.5in) LP 1yr Wty 512e Digitally Signed Firmware HDD	834031-B21
HPE 6TB SAS 12G Midline 7.2K LFF (3.5in) LP 1yr Wty 512e HDD	861746-B21
HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) LP 1yr Wty Digitally Signed Firmware HDD	833928-B21
HPE 2TB SAS 12G Midline 7.2K LFF (3.5in) LP 1yr Wty Digitally Signed Firmware HDD	833926-B21
<b>Midline - 6G SATA- SFF Drives</b>	
HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	765455-B21
HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD	655710-B21

### Midline - 6G SATA - LFF Drives

HPE 12TB SATA 6G Midline 7.2K LFF (3.5in) LP 1yr Wty Helium 512e Digitally Signed Firmware HDD	881787-B21
HPE 8TB SATA 6G Midline 7.2K LFF (3.5in) LP 1yr Wty 512e Digitally Signed Firmware HDD	834028-B21
HPE 6TB SATA 6G Midline 7.2K LFF (3.5in) LP 1yr Wty 512e HDD	861742-B21
HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) LP 1yr Wty Digitally Signed Firmware HDD	861683-B21
HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) LP 1yr Wty Digitally Signed Firmware HDD	861681-B21
HPE 1TB SATA 6G Midline 7.2K LFF (3.5in) LP 1yr Wty Digitally Signed Firmware HDD	861686-B21

### SSD Selection

For SSD selection guidance, please visit <https://ssd.hpe.com/>

#### Read Intensive - 12G SAS - SFF - Solid State Drives

HPE 3.84TB SAS 12G Read Intensive SFF SC SS540 SSD	P21143-B21
HPE 3.84TB SAS 12G Read Intensive SFF SC Value SAS RM5 SSD	P10444-B21
HPE 1.92TB SAS 12G Read Intensive SFF SC SS540 SSD	P21141-B21
HPE 1.92TB SAS 12G Read Intensive SFF SC PM1643a SSD	P19905-B21
HPE 1.92TB SAS 12G Read Intensive SFF SC PM5 SSD	P04519-B21
HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P06586-B21
HPE 1.92TB SAS 12G Read Intensive SFF SC Value SAS RM5 SSD	P10442-B21
HPE 960GB SAS 12G Read Intensive SFF SC SS540 SSD	P21139-B21
HPE 960GB SAS 12G Read Intensive SFF SC PM1643a SSD	P19903-B21
HPE 960GB SAS 12G Read Intensive SFF SC PM5 SSD	P04517-B21
HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P06584-B21
HPE 960GB SAS 12G Read Intensive SFF SC Value SAS RM5 SSD	P10440-B21

#### Mixed Use - 12G SAS - SFF - Solid State Drives

HPE 3.84TB SAS 12G Mixed Use SFF SC Value SAS RM5 SSD	P10460-B21
HPE 3.2TB SAS 12G Mixed Use SFF SC SS540 SSD	P21135-B21
HPE 1.92TB SAS 12G Mixed Use SFF SC Value SAS RM5 SSD	P10454-B21
HPE 1.6TB SAS 12G Mixed Use SFF SC SS540 SSD	P21133-B21
HPE 1.6TB SAS 12G Mixed Use SFF SC PM1645a SSD	P19915-B21
HPE 960GB SAS 12G Mixed Use SFF SC Value SAS RM5 SSD	P10448-B21
HPE 800GB SAS 12G Mixed Use SFF SC SS540 SSD	P21131-B21
HPE 800GB SAS 12G Mixed Use SFF SC PM1645a SSD	P19913-B21
HPE 800GB SAS 12G Mixed Use SFF SC PM5 SSD	P04527-B21

## Core Options

HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P04525-B21
<b>Write Intensive - 12G SAS - SFF - Solid State Drives</b>	
HPE 1.6TB SAS 12G Write Intensive SFF SC SS540 SSD	P21129-B21
HPE 800GB SAS 12G Write Intensive SFF SC SS540 SSD	P21127-B21
HPE 800GB SAS 12G Write Intensive SFF SC PM5 SSD	P04543-B21
HPE 400GB SAS 12G Write Intensive SFF SC SS540 SSD	P21125-B21
HPE 400GB SAS 12G Write Intensive SFF SC PM5 SSD	P04541-B21
<b>Mixed Use - 12G SAS - LFF - Solid State Drives</b>	
HPE 3.84TB SAS 12G Mixed Use LFF LPC Value SAS RM5 SSD	P10462-B21
HPE 1.92TB SAS 12G Mixed Use LFF LPC Value SAS RM5 SSD	P10458-B21
HPE 1.6TB SAS 12G Mixed Use LFF LPC PM5 SSD	P04535-B21
HPE 960GB SAS 12G Mixed Use LFF LPC Value SAS RM5 SSD	P10452-B21
HPE 800GB SAS 12G Mixed Use LFF LPC PM5 SSD	P04531-B21
<b>Read Intensive - SATA - SFF - Solid State Drives</b>	
HPE 7.68TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor	P18430-B21
HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18428-B21
HPE 3.84TB SATA 6G Read Intensive SFF SC 5300P SSD	P19943-B21
HPE 3.84TB SATA 6G Read Intensive SFF SC S4510 SSD	P05946-B21
HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18426-B21
HPE 1.92TB SATA 6G Read Intensive SFF SC 5300P SSD	P19941-B21
HPE 1.92TB SATA 6G Read Intensive SFF SC S4510 SSD	P05938-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18424-B21
HPE 960GB SATA 6G Read Intensive SFF SC 5300P SSD	P19939-B21
HPE 960GB SATA 6G Read Intensive SFF SC S4510 SSD	P05932-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18422-B21
HPE 480GB SATA 6G Read Intensive SFF SC 5300P SSD	P19937-B21
HPE 480GB SATA 6G Read Intensive SFF SC S4510 SSD	P05928-B21
HPE 480GB SATA 6G Read Intensive SFF SC PM883 SSD	P04560-B21
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18420-B21
HPE 240GB SATA 6G Read Intensive SFF SC 5300P SSD	P19935-B21
HPE 240GB SATA 6G Read Intensive SFF SC S4510 SSD	P05924-B21
<b>Very Read Optimized- SATA - SFF - Solid State Drives</b>	
HPE 3.84TB SATA 6G Very Read Optimized SFF SC 5210 SSD	P23489-B21
HPE 1.92TB SATA 6G Very Read Optimized SFF SC 5210 SSD	P23487-B21
<b>Mixed Use - SATA - SFF - Solid State Drives</b>	
HPE 3.84TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18438-B21
HPE 3.84TB SATA 6G Mixed Use SFF SC 5300M SSD	P19953-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18436-B21
HPE 1.92TB SATA 6G Mixed Use SFF SC 5300M SSD	P19951-B21
HPE 1.92TB SATA 6G Mixed Use SFF SC SM883 SSD	P09722-B21
HPE 1.92TB SATA 6G Mixed Use SFF SC S4610 SSD	P05986-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P07930-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18434-B21
HPE 960GB SATA 6G Mixed Use SFF SC 5300M SSD	P19949-B21
HPE 960GB SATA 6G Mixed Use SFF SC SM883 SSD	P09716-B21

## Core Options

HPE 960GB SATA 6G Mixed Use SFF SC S4610 SSD	P05980-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18432-B21
HPE 480GB SATA 6G Mixed Use SFF SC 5300M SSD	P19947-B21
HPE 480GB SATA 6G Mixed Use SFF SC SM883 SSD	P09712-B21
HPE 480GB SATA 6G Mixed Use SFF SC S4610 SSD	P05976-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P07922-B21

**Read Intensive - SATA - LFF - Solid State Drives**

HPE 1.92TB SATA 6G Read Intensive LFF LPC 5300P SSD	P19976-B21
HPE 960GB SATA 6G Read Intensive LFF LPC PM883 SSD	P09691-B21
HPE 480GB SATA 6G Read Intensive LFF LPC 5300P SSD	P19974-B21

**Very Read Optimized- SATA - LFF - Solid State Drives**

HPE 7.68TB SATA 6G Very Read Optimized LFF LPC 5210 SSD	P23495-B21
HPE 3.84TB SATA 6G Very Read Optimized LFF LPC 5210 SSD	P23491-B21

**Mixed Use - SATA - LFF - Solid State Drives**

HPE 1.92TB SATA 6G Mixed Use LFF LPC SM883 SSD	P09726-B21
HPE 1.92TB SATA 6G Mixed Use LFF LPC 5300M SSD	P19984-B21
HPE 960GB SATA 6G Mixed Use LFF LPC 5300M SSD	P19980-B21

**Internal Dual M.2 Kit**

HPE Universal SATA 6G AIC HHHH M.2 SSD Enablement Kit	878783-B21
---	------------

**Notes:** The Universal SATA M.2 Kit above will require a PCIe slot and support up to two of the same M.2 cards below.

**Read Intensive - M.2 - Solid State Drives (2280 type)**

HPE 960GB SATA 6G Read Intensive M.2 2280 5300P SSD	P19892-B21
HPE 480GB SATA 6G Read Intensive M.2 2280 5300P SSD	P19890-B21
HPE 240GB SATA 6G Read Intensive M.2 2280 5300B SSD	P19888-B21

**M.2 Cable Kit**

HPE DL160 Gen10 SATA M.2 Cable Kit	866456-B21
------------------------------------	------------

**Notes:** Must be selected along with "HPE Universal SATA HHHH 3yr Wty M.2 Kit- 878783-B21"

**Hard Drive Blank Kits**

HPE Small Form Factor Hard Drive Blank Kit	666987-B21
HPE Gen9 LFF HDD Spade Blank Kit	807878-B21

## HPE Networking

**25 Gigabit Ethernet adapters**

HPE Ethernet 10/25Gb 2-port SFP28 QL41401-A2G Adapter	867328-B21
HPE Ethernet 10/25Gb 2-port SFP28 BCM57414 Adapter	817718-B21
HPE Ethernet 10/25Gb 2-port SFP28 MCX4121A-ACUT Adapter	817753-B21

**10 Gigabit Ethernet adapters**

HPE Ethernet 10Gb 2-port BASE-T QL41401-A2G Adapter	867707-B21
---	------------

**Notes:** Max 1 per system

### Core Options

HPE Ethernet 10Gb 2-port BASE-T 57810S Adapter	656596-B21
HPE Ethernet 10Gb 2-port SFP+ 57810S Adapter	652503-B21
HPE Ethernet 10Gb 2-port BASE-T BCM57416 Adapter	813661-B21
HPE Ethernet 10Gb 2-port SFP+ X710-DA2 Adapter	727055-B21
HPE Ethernet 10Gb 2-port BASE-T X550-AT2 Adapter	817738-B21

#### 1 Gigabit Ethernet adapters

HPE Ethernet 1Gb 4-port BASE-T BCM5719 Adapter	647594-B21
HPE Ethernet 1Gb 4-port BASE-T I350-T4V2 Adapter	811546-B21

**Notes:** Max 1 per system. Can only be installed in Slot 1

HPE Ethernet 1Gb 2-port BASE-T I350-T2V2 Adapter	652497-B21
HPE Ethernet 1Gb 2-port BASE-T BCM5720 Adapter	615732-B21

#### FlexibleLOM adapters

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR-QSFP Adapter	764285-B21
HPE Ethernet 10/25Gb 2-port FLR-SFP28 MCX4121A-ACFT Adapter	817749-B21
HPE Ethernet 10/25Gb 2-port FLR-SFP28 BCM57414 Adapter	817709-B21
HPE Ethernet 10/25Gb 2-port FLR-SFP28 QL41401-A2G Converged Network Adapter	867334-B21
HPE Ethernet 10Gb 2-port FLR-SFP+ X710-DA2 Adapter	727054-B21
HPE Ethernet 10Gb 2-port FLR-T X550-AT2 Adapter	817745-B21
HPE FlexFabric 10Gb 4-port FLR-T 57840S Adapter	764302-B21
HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter	817721-B21
HPE FlexFabric 10Gb 2-port FLR-SFP+ 57810S Adapter	700751-B21
HPE FlexFabric 10Gb 2-port FLR-T 57810S Adapter	700759-B21
HPE Ethernet 1Gb 4-port FLR-T BCM5719 Adapter	629135-B22
HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 Adapter	665240-B21

#### Notes:

- The DL180 Gen10 ships with 2x 1 Gb Embedded Network controller.
- Only one FlexibleLOM can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped.
- FlexibleLOM Enablement Kit (866941-B21) is required to install these adapters
- Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/us/en/product-catalog/servers/adapters/pip.models.hpe-storefabric-converged-network-adapters.4118472.html>

#### Media Module adapters

HPE Ethernet 1Gb 2-port 368T Media Module Adapter	866464-B21
HPE Ethernet 10Gb 2-port 568SFP+ Media Module Adapter	866467-B21
HPE Ethernet 10Gb 2-port 568T Media Module Adapter	866470-B21

#### Notes:

- The DL180 Gen10 chassis ships with 2x 1 Gb embedded.
- Only one Media Module can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped
- These adapters should be installed in the Media Module connector slot on the system board only.
- Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.

#### HPE InfiniBand

### Core Options

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter	764284-B21
HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR-QSFP Adapter	764285-B21

---

### HPE Power Supplies

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

#### HPE Flex Slot Power Supplies

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865408-B21
HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit	865438-B21
HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit	865428-B21
HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865414-B21
HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit	865434-B21
HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	830272-B21
HPE DL160/180 Gen10 Redundant Power Supply Enablement Kit	866442-B21

**Notes:** [This enablement kit is required with the selection of a Flex Slot power supply](#)

---

### Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

#### Embedded Management

##### HPE iLO Advanced

HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features	E6U59ABE
HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features	512485-B21
HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features	512486-B21
HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features	512487-B21
HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features	E6U64ABE
HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features	BD505A
HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features	BD506A
HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features	BD507A

#### HPE iLO Common Password Setting

HPE iLO Common Password FIO Setting	P08040-B21
-------------------------------------	------------

##### Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services

##### HPE Converged Infrastructure Management Software

HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	

##### HPE OneView Advanced (without HPE iLO Advanced)

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE
HPE OneView Physical Media Kit LTU	E5Y37A

##### Notes:

- Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>
- Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.
- Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>

## Additional Options

## HPE Storage Options

## Emulex Fibre Channel HBAs

HPE SN1200E 16Gb Single Port Fibre Channel Host Bus Adapter	Q0L13A
HPE SN1200E 16Gb Dual Port Fibre Channel Host Bus Adapter	Q0L14A
HPE SN1600E 32Gb Single Port Fibre Channel Host Bus Adapter	Q0L11A
HPE SN1600E 32Gb Dual Port Fibre Channel Host Bus Adapter	Q0L12A

## QLogic Fibre Channel HBAs

HPE SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter	P9D93A
HPE SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter	P9D94A
HPE SN1600Q 32Gb Single Port Fibre Channel Host Bus Adapter	P9M75A
HPE SN1600Q 32Gb Dual Port Fibre Channel Host Bus Adapter	P9M76A

## Converged Network Adapters

HPE CN1100R Dual Port Converged Network Adapter	QW990A
HPE CN1100R 10GBASE-T Dual Port Converged Network Adapter	N3U52A
HPE CN1200E 10GBASE-T Dual Port Converged Network Adapter	N3U51A

---

## HPE Rack Options

## Rail Kits

HPE 2U Small Form Factor Easy Install Rail Kit	733660-B21
<b>Notes:</b> This (733660-B21) Rail kit can also be used for LFF chassis.	
HPE 2U Cable Management Arm for Easy Install Rail Kit	733664-B21

---

## HPE Racks

Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

---

## HPE Power Distribution Units (PDUs)

Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

---

### Additional Options

Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.

Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

---

### HPE Uninterruptible Power Systems (UPS)

To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.

Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

---

### HPE Rack Options

Please see the [HPE IT Access and Control](#) for information on these products and their specifications.

---

### HPE USB and SD Options


#### HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HPE 32GB microSD Flash Memory Card	700139-B21
HPE 32GB microSD RAID 1 USB Boot Drive	P21868-B21
HPE 8GB Dual microSD Flash USB Drive	741279-B21



### Memory

#### Memory Population guidelines

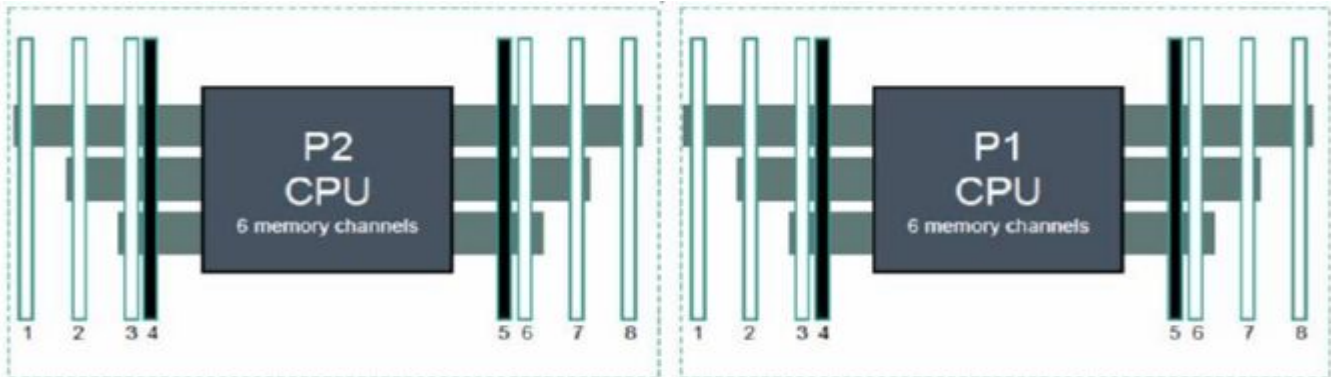

#### HPE DL160/DL180 Gen 10 Servers Front Server

(2+1+1 slots per channel)

1 DIMM			3					
2 DIMM s		2	3					
3 DIMM s	1	2	3					
4 DIMM s		2	3			6	7	
5 DIMM s*	1	2	3			6	7	
6 DIMM s	1	2	3			6	7	8
7 DIMM s*	1	2	3	4		6	7	8
8 DIMM s*	1	2	3	4	5	6	7	8

#### HPE ProLiant Gen10 8 slot per CPU DIMM population order

**Notes:**\*Unbalanced, not recommended

#### General Memory Population Rules and Guidelines:

- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.
- For details on the HPE Server Memory Options Population Rules, visit:
- <http://www.hpe.com/docs/memory-population-rules>
- To realize the performance memory capabilities listed in this document, HPE DDR4 SmartMemory is required. For additional information, please see the [HPE DDR4 SmartMemory QuickSpecs](#).


**Notes:** The maximum memory speed is a function of the memory type, memory configuration, and

## Memory

processor model

For details on the HPE Server Memory speed, visit: <https://www.hpe.com/docs/memory-speed-table>

## Storage

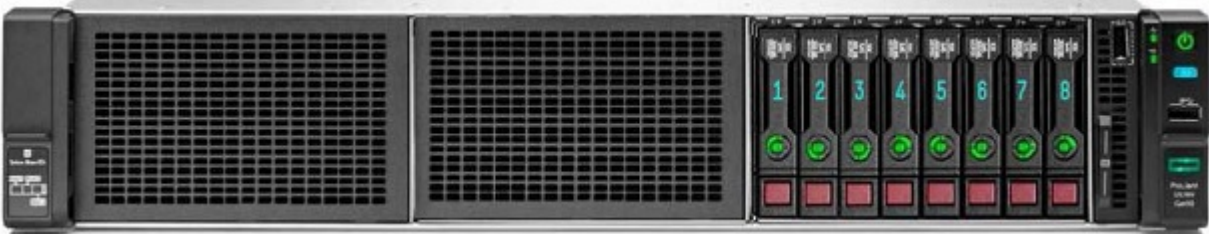

8 SFF Drives



8LFF Drives



12LFF Drives

### Technical Specifications

#### System Unit

##### Dimensions (Height X Width X Depth)

- 8.75 x 44.54 x 63.47 cm

3.44 x 17.54 x 24.99 in (Dimensions for 12LFF)

##### Weight (approximate)

- **Minimum**

8 SFF/LFF chassis with 1x SFF/LFF HDD and 7 HDD blanks, 2x Drive Bay blanks, 1x processor including standard heatsink, 1x power supply (plus blank), 1x Smart Array, 1x Riser installed, cables for the above)

– 13.0 kg--26.0 kg  
28.0lb--58.0 lb

---

#### Input Requirements(per power supply)

##### Rated Line Voltage

- 100 to 120 VAC
  - 200 to 240 VAC
- 

#### BTU Rating

- **Maximum**

For 500W Power Supply: 1979 BTU/hr (at 100 VAC), 1911 BTU/hr (at 200 VAC), 1965 BTU/hr (at 240 VAC) for China Only

---

#### Power Supply Output(per power supply)

- **Rated Steady-State Power**

For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VAC) input for China only

---

#### System Inlet Temperature

- **Standard Operating Temperature**

10° to 35°C (50° to 95°F)at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.

System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

---

### Technical Specifications

- **Extended Ambient Operating Temperature**

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:<http://www.hpe.com/servers/ashrae>

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:<http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

- **Non-operating**

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

---

### Relative Humidity

- **Operating**

8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.

- **Non-operating** (Non-condensing)

5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing..

---

### Altitude

- **Operating**

3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

- **Non-operating**

9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

---

### Acoustic Noise

Listed are the declared A-Weighted sound power levels ( $L_{WA(d)}$ ) and declared average bystander position A-Weighted sound pressure levels ( $L_{pAm}$ ) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

### Technical Specifications

Configuration SKU	Entry(LFF) / (SFF)	Base(LFF)/ SFF)	Performance(LFF)/ (SFF)
Idle			
L <sub>WAd</sub>	4.2 B	4.3 B	4.7 B
L <sub>pAm</sub>	26.6 dBA	27.0 dBA	28.5 dBA
Operating			
L <sub>WAd</sub>	5.2 B	5.4 B	5.7 B
L <sub>pAm</sub>	35.4 dBA	37.2 dBA	39.7 dBA

#### Notes:

- Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.
- Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.
- The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

### Emissions Classification (EMC) - Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

### HPE Smart Array

For information on the HPE Smart Array E208i-p SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array E208e-p SR Gen10 Controller please refer to their [QuickSpecs](#).

### Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

### Summary of Changes

Date	Version History	Action	Description of Change
08-Sep-2020	Version 16	Changed	Overview, Standard Features, Pre- Configured Models, Configuration Information, Core Options and Additional Options sections were updated.  Obsolete SKUs were removed.
01-Jun-2020	Version 15	Changed	Overview, Configuration Information, Core Options and Additional Options sections were updated.
06-Apr-2020	Version 14	Changed	Core Options section was updated.
16-Mar-2020	Version 13	Changed	Service and Support, Pre- Configured Models, Core Options and Additional Options sections were updated.
03-Feb-2020	Version 12	Changed	Overview, Standard Features, Configuration Information, Pre-Configured Models, Core Options, Additional Options and Memory sections were updated.
02-Dec-2019	Version 11	Changed	Configuration Information, Core Options, and Additional Options were updated.
18-Nov-2019	Version 10	Changed	Overview, Standard Features, Configuration Information, Core Options, and Additional Options were updated.
04-Nov-2019	Version 9	Changed	Standard Features and Additional Options section were updated.
07-Oct-2019	Version 8	Changed	Overview, Standard Features, Pre-configured Models, Core Options, Additional Options, Memory and Technical Specifications sections were updated.  Obsolete SKUs were removed.
12-Aug-2019	Version 7	Changed	Overview, Standard Features and Additional Options sections were updated.
30-Jul-2019	Version 6	Changed	Additional Options section was updated.
01-Jul-2019	Version 5	Changed	Overview, Standard Features, Service and Support, Configuration Information and Additional Options sections were updated.
03-Jun-2019	Version 4	Changed	Overview, Standard Features, Service and Support, Configuration Information, Additional Options, Memory, Storage and Technical Specifications sections were updated.
02-Apr-2019	Version 3	Changed	Standard Features and Additional Options sections were updated.
04-Mar-2019	Version 2	Changed	Internal View image has been updated
04-Feb-2019	Version 1	New	New QuickSpecs.

### Copyright

---

Make the right purchase decision. Contact our presales specialists.



Chat



Email



Call

---

© Copyright 2020 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel and Xeon are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft, Windows, and Windows Server are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less



a00021862enw - 16058 - Worldwide - V16 - 08-September-2020