

# J9821A Datasheet

Get a Quote

## Overview

The HPE Aruba 5400R Switch Series is a Layer 3 modular switch series that delivers high-performance, low latency and resiliency for a better mobile-first campus experience. J9821A is a HPE 5406R z12 Switch, including 1 HPE 5400R z12 Management Module (J9827A) and 1 HPE 5406R z12 Switch Fan Tray (J9831A).

### Quick Spec

Figure 1 shows the appearance of HPE J9821A with installed modules. These modules should be purchased separately.



Table 1 shows the quick spec.

<b>Product Number</b>	J9821A
<b>Type</b>	HPE 5406R z12 Switch
<b>Included accessories</b>	1 HPE 5400R z12 Management Module (J9827A) 1 HPE 5406R z12 Switch Fan Tray (J9831A)
<b>I/O ports and slots</b>	6 open module slots Supports a maximum of 144 autosensing 10/100/1000 ports or 144 SFP ports or 48 SFP+ ports or 48 HPE Smart Rate Multi-Gigabit or 12 40GbE ports, or a combination
<b>Power supplies</b>	2 power supply slots 1 minimum power supply required (ordered separately)
<b>Fan Tray</b>	Includes: 1 x J9831A 1 fan tray slot
<b>Dimensions (W x D x H)</b>	17.5(w) x 17.75(d) x 6.9(h) in. (44.45 x 45.09 x 17.53 cm) (4U height)
<b>Weight</b>	24.5 lb (11.11 kg)

### Product Details

Figure 2 shows the front view of HPE J9821A with installed modules. These modules should be purchased separately.


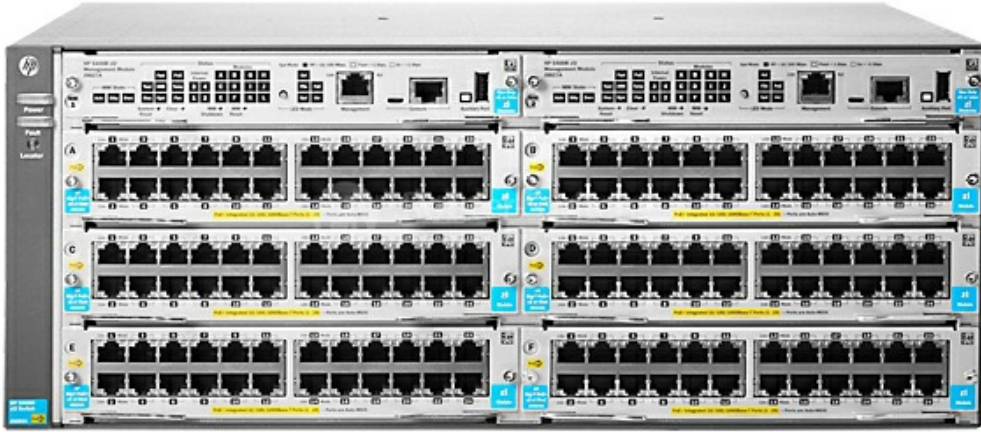


Figure 3 shows the back view of HPE J9821A with installed modules. These modules should be purchased separately.

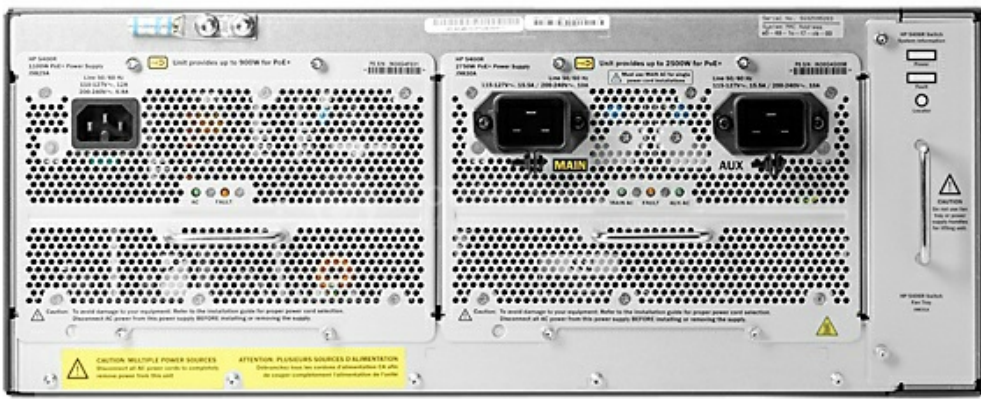

### Compare to Similar Items

Table 2 shows the comparison.

<b>Product Code</b>	J9821A	J9822A
<b>Type</b>	HPE 5406R z12 Switch	HPE 5412R z12 Switch
<b>Included accessories</b>	1 HPE 5400R z12 Management Module (J9827A) 1 HPE 5406R z12 Switch Fan Tray (J9831A)	1 HPE 5400R z12 Management Module (J9827A) 1 HPE 5412R z12 Switch Fan Tray (J9832A)
<b>I/O ports and slots</b>	6 open module slots Supports a maximum of 144 autosensing 10/100/1000 ports or 144 SFP ports or 48 SFP+ ports or 48 HPE Smart Rate Multi-Gigabit or 12 40GbE ports, or a combination	12 open module slots Supports a maximum of 288 autosensing 10/100/1000 ports or 288 SFP ports or 96 SFP+ ports or 96 HPE Smart Rate Multi-Gigabit or 24 40GbE ports, or a combination
<b>Power supplies</b>	2 power supply slots 1 minimum power supply required (ordered separately)	4 power supply slots 2 minimum power supplies required (ordered separately)
<b>Fan Tray</b>	Includes: 1 x J9831A 1 fan tray slot	Includes: 1 x J9832A 1 fan tray slot

### Get more information

Do you have any question about the J9821A?

Contact us now via [Live Chat](#) or [sales@router-switch.com](mailto:sales@router-switch.com).

## Specification

## J9821A Specification

<b>Type</b>	HPE 5406R zL2 Switch
<b>Included accessories</b>	1 HPE 5400R zL2 Management Module (J9827A) 1 HPE 5406R zL2 Switch Fan Tray (J9831A)
<b>I/O ports and slots</b>	6 open module slots Supports a maximum of 144 autosensing 10/100/1000 ports or 144 SFP ports or 48 SFP+ ports or 48 HPE Smart Rate Multi-Gigabit or 12 40GbE ports, or a combination
<b>Power supplies</b>	2 power supply slots 1 minimum power supply required (ordered separately)
<b>Fan Tray</b>	Includes: 1 x J9831A 1 fan tray slot
<b>Dimensions (W x D x H)</b>	17.5(w) x 17.75(d) x 6.9(h) in. (44.45 x 45.09 x 17.53 cm) (4U height)
<b>Weight</b>	24.5 lb (11.11 kg)
<b>Memory and processor</b>	
v3 Gigabit Module	Dual ARM® Coretex A9 @ 1 GHz; Packet buffer size: 13.5 MB internal
v2 Gigabit Module	ARM 11 @ 450 MHz; Packet buffer size: 18 MB internal
v3 10G Module	Dual ARM Coretex A9 @ 1 GHz; Packet buffer size: 13.5 MB internal
v2 10G Module	ARM 11 @ 550 MHz; Packet buffer size: 18 MB internal
v3 40G Module	Dual ARM Coretex A9 @ 1 GHz; Packet buffer size: 13.5 MB internal
Management Module	Freescale P2020 dual core @ 1.2 GHz, 16 MB flash, 1 GB SD Card, 4 GB DDR3 SODIMM
<b>Mounting and enclosure</b>	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware included); Horizontal surface mounting only
<b>Performance (IPv6 Ready Certified)</b>	
1000 Mb Latency	< 2.8 μs (FIFO 64-byte packets)
10 Gbps Latency	< 1.8 μs (FIFO 64-byte packets)
40 Gbps Latency	< 1.5 μs (FIFO 64-byte packets)
Throughput	Up to 571.4 Mpps
Routing/Switching capacity	960 Gbps
Switch fabric speed	1015 Gbps
Routing table size	10000 entries (IPv4), 5000 entries (IPv6)
MAC address table size	64000 entries
<b>Environment</b>	
Operating temperature	32°F to 113°F (0°C to 45°C); 0°C to 40°C with J8177C transceiver installed, 0°C to 35°C with FIPS Opacity Shield installed
Operating relative humidity	15% to 95% @ 113°F (45°C), noncondensing
Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)

Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
Altitude	Up to 10,000 ft (3 km)
Acoustic	Power: 44 dB, Pressure: 31.7 dB ISO 7779, ISO 9296
<b>Electrical characteristics</b>	
Frequency	50/60 Hz
80plus.org Certification	Gold
Description	Does not come with power supply. Two power supply slots are available; three different power supplies are available. See power supply products for additional specifications.
Maximum heat dissipation	2450 BTU/hr (2584 kJ/hr), (max. non-PoE); 3700 BTU/hr (3903 kJ/hr), (max. using PoE)
Voltage	100-127/200-240 VAC, rated
Idle power	(depending on power supply chosen)
Notes	Heat dissipation does not include heat dissipated by the PoE-powered devices themselves.
<b>Safety</b>	CSA 22.2 No. 60950; UL 60950; IEC 60950; EN 60950
<b>Emissions</b>	FCC part 15 Class A; EN 55022/CISPR 22 Class A
<b>Immunity</b> EN ESD Radiated EFT/Burst Surge Conducted Power frequency magnetic field Harmonics Flicker	EN 55024, CISPR 24 IEC 61000-4-2; 4 kV CD, 8 kV AD; HPE ENV. 765.002 IEC 61000-4-3; 3 V/m IEC 61000-4-4; 1.0 kV (power line), 0.5 kV (signal line) IEC 61000-4-5; 1 kV/2 kV AC, 1 kV signal, 0.5 kV DC IEC 61000-4-6; 3 Vrms IEC 61000-4-8; 1 A/m, 50 or 60 Hz IEC 61000-4-11; >95% reduction, 0.5 period; 30% reduction, 25 periods EN 61000-3-2, IEC 61000-3-2 EN 61000-3-3, IEC 61000-3-3
<b>Management</b>	IMC—Intelligent Management Center; Command-line interface; Web browser; Configuration menu; Out-of-band management (RJ-45 Ethernet); SNMP Manager; Out-of-band management (serial RS-232C or micro USB) AirWave Network Management
<b>Notes</b>	Supported 1G SFP transceivers are revision "B" or later (product number ends with the letter "B" or later; For example, J9142B, J8177C).

## Want to Buy

Order Now

Get a Quote

## Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

## Contact Us

---

- Tel: +1-626-239-8066 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: [sales@router-switch.com](mailto:sales@router-switch.com)