


Tripp Lite Single-Phase Power Distribution Units (PDUs)

Tripp Lite has the complete solution for IP Power Distribution, Monitoring and Management.

- ✓ RELIABLE POWER DISTRIBUTION FOR HIGH-DENSITY IT ENVIRONMENTS
- ✓ UP TO 40 OUTLETS OF POWER DISTRIBUTION FROM A UPS, OUTLET OR GENERATOR
- ✓ HORIZONTAL 1U AND VERTICAL 0U RACKMOUNT, WALL-MOUNT OR UNDER-COUNTER CONFIGURATIONS

Key Features and Benefits:

- **Metered** models display total power consumption of connected equipment, assuring maximum PDU utilization without risk of overload
- **Monitored** models support remote monitoring of load level and site conditions
- **Switched** models support individual outlet control and remote monitoring of load level and site conditions
- **Automatic Transfer Switching** feature allows operation from a secondary input source if the primary input fails
- **Hot-Swappable** models allow for UPS maintenance without interrupting power to connected equipment

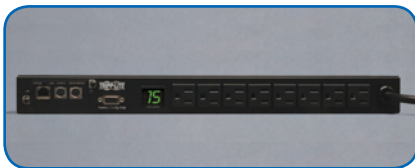

PDUMNH15



PDUMH30HVNET



PDU BH20

PDU FEATURES BY GROUPING

	Basic PDUs	Metered PDUs	Monitored PDUs	Switched PDUs
DISTRIBUTE POWER to multiple devices (multiple outlets)	✓	✓	✓	✓
LOCALLY VIEW PDU load (amps) (digital load meter)		✓	✓	✓
REMOTELY VIEW PDU load (amps) & alarm conditions (network interface / software)			✓	✓
REMOTELY CONTROL individual outlets (network interface / software / switchable outlets)				✓

See Reverse for Individual Product Specifications.



www.tripplite.com

PDUMV20HV

PDU Specifications

Model Number	Input Voltage				Capacity		Input Plug	Input Cord Length	Outlet #1		Outlet #2		Form Factor ^(F)	Toolless Mounting
	120	208	240	230	Peak	Continuous			Qty.	Type	Qty.	Type		
BASIC PDUs														
PDU1215	X				15A	15A	5-15P	15 ft.	13	5-15R	-	-	1U	
PDU1220	X				20A	20A	5-20P	15 ft.	13	5-15/20R ^(E)	-	-	1U	
PDU1220T	X				20A	20A	L5-20P	15 ft.	13	5-15/20R ^(E)	-	-	1U	
PDU1230		X	X		30A ^(A)	24A	L6-30P	15 ft.	2	C19	16	C13	1U	
PDU12IEC	X	X	X	X	16A	16A	C20 inlet ^(C)	User-Supplied	2	C19	12	C13	1U	
PDU2430	X				30A ^(A)	24A	L5-30P	15 ft.	24	5-15R	-	-	1U	
PDUH20DV	X	X	X	X	20A ^(A)	16A	C20 inlet	12 ft.	2	C19	12	C13	1U	
PDUH20HVL6		X	X		20A ^(A)	16A	L6-20P	15 ft.	2	C19	12	C13	1U	
PDUNV	X	X	X	X	16A	16A	C20, 5-15P, 5-20P ^(C,D) , L5-20P, L6-20P, C14	10 ft.	2	C19	12	C13	1U	
PDUV15	X				15A	15A	5-15P	15 ft.	12	5-15R	-	-	0U	✓
PDU1415	X				15A	15A	5-15P	15 ft.	14	5-15R	-	-	0U	✓
PDU1420T	X				20A	20A	L5-20P	15 ft.	14	5-15/20R ^(E)	-	-	0U	✓
PDUV20	X				20A	20A	5-20P	15 ft.	12	5-15R	-	-	0U	✓
PDUV30HV		X	X		30A ^(A)	24A	L6-30P	10 ft.	6	C19	32	C13	0U	✓
PDU40TDUAL	X				40A	40A (2x20)	L5-20P, 5-20P (x2) ^(B)	2 x 10 ft.	40	5-15/20R ^(E)	-	-	0U	✓
METERED PDUs														
PDUMH15	X				15A	15A	5-15P	15 ft.	13	5-15R	-	-	1U	
PDUMH20	X				20A	20A	L5-20P, 5-20P ^(B)	15 ft.	12	5-15/20R ^(E)	-	-	1U	
PDUMH30	X				30A ^(A)	24A	L5-30P	15 ft.	16	5-15/20R ^(E)	-	-	1U	
PDUMH20HV		X	X	X	20A ^(A)	16A	C20 inlet, L6-20P	12 ft.	2	C19	8	C13	1U	
PDUMH30HV		X	X		30A ^(A)	24A	L6-30P	12 ft.	2	C19	8	C13	2U	
PDUMH32HV				X	32A	32A	IEC309 32A (2P+E)	12 ft.	2	C19	16	C13	2U	
PDUMV15	X				15A	15A	5-15P	15 ft.	16	5-15R	-	-	0U	✓
PDUMV20	X				20A	20A	L5-20P, 5-20P ^(B)	15 ft.	20	5-15/20R ^(E)	-	-	0U	✓
PDUMV20HV		X	X	X	20A ^(A)	16A	C20 inlet, L6-20P ^(C)	10 ft.	6	C19	32	C13	0U	✓
PDUMV30	X				30A ^(A)	24A	L5-30P	10 ft.	24	5-15/20R ^(E)	-	-	0U	✓
PDUMV30HV		X	X		30A ^(A)	24A	L6-30P	10 ft.	6	C19	24	C13	0U	✓
PDUMV40	X				40A	40A (2x20)	L5-20P, 5-20P (x2) ^(B)	2 x 10 ft.	32	5-15/20R ^(E)	-	-	0U	✓
MONITORED PDUs														
PDUMNH15	X				15A ^(A)	12A	5-15P	12 ft.	16	5-15R	-	-	1U	
PDUMNH20	X				20A ^(A)	16A	L5-20P, 5-20P ^(B)	12 ft.	16	5-15/20R ^(E)	-	-	1U	
PDUMNH20HV		X	X	X	20A ^(A)	16A	C20, L6-20P	8.5 ft.	8	C13	-	-	1U	
PDUMNH30	X				30A ^(A)	24A	L5-30P	10 ft.	16	5-15/20R ^(E)	-	-	2U	
PDUMNH30HV		X	X		30A ^(A)	24A	L6-30P	12 ft.	12	C13	4	C19	2U	
PDUMNH32HV				X	32A	32A	IEC309 32A (2P+E)	12 ft.	4	C19	12	C13	2U	
PDUMNV15	X				15A ^(A)	12A	5-15P	10 ft.	16	5-15R	-	-	0U	✓
PDUMNV20	X				20A ^(A)	16A	L5-20P, 5-20P ^(B)	10 ft.	24	5-15/20R ^(E)	-	-	0U	✓
PDUMNV20HV		X	X	X	20A ^(A)	16A	C20, L6-20P ^(C)	10 ft.	20	C13	4	C19	0U	✓
PDUMNV30	X				30A ^(A)	24A	L5-30P	10 ft.	24	5-15/20R ^(E)	-	-	0U	✓
PDUMNV30HV		X	X		30A ^(A)	24A	L6-30P	10 ft.	20	C13	4	C19	0U	✓
SWITCHED PDUs														
PDUMH15NET	X				15A ^(A)	12A	5-15P	12 ft.	16	C13	-	-	1U	
PDUMH20NET	X				20A ^(A)	16A	L5-20P, 5-20P	12 ft.	16	5-15/20R ^(E)	-	-	1U	
PDUMH30NET	X				30A ^(A)	24A	L5-30P	10 ft.	16	5-15/20R ^(E)	-	-	2U	
PDUMH15HVNET		X	X	X	15A ^(A)	12A	C14 inlet ^(C)	6.5 ft.	8	C13	-	-	1U	
PDUMH20HVNET		X	X	X	20A ^(A)	16A	C20 inlet ^(C)	8.5 ft.	8	C13	-	-	1U	
PDUMH30HV19NET		X	X		30A ^(A)	24A	L6-30P	10 ft.	8	C13	6	C19	2U	
PDUMH30HVNET		X	X		30A ^(A)	24A	L6-30P	10 ft.	16	C13	-	-	2U	
PDUMH32HVNET				X	32A	32A	IEC309 32A (2P+E)	12 ft.	2	C19	16	C13	2U	
PDUMV15NET	X				15A ^(A)	12A	5-15P	10 ft.	16	5-15/20R ^(E)	-	-	0U	✓
PDUMV20NET	X				20A ^(A)	16A	L5-20P, 5-20P ^(B)	10 ft.	24	5-15/20R ^(E)	-	-	0U	✓
PDUMV30NET	X				30A ^(A)	24A	L5-30P	10 ft.	24	5-15/20R ^(E)	-	-	0U	✓
PDUMV20HVNET		X	X	X	20A ^(A)	16A	C20, L6-20P ^(C)	10 ft.	4	C19	20	C13	0U	✓
PDUMV30HVNET		X	X		30A ^(A)	24A	L6-30P	10 ft.	4	C19	20	C13	0U	✓
PDUMV32HVNET				X	30A ^(A)	24A	IEC309 32A (2P+E)	10 ft.	4	C19	20	C13	0U	✓
METERED PDUs WITH AUTO TRANSFER SWITCHING														
PDUMH15AT	X				15A	15A	5-15P (x2)	2 x 12 ft.	8	5-15R	-	-	1U	
PDUMH20AT	X				20A	20A	L5-20P, 5-20P (x2) ^(B)	2 x 12 ft.	16	5-15/20R ^(E)	-	-	1U	
PDUMH30AT	X				30A ^(A)	24A	L5-30P (x2)	10 ft.	1	L5-30R	24	5-15/20R ^(F)	2U	
PDUMH20HVAT		X	X	X	20A ^(A)	16A	C20 inlet (x2)	12 ft.	2	C19	8	C13	1U	
PDUMH30HVAT		X	X		30A ^(A)	24A	L6-30P (x2)	10 ft.	1	L6-30R	2	C19	2U	
SWITCHED PDUs WITH AUTO TRANSFER SWITCHING														
PDUMH15ATNET	X				15A	15A	5-15P	2 x 12 ft.	8	5-15R	-	-	1U	
PDUMH20ATNET	X				20A	20A	L5-20P, 5-20P ^(B)	2 x 12 ft.	16	5-15/20R ^(E)	-	-	1U	
PDUMH30ATNET	X				30A ^(A)	24A	L5-30P	10 ft.	1	L5-30R	24	5-15/20R ^(F)	2U	
PDUMH20HVATNET		X	X	X	20A ^(A)	16A	C20 inlet (x2) ^(C)	2 x 12 ft.	2	C19	8	C13	1U	
PDUMH30HVATNET		X	X		30A ^(A)	24A	L6-30P	10 ft.	1	L6-30R	2/16	C19/C13	2U	
HOT-SWAP PDUs														
PDUB15	X				15A ^(A)	12A	5-15P (x2)	10 ft.	8	5-15R	-	-	2U	
PDUB20	X				20A ^(A)	16A	5-20P (x2)	10 ft.	4	5-15/20R	4	5-15R	2U	
PDUB30	X				30A ^(A)	24A	L5-30P (x2)	10 ft.	6	5-15/20R	1	L5-30R	2U	
PDUBHV10		X	X	X	10A	10A	C14 inlet (x2)	6 ft.	8	C13	-	-	2U	
PDUBHV20		X	X	X	20A	20A	C20 inlet (x2)	6 ft.	6	C13	2	C19	2U	

(A) Agency-derived input is 80% of maximum input. (B) Includes twist-lock L5-20P plug(s) with adapter(s) to convert to straight-blade 5-20P plug(s). (C) For 230V applications, connect the inlet to a user-supplied input cord with a region-specific plug. (D) Includes fixed input cord with 20 inlet, plus adapters for C14, 5-15P 5-20P, L5-20P and L6-20P. (E) 5-15/20R outlets are compatible with 5-15P and 5-20P plugs. (F) 0U represents vertical installation. PDUs also support surface mounting.

**For More Information,
Contact Your Tripp Lite
Sales Representative**



Tripp Lite has been a trusted manufacturer of innovative solutions for over 85 years!



1111 W. 35th Street, Chicago, IL 60609
773.869.1111 • www.tripplite.com

All trademarks are the property of their respective owners. Tripp Lite follows a policy of continuous improvement. Product specifications are subject to change without notice. Actual product may differ slightly from photo.