# **HP LaserJet Enterprise MFP M527 Series**



Finish tasks faster<sup>1</sup> and help protect against threats with multi-level device security in an MFP.<sup>9</sup>

Finish key tasks faster with an MFP that starts right away and helps conserve energy.<sup>1</sup> Multi-level device security helps protect from threats. Original HP Toner cartridges with JetIntelligence and this printer produce more high-quality pages.<sup>2</sup>



HP LaserJet Enterprise MFP M527dn



**HP LaserJet Enterprise MFP M527f** 



HP LaserJet Enterprise Flow MFP M527z

#### Accelerate your work and use less energy

- Don't wait for documents. Print your first page in as few as 8.7 seconds from energy-efficient sleep mode.
- Speed through jobs on a variety of media. Print and scan both sides of the page at once.
- This MFP leads its class in low energy use—thanks to its innovative design and toner technology.<sup>3</sup>
- Now 24% smaller—this MFP fits in tight places to boost performance in any workspace.8

#### Unparalleled fleet security and management

- Embedded features detect security threats and heal your MFP, protecting it from boot up to shutdown.<sup>9</sup>
- Protect sensitive data on the MFP and in transit, using embedded security features and 256-bit encryption.<sup>9</sup>
- Protect sensitive business data with embedded and optional HP JetAdvantage Security Solutions.<sup>10</sup>
- Centralize control of your printing environment with HP Web Jetadmin—and help build business efficiency.

#### More pages, performance, and protection

- Produce sharp text, bold blacks, and crisp graphics with precision black toner.
- Get more. Original HP Toner with JetIntelligence delivers more pages per cartridge than predecessors.<sup>2</sup>
- Help ensure the Original HP quality you paid for with anti-fraud and cartridge authentication technology.
- Print right away with a preinstalled toner cartridge. Replace it with an optional high-yield cartridge.<sup>11</sup>

#### Stay connected with secure mobile printing options


- Enable 128-bit encrypted wireless direct printing from mobile devices—without accessing the network.<sup>4</sup>
- Print with just a touch of your NFC-enabled mobile device to this printer—no network
- Easily print from a variety of smartphones and tablets—generally no setup or apps required.<sup>7</sup>
- Easily access, print, and share resources with Ethernet and optional wireless networking.

<sup>1</sup> Based on HP internal testing of top three leading competitors' first page out from sleep mode and duplex print and copy speed completed 8/2015. Subject to device settings. Actual results may vary. For details, see hp.com/go/Liclaims <sup>6</sup> More pages versus predecessor cartridges claim based on page-yield comparison of HP 55X High Yield Black Original Laser Jet Toner Cartridges with HP 87X High Yield Black Original Laser Jet Toner Cartridges. For more information, see hp.com/go/learnaboutsupplies <sup>3</sup> Based on HP testing using the ENERGY STAR® program's Typical Electricity Consumption (TEC) method or as reported in energystar.gov versus the top three leading competitors as of 8/2015. Actual results may vary. For details see hp.com/go/Liclaims <sup>4</sup> Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise MPP M527dn/f. Mobile device, an app or driver may also be required. Wireless performance is dependent on physical environment and distance from the access point in the MFP or printer. For details, see hp.com/go/businessmobileprinting <sup>3</sup> Wireless networking requires purchase of the HP Jetdirect 2900nw Print Server for the HP Laser Jet Enterprise MFP M527dn/f. Wireless performance is dependent on physical environment and distance from access point, and may be limited during active VPN connections. <sup>6</sup> Touch-to-print capability is standard on the HP Laser Jet Enterprise HPP M527dn/f. Mobile device must support Near Field Communication (NFC)—enabled printing. For more information, see hp.com/go/businessmobileprinting <sup>7</sup> Wireless operations are compatible with 2.4 GHz operations only. App or software and HP ePrint account registration may also be required. Some features require purchase of an optional accessory. Learn more at hp.com/go/pnobileprinting <sup>8</sup> Compared with the HP Laser Jet Enterprise MFP M527s. <sup>8</sup> Some features require additional purchase. A Futures-Evart service pack update may be required to activate security features. Learn more at hp.com/go/prin

## **Product walkaround**

- 1 100-sheet automatic document feeder (ADF) with single-pass, two-sided scanning and HP EveryPage
- 2 Hardware Integration Pocket (HIP)<sup>1</sup> for connecting accessory and third-party devices
- 3 Easy-access USB port to save and print files directly<sup>2</sup>
- 4 250-sheet output tray
- 5 Top cover (access to Original HP Toner cartridges with JetIntelligence)
- 6 100-sheet multipurpose tray
- 7 550-sheet tray 2
- 8 Intuitive 20.3 cm (8-inch) touchscreen control panel
- 9 Pull-out keyboard for easy, accurate data entry
- 10 Convenience stapler
- 11 Convenient front on/off button
- 12 Built-in automatic duplexer
- 13 Built-in wireless direct<sup>3</sup> and NFC touch-to-print<sup>4</sup>
- 14 1.2 GHz MHz processor, 1.25 GB RAM<sup>5</sup>
- 15 HP High-Performance Secure Hard Disk
- 16 Slot for optional cable-type security lock
- 17 Fax port
- 18 HP Jetdirect Gigabit Ethernet print server
- 19 Hi-Speed USB 2.0 printing port
- Hi-Speed USB 2.0 port (for connecting third-party devices)
- 21 Rear door (access to the print path)

#### HP LaserJet Enterprise Flow MFP M527z shown

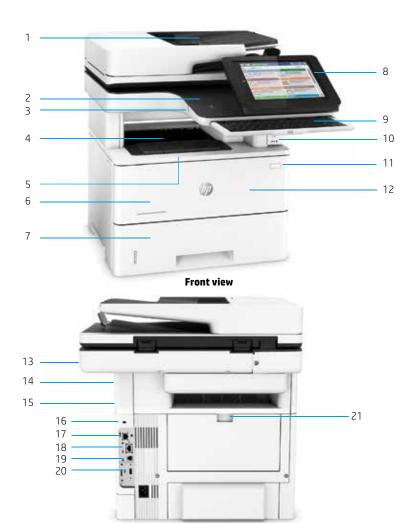

**Back view** 

# Series at a glance



Model	MFP M527dn	MFP M527f	Flow MFP M527z
Product number	F2A76A	F2A77A	F2A78A
Fax	Optional	✓	✓
HP High-Performance Secure Hard Disk	Optional	✓	✓
100-page ADF with single-pass, two-sided scanning	✓	✓	✓ (Plus HP EveryPage)
Advanced workflow capabilities including pull-out keyboard	Not available	Not available	✓
Wireless direct³ and NFC touch-to-print⁴	Optional	Optional	✓
ENERGY STAR® and Blue Angel certified	✓	✓	✓

¹ Solutions deployed through the Hardware Integration Pocket may require additional purchase. ² An administrator must enable the easy-access USB port before use. ³ Wireless direct printing is standard on the HP Laser Jet Enterprise Flow MFP MS272 only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise MFP MS27dn/f. Mobile device needs to be connected directly to the Wi-Fi network of a wireless direct-capable MFP or printer prior to printing. Depending on mobile device, an app or driver may also be required. Wireless performance is dependent on physical environment and distance from the access point in the MFP or printer. For details, see <a href="https://documents.org/nc/businessmobileprinting">https://documents.org/nc/businessmobileprinting</a> ¹ Touch-to-print capability is standard on the HP Laser Jet Enterprise Flow MFP M527z only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise MFP M527dn/f. Mobile device must support Near Field Communication (NFC)-enabled printing. For more information, see <a href="https://documents.org/nc/businessmobileprinting">https://documents.org/nc/businessmobileprinting</a> ¹ Maximum system memory is 2.5 GB. Maximum usable printer memory is 2 GB with an additional 500 MB of memory available for the scanner. Maximum memory is achieved with the optional ¹ (GB DIMM (ESK48A) installed.

#### **HP Services**

Downtime can have serious consequences, so HP provides support beyond the standard warranty. You benefit from reduced risk, maximized uptime, predictable service delivery and no unbudgeted repair costs. Choose from:

**Optimized Care (optimum performance** and stability): 4 hour Onsite Support. Maintenance Kit Replacement Service. Installation with Network Configuration Service

#### Standard Care (high level of uptime): Next

Business Day Onsite Support, Maintenance Kit Replacement Service, Installation with Network Configuration Service

**Basic Care (minimum recommended** support): Next Business Day Onsite Support

**4 hr Onsite Support:** Onsite support within four hours after a service call received within the coverage window

**Next Business Day Onsite Support:** Onsite service the next business day after the service call is received

#### **Maintenance Kit Replacement Service:**

Onsite replacement of your printer's maintenance kit including parts, materials, and labor

#### **Installation with Network Configuration**

**Service:** Assembly, network configuration, and basic administrator familiarization

For more information about HP Care Pack, HP Contractual, or HP Managed Print Services, visit hp.com/go/printservices



















### **Top Features**

Work quickly with the fastest first page out from sleep mode—on the most energy-efficient MFP in its class.<sup>1,3</sup> Launch two-sided printing, scan, and fax right from the touchscreen. Reload paper less often with a 2,300-sheet maximum capacity.<sup>6</sup>

Trust your MFP is secure from power-up to power-down. Get strong protection for devices, data, and documents with embedded and optional security features while centrally managing your entire fleet.8

Bring out the best in your MFP. Print more high-quality pages than ever before, 2 using specially designed Original HP Toner cartridges with JetIntelligence. Count on the authentic HP quality you paid for—something the competition can't match.

Enable secure wireless printing in the office—with or without network access4—and keep users connected with Ethernet and optional wireless networking. Print with just a touch from mobile devices.5

Product	
F2A77A	HP LaserJet Enterprise MFP M527dn HP LaserJet Enterprise MFP M527f HP LaserJet Enterprise Flow MFP M527z

F2A72A	HP LaserJet 550-sheet Paper Tray
F2A73A	HP LaserJet Printer Cabinet
E5K48A	HP 1GB DDR3 x32 144-Pin 800MHz SODIMM
B5L29A	HP Secure High Performance Hard Disk Drive
F5S62A	HP Trusted Platform Module Accessory
CZ208A	HP Common Card Reader
F2A87A	HP Internal USB Ports for M506, M527
B5L28A	HP Internal USB Ports
B5L31A	HP Foreign Interface Harness
J8031A	HP Jetdirect 2900nw Print Server
J8030A	HP Jetdirect 3000w NFC/Wireless Accessory

B5L53A HP LaserJet MFP Analog Fax Accessory 600 (only on M527dn) A7W12A HP LaserJet Keyboard Overlay Kit for Simplified Chinese & Traditional Chinese (only on M527z)

A7W14A HP LaserJet Keyboard Overlay Kit Swedish (only on M527z)

#### Orderable supplies

Accessories

Q7432A	HP Staple Cartridge Refill (only on M527f and M527z)
B5I 52A	HP 200 ADE Roller Replacement Kit

HP 200 ADF Roller Replacement Kit

#### Supplies<sup>7</sup>

CF287A	HP 87A Black Original LaserJet Toner Cartridge (~9,000 pages)
CF287X	HP 87X Black Original LaserJet Toner Cartridge (~18,000 pages)

#### **HP Care Packs**

U8TT5E	HP 3-year Next Business Day + DMR LaserJet M527 MFP Hardware Support
U8TT6E	HP 4-year Next Business Day + DMR LaserJet M527 MFP Hardware Support
U8TT7E	HP 5-year Next Business Day + DMR LaserJet M527 MFP Hardware Support
U8TT8E	HP 3-year 4h 9x5 + DMR LaserJet M527 MFP Hardware Support
U8TT9E	HP 4-year 4h 9x5 + DMR LaserJet M527 MFP Hardware Support
U8TU0E	HP 5-year 4h 9x5 + DMR LaserJet M527 MFP Hardware Support
U8TU1E	HP 3-year 4h 13x5 + DMR LaserJet M527 MFP Hardware Support
U8TU2E	HP 4-year 4h 13x5 + DMR LaserJet M527 MFP Hardware Support
U8TU3E	HP 5-year 4h 13x5 + DMR LaserJet M527 MFP Hardware Support
U8TV6PE	HP 1-year Post Warranty Next Business Day + DMR LaserJet M527 MFP
	Hardware Support
U8TV7PE	HP 2-year Post Warranty Next Business Day + DMR LaserJet M527 MFP
	Hardward Support

**USTVSPF** HP 1-year Post Warranty 4h 9x5 + DMR LaserJet M527 MFP Hardware Support HP 1-year Post Warranty 4h 13x5 + DMR LaserJet M527 MFP Hardware Support

Protect your investment with HP Care Pack. Let HP certified engineers resolve your technical issues. For more details on HP Care Pack, go to hp.com/go/cpc

#### Paper

Contact HP via phone: Asia: 65 6253 8500

#### Solutions

HP Web Jetadmin: hp.com/go/wja

HP Universal Print Driver: hp.com/go/upd

HP Imaging and Printing Security Center: hp.com/go/ipsc

Based on HP internal testing of top three leading competitors' first page out from sleep mode and duplex print and copy speed completed 8/2015. Subject to device settings. Actual results may vary. For details, see hp.com/go/Ljclaims 2 More pages versus predecessor cartridges claim based on page-yield comparison of HP 5SX High Yield Black Original Laser Jet Toner Cartridges with HP 87X High Yield Black Original Laser Jet Toner Cartridges. For more information, see hp.com/go/learnaboutsupplies 2 Based on HP testing using the ENERGY STAR® program's Typical Electricity Consumption (TEC) method or as reported in energystar.gov versus the top three leading competitors as of 8/2015. Actual results may vary. For details see hp.com/go/Liclaims a Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise MFP M527dn/f. Mobile device needs to be connected directly to the WiFi network of a wireless direct-capable MFP or printer prior to printing. Depending on mobile device, an app or driver may also be required. Wireless performance is dependent on physical environment and distance from the access point in the MFP or printer. For details, see hp.com/go/businessmobileprinting 5 Wireless networking requires purchase of the HP Jetdirect 2900nw Print Server for the HP LaserJet Enterprise MFP M527dn/f. Wireless performance is dependent on physical environment and distance from access point, and may be limited during active VPN connections.

Purchase of optional paper trays required to reach maximum input capacity. Declared yield value in accordance with ISO/IEC 19752 and continuous printing. Actual yields vary considerably based on images printed and other factors. For details see <a href="hp.com/go/learnaboutsupplies">hp.com/go/learnaboutsupplies</a> Some features require additional purchase. A FutureSmart service pack update may be required to activate security features. Learn more at hp.com/go/printsecurity 3

# **HP LaserJet Enterprise MFP M527 Series**

Functions  Print  Duplex print options  Print speed'  First page out <sup>2</sup> Print technology  Print resolution  Print resolution technologies  Print arresolution technologies  Print carridges number  Standard print languages  Printer management	Black (A4, ready): As fast at Black (best): Up to 12	Automatic (standard)  (er): Up to 45 ppm; Black (Landscape, A5): Up to 65 ppm; Black (duple s 5.7 sec; A5 fast as 11.2 sec (100 V); Black (A4, sleep): A5 fast as 8.7 s  Laser  200 x 1200 dpi; Black (normal): Up to 600 x 600 dpi; Black (fine lines)	ec ; As fast as 13.9 sec (100 V)		
Duplex print options Print speed' First page out' Print technology Print resolution Print resolution Print resolution technologies Print cartridges number Standard print languages Printer management	Black (A4, ready): As fast at Black (best): Up to 12	er): Up to 45 ppm; <b>Black (Landscape, A5):</b> Up to 65 ppm; <b>Black (duple</b> 5 5.7 sec; As fast as 11.2 sec (100 V); <b>Black (A4, sleep):</b> As fast as 8.7 s Laser 200 x 1200 dpi; <b>Black (normal):</b> Up to 600 x 600 dpi; <b>Black (fine lines)</b>	ec ; As fast as 13.9 sec (100 V)		
Print speed¹ First page out² Print technology Print resolution Print resolution technologies Print cartridges number Standard print languages Printer management	Black (A4, ready): As fast at Black (best): Up to 12	er): Up to 45 ppm; <b>Black (Landscape, A5):</b> Up to 65 ppm; <b>Black (duple</b> 5 5.7 sec; As fast as 11.2 sec (100 V); <b>Black (A4, sleep):</b> As fast as 8.7 s Laser 200 x 1200 dpi; <b>Black (normal):</b> Up to 600 x 600 dpi; <b>Black (fine lines)</b>	ec ; As fast as 13.9 sec (100 V)		
First page out <sup>2</sup> Print technology Print resolution Print resolution technologies Print cartridges number Standard print languages Printer management	Black (A4, ready): As fast at Black (best): Up to 12	s 5.7 sec ; As fast as 11.2 sec (100 V); <b>Black (A4, sleep):</b> As fast as 8.7 s Laser 200 x 1200 dpi; <b>Black (normal):</b> Up to 600 x 600 dpi; <b>Black (fine lines)</b>	ec ; As fast as 13.9 sec (100 V)		
Print technology Print resolution Print resolution technologies Print cartridges number Standard print languages Printer management	Black (best): Up to 12	Laser 200 x 1200 dpi; <b>Black (normal):</b> Up to 600 x 600 dpi; <b>Black (fine lines)</b>			
Print resolution technologies Print cartridges number Standard print languages Printer management			: Up to 1200 x 1200 dpi		
Print cartridges number Standard print languages Printer management	1 Black (HP 87A Black Original I	300 dni 600 dni HP FastRes 1200 HP ProRes 1200			
Standard print languages Printer management	T Black (HP 8 / A Black Original i		300 dpi, 600 dpi, HP FastRes 1200, HP ProRes 1200		
Printer management		LaserJet Toner Cartridge ~9,000 pages or HP 87X Black Original LaserJe PCL 5 driver available from the Web only), HP postscript level 3 emulatior			
can		Template for UPD, AutoUpgradeUPD, Driver configuration Utility, Driver C			
		move PlugPlay Drivers; HP Web JetAdmin Software, HP Proxy Agent Soft			
Scan type/technology		ype: Flatbed and ADF, E-duplex CIS; <b>Technology:</b> Contact Image Sensor			
Scan speed <sup>3</sup>		(b&w), up to 38 ppm/38 ipm (colour)	Normal, A4: Up to 45 ppm/64 ipm (b&w), up to 45 ppm/58 ipm (col		
Scan resolution	Enh	nanced: Up to 600 dpi; Hardware: Up to 600 x 600 dpi; Optical: Up to 6	00 dpi		
Scan size	Front papel applications: Copy F. ma	Flatbed/ADF: 216 x 356 mm (8.5 x 14 in)  ail, Save to Network Folder, Save to USB, Save to Device Memory, Open E	stancibility Distform (OVD) applications		
Scan input modes Scan file format	ттопі рапетаррії атору, Е-тта	sit, save to Network Folder, save to osb, save to bevice Hernory, open E.	Digital Send: PDF, JPEG, TIFF, MTIFF, XPS, PDF/A, TEXT (OCR), Unico		
	PDF, JPEG, TIFF, MTIFF, XPS, PDF/A		TEXT (DCR), RTF (DCR), Searchable PDF (DCR), Searchable DDFA (DCR), Starthable DDFA (DCR), HTML (DCR), CSV (DCR); Scan to easy access USB: PDF, IPE ITEF, MTIFF, XPS, PDFA, TEXT (DCR), Unicode TEXT (DCR), RTF (DCF Searchable PDF (DCR), Searchable PDFA (DCR), HTML (DCR), CSV (DCP) (DCR), CSV (DCR), SEARCHABLE PDFA (DCR), HTML (DCR), CSV (DCR), DCR, DCR, DCR, DCR, DCR, DCR, DCR, DCR		
рру					
Copy speed <sup>4</sup>		Black (normal, letter): Up to 45 cpm; Black (duplex, A4): Up to 34 cpm			
First copy out	Black (A4): As fast as 6.3 sec; As fast as 11.0 sec (100 V); Black	ack (A4, sleep): As fast as 9.6 sec; As fast as 15.2 sec (100 V)	<b>Black (A4):</b> As fast as 6.3 sec; As fast as 11.0 sec (100 V); <b>Black (A4, sleep):</b> As fast as 10.8 sec; As fast as 15.9 sec (100 V		
Copy resolution		Black (text & graphics): Up to 600 × 600 dpi (flatbed), 600 × 450 dpi (Al			
Max no of copies	<u> </u>	Up to 9,999 copies			
Copier resize		25 to 400%			
Copier settings		(darkness, contrast, background cleanup, sharpness); N-up; N or Z-orde			
	edg	e-to-edge job storage; ID Copy; Book Copy; A-to-B Copy (different media	sizes)		
Eav cpood <sup>5</sup>	Optional	22 C.L 2	c per page (letter)		
Fax speed <sup>5</sup> Fax resolution	Optional Optional	33.6 Kbps, 3 Se <b>Black (best):</b> Up to 300 x 300 dpi (400 x 400 dpi for received faxes or			
. d. resolution	Ориона		ayscale: 300 x 300 dpi (400 x 400 dpi for received faxes only)		
Fax features	Optional	Auto fax reduction supported: Yes; Auto-Redialing: Yes; Fax Fax forwarding supported: Yes; Junk barrier s	delayed sending: No; Distinctive ring detection supported: No; upported: Yes; Maximum speed dialing numbers: supported: Yes; Fax polling supported: Yes (poll to receive only)		
Fax smart software features	Optional		book; LAN/Internet fax; Fax number confirmation; Holiday fax schedu		
nnectivity	Optional	stored rakes, i as dictiving, i as ror warding, scale to in, i as dadies	book, Estignice real, real number committee, rolled year seried		
Standard connectivity	2 Hi-Speed USB 2.0 Host; 1 Hi-Speed USB 2.0 Device;	2 Hi-Speed USB 2.0 Host; 1 Hi-Speed USB 2.0 Device;	2 Hi-Speed USB 2.0 Host; 1 Hi-Speed USB 2.0 Device; 1 Gigabit Ethe		
•	1 Gigabit Ethernet 10/100/1000T network	1 Gigabit Ethernet 10/100/1000T network; 1 Fax	10/100/1000T network; 1 Fax; 802.11 b/g/n with Wireless Direct		
Mobile print capability <sup>6</sup>	HP ePrint; Apple AirPr	rint™; Mopria-certified	HP ePrint; Apple AirPrint™; Mopria-certified; Wireless Direct Printi		
Network ready	Standard (built i	in Gigbit Ethernet)	NFC touch-to-print  Standard (built-in Gigabit Ethernet), Wi-Fi 802.11 b/g/n		
Network capabilities		MPv1/v2c/v3, HTTP, HTTPS, FTP, TFTP, Port 9100, LPD, WS Discovery, IPF			
The trong capabilities	11 V 1/11 VO. Typic Borriota Companion (1 lac 05 V To.E. For Higher), 511	Auto-IP, SLP, Telnet, IGMPv2, BOOTP/DHCP, WINS, IP Direct Mode, WS Pri	nt		
Wireless capability	Optional, enabled with pu	urchase of HW accessories	Yes, Embedded NFC/HP Wireless Direct		
emory		1: 1.25 GB (Printer), 500 MB (Scanner); Maximum: 2.0 GB (Printer), 500 M			
ıty cycle <sup>7</sup>	Up to	150,000 pages; Recommended monthly page volume:8 2,000 to 7,50	0 pages		
ocessor speed		1.2 GHz			
per handling	1 v FEO, choot input trave 1 v 100 cho	et multipurpose tray; 3 x optional additional 550-sheet input trays; <b>Opti</b>	enals EEO choot tray (add up to 3 trays)		
Input Output	1 x 550-sneet input tray, 1 x 100-snee	250-sheet output bin	oliat: 550-sneet tray (add up to 5 trays)		
Media type	Paper (hond, colour letterhead		tock: transparencies: user-defined		
Media weight	Taper (boria, coloui, tetterrieda,	Paper (bond, colour, letterhead, plain, preprinted, prepunched, recycled, rough); envelopes; labels; cardstock; transparencies; user-defined  Tray 1: 60 to 199 g/m²; Tray 2+: 60 to 120 g/m²			
Media sizes custom	Tray 1: 76 x 127 to 216	5 x 356 mm; Tray 2: 105 x 148 to 216 x 297 mm; Optional Trays 3+: 10	05 x 148 to 216 x 356 mm		
mensions (W x D x H)		482 x 496 x 497 mm (18.98 x 19.52 x 19.55 in)			
eight	21.9 kg (48.2 lb)	22.0 kg (48.5 lb)	22.3 kg (49.1 lb)		
hat's in the box		9,000 pages); CDs containing software and electronic documentation; Us			
arranty features	One-year, next-business day, onsite warranty. Warranty and support option	ns vary by product, country and local legal requirements. Go to <u>hp.com/suppo</u>	rt to learn about HP award winning service and support options in your req		
<b>/stems</b> Compatible operating systems	Windows OS compatible with In-Box Driver; Windows XP SP3 all 32-bit editions (XP Home, XP Pro, etc.); Windows Vista all 32-bit editions (Home Basic, Premium, Professional, etc.); Windows 7 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (Excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit edit				
Minimum system requirements	PC: Windows XP SP3 all 32-bit editions (XP Home, XP Pro, etc.); Windows Vista all 32-bit editions (Home Basic, Premium, Professional, etc.); Windows 7 all 32- & 64-bit editions; Windows 8/8.1 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Or For Tablets); Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Or For Tablets); Windows 10 all 32- & 64-bit editions; Windows 8/8.1 all 32- & 64-bit editions; Windows 10 all 32- & 64-bit edi				
onts and typefaces	105 internal TrueType fonts scalable in HP PCL, 92 internal scalable fonts in HP postscript Level 3 emulation (Euro symbol built-in); 1 internal Unicode Fonts (Andale Mono World Type); 2 Internal Windows Vi (Calibri, Cambria); additional font solutions available via third-party flash memory cards; HP LaserJet Fonts and IPDS Emulation available at ho.com/go/Jaserietfonts		nicode Fonts (Andale Mono World Type); 2 Internal Windows Vista 8 Fo		
ontrol panel					
v. panet		20.3 cm (8.0-in) colour LCD with touchscreen; rotating (adjustable angle) display; illuminated Home button (for quick return to the Home menu)  20.3 cm (8.0-in) colour LCD with touchscreen; rotating (adjustable angle) display; illuminated Home button (for quick return to the I angle) display, illuminated Home button (for quick return to the I menu); integrated Keyboard  Power supply type: Internal (Built-in) power supply; Power supply required: Input Voltage: 100 to 127 VAC, 50/60 Hz, 7.5 A (+/- 10%); Input Voltage: 220 to 240 VAC, 50/60 Hz, 4.0 A (+/- 10%) (Not dual voltage); Integrated Keyboard (Built-in) power supply; Power supply required: Input Voltage: 100 to 127 VAC, 50/60 Hz, 7.5 A (+/- 10%); Input Voltage: 220 to 240 VAC, 50/60 Hz, 4.0 A (+/- 10%) (Not dual voltage); Integrated Keyboard (Built-in) power supply; Power supply required: Input Voltage: 100 to 127 VAC, 50/60 Hz, 4.0 A (+/- 10%); Input Voltage: 100 to 127 VAC,			
ower .	input voltage requirement and supplied power cord varies by part number and option code identifier); Power consumption: 9 671 watts (Printing), 27.8 watts (Ready), 3.2 watts (Sleep), 0.71 watts (Auto-Off/Auto-On LAN connection: 0.06 watts (Auto-Off), 0.06 watts (Off)				
	For Windows OS: HD Software Installer/Uniostaller LID DOL 61	For Windows OS: HP Software Installer/Uninstaller, HP PCL 6 Printer Driver, HP Device Experience (DXP), HP Send Fax, HP Update, Product Registration Assist, HP Web Services Assist (HP Connected), Online user manuals; For Mac OS: Welcome Screen, (Directs users to HP.com or OS App Source for Laser Jet Software)			
			e for LaserJet Software)		
oftware included	Online user manuals;  Acoustic power emissions:106.8 B(A); Acoustic power emissions (rea	For Mac OS: Welcome Screen, (Directs users to HP.com or OS App Sourced): 4.0 B(A); Acoustic pressure emissions bystander (active, printing)	g): 54 dB(A); Acoustic pressure emissions bystander (ready): 25 d		
oftware included	Online user manuals;  Acoustic power emissions: 10 6.8 B(A); Acoustic power emissions (rea  Operating temperature range: 15 to 32.5° C (59 to 90.5° F); Recom	For Mac OS: Welcome Screen, (Directs users to <u>HP.com</u> or OS App Source ady): 4.0 B(A); Acoustic pressure emissions bystander (active, printing nmended operating temperature: 17.5 to 25°C (63.5 to 77°F); Non-o	g): 54 dB(A); Acoustic pressure emissions bystander (ready): 25 d perating humidity range: 10 to 90% RH; Operating humidity rang		
oftware included coustic vvironmental ranges	Online user manuals;  Acoustic power emissions: 6.8 B(A); Acoustic power emissions (rea  Operating temperature range: 15 to 32.5° C (59 to 90.5° F); Recom	For Mac OS: Welcome Screen, (Directs users to HP.com or OS App Sourc ady): 4.0 B(A); Acoustic pressure emissions bystander (active, printir nmended operating temperature: 17.5 to 25° C (63.5 to 77° F); Non-01 10 to 80% RH; Recommended operating humidity range: 30 to 70% f	g): 54 dB(A); Acoustic pressure emissions bystander (ready): 25 d perating humidity range: 10 to 90% RH; Operating humidity range RH		
ower  oftware included  coustic voironmental ranges ecurity management	Online user manuals;  Acoustic power emissions: 6.8 B(A); Acoustic power emissions (rea  Operating temperature range: 15 to 32.5° C (59 to 90.5° F); Recom	For Mac OS: Welcome Screen, (Directs users to <u>HP.com</u> or OS App Sours ddy): 4.0 B(A). Acoustic pressure emissions bystander (active, printir mmended operating temperature: 17.5 to 25° C (63.5 to 77° F). Non-o- 10 to 80% RH; Recommended operating humidity range: 30 to 70% f authentication (EAP-PEAP EAP-TIS), IPP over TIS, [Psec/Firewall with Ca	g): 54 dB(A); Acoustic pressure emissions bystander (ready): 25 di perating humidity range: 10 to 90% RH; Operating humidity range RH		
ftware included oustic vironmental ranges	Online user manulas;  Acoustic power emissions: a 6.8 B(A); Acoustic power emissions (rea  Operating temperature range: 15 to 32.5 c (59 to 90.5 f); Recon  Management security: SNMPv3, SSL/TLS, WPA2-Enterprise, 80.2.1X  IEC 60950-1:2005 +A1:2009 +A2:2013 (International); EN60950-62479:2010; Low Voltage Directive 2006/95/EC with CE Mark (Europe	For Mac OS: Welcome Screen, (Directs users to HP.com or OS App Sourc ady): 4.0 B(A); Acoustic pressure emissions bystander (active, printir nmended operating temperature: 17.5 to 25° C (63.5 to 77° F); Non-01 10 to 80% RH; Recommended operating humidity range: 30 to 70% f	g): 54 dB(A); Acoustic pressure emissions bystander (ready): 25 d perating humidity range: 10 to 90% RH; Operating humidity range: hritificate, Pre-Shared Key Authentication, and Kerberos Authentication  007/IEC 60825-1:2007 (Class 1 Laser Product); EN 62479:2010/IEC da); (2AN/CSA C22.2 No. 60950-1-07 2nd Ed. 2011-12; Compliance w		

#### To learn more, visit hp.com

© Copyright 2015 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

ENERGY STAR and the ENERGY STAR logo are registered U.S. marks. Microsoft and Windows are registered trademarks of Microsoft Corporation. AirPrint and the AirPrint logo are trademarks of Apple Inc., registered in the U.S. and other countries. Linux is a U.S. registered trademark of Linus Torvalds. UNIX is a registered trademark of The Open Group. NetWare® is a trademark of Novell, Inc.

