High Current Fuses







UL Recognized MEGA® Fuses

UL Recognized MEGA® Fuses Rated 32V

Package

Size

500

Rating

80 - 175

Bolt

Size

M8

The MEGA® Fuse is designed for high current circuit protection with "Diffusion Pill Technology." The MEGA® Fuse also provides time delay characteristics. Designed and patented by Littelfuse, the MEGA® Fuse is ideal for battery and alternator protection application and other heavy gauge cables requiring ultra-high current protection.

Specifications

Voltage Rating: Interrupting Rating: **Recommended Environmental Temperature:** Terminals Material: Housing Material: Mounting Torque M8: Complies with:

32 VDC 2000A @ 32 VDC -40°C to + 125°C Copper PPA-GF30FR (U.L. 94 Flammability rating - VO) 12-18 Nm ISO 8820-5 ,UL 248 Special Purpose Fuses



Ordering Information

Part Number

0298xxx.ZXEH-UL

Time-Current Characteristics


	Opening Time Min / Max (s)		
% of Rating	80A-175A		
75	- / -		
100	14,400 / ∞		
135	120 / 1800		
200	1 / 15		
350	0.3 / 5		
500	- / -		
600	0.1 / 1		



Part Number	Current Rating (A)	Color Code	Test Cable Size (mm²)	Typ. Voltage Drop (mV)	Typ. Cold Resistance (mΩ)	Typ. I²t (A²s)
0298080.ZXEH-UL	80		10	87	0.72	21,500
0298100.ZXEH-UL	100		16	87	0.56	31,100
0298125.ZXEH-UL	125		16	80	0.42	57,800
0298150.ZXEH-UL	150		25	92	0.35	100,000
0298175.ZXEH-UL	175		25	62	0.23	168,000

The typical I²t is an average value calculated from the breaking capacity tests by using the melting time before the arcing occurs.

Time-Current Characteristic Curves

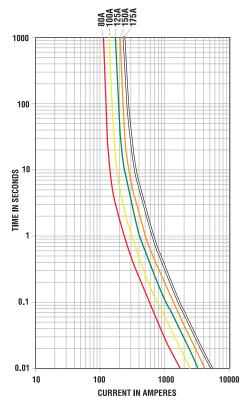

REV07272021


Littelfuse® products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littlefuse[®] product documentation. Warranties granted by Littlefuse[®] shall be deemed void for products used for any purpose not expressly set forth in applicable Littlefuse[®] documentation. Littlefuse[®] shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littlefuse[®] as set forth in applicable Littlefuse[®] documentation. The sale and use of Littlefuse[®] products is subject to Littlefuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse




UL Recognized MEGA® Fuses Rated 32V

Dimensions

Dimensions in mm for reference only. See outline drawing for dimensions and tolerances.

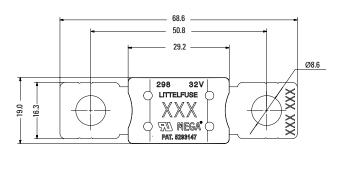




Temperature Table

	max. allowed current load [A] at ambient temperature (typical derating)									
	-40°C	0°C	20°C	65°C	85°C	110°C	125°C			
80A	80	77	73	61	56	47	41			
100A	100	97	91	76	69	58	51			
125A	125	123	116	98	89	76	66			
150A	150	143	135	114	103	87	76			
175A	175	175	171	142	128	107	92			

Typical Derating of Fuse Melting Element

Temperature Security Margin is 20% Please contact Littelfuse® for Details Regarding Derating Test Set-Up.

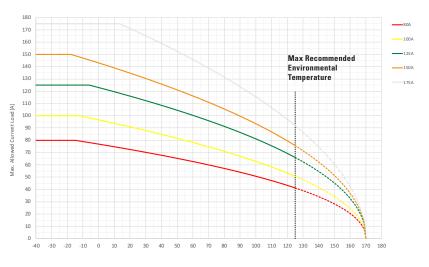

Derating curves may change depending on the final condition of the application (terminals characteristics, wire size etc..). Please ask Littelfuse® for more information.

REV07272021

Littelfuse® products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littlefuse[®] product documentation. Warranties granted by Littlefuse[®] shall be deemed void for products used for any purpose not expressly set forth in applicable Littlefuse[®] documentation. Littlefuse[®] shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littlefuse[®] as set forth in applicable Littlefuse[®] documentation. The sale and use of Littlefuse[®] products is subject to Littlefuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse®