

Liebert® GXT5™

5 to 10kVA

Intelligent and Efficient UPS Protection for your Mission-Critical Applications



Intelligent and Efficient UPS Protection for your Mission Critical Applications

The Vertiv™ Liebert® GXT5™ UPS is an online double conversion UPS solution which offers premium power outage protection and continuous power conditioning in a compact and flexible deployment system.

The Liebert® GXT5™ single phase UPS operates with high power efficiency and it is ideally suited to protect critical infrastructure in both centralized and edge network applications.

Scalable runtime options with matching external battery cabinets offer additional flexibility when extended uninterrupted power is required. User-friendly LCD interface as well as full network management capability, including configuration and remote updates, make this system easy to deploy and simple to maintain. With market-leading efficiency and unity power factor operation, the Liebert® GXT5™ will fill your critical application needs.

Sleep well knowing your business is protected by the premium products from Vertiv™.



Vertiv™ Liebert® GXT5™



With internet of things (IoT), edge computing and 5G driving the proliferation of interconnected devices, there is growing need to place compute and storage closer to the users to reduce latency and improve the overall customer experience.

These new technology trends are putting pressure on the power demand, as there is all the more a need to maintain efficiency and availability. You need an uninterruptible power supply (UPS) system that's highly available, energy efficient and flexible enough to adapt according to your business needs.

The new Liebert GXT5 from Vertiv is an advanced version of the widely-regarded GXT UPS series.

Liebert GXT5 is ideal for the following applications and more:

- Edge Applications
- Finance and Banking
- Telecom
- Healthcare
- Retail
- Cloud Edge




Liebert® GXT5™ Highlights



How You Benefit from Liebert GXT5 UPS?

DESIGNED FOR HIGH AVAILABILITY





- Device can be swapped during operation without powering down connected equipment thanks to the manual bypass POD integrated in the device (removable connection box)
- Minimum downtime of the device provided by hot-swappable battery modules which can be changed during operation
- Vertiv™ LIFE™ Service remote diagnostic and preventive monitoring service helps to enhance uptime, as well as operational efficiency
- Operates at full power up to 40 °C (up to 50 °C with derating)

USER-FRIENDLY OPERATION AND INSTALLATION

• Integrated solution that combines electronics and batteries in a single part number



- Easy to read gravity sensing graphical color display
- Intuitive user interface, local configuration and management
- Enabling remote management
- Support for the new Vertiv suite of remote management tools (Vertiv Power Insight, SNMP/webcards, etc)
- Auto-detection of up to 6 external battery cabinets (EBC) but supports EBCs up to 10 numbers. EBC helps an easy and fast installation when long runtimes are required

LONGER LIFE TIME AND RUN-TIME OF THE BATTERIES



- Extended run-times provided by the addition of external battery cabinets
- Improved battery care by temperature compensated battery charging
- Programmable sockets help to extend runtime for the most critical loads and smart disconnection of the less critical ones
- Intelligent battery health management ensures a longer life time (optimized battery maintenance and replacement when needed)

OPTIMIZED ENERGY AND CAPACITY MANAGEMENT



- Active ECO operating mode with up to 98% efficiency
- Efficiency in on-line double conversion mode up to 95%
- Energy Star 2.0 certified
- Programmable sockets for critical loads prioritization and energy optimization
- Capacity for parallel or redundant operation (10/16/10kVA) thus bringing a next level of flexibility for growth and future expansion


SEAMLESS CONNECTIVITY




- · Programmable dry contacts
- Supports SNMP, WEB and Sensors, thanks to the powerful RDU101 card



Liebert GXT5 5-6kVA 230V

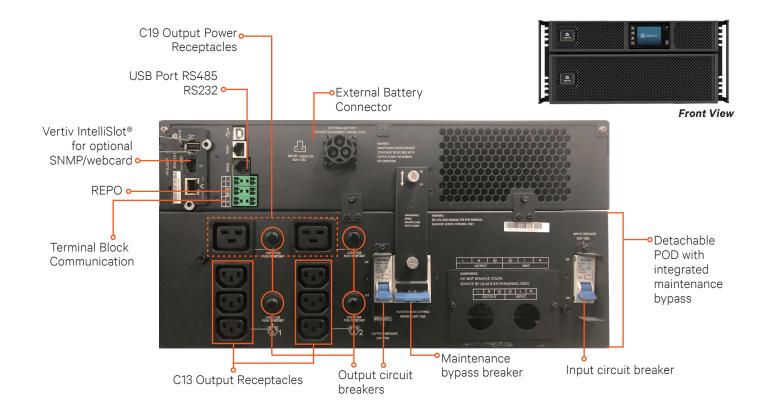

Liebert GXT5 8-10kVA 230V

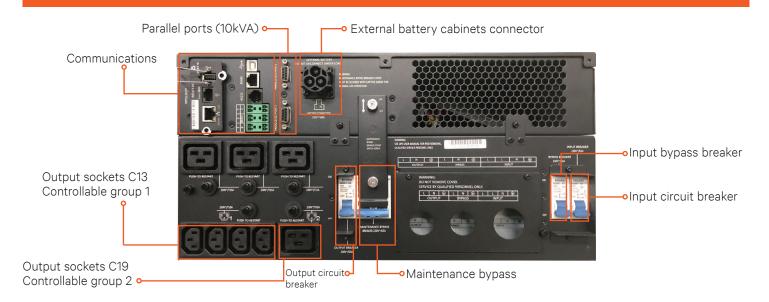

Ę

External Battery Cabinet

MODEL NUMBER:	GXT5-EBC192VRT3U					
UPS Model	5 – 10-KVA MODELS					
Dimensions and weight						
Dimensions (mm) Unit, W×D×H	430 x 630 x 130					
Weight (kg)	57.6					
Battery Parameters						
Туре	Valve-regulated, non-spillable, lead acid					
Quantity x Voltage	16 x 12 V					
Battery Mfr./Part#	9 AH; LEOCH/DJW12-9.0					
Environmental Parameters						
Operating Temp, °C (°F)	0 to 40 (32 to 104)					
Storage Temp, °C (°F)	-15 to 40 (5 to 104)					
Relative Humidity	0 – 95% non-condensing					
Operating Elevation	Up to 3,000 m (9,842.5 ft.) at 25 °C (77 °F)					
Agency Credentials						
Safety	IEC62040-1:2008version,GS mark; UL1778, c-UL listed					
Transportation	ISTA Procedure 1E					





Battery Run Times

5kVA Models

				Ba	ckup T	ime (Mi	n)			
No. of EBCs	5 kVA	4.5 kVA	4 kVA	3.5 kVA	3 kVA	2.5 kVA	2 kVA	1.5 kVA	1 kVA	0.5 kVA
UPS	7.0	8.0	9.5	11.5	14.5	18.5	25.0	36.5	59.0	120.0
UPS+1 EBC	19.0	22.0	26.0	31.0	38.5	48.0	62.5	85.0	129.0	272.5
UPS+2 EBC	33.5	38.5	45.0	53.0	63.5	78.0	99.0	133.0	211.0	427.5
UPS+3 EBC	49.0	55.5	64.0	74.0	88.0	107.5	136.0	189.5	294.0	582.5
UPS+4 EBC	64.0	72.0	82.5	95.5	113.0	138.0	179.5	246.0	377.0	737.5
UPS+5 EBC	79.0	89.0	101.0	117.0	138.5	173.0	222.5	303.0	460.0	892.5
UPS+6 EBC	94.0	105.5	120.0	139.0	168.0	208.0	266.0	359.5	543.0	1047.5

6kVA Models

	Backup Time (Min)										
No. of EBCs	6 kVA	5.4 kVA	4.8 kVA	4.2 kVA	3.6 kVA	3 kVA	2.4 kVA	1.8 kVA	1.2 kVA 48.0 107.0 172.0 242.0 312.0 382.0 452.0	0.6 kVA	
UPS	5.5	6.0	7.5	9.0	11.0	14.5	19.5	29.0	48.0	100.0	
UPS+1 EBC	14.5	17.0	20.0	24.0	30.0	38.5	50.5	70.0	107.0	226.0	
UPS+2 EBC	26.0	30.5	35.5	42.0	51.0	63.5	81.5	110.0	172.0	357.5	
UPS+3 EBC	39.0	44.5	51.5	60.5	72.0	88.0	112.5	154.0	242.0	489.0	
UPS+4 EBC	51.5	58.5	67.0	78.0	92.5	113.0	145.0	201.5	312.0	621.0	
UPS+5 EBC	64.5	72.5	82.5	96.0	113.5	138.5	181.5	249.5	382.0	752.5	
UPS+6 EBC	77.0	86.5	98.5	113.5	134.0	168.0	218.0	297.5	452.0	884.5	

8kVA Models

				Ва	ckup T	ime (Mi	n)			
No. of EBCs	8 kVA	7.2 kVA	6.4 kVA	5.6 kVA	4.8 kVA	4 kVA	3.2 kVA	2.4 kVA	1.6 kVA	0.8 kVA
UPS	3.5	4.0	4.5	6.0	7.5	9.5	13.0	19.5	33.5	75.0
UPS+1 EBC	9.5	11.5	13.5	16.0	20.0	26.0	35.0	50.5	79.0	166.0
UPS+2 EBC	17.5	20.5	24.0	29.0	35.5	45.0	59.0	81.5	124.5	267.5
UPS+3 EBC	26.5	30.5	35.5	42.5	51.5	64.0	82.0	112.5	176.0	369.0
UPS+4 EBC	36.0	41.0	48.0	56.0	67.0	82.5	105.5	145.0	229.5	471.0
UPS+5 EBC	45.5	52.0	59.5	69.5	82.5	101.0	128.5	181.5	283.0	572.5
UPS+6 EBC	55.5	62.5	71.5	83.0	98.5	120.0	155.0	218.0	336.5	674.5

10kVA Models

				Ва	ckup T	ime (Mi	n)			
No. of EBCs	10 kVA	9 kVA	8 kVA	7 kVA	6 kVA	5 kVA	4 kVA	3 kVA	2 kVA	1 kVA
UPS	2.0	2.5	3.5	4.0	5.5	7.0	9.5	14.5	25.0	59.0
UPS+1 EBC	7.0	8.0	9.5	12.0	14.5	19.0	26.0	38.5	62.5	129.0
UPS+2 EBC	13.0	15.0	17.5	21.0	26.0	33.5	45.0	63.5	99.0	211.0
UPS+3 EBC	19.5	22.5	26.5	31.5	39.0	49.0	64.0	88.0	136.0	294.0
UPS+4 EBC	26.5	30.5	36.0	42.5	51.5	64.0	82.5	113.0	179.5	377.0
UPS+5 EBC	34.5	39.5	45.5	54.0	64.5	79.0	101.0	138.5	222.5	460.0
UPS+6 EBC	42.0	48.0	55.5	64.5	77.0	94.0	120.0	468.0	266.0	543.0

Note:

^{*}EBC- External Battery Cabinet

^{**}Battery autonomy times are based on operation at 25°C. The autonomy times are approximate and are based on fully charged batteries and can vary +/-5% because of battery manufacturing variances.



Technical Specifications

Model Number	GXT5-5000IRT5UXLN	GXT5-6000IRT5UXLN	GXT5-8000IRT5UXLN	GXT5-10KIRT5UXLN	
Ratings (VA/W)	5000 VA / 5000 W	6000 VA / 6000 W	8000 VA / 8000 W	10,000 VA / 10,000 W	
Dimensions and weight					
Dimensions (mm) Unit, W×D×H		430×6	30×217		
Unit weight (kg)	70	0.8	74.5		
Input AC Parameters					
Operating Frequency, Nom		60 Hz (Factory [Default is 50 Hz)		
Factory Default Voltage		230	VAC		
User-configurable Voltage		200/208/220,	/230/240 VAC		
Operating Voltage Range without battery operation		176 to 288 VAC (100 to 176	3 VAC with power derating)		
Maximum allowable Voltage		288	VAC		
Input frequency without battery operation		40 to	70 Hz		
Output AC Parameters					
AC-AC Efficiency	94%	94%	94.5%	95%	
Factory Default Voltage		230	VAC		
Frequency		50 Hz or 60	Hz, Nominal		
Waveform		Pure Si	inewave		
Output Power Connection		Output ter	minal block		
Main Mode Overload	>150% minimum 20	0 ms, 125 – 150% for 60 seco	nds; 105 – 125% for 5 minutes	; ≤ 105% continuous	
Internal Battery					
Charger Current	2.25 A (default), maximum 5 A	2.25 A (default)	, maximum 8 A	
Type		Valve-regulated, no	n-spillable, lead acid		
Qty x V x Rating		-	V x 9.0 AH		
Back-up Time at Full Load	7	5,5	3,5	2	
Back-up Time at Half Load	19	14,5	9,5	7	
Bypass Protection Limits					
Upper-limit selections		+ 10%, + 15%, + 2	0%; default + 10%.		
Lower-limit selections			0%; default - 15%		
Disable-bypass operation	,	When the input frequency pro	events synchronous operation	ı	
General			,		
Operating Temperature, °C		Full power up to 40 °C (u	up to 50 °C with derating)		
Storage Temperature, °C			o + 40		
Relative Humidity			n-condensing		
Operating Elevation			25°C (77°F) without derating		
Audible Noise	<55 dB		50 dBA, at 1 meter from rear of	or sides	
Safety			3 version, GS mark		
EMI/EMC/C-Tick EMC)-2 2nd Ed (Cat 2)		
ESD			-2, Level 4, Criteria A		
Radiated Susceptibility			-3, Level 3, Criteria A		
Electrical Fast Transient			-4, Level 4, Criteria A		
Surge Immunity			-5, Level 4, Criteria A		
Transportation			cedure 1E		
		DIATIO	555410 IE		
POD	PD5-CER	HDWRMBS	PD5-CE10F	-IDWRMRS	
Model Number		IDWRMBSU	PD5-CE10H		
Amp Rating	50) A	63	A	
Includes		0 V Sockets, Six C13 10 A / Sockets	Four ICE320 C19 16 A / 250 250 V 9		

Note: UPS Specifications are subject to change without any prior notification.



Vertiv.com | Asia-Pacific

© 2019 Vertiv Group Corp. All rights reserved. Vertiv[™] and the Vertiv logo are trademarks or registered marks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.