


Wire-Free Camera Base Station with built-in Siren




Key Features

- Supports access up to 6 1080P resolution wireless battery cameras
- Prolong the overall battery life of the cameras by utilizing extra low power consumption standby mode
- 100 decibel siren on the base station that can be triggered when motion is detected
- Extend the coverage for Battery Cameras
- Cable or optional Wi-Fi connection for base station to router

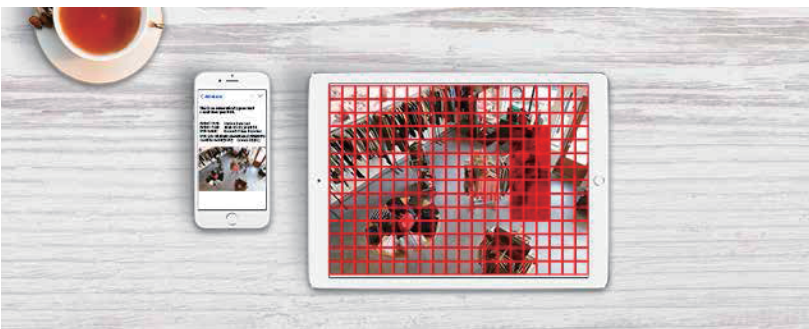

Motion Detection - Email Notification

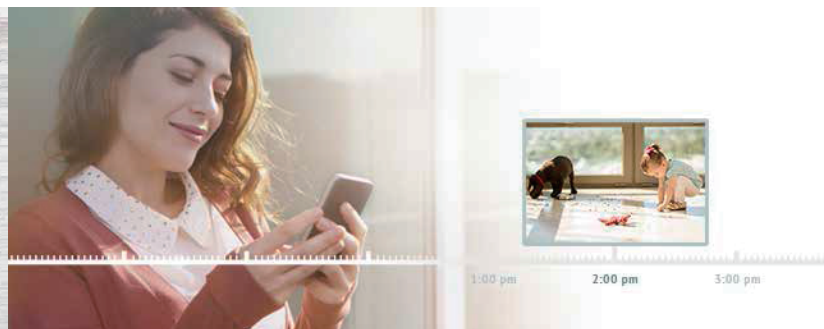

Remote View

Wire-Free Camera Base Station with built-in Siren

System	
CPU	Qualcomm @ 650 MHz (Maximum)
RAM	128MB
Flash	16 MB
Alarm Siren	Support
Antenna	2.4G: 2 internal @ 2dB max, Sub-1G: 1 internal
Indicator	One System LED, One WAN Port LED
Button	One SYNC button. One Power button. One Reset button, hold 10 seconds to RESET
Battery Camera	Support up to 6 Battery Cameras
Network	
Network Interface	1 RJ-45 10/100Mbps Self-adaptive Ethernet WAN interface
Wireless Interface	Support 2.4G connection. The actual available channels vary according to the sales area regulations. Theoretical maximum rate is 144M at 802.11b/g/n. Support Sub-1G connection with Low-Power Private Protocol. Working Band of 433M/868M/915M and available channels vary according to the sales area regulations.
General	
Operating conditions	32° F ~ 104° F (0° C ~ 40° C) humidity 10% to 90%.
Power Supply	DC 5V 2A, The adapter supports a wide voltage range, expected 100V~240V
Power Consumption	<10W
Ingress Protection	Indoor use only
Dimensions	3.7" × 3.7" × 4.3" (95x 95 x 110mm)
Weight	0.40lbs (180g)