



Image shown may not reflect actual configuration.

Features

Reliable, Modular and Scalable

The Cat ETS and ECE modules are robust and consist of pre-engineered containers that are easily installed on site. Multiple energy storage modules may be operated in parallel to provide increased power output and/or increase the battery energy capacity. Installed modules allow optimized genset operation.

Renewable Integration

The energy storage modules are designed to work with an array of renewable systems, including solar and wind. Seamless integration with the Cat® Microgrid Master Controller (MMC) allows for maximum renewable penetration and full asset control. The onboard multi-mode Cat® Bi-Directional energy storage inverter is capable of grid forming allowing generator set(s) to be completely switched off, further reducing fuel consumption and operating costs.

Grid Stabilization

The ETS module also protects against many typical power problems, including grid outage, voltage sags/surges, and under/over frequency conditions.

Cat Bi-Directional Energy Storage Inverter

The Cat BDP1000 inverter is the core to the energy storage system. Based on technology developed for Cat electric drive machines, the Cat BDP provides exceptional reliability, durability and features that include:

- Controls for the charging and discharging of the energy storage equipment.
- 2 per unit fault current capability
- Static VAR compensator
- · Four-quadrant output power factor control

Cat® Energy Time Shift modules

1000 kW Energy Time Shift (ETS) with 1518-9108 kWh Energy Capacity Expansion (ECE) 50 Hz 380-415 Volt 60 Hz 480-600 Volt

The Cat® ETS and ECE container modules are a scalable and rapidly deployable energy storage system. The energy storage system integrates with solar or other renewable sources to store energy from the overproduction of the renewable source for use when the renewable source is not available. Cat energy storage systems provide temporary backup power to facilities in the event of a power outage.

- · Dual parallel control of two inverter halves
- Patented nonlinear droop for tight control of voltage and frequency
- Seamless mode transfer
- Automatic anti-islanding
- Grid forming, grid firming, and grid following modes
- · Autonomous mode or Remote-Control mode
- Parallel ready multiple modules may be used in parallel to increase total output up to 100+MW)

Energy Storage

 Advanced lithium-ion batteries provide energy density, high discharge/recharge efficiency, and long cycle life.

Standard Equipment

- Cat BDP1000 bi-directional energy storage inverter
- · Energy storage batteries
- · Color HMI touchscreen
- · CSC certified ISO High Cube container
- · Remote communications via Modbus TCP
- HVAC system to maintain optimal interior temperatures
- · Convenience receptacles
- Fire suppression system

Applications

- · Time shifting of energy from renewables, genset or utility
- Renewable smoothing
- · Peak shaving
- · Grid firming/grid stabilization
- · Generator set transient assist
- Facility backup
- Reserve power capacity




Product Scalability

The ETS1500 contains the Cat BDP1000 bi-directional energy storage inverter with a fixed number of batteries and support equipment. The ETS1500 may be installed and operated alone or in combination with up to three (3)

| Total Energy Capacity | Continuous Power Rating | Energy Time Shift (ETS) | Energy Capacity Expansion (ECE) | | |
|-----------------------|----------------------------|----------------------------|---------------------------------|-------------------|-------------------|
| 1.5 MWh | 570 kW | ETS1500 | | | |
| 3.0-4.0 MWh | 1 MW | ETS1500 | ECE1500/2000/2500 | | |
| 4.5-6.5 MWh | 1 MW | ETS1500 | ECE1500/2000/2500 | ECE1500/2000/2500 | |
| 6.0-9.1 MWh | 1 MW | ETS1500 | ECE1500/2000/2500 | ECE1500/2000/2500 | ECE1500/2000/2500 |

Modular Configuration

Energy Time Shift (ETS) - BDP Inverter with liquid cooling - 6 racks of batteries - HVAC for batteries - Fire suppression - Transformer

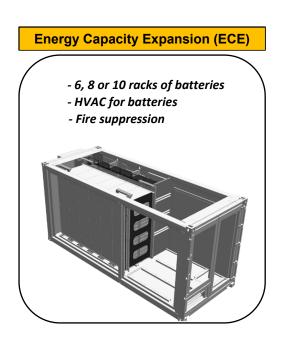



Technical Specifications*

| Model | ETS1500 | | |
|--|------------------|------------------|------------------------|
| Module Output | | | |
| Maximum Continuous at 1.0 PF | kW | [‡] 570 | 1000 |
| Energy (Nameplate Start of Life) | kWh | 1518 | |
| Number of Battery Racks | qty | 6 | |
| Energy type | | Li-lon - Energy | |
| Battery Chemistry | | NMC | |
| Туре | | High Energy | |
| Inverter Model | | BDP1000 | |
| Number of inverters | | 1 | |
| Isolation Transformer | Pri / Sec | △-Delta | ı / Y-Wye |
| Number of Transformers | | | 1 |
| Output Voltage | (50Hz) (60Hz) | | .5*/690* VAC 00 VAC |
| Output Voltage THD | | <3 | 3% |
| Ambient Temperature Capability | °C | -40 to +50 | |
| Altitude | mASL | 3000 | |
| Average Parasitic Load | | | |
| At 0° / 40°C in standby operation (0% load) | kW | 2.0/4.0 | 2.0/4.0 |
| At 0° / 40°C in continuous operation (100% l | kW | 33.0/36.0 | 33.0/36.0 |
| Shore Power Connection | V (50Hz) | 400V | 50Hz |
| | V (60Hz) | 480V 60Hz | |
| Features | | ı | |
| Microgrid Stabilization | | Yes | |
| Patented Non-Linear Droop Control | | Yes | |
| Seamless mode transfer | | Ye | es |
| Islanding detection | | Yes | |
| Grid forming | | Yes | |
| Four Quadrant Power Factor Control | Ye | es | |
| Static VAR compensator | Ye | es | |
| 2 Per Unit Fault Current Capability | Ye | es | |
| Reserve Power Capacity | Ye | es | |
| Plug-and-Play parallel ready | Ye | es | |
| Energy Storage Management | Yes | | |
| Human-Machine Interface | Yes | | |
| Fire Suppression System | Yes | | |
| Communications Protocols | Modbu | s TCP/IP | |

| ECE1500 | ECE2000 | ECE2500 | |
|-----------|---------------------------------------|-----------|--|
| | | | |
| - | - | - | |
| 1518 | 2024 | 2530 | |
| 6 | 8 | 10 | |
| | Li-lon - Energy | | |
| | NMC | | |
| | High Energy | | |
| | - | | |
| | - | | |
| | - | | |
| | - | | |
| | 800-1000 VDC | | |
| | 800-1000 VDC | | |
| | - | | |
| | -40 to +50 | | |
| | 3000 | | |
| | | | |
| 2.0/4.0 | 2.0/4.0 | 2.0/4.0 | |
| 33.0/36.0 | 22.0/26.0 | 000/000 | |
| 33.0/36.0 | 33.0/36.0 | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz | 33.0/36.0 | |
| 33.0/36.0 | | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz 480V 60Hz | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz 480V 60Hz | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz 480V 60Hz - - | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz 480V 60Hz - - - | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz 480V 60Hz - - - | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz 480V 60Hz - - - | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz 480V 60Hz - - - | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz 480V 60Hz - - - | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz 480V 60Hz - - - | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz 480V 60Hz - - - | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz 480V 60Hz - - - | 33.0/36.0 | |
| 33.0/36.0 | 400V 50Hz 480V 60Hz - - - | 33.0/36.0 | |

^{¥ -} Ensure compatibility of all microgrid equipment by referring to A&I guides (or equivalent) for generator sets, BDP inverters, PV inverters, switchgear, and controls. Contact your local Cat dealer for assistance selecting compatible equipment.

^{‡ -} Power is limited due to available energy content.

^{* -} Consult factory for output voltage technical data and product availability.



Applicable Standards and Certifications

• UL Listed to the following standards (cULus certification and mark):

| | ETS | ECE |
|---|-----|-----|
| Energy Storage System | | |
| • UL 9540 Ed1 | ✓ | ✓ |
| UL 9540 Ed2 (pending) | ✓ | ✓ |
| Bi-Directional Energy Storage | | |
| Inverter (BDP1000) | | |
| • UL 1741 SA | ✓ | |
| • UL 1741 SB (pending) | ✓ | |
| • IEEE1547-2018 | ✓ | |
| • IEEE1547.1-2020 | ✓ | |
| • UL1998 | ✓ | |
| • CSA C22.2 No. 107.1:16 | ✓. | |
| CSA C22.3 (pending) | ✓ | |

• CE Declaration of Conformity:


| | ETS | ECE |
|-------------------------------|--------------|-----|
| Energy Storage System | | |
| • IEC60204-1 | ✓ | ✓ |
| Bi-Directional Energy Storage | | |
| Inverter (BDP1000) | | |
| • IEC62477-1 (pending) | ✓ | |
| • IEC62909 (pending) | \checkmark | |

Remote Monitoring (Sold Separately)

The Cat® Connect telematic device (PLR809 router) and an active subscription to Cat Connect are required for battery warranty. The internet connection provides real time monitoring of the performance and health of the battery and installation. If an issue is detected, local technicians can be dispatched to resolve the problem.

Worldwide Product Support

- Cat dealers provide extensive post-sale support including maintenance and repair agreements.
- Cat dealers have over 1,800 dealer branch stores operating in 200 countries.

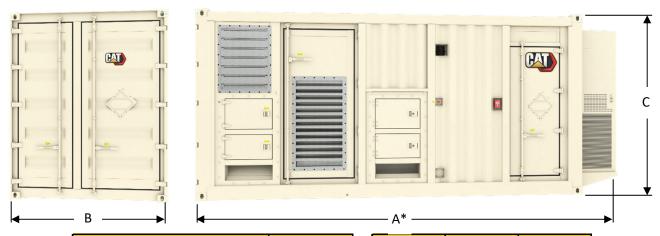

| Dimensions | ETS1500 | |
|-----------------------|---------|--------------|
| A - Length | m (ft) | 6.75 (22.13) |
| B - Width | m (ft) | 2.4 (8) |
| C - Height | m (ft) | 2.8 (9.5) |
| Weight (approximate) | kg | 18,725 |
| vveignt (approximate) | (lbs) | 41,282 |

| ECE1500 | ECE2000 | ECE2500 | |
|--------------|--------------|--------------|--|
| 6.75 (22.13) | 6.75 (22.13) | 6.75 (22.13) | |
| 2.4 (8) | 2.4 (8) | 2.4 (8) | |
| 2.8 (9.5) | 2.8 (9.5) | 2.8 (9.5) | |
| 16,325 | 19,693 | 23,061 | |
| 35,990 | 43,416 | 50,841 | |

Note: Do not use for installation design. See general dimension drawings for detail. Dimensions are dependent on selected options.

* Without A/C module length 6.06 m or 19.87 ft

Materials and specifications are subject to change without notice.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.