

Rev. 1.0, Jan 2021

MZ7L33T8HBNA-00A07 MZ7L31T9HBNA-00A07 MZ7L3960HBLT-00A07 MZ7L3480HBLT-00A07

2.5"SATA 6Gbps PM897

SAMSUNG Solid State Drive

datasheet

SAMSUNG ELECTRONICS RESERVES THE RIGHT TO CHANGE PRODUCTS, INFORMATION AND SPECIFICATIONS WITHOUT NOTICE.

Products and specifications discussed herein are for reference purposes only. All information discussed herein is provided on an "AS IS" basis, without warranties of any kind.

This document and all information discussed herein remain the sole and exclusive property of Samsung Electronics. No license of any patent, copyright, mask work, trademark or any other intellectual property right is granted by one party to the other party under this document, by implication, estoppel or otherwise.

Samsung products are not intended for use in life support, critical care, medical, safety equipment, or similar applications where product failure could result in loss of life or personal or physical harm, or any military or defense application, or any governmental procurement to which special terms or provisions may apply.

For updates or additional information about Samsung products, contact your nearest Samsung office.

All brand names, trademarks and registered trademarks belong to their respective owners.

© 2021 Samsung Electronics Co., Ltd. All rights reserved.

Datasheet

SATA SSD

MZ7L3960HBLT-00A07 MZ7L33T8HBNA-00A07 MZ7L3480HBLT-00A07 MZ7L31T9HBNA-00A07



Revision History

Revision No.	<u>History</u>	<u>Draft Date</u>	<u>Remark</u>	<u>Editor</u>	Review by
1.0	1. Initial release.	Jan. 20. 2021	Final	S.M.Lee	H.I.Choi

MZ7L3960HBLT-00A07 MZ7L33T8HBNA-00A07 MZ7L3480HBLT-00A07 **MZ7L31T9HBNA-00A07**

SAMSUNG

1 sector per 10¹⁷ bits read

SAMSUNG Solid State Drive SM883 Features

Part Number	Capacity ¹⁾
MZ7L33T8HBNA-00A07	3,840GB
MZ7L31T9HBNA-00A07	1,920GB
MZ7L3960HBLT-00A07	960GB
MZ7L3480HBLT-00A07	480GB

FEATURES

- SATA 6Gbps
- 2.5" 7mmT
- Fully Complies with ATA/ATAPI Command Set 4 (ACS-4)
- Fully Complies with Serial ATA 3.3 Standard
- Hardware based AES 256-bit Encryption Engine (optional)
- Support NCQ (up to 32 depth) Command Set
- Support TRIM Command
- RoHS Compliant

PERFORMANCE

Data Transfer Rate

- Sequential Read Up to 560 MB/s²⁾ Up to 530 MB/s²⁾ - Sequential Write Up to 57 KIOPS3) - Random Read (8KB) Up to 40 KIOPS3) - Random Write (8KB) - Random Read (4KB) Up to 97 KIOPS3) Up to 60 KIOPS3) - Random Write (4KB)

 IOPS Consistency (Read/Write @4KB) 	95 / 90%
 Latency (Read/Write @4KB, QD1) 	105/ 30us
Quality of Service(99.99%)	
- Read (4KB, QD=1)	0.2 ms
Write (AKB, OD=1)	0.05 mg

- Write (4KB, QD=1) $0.05 \, \text{ms}$ - Read (4KB, QD=32) 0.6 ms - Write (4KB, QD=32) 0.7 ms

RELIABILITY

Non-recoverable Read Error	1 sector per 10 ¹⁷ bits read
• MTBF	2,000,000 hours
• TBW	
(3840GB)	21,024 TB
(1920GB)	10,512 TB
(960GB)	5,256 TB
(480GB)	2,628 TB

ENVIRONMENTAL SPECIFICATIONS⁴⁾

• Temperature 0 ~ 70 °C - Operating - Non-operating -40 ~ 85 °C 5 ~ 95% • Humidity (non-condensing)

- Linear Shock (0.5ms duration with half sine wave)

- Non-operating 1,500G

- Vibration (20Hz to 2,000Hz, 4min/cycle, 4cycle/axis on 3axis) Non-operating 20G

POWER REQUIREMENTS 5) 6)

Supply Voltage	+5V ± 5%
 Voltage Ripple/Noise (max.) 	100mV p-p
• Active (Read) (Typ.)	2.3 W RMS
Active (Write) (Typ.)Idle (Typ.)	3.0 W RMS 1.4 W

PHYSICAL DIMENSION

Width	100.20 ± 0.25 mm
• Depth	69.85 ± 0.25 mm
 Height 	7.00 ± 0.00/-0.50 mm
 Weight 	Up to 70 g

NOTE: Specifications are subject to change without notice.

^{.1) 1}MB = 1,000,000 Bytes, 1GB = 1,000,000,000 Bytes, Unformatted Capacity. User accessible capacity may vary depending on operating environment and

²⁾ Sequential performance was measured by using FIO 2.7 in Linux CentOS 7.4 with 128KB (131,072 bytes) of data transfer size in Queue Depth=32 by 1 worker.

³⁾ Random performance was measured by using FIO 2.7 in Linux CentOS 7.4 with 4KB (4,096 bytes), 8KB (8,192 bytes) of data transfer size in Queue Depth=32 by 1 workers. Measurements were performed on a full Logical Block Address (LBA) span of the drive in sustained state. The actual performance may vary depending on use conditions and environment.

⁴⁾ Operating Temperature (0 \sim 70 $^{\circ}$ C / Tc) is measured at the hottest point on the case. Sufficient airflow is recommended to be operated properly on heavier workloads wthin device operating temperature.

⁵⁾ Active Read power is measured on 4 KB random read.

Active Write power is measured on 128 KB sequential write.

⁶⁾ Idle power is measured with DIPM off.

MZ7L3960HBLT-00A07 MZ7L33T8HBNA-00A07 MZ7L3480HBLT-00A07 MZ7L31T9HBNA-00A07



1.0 INTRODUCTION	. 5
1.1 General Description	
1.2 Product List	
1.3 Ordering Information	. 5
2.0 PRODUCT SPECIFICATIONS	. 6
2.1 Interface and Compliance	
2.2 Drive Capacity	
2.3 System Performance	
2.4 IOPS Consistency	. 6
2.5 Latency	
2.6 Quality of Service (QoS)	
2.7 Supply Voltage	
2.8 System Power Consumption	
2.9 Inrush Current	
2.10 Environmental Specifications	
2.10.1 Temperature	
2.10.2 Dynamic Thermal Throttling	
2.10.3 DTT Table	
2.10.4 Composite Temperature (Tcomposite)	
2.10.5 Humidity	
2.10 Reliability	
2.11.1 Mean Time Between Failures	
2.11.2 Uncorrectable Bit Error Rate	
2.11.3 Data Retention	10
2.11.4 Endurance	
3.0 MECHANICAL SPECIFICATION	
4.0 ELECTRICAL INTERFACE SPECIFICATION	
4.1 Serial ATA Interface Connector	
4.2 Pin Assignments	
4.3 P3 Electrical Specification	. 12
5.0 COMMAND DESCRIPTIONS	. 13
5.1 Supported ATA Commands	. 13
5.2 Individual Attribute Data Structure	. 14
6.0 IDENTIFY DEVICE DATA	. 16
7.0 SPOR SPECIFICATION (Sudden Power Off and Recovery)	. 19
7.1 Data Recovery in Sudden Power Off	. 19
7.2 Time to Ready Sequence	
8.0 PRODUCT COMPLIANCE	
0.0 REFERENCES	21



1.0 INTRODUCTION

1.1 General Description

This document describes the specification of the PM897 SSD which use SATA 6Gb/s interface.

PM897 are fully consist of semiconductor device and using NAND Flash Memory which has a high reliability and a high technology for a storage media. As the SSD doesn't have a moving parts such as platter(disk) and head media, it gives a good solution for a storage device with a high performance, high

PM897 delivers 560GB/s for sequential read and 530GB/s for sequential write speed under up to 3W power.

1.2 Product List

Form factor	Density	Part Number		
2.5" 7mmT	3,840GB	MZ7L33T8HBNA-00A07		
	1,920GB	MZ7L31T9HBNA-00A07		
	960GB	MZ7L3960HBLT-00A07		
	480GB	MZ7L3480HBLT-00A07		

1.3 Ordering Information

M	Z	X	X	X	X	X	X	X	X	X	X	-	X	X	X	X	X
1	2	3	1	5	6	7	R	a	10	11	12	13	1/	15	16	17	18

B: 3rd Generation

1. Memory (M) 10. Flash Generation

2. Module Classification

Z: SSD 11~12. NAND Density

NA: 12T(4T ODP 2CE+8T HDP 2CE)(FBI)

3. Form Factor LT: 4T ODP 2CE(FBI)

7: 2.5" 7mmT SATA

4. Line-Up 13. " - "

14. Default

5. SSD CTRL

3: Metis, S.LSI

15. HW revision

6~8. SSD Density A: General

1T9: 1.92TB 16. Packing type

960: 960 GB 0: Bulk

480: 480GB 17~18. Customer

07: General TCG

9. NAND PKG

3T8: 3.84TB

L: Client/SV (VNAND 3bit MLC)

H: BGA



2.0 PRODUCT SPECIFICATIONS

2.1 Interface and Compliance

- SATA 6.0Gbps
- Fully compatible with ATA/ATAPI-7 Standard
- Compatible with ATA/ATAPI-8 ACS4 Mandatory Command
- Native Command Queuing (NCQ) Command Set
- Support Data Set Management Command

2.2 Drive Capacity

[Table 1] User Capacity and Addressable Sectors

	480GB	960GB	1,920 GB	3,840 GB			
User-Addressable Sectors	937,703,088	1,875,385,008	3,750,748,848	7,501,476,528			
Bytes per Sector	512 Bytes						

NOTE:

- 1) Gigabyte (GB) = 1,000,000,000 Bytes, 1 Sector = 512Bytes
- 2) Capacity shown in Table 1 represents the total usable capacity of the SSD which may be less than the total physical capacity. A certain area in physical capacity, not in the area shown to the user, might be used for the purpose of NAND flash management.
- 3) Max. LBA shown in Table 1 represents the total user addressable sectors in LBA mode and calculated by IDEMA rule

2.3 System Performance

[Table 2] Sequential Read / Write Performance

Read / Write	480GB	960GB	1,920 GB	3,840 GB
Sequential Read (128 KB)	560MB/s	560MB/s	560MB/s	560MB/s
Sequential Write (128 KB)	530MB/s	530MB/s	530MB/s	530MB/s

NOTE:

- 1) Actual performance may vary depending on use conditions and environment.
- 2) Sequential performance was measured by using FIO 2.7 in Linux Cent OS 7.4 (Kernel 3.10.0) with 128KB (131,072 bytes) of data transfer size in Queue Depth=32 by 1 worker.
- 3) 1 MB/sec = 1,000,000 bytes/sec was used in sequential performance.

[Table 3] Sustained Random Read / Write Performance

Read / Write	480GB	960GB	1,920 GB	3,840 GB
Random Read IOPS (8 KB)	57K	57K	57K	57K
Random Write IOPS (8 KB)	40K	40K	40K	40K
Random Read IOPS (4 KB)	97K	97K	97K	97K
Random Write IOPS (4 KB)	60K	60K	60K	60K

NOTE:

1) Actual performance may vary depending on use conditions and environment.

2) Random performance was measured by using FIO 2.7 in Linux CentOS 7.4 (Kernel 3.10.0) with 4KB(4,096 bytes) / 8KB(8,192 bytes) of data transfer size in Queue Depth=32 by 1 worker. Measurements were performed on a full Logical Block Address (LBA) span of the drive in sustained state. The actual performance may vary depending on use conditions and environment.

2.4 IOPS Consistency

IOPS Consistency	480GB	960GB	1,920 GB	3,840 GB
Random Read (4 KB)	95%	95%	95%	95%
Random Write (4 KB)	90%	90%	90%	90%

NOTE:

1) IOPS consistency measured using FIO 2.7 in Linux CentOS 7.4 (Kernel 3.10.0) with 4KB (4,096 bytes) of data transfer size in Queue Depth=32 by worker 1.

2) IOPS Consistency (%) = (99.9% IOPS) / (Average IOPS) x 100.



2.5 Latency

Latency	480GB	960GB	1,920 GB	3,840 GB
Read (4 KB)	105us	105us	105us	105us
Write (4 KB)	30us	30us	30us	30us

NOTE:

2.6 Quality of Service (QoS)

Quality of Service (99%)	480GB	960GB	1,920 GB	3,840 GB
Read (4 KB, QD=1)	0.25 ms	0.2 ms	0.2 ms	0.2 ms
Write (4 KB, QD=1)	0.04 ms	0.04 ms	0.04 ms	0.04 ms
Read (4 KB, QD=32)	0.6 ms	0.51 ms	0.42 ms	0.42 ms
Write (4 KB, QD=32)	0.6 ms	0.6 ms	0.6 ms	0.6 ms
Quality of Service (99.99 %)	480GB	960GB	1,920 GB	3,840 GB
Quality of Service (99.99 %) Read (4 KB, QD=1)	480GB 0.25 ms	960GB 0.21 ms	1,920 GB 0.2 ms	3,840 GB 0.2 ms
. , ,			,	,
Read (4 KB, QD=1)	0.25 ms	0.21 ms	0.2 ms	0.2 ms

NOTE:

2.7 Supply Voltage

[Table 4] Supply Voltage

Item	Requirements
Allowable voltage	5.0 V <u>+</u> 5%
Allowable noise / ripple	100 mV p-p or less

2.8 System Power Consumption

[Table 5] Power Consumption

Read/Write	480GB	960GB	1,920 GB	3,840 GB
Active Write ¹ (Typ.)	2.6W	2.9W	3.0 W	3.0 W
Active Read ² (Typ.)	2.1W	2.2W	2.2 W	2.3 W
Idle ³	1.4W	1.4W	1.4 W	1.4 W

- 1) Active Write power is measured on 128 KB sequential write (QD32, Worker1)
- 2) Active Read power is measured on 4 KB random read (QD4, Worker4)

2.9 Inrush Current

[Table 6] Inrush Current

Parameter	Requirements
Inrush Current	1.2A, <1sec

NOTE:

¹⁾ Random Latency is measured using FIO 2.7 in Linux CentOS 7.4 (Kernel 3.10.0) with 4KB (4,096 bytes) of data transfer size in Queue Depth=1 by worker 1.

¹⁾ QoS is measured using Fio 2.7 (99 and 99.99%) in CentOS 7.4 (Kernel 3.10.0) with 4KB(4,096 bytes) of data transfer size in Queue Depth 1, 32.

²⁾ QoS is measured as the maximum round-trip time taken for 99 and 99.99% of commands to host.

³⁾ Idle power is measured with DIPM off.
4)The Active and Idle power is defined as the highest averaged power value, which is the max RMS average value over 100ms duration.

¹⁾ The measurement value of inrush current is also compatible with the standard specification of "Enterprise SSD Form Factor Version 1.0a" released by SSD Form Factor Working Group.

2.10 Environmental Specifications

2.10.1 Temperature

[Table 7] Temperature Specifications

Tem	perature	480GB 960GB		1,920 GB	3,840 GB
Temperature	Operating 1)	0 °C to 70 °C			
romporaturo	Non-Operating	-40 °C to 85 °C			

NOTE:

2.10.2 Dynamic Thermal Throttling

The dynamic thermal throttling (DTT) is implemented to prevent overheating. Table 8 shows the engaging and recovery temperature thresholds.

2.10.3 DTT Table

[Table 8] Dynamic Thermal throttling

Step	Engaging temperature ^{1),2)}	Dis-engaging temperature	Performance ³⁾
DTT1	81	80	<90%
DTT2	83	82	<45%
DTT3	85	84	<25%
Critical (DTT4)	87	86	<1%
Shut-down ⁴⁾	95	N/A	N/A

NOTE:

- 1) All temperatures are based on T_{composite} values
- 2) Recovering to the previous step as the temperature falls.
- 3) Throttling levels could be varying with workloads.
 4) Hanged/Halted. Recovering after power cycle.

2.10.4 Composite Temperature (Tcomposite)

The T_{composite} is defined by the correlation equations as the below.

T_{composite}=TS

Where, TS means the temperature of reading in the thermal sensor on SSD.

2.10.5 Humidity

[Table 9] Humidity Specifications

Pa	rameter	480GB	960GB	1,920 GB	3,840 GB
Humidity ¹⁾	Non-Operating	5 to 95%			

2.10.6 Shock and Vibration

[Table 10] Shock and Vibration Specifications

	Parameter	480GB	960GB	1,920 GB	3,840 GB
Shock ¹	Non-Operating	1500G			
Vibration	Non-Operating	20G			

NOTE:

1) Test condition for shock: 0.5ms duration with half sine wave

2) Test condition for vibration : 20Hz to 2,000Hz, 4min/cycle, 4cycle/axis on 3 axis

¹⁾ Operating Temperature of the hottest point on the case (Tc). The drive will be working properly within the operating temperature range without deteriorating device reliability or any throttling. Sufficient airflow would be recommended to be operated properly on any heavier workloads within device operating temperature

¹⁾ Humidity is measured in non-condensing state

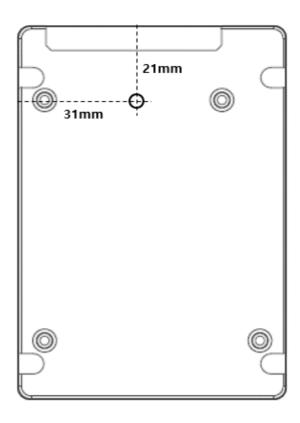


Figure 1. Standard Tcase point

MZ7L3960HBLT-00A07 MZ7L33T8HBNA-00A07 MZ7L3480HBLT-00A07 MZ7L31T9HBNA-00A07



2.11 Reliability

The reliability specification of the Samsung SSD PM893 follows JEDEC standard, which are included in JESD218 and JESD219 documents.

2.11.1 Mean Time Between Failures

MTBF is Mean Time Between Failure, and is the predicted elapsed time between inherent failures of a system during operation. MTBF can be calculated as the arithmetic average time between failures of a system.

[Table 11] MTBF Specifications

Parameter	480GB	960GB	1,920 GB	3,840 GB
MTBF	2,000,000 Hours			

NOTE:

3) MTBF is Mean Time Between Failure, As same word, annual failure ratio is 0.438%.

2.11.2 Uncorrectable Bit Error Rate

By definition, Uncorrectable Bit Error Rate (UBER) is a metric for the rate of occurrence of data errors, equal to the number of data errors per bits read as specified in the JESD218 document of JEDEC standard.

[Table 12] UBER Specifications

Parameter	480GB	960GB	1,920 GB	3,840 GB
UBER	1 sector per 10 ¹⁷ bits read			

2.11.3 Data Retention

By definition, data retention is the expected time period for retaining data in the SSD at the maximum rated endurance in power-off state as specified in the JESD218 document of JEDEC standard.

[Table 13] Data Retention Specifications

Parameter	480GB	960GB	1,920 GB	3,840 GB
Data Retention		3n	nonths	

NOTE:

2.11.4 Endurance

By definition, the endurance of SSD in enterprise application is defined as the maximum number of drive writes per day that can meet the requirements specified in the JESD218 document of JEDEC standard.

[Table 14] Drive Write Per Day (DWPD) Specifications

Parameter	480GB	960GB	1,920 GB	3,840 GB
DWPD		3 drive writes per da	ay over 5 years	

[Table 15] TBW (TeraBytes Written) Specifications

Parameter	480GB	960GB	1,920 GB	3,840 GB
TBW	2,628 TB	5,256 TB	10,512 TB	21,024 TB

NOTE

1) TBW is measured while running 100 % random 4 KB writes across the entire SSD.(TBW = DWPD x 365 x 5years x User capacity)

¹⁾ Data retention was measured by assuming that SSD reaches the maximum rated endurance at 40'C in power-off state.



3.0 MECHANICAL SPECIFICATION

[Table 16] Physical Dimensions and Weight

Model	Height (mm)	Width (mm)	Length (mm)	Weight (gram)	
480/960/1,920/3,840GB	7.00 \pm 0.00 / -0.50	69.85 ± 0.25	100.20 ± 0.25	Up to 70g	

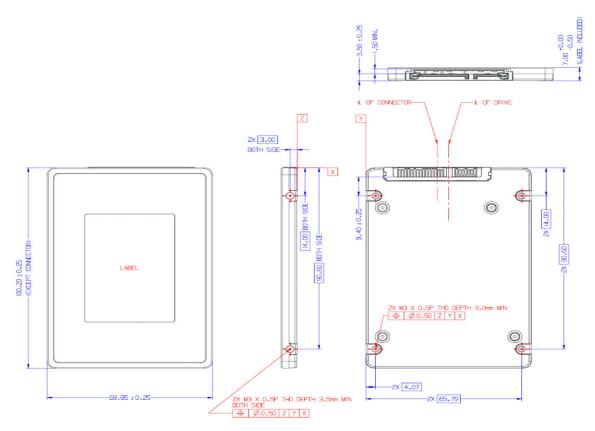


Figure 2. Physical Dimension



4.0 ELECTRICAL INTERFACE SPECIFICATION

4.1 Serial ATA Interface Connector

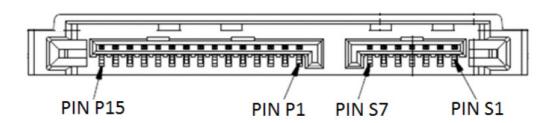


Figure 3. Drive Plug Connector

4.2 Pin Assignments

[Table 17] Pin Assignments

Word	No.		Plug Connector pin definition					
vvoiu	-							
	S1	GND	2 nd mate					
	S2	A +	Differential signal A from Phy					
	S3	A -	Smorthal digital (non 1 h)					
Signal	S4	GND	2 nd mate					
	S5	B -	Differential signal B from Phy					
	S6	B +	- Differential Signal B from Fifty					
	S7	GND	2 nd mate					
Key and spacing separate signal and power segments								
	P1	Retired	3rd Mate					
	P2	Retired	3rd Mate					
	P3	DEVSLP/PWDIS	2 nd mate (Not Support DEVSLP)					
	P4	GND	1 st mate					
	P5	GND	2 nd mate					
	P6	GND	2 nd mate					
	P7	V5	5 V power, pre-charge, 2 nd mate					
Power	P8	V5	5 V power					
	P9	V5	5 V power					
	P10	GND	2 nd mate					
	P11	DAS / DSS	Device Activity Signal					
	P12	GND	1 st mate					
	P13	V12	12 V power, pre-charge, 2 nd mate (Unused)					
	P14	V12	12 V power (Unused)					
	P15	V12	12 V power (Unused)					

NOTE:

4.3 P3 Electrical Specification

Parameter	Value	Parameter	Value
Absolute Maximum Input Voltage	3.6V	VIH(HIGH Level Input Voltage)	2.03V
VIL(LOW Level Input Voltage)	1.98V	Deglitch Time	5us

^{1.} Uses 5 V power only. 3.3 V and 12 V power are not used



5.0 COMMAND DESCRIPTIONS

5.1 Supported ATA Commands

[Table 18] Supported ATA Commands Summary

Command Name	Command Code (Hex)	Command Name	Command Code (Hex)
CHECK POWER MODE	E5h / 98h	SEND FPDMA QUEUED	64h
DEVICE CONFIGURATION	B1h	SET DATE N TIME	77h
DOWNLOAD MICROCODE	92h	SET FEATURES	EFh
DOWNLOAD MICROCODE DMA	93h	SET MAX ADDRESS	F9h
EXECUTE DEVICE DIAGNOSTIC	90h	SET MAX ADDRESS EXT	37h
FLUSH CACHE	E7h	SET MULTIPLE MODE	C6h
FLUSH CACHE EXT	EAh	SLEEP	E6h / 99h
IDENTIFY DEVICE	ECh	S.M.A.R.T.	B0h
IDLE	E3h / 97h	STANDBY	E2h / 96h
IDLE IMMEDIATE	E1h / 95h	STANDBY IMMEDIATE	E0h / 94h
INITIALIZE DEVICE PARMETERS	91h	TRIM	06h
READ BUFFER	E4h	WRITE BUFFER	E8h
READ BUFFER DMA	E9h	WRITE BUFFER DMA	EBh
READ DMA	C8h	WRITE DMA	CAh
READ DMA (w/o retry)	C9h	WRITE DMA (w/o retry)	CBh
READ DMA EXT	25h	WRITE DMA EXT	35h
READ FPDMA QUEUED	60h	WRITE DMA FUA EXT	3Dh
READ LOG DMA EXT	47h	WRITE FPDMA QUEUED	61h
READ LOG EXT	2Fh	WRITE LOG DMA EXT	57h
READ MULTIPLE	C4h	WRITE LOG EXT	3Fh
READ MULTIPLE EXT	29h	WRITE MULTIPLE	C5h
READ NATIVE MAX ADDRESS	F8h	WRITE MULTIPLE EXT	39h
READ NATIVE MAX ADDRESS EXT	27h	WRITE MULTIPLE FUA EXT	CEh
READ SECTORS	20h	WRITE SECTORS	30h
READ SECTORS (w/o retry)	21h	WRITE SECTORS (w/o retry)	31h
READ SECTORS EXT	24h	WRITE SECTORS EXT	34h
READ VERIFY SECTORS	40h	WRITE UNCORRECTABLE EXT	45h
READ VERIFY SECTORS (w/o retry)	41h	TRUSTED NON DATA	5Bh
READ VERIFY SECTORS EXT	42h	TRUSTED RECEIVE	5Ch
RECALIBRATE	10h	TRUSTED RECEIVE DMA	5Dh
NCQ NONDATA	63h	TRUSTED SEND	5Eh
SANITIZE DEVICE	B4h	TRUSTED SEND DMA	5Fh
SECURITY DISABLE PASSWORD	F6h		
SECURITY ERASE PREPARE	F3h		
SECURITY ERASE UNIT	F4h		
SECURITY FREEZE LOCK	F5h		
SECURITY SET PASSWORD	F1h		
SECURITY UNLOCK	F2h		
SEEK	70h		

MZ7L3960HBLT-00A07 MZ7L33T8HBNA-00A07 MZ7L3480HBLT-00A07 MZ7L31T9HBNA-00A07



5.2 Individual Attribute Data Structure

The following defines the 12 bytes that make up the information for each Attribute entry in the Device Attribute Data Structure.

Byte	Descriptions
0	Attribute ID number 01-FFh
1 - 2	Status flag bit 0 (pre-failure / advisory bit) bit 0 = 0: If attribute value is less than the threshold, the drive is in advisory condition. Product life period may expired. bit 0 = 1: If attribute value is less than the threshold, the drive is in pre-failure condition. The drive may have failure. bit 1 (on-line data collection bit) bit 1 = 0: Attribute value will be changed during off-line data collection operation. bit 1 = 1: Attribute value will be changed during normal operation. bit 2 (Performance Attribute bit) bit 3 (Error rate Attribute bit) bit 4 (Event Count Attribute bit) bit 5 (Self-Preserving Attribute bit) bit 5 (Self-Preserving Attribute bit) bit 6 - 15 Reserved
3	Attribute value 01h - FDh *1 00h, FEh, FFh = Not in use 01h = Minimum value 64h = Initial value Fdh = Maximum value
4	Worst Ever normalized Attribute Value (valid values from 01h - FEh)
5 - 10	Raw Attribute Value Attribute specific raw data (FFFFFh - reserved as saturated value)
11	Reserved (00h)
*1 For ID = 199 CR	C Error Count

MZ7L3960HBLT-00A07 MZ7L33T8HBNA-00A07 MZ7L3480HBLT-00A07 MZ7L31T9HBNA-00A07



The device supports following Attribute ID Numbers.

[Table 20] SMART Attributes

ID (Word)	Attribute Name	Status Flag	Threshold (%)
5	Reallocated Sector Count	110011	10
9	Power-on Hours	110010	-
12	Power-on Count	110010	-
177	Wear Leveling Count	010011	5
179	Used Reserved Block Count (total)	010011	10
180	Unused Reserved Block Count (total)	010011	10
181	Program Fail Count (total)	110010	10
182	Erase Fail Count (total)	110010	10
183	Runtime Bad Count (total)	010011	10
184	End to End Error data path Error Count	110011	97
187	Uncorrectable Error Count	110010	-
190	Air Flow Temperature	110010	-
194	Temperature	100010	-
195	ECC Error Rate	011010	-
197	Pending Sector Count	110010	-
199	CRC Error Count	111110	-
202	SSD Mode Status	110011	10
235	Power Recovery Count	010010	-
241	Total LBA Written	110010	-
242	Total LBA Read	110010	-
243	SATA Downshift Control	110010	-
244	Thermal Throttle Status	110010	-
245	Timed Workload Media Wear	110010	-
246	Timed Workload Host Read / Write Ratio	110010	-
247	Timed Workload Timer	110010	-
251	NAND Writes	110010	

NOTE:

^{1.} Any nonzero value in the Attribute ID Number indicates an active attribute.



6.0 IDENTIFY DEVICE DATA

[Table 21]	-			0.04000	
Word	480GB		1,920 GB	*	General Information
0	0040h	0040h	0040h	0040h	Obsolete
1	3FFFh	3FFFh	3FFFh	3FFFh	Obsolete
2	C837h	C837h	C837h	C837h	Obsolete
3	0010h	0010h	0010h	0010h	Retired
4 - 5	0000h	0000h	0000h	0000h	Obsolete
6	003Fh	003Fh	003Fh	003Fh	Obsolete
7 - 8	0000h	0000h	0000h	0000h	Reserved for the Compact Flash Association
9	0000h	0000h	0000h	0000h	Retired
10 - 19	XXXXh	XXXXh	XXXXh	XXXXh	Serial Number (ATA string)
20-21	0000h	0000h	0000h	0000h	Obsolete
22	0000h	0000h	0000h	0000h	Obsolete
23-26	XXXXh	XXXXh	XXXXh	XXXXh	Firmware Revision (ATA string)
27-46	XXXXh	XXXXh	XXXXh	XXXXh	Model Number
47	8010h	8010h	8010h	8010h	Read / Write Multiple Support
48	4001h	4001h	4001h	4001h	Trusted Computing Feature Set Options
49	2F00h	2F00h	2F00h	2F00h	Capabilities
50	4000h	4000h	4000h	4000h	Capabilities
51-52	0200h	0200h	0200h	0200h	Obsolete
53	0007h	0007h	0007h	0007h	Obsolete
54	3FFFh	3FFFh	3FFFh	3FFFh	Obsolete
55	0010h	0010h	0010h	0010h	Obsolete
56	003Fh	003Fh	003Fh	003Fh	Obsolete
57	FC10h	FC10h	FC10h	FC10h	Obsolete
58	00FBh	00FBh	00FBh	00FBh	Obsolete
59	BD10h	BD10h	BD10h	BD10h	Multiple Logical Setting
60	FFFFh	FFFFh	FFFFh	FFFFh	Obsolete
61	0FFFh	0FFFh	0FFFh	0FFFh	Obsolete
62	0000h	0000h	0000h	0000h	Obsolete
63	0007h	0007h	0007h	0007h	Multi-word DMA Transfer
64	0003h	0003h	0003h	0003h	PIO Transfer Modes Supported
65	0078h	0078h	0078h	0078h	Minimum Multiword DMA Transfer Cycle Time per Word (ns)
66	0078h	0078h	0078h	0078h	Manufacturer's Recommended Multiword DMA Cycle Time (ns)
67	0078h	0078h	0078h	0078h	Minimum PIO Transfer Cycle Time without IORDY Flow Control (ns)
68	0078h	0078h	0078h	0078h	Minimum PIO Transfer Cycle Time with IORDY Flow Control (ns)
69	4F30h	4F30h	4F30h	4F30h	Additional Supported
70-74	0000h	0000h	0000h	0000h	Reserved
75	001Fh	001Fh	001Fh	001Fh	Queue Dept
76	850Eh	850Eh	850Eh	850Eh	Serial ATA Capabilities
77	0066h	0066h	0066h	0066h	Serial ATA Additional Capabilities
78	1064h	1064h	1064h	1064h	Serial ATA Features Supported
79	0060h	0060h	0060h	0060h	Serial ATA Features Enabled
80	0FFCh	0FFCh	0FFCh	0FFCh	Major Version Number
81	005Eh	005Eh	005Eh	005Eh	Minor Version Number
82	746Bh	746Bh	746Bh	746Bh	Commands and Feature Sets Supported
83	740Bii 7D01h	740Bii 7D01h	740Bii	740Bii	Commands and Feature Sets Supported Commands and Feature Sets Supported
84	4163h	4163h	4163h	4163h	Commands and Feature Sets Supported Commands and Feature Sets Supported or Enabled
04	410311	410311	410311	410311	Commands and realtire Sets Supported of Enabled

MZ7L3960HBLT-00A07 MZ7L33T8HBNA-00A07 MZ7L3480HBLT-00A07 MZ7L31T9HBNA-00A07



SET MANAGEMENT-

MZ7L3960HBLT-00A07 MZ7L33T8HBNA-00A07 MZ7L3480HBLT-00A07 MZ7L31T9HBNA-00A07



221	0000h	0000h	0000h	0000h	Reserved
222	10FFh	10FFh	10FFh	10FFh	Transport Major Version Number
223	0000h	0000h	0000h	0000h	Transport Minor Version Number
224-229	0000h	0000h	0000h	0000h	Reserved
230-233	0000h	0000h	0000h	0000h	Extended Number of User Addressable Sectors
234	0000h	0000h	0000h	0000h	Minimum Number of 512-byte Data Blocks per DOWNLOAD MICROCODE Command for Mode 03h
235	1400h	1400h	1400h	1400h	Maximum Number of 512-byte Data Blocks per DOWNLOAD MICROCODE Command for Mode 03h
236-242	0000h	0000h	0000h	0000h	Reserved
243	4000h	4000h	4000h	4000h	FDE Security Features ** SED : 4000h, Non-SED: 0000h **
244-254	0000h	0000h	0000h	0000h	Reserved
255	XXA5h	XXA5h	XXA5h	XXA5h	Integrity Word



7.0 SPOR SPECIFICATION (Sudden Power Off and Recovery)

7.1 Data Recovery in Sudden Power Off

If power interruption is detected, SSD dumps all cached user data and meta data to NAND Flash. SSD could protect even the user data in DRAM from sudden power off while SSD is used with cache on. Commonly, data is protected all of the operation period.

7.2 Time to Ready Sequence

In normal power-off recovery status, SSD needs less than 10 seconds to reach operating mode where SSD works perfectly with cache-on state. SSD is ready to respond Identify Device command during FTL OPEN. When the sudden power-off occurs, the user data in DRAM will be dumped into to NAND Flash using the stored power in the capacitor. In sudden power-off recovery condition, mapping data will be loaded or the FTL meta data be rebuilt perfectly for initial max. 10 seconds. During this period, Identify Device command is still supported. It is called SPOR (Sudden Power Off and Recovery).

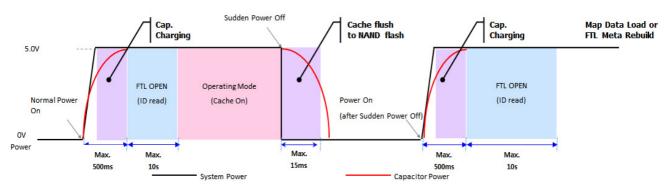


Figure 4. Time to Ready Sequence

[Table 22] Device Ready Time for Normal Read / Write Operation after Sudden Power Off

	480GB	960GB	1,920 GB	3,840GB
Max. Open Time (sec)		10s		



8.0 PRODUCT COMPLIANCE

[Table 23] Certifications and Declarations

Category	Certifications		
Safety	c-UL-us		
	CE		
	TUV		
	СВ		
EMC	CE (EU)		
	BSMI (Taiwan)		
	KCC (South Korea)		
	VCCI (Japan)		
	RCM (Australia)*		
	Morocco		
	FCC (USA)		
	IC (CANADA)		

^{*} The three existing compliance marks (C-Tick, A-Tick and RCM) are consolidated into a single compliance mark - the RCM



Caution: Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications, However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help

Modifications not expressly approved by the manufacturer could void the user's authority to operated the equipment under FCC rules.



1. 기자재 명칭 : SSD (Solid State Drive)

2. 모델명(Model): 라벨 별도 표기

3. 제조연월 : 라벨 별도 표기 4. 제조자 : 삼성전자(주)

5. 제조국가: 대한민국

6. 상호명 : 삼성전자(주)

Industry Canada ICES-003 Compliance Label:

CAN ICES-3 (B)/NMB-3(B)

MZ7L3960HBLT-00A07 MZ7L33T8HBNA-00A07 MZ7L3480HBLT-00A07 MZ7L31T9HBNA-00A07



9.0 REFERENCES

[Table 24] Standards References

Item	Website
Serial ATA Revision 3.3	http://www.sata-io.org
ATA/ATAPI Command Set - 4 (ACS-4)	http://www.t13.org
SFF-8223, 2.5-inch Drive with Serial Attachment Connector	http://www.sffcommittee.org
SFF-8201, 2.5-inch drive form factor	http://www.sffcommittee.org
Solid-State Drive Requirements and Endurance Test Method (JESD218A)	http://www.jedec.org/standards-documents/docs/jesd218a
Solid-State Drive Requirements and Endurance Test Method (JESD219A)	http://www.jedec.org/standards-documents/docs/jesd219a