



ScanSnap

Color Image Scanner

S1300i



Simple, Speedy & Compact.
From Paper to PDF in One Touch!

shaping tomorrow with you



■ General Specifications

Product name		ScanSnap S1300i	
Scanner type		ADF (Automatic Document Feeder), duplex scanning	
Scanning modes		Color, grayscale, monochrome, automatic (color / grayscale / monochrome detection)	
Image sensor		CIS (Contact Image Sensor) x 2	
Light source		3 Color LED (Red / Green / Blue)	
Optical resolution		600 dpi	
Scanning speed (A4 portrait) *1	AC adapter	Auto mode *2	Simplex / Duplex: 6 ppm
		Normal mode	Color / Grayscale: 150 dpi, Monochrome: 300 dpi, Simplex / Duplex: 12 ppm
		Better mode	Color / Grayscale: 200 dpi, Monochrome: 400 dpi, Simplex / Duplex: 9 ppm
		Best mode	Color / Grayscale: 300 dpi, Monochrome: 600 dpi, Simplex / Duplex: 6 ppm
		Excellent mode	Color / Grayscale: 600 dpi, Monochrome: 1,200 dpi, Simplex / Duplex: 1 ppm
		Auto mode *2	Simplex / Duplex: 2 ppm
	USB bus powered *3	Normal mode	Color / Grayscale: 150 dpi, Monochrome: 300 dpi, Simplex / Duplex: 4 ppm
		Better mode	Color / Grayscale: 200 dpi, Monochrome: 400 dpi, Simplex / Duplex: 3 ppm
		Best mode	Color / Grayscale: 300 dpi, Monochrome: 600 dpi, Simplex / Duplex: 2 ppm
		Excellent mode	Color / Grayscale: 600 dpi, Monochrome: 1,200 dpi, Simplex / Duplex: 1 ppm
		Auto mode *2	Simplex / Duplex: 2 ppm
		Normal mode	Color / Grayscale: 150 dpi, Monochrome: 300 dpi, Simplex / Duplex: 4 ppm
Document size	Normal mode	A4, A5, A6, B5, B6, Business card, Post card, Letter, Legal and Custom sizes (Max: 216 x 360 mm (8.5 x 14.17 in.), Min: 50.8 x 50.8 mm (2 x 2 in.)) / Automatically recognizes document size	
	Long paper scanning *4	863 mm (34 in.)	
Paper weight (Thickness)	64 to 104.7 g/m2 (17.1 to 28.0 lb)		
Paper chute capacity *5	Maximum 10 sheets (A4, 80 g/m2 or 20 lb)		
Interface	USB2.0 (USB1.1 Compatible)		
Power requirement	AC adapter	AC 100 to 240 V, 50 / 60 Hz	
	USB bus power	5 V / 1 A (0.5 A x 2 port)	
Power consumption	Power cable connection	During operation: 9 W or less, During sleep mode: 2.6 W or less, During off mode: 0.5 W or less	
	USB bus power cable connection	During operation: 5 W or less, During sleep mode: 2 W or less, During off mode: 0.5 W or less	
Operation environment	Temperature: 5 to 35 °C (41 to 95 °F) Relative humidity: 20 to 80% (Non-condensing)		
Dimensions (W x D x H) *6	284 x 99 x 77 mm (11.18 x 3.90 x 3.03 in.)		
Device weight	1.4 kg (3.08 lb)		
Environmental compliance	ENERGY STAR® / RoHS		
Multifeed detection	Length check		
Driver	Specific driver • Windows®: Does not support TWAIN / ISIS™ • Mac OS: Does not support TWAIN		

*1 Scanning speeds may vary due to the system environment used. *2 Documents measuring approximately 148 mm in length or less are scanned in "Best mode", while other documents are scanned in "Better mode". *3 When using the USB bus power cable, the personal computer must have two USB ports: one for power feeding, the other for USB cable connection. *4 ScanSnap S1300i is capable of scanning documents that exceed A4 size in length. It supports the scanning of longer documents in all modes, except for "Excellent mode". *5 Maximum capacity varies, depending upon paper weight. *6 When chuter is closed.

■ Software	Windows®	Mac OS
Driver *1 *2	ScanSnap Manager V5.1	ScanSnap Manager V3.2
	ScanSnap Organizer V4.1	-
	CardMinder™ V4.1	-
	-	Cardiris™ 4.0 for ScanSnap
	ABBY FineReader for ScanSnap™ 4.1	ABBY FineReader for ScanSnap™ 4.1
	Scan to Microsoft® SharePoint® 3.4	-
Applications	Evernote for Win 4.5	Evernote for Mac 3.3

*1 TWAIN or ISIS™ applications cannot be used directly. *2 "One Touch" image file (JPEG, PDF and searchable PDF) generation. These functions are operable with ScanSnap Manager (ScanSnap specific driver).

■ Options	Part number	Remarks
ScanSnap S300 Soft Case *1	PA03541-0004	Intended for ScanSnap S1300i, S1300, S300, S300M and included items

*1 This product has been especially designed for storing and carrying ScanSnap S1300i/S1300/S300/S300M. Please note that this product is not guaranteed to withstand damage by excessive shock or external pressure.

■ Consumables	Description	Part number	Remarks
Pick Roller *1	PA03541-0001	Life cycle: Every 100,000 sheets or one year.	
	PA03541-0002	Life cycle: Every 10,000 sheets or one year.	
	PA03950-0352	100 ml bottle: For use on the Pick Roller and Pad Assy	
	PA03950-0419	1 pack (24 sheets): For use on the Pick Roller and Pad Assy	

*1 These recommended lifetimes are for 80 g/m2 (20 lb) A4 sized documents. Therefore, appropriate replacement lifetimes may vary for other document types.

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. ScanSnap users are responsible for how they use this scanner. It is imperative that ScanSnap users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.

* ABBYY™ FineReader™ Engine ©2011 ABBYY. OCR by ABBYY. ABBYY and FineReader are trademarks of ABBYY. * Adobe, Acrobat are either registered trademarks or tradenames of Adobe Systems Incorporated in the United States and/or other countries. * Cardiris is a trademark of I.R.I.S. * Evernote is a registered trademark or trademark of Evernote Corporation. * Google, Google Docs, Android and Google Play are registered trademarks or trademarks of Google Inc. * Intel, Pentium, and Intel Core are registered trademarks or trademarks of Intel Corporation in the United States and other countries. * ISIS™ is a registered trademark of EMC Corporation in the United States. * Mac, Mac OS, OS X, iPad, iPhone and App Store are trademarks of Apple Inc. * Microsoft, Windows, Windows Vista, Excel, PowerPoint, SharePoint and Internet Explorer are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. * Word is the product of Microsoft Corporation in the United States. * Salesforce and Salesforce CRM are registered trademarks or trademarks of salesforce.com which is based in the U.S. * ScanSnap, ScanSnap logo, ScanSnap Manager, ScanSnap Organizer, CardMinder and Rack2-Filer are registered trademarks or trademarks of PFI LIMITED in Japan. * Wi-Fi and Wi-Fi Protected Setup are trademarks of Wi-Fi Alliance. * Other company names and product names are the trademarks or registered trademarks of the respective companies.

For more ScanSnap related information, visit our Web site at: <http://www.fujitsu-scansnap.com>

■ ScanSnap S1300i System Requirements

■ Windows®					
Compatible operating systems		Windows® 8 (32-bit / 64-bit)	Windows® 7 (32-bit / 64-bit)	Windows Vista® (32-bit / 64-bit) *1	Windows® XP (32-bit) *2
Driver / Applications *3	ScanSnap Manager V5.1	Supported	Supported	Supported	Supported
	ScanSnap Organizer V4.1	Supported	Supported	Supported	Supported
	CardMinder™ V4.1	Supported	Supported	Supported	Supported
	ABBY FineReader for ScanSnap™ 4.1	Supported	Supported	Supported	Supported
	Scan to Microsoft® SharePoint® 3.4	Supported	Supported	Supported	Supported
Hardware requirements *4	CPU *5	Intel® Pentium® 4 1.8 GHz or higher (Recommended: Intel® Core™ 2 Duo 2.2 GHz or higher)			
	Memory capacity *5	64-bit: 2 GB or more 32-bit: 1 GB or more		512 MB or more (Recommended: 1 GB or more)	
	Display	1,024 x 768 pixels or more			
	Disk capacity *6	2,290 MB or more of free hard disk space (1 GB or more is required for ScanSnap S1300i Deluxe. For details, refer to the manual of Rack2-Filer Smart with Magic Desktop.)			
	DVD-ROM drive	Required for installation			
USB port *5 *7	USB3.0 / USB2.0 / USB1.1				

*1 For use with Service Pack 1 or higher. *2 For use with Service Pack 3 or higher. Compatible with Windows® XP Professional / Home Edition. *3 Please refer to the ScanSnap Web site for latest support information. *4 The ScanSnap device may not work if the connected computer does not meet this requirement. *5 Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. *6 Microsoft .NET Framework 3.5 SP1 will be installed (requires 500 MB of disk space) together with either ScanSnap Manager or ScanSnap Organizer for systems that do not have .NET Framework 3.5 SP1 installed. *7 ScanSnap operates on both USB 2.0 and USB 3.0 without any difference in performance. * System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

■ Mac OS					
Compatible operating systems		OS X v10.8	Mac OS X v10.7	Mac OS X v10.6 *1	Mac OS X v10.5 *2
Driver / Applications *3	ScanSnap Manager V3.2	Supported	Supported	Supported	Supported
	Cardiris™ 4.0 for ScanSnap	Supported	Supported	Supported	Supported
	ABBY FineReader for ScanSnap™ 4.1	Supported	Supported	Supported	Supported
	Evernote for Mac 3.3	Supported	Supported	Supported	Not supported
	CPU *5	Intel® Core™ Duo 1.83 GHz or higher (Recommended: Intel® Core™ 2 Duo 2.4 GHz or higher)			
Hardware requirements *4	Memory capacity *5	2 GB or more		1 GB or more (Recommended: 1 GB or more)	
	Display	1,024 x 768 pixels or more			
	Disk capacity	1,580 MB free hard disc space for installation			
	DVD-ROM drive	Required for installation			
	USB port *5 *6	USB2.0 / USB1.1			

*1 Mac OS X v10.6.6 or later recommended. *2 Mac OS X v10.5.8 recommended. *3 Please refer to the ScanSnap Web site for latest support information. *4 The ScanSnap device may not work if the connected computer does not meet this requirement. *5 Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. *6 ScanSnap operates on both USB 2.0 and USB 3.0 without any difference in performance. * System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

■ Rack2-Filer Smart V1.0 / Magic Desktop V1.0 *1 *2 *3 System Requirements					
Compatible operating systems		Windows® 8 (32-bit / 64-bit) *4	Windows® 7 (32-bit / 64-bit) SP1 or later	Windows Vista® (32-bit / 64-bit) SP2 or later	Windows® XP (32-bit) SP3 or later
Hardware requirements	CPU	Intel® Pentium® 4 1.8 GHz or higher (Recommended: Intel® Core™ 2 Duo 2.2 GHz or higher)			
	Memory capacity	2 GB or more (Recommended: 4 GB or more)			
	Display	1,024 x 768 pixels or more			
	Disk capacity	-		64bit: 2 GB or more 32bit: 850 MB or more	
	Installation drive	1 GB or more disc space* * Additional space is required for the data created by Rack2-Filer Smart and Magic Desktop			
Supported scanners	ScanSnap iX500, S1500, S1300i, S1300, S1100				
Supported mobile devices	Model	iPad series, iPhone series (4 or later), iPod touch series (4th generation or later)			
	OS	iOS 4.3 or later			
	Application	Rack2-Filer Smart for iOS 1.1.0 or later			

*1 This product only supports Microsoft® Windows®. *2 Please refer to the Rack2-Filer Smart Web site and the Magic Desktop Web site. *3 When installing Magic Desktop, Internet connection is required. *4 Rack2-Filer Smart and Magic Desktop runs as a desktop application. *5 This is the free capacity required when .NET Framework 4 is not installed.

■ Included items	• AC cable • AC adapter • Rack2-Filer Smart with Magic Desktop (Exclusive to ScanSnap S1300i Deluxe)	• USB bus power cable • USB cable (2.0 m)	• Set-up DVD-ROM • Safety Precautions
------------------	--	--	--

⚠ Safety Precautions Be sure to carefully read all safety precautions prior to using this product and use this device as instructed. Do not place this device in wet, moist, steamy, dusty or oily areas. Using this product under such conditions may result in electrical shock, fire or damage to this product.

Fujitsu Asia Pte Ltd (Singapore) Tel: 6512 7467/873 Fax: 6512 7499	PT Fujitsu Indonesia Tel: (62-21) 570 9330 Fax: (620-21) 573 5477	Fujitsu India Pvt. Limited Tel: +91 124 470 5100 Tel: (603) 8318 3700 Fax: +91 124 470 5198, 460 5199 Fax: (603) 83188700	Fujitsu (Malaysia) Sdn Bhd Tel: (63 2) 841 8488 Fax: (63 2) 8177576	Fujitsu Philippines, Inc. Tel: +66 (0) 2302 1500 Fax: +66 2302 1555	Fujitsu Systems Business (Thailand) Ltd. Tel: +66 4 220 3113 Fax: +91 124 470 5198, 460 5199	Fujitsu Vietnam Limited Tel: +84 4 220 3113 Fax: +91 124 470 5198, 460 5199
--	---	---	---	---	--	---

Specifications are subject to change without prior notice.

Stack. Scan. Simple!



The portable ScanSnap S1300i provides PC and Mac users the tools to be productive and paperless...anywhere.

Features for PC

ScanSnap Organizer 4.1 allows PC users a convenient way to store, manage, and view PDF and JPEG files as well as perform post-scan editing, keyword entry, and searchable PDF conversion.



CardMinder 4.1 provides PC users a fast way to capture both sides of a business card, extract the information automatically, and export it to Outlook, Act!, and other contact management software.



ScanSnap Quick Menu for PC



Scan to Cloud

Like all current ScanSnap models, the S1300i can scan to cloud services Evernote, Google Docs™, Salesforce CRM, SugarSync and SharePoint Online (for Windows®).

NEW Scan to Dropbox

Easily store and share your documents by scanning them to Dropbox.



Scan 'outside-the-box' into virtually any application or cloud service from a PC (for Windows®).



NEW Scan to Smart Phones and Tablets

Like all scanners of the ScanSnap series, the S1300i supports wireless scanning to iPad and iPhone devices via the mobile app ScanSnap Connect Application, which now comes in a version for select Android™ smartphones and tablets.



ABBYY FineReader for ScanSnap

provides users one-button scanning directly to editable Microsoft Word and Excel files.

Scan to Word

Scan to Excel

Features for Mac

Scan to Functions allows Mac users a flexible way to manage their PDF, Searchable PDF, and JPEG files. Operators can save content to a folder, a network folder, iPhoto, and even directly to their iDisk account.



Cardiris provides Mac users a convenient way to scan their business cards and export the contact information directly to Address Book or Entourage.



ScanSnap Quick Menu for Mac




ScanSnap Automatic Features

Auto Color Detection




Color, Grayscale, & Monochrome

Auto Quality Function



Increases resolution to Best on small documents (A6 or smaller)

Auto Paper Size Detection

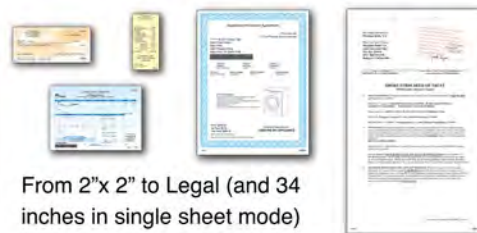

From 2"x 2" to Legal (and 34 inches in single sheet mode)

Auto De-skew & Orientation



Straightens crooked documents and helps rotate upside-down ones

Auto Keyword Function



Use a standard highlighter pen on B & W documents to create searchable keywords



*Rack2-Filer 5.0 license is provided with ScanSnap S1300i Deluxe Bundle only (Part: PA03643-B015).