

## TouchBoard G80-11900



Models may vary from the image shown

### Compact keyboard with built-in touchpad

The multifunctional TouchBoard is the perfect solution for limited spaces in situations requiring the functions of a "mouse". Particularly in hard industrial applications, the Cherry keyboard shows what she is made of. The model combines outstanding quality with long service life and precise, easy-to-operate touchpad.

### Key benefits

- Individual keys with Gold Crosspoint contacts (MX technology)
- Designed for continuous usage - over 50 mill. confirmations per key
- Robust and reliable
- Space-saving and ergonomic
- Ideal for limited space and 19" applications
- Can be used with the standard drivers of the operating system
- USB keyboard: the following keys can be programmed freely using KeyM@n software (software macros) in 3 levels (single confirmation in combination with "CTRL", in combination with "SHIFT"): function keys "F1"- "F12", "INSERT", "DELETE", "POSITION1", "END", "PAGE-UP", "PAGE-DOWN", "PRINT", "PAUSE", comma and zero in the numeric field.

### Technical Data:

#### Layout (country or language):

Product dependant, see table "Models"

#### Housing colour:

Product dependant, see table "Models"

#### Key colour:

Product dependant, see table "Models"

#### Weight (product):

approx. 1000 g

#### Total weight (with packaging):

approx. 1200 g

#### Cable Length:

approx. 1.75 m

#### Storage Temperature:

-20°C to 60°C

#### Operating Temperature:

0°C to 50°C

#### Current Consumption:

Product dependant, see table "Models"

#### Interface:

Product dependant, see table "Models"

#### Product approvals:

Product dependant, see table "Models"

#### System requirements:

Product dependant, see table "Models"

#### Delivery Volume:

Product dependant, see table "Models"

#### Dimensions (product):

approx. 415 x 193 x 37 mm

#### Packaging dimensions:

approx. 447 x 250 x 45 mm

#### Reliability:


- MCBF > 10 bill. operations
- MTBF > 874,000 hours

#### Touchpad:

- Resolution: 1000 dpi
- Number of Keys: 2

#### Keyboard:

- Key technology: MX
- Service life, standard key: > 50 million key operations
- Operation characteristics: BLACK SWITCH Linear (60 cN)

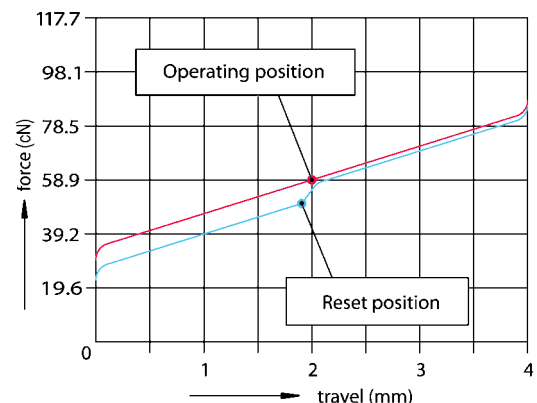

- Inscription technology: Laser

- Inscription layout: Standard

- Number of Keys: Product dependant, see table "Models"

#### Packaging Unit:

- Number of products in the master package: 66

- Number of master packages per pallet: 2

#### Warranty:

2 years

Errors, technical changes and delivery possibilities excepted.  
Technical information refers only to the specifications of the  
products. Features may differ from the information provided.

**Models:**

(possible country/layout versions, others available on request)

Product name	Order number	Layout (country or language)	Housing colour	Key colour	Current Consumption	Interface	Product approvals	System requirements	Delivery Volume	Number of Keys	
1	TouchBoard G80-11900	G80-11900LPMBE-0	Belgium	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
2	TouchBoard G80-11900	G80-11900LPMBE-2	Belgium	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
3	TouchBoard G80-11900	G80-11900LPMCH-0	Switzerland	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
4	TouchBoard G80-11900	G80-11900LPMCH-2	Switzerland	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
5	TouchBoard G80-11900	G80-11900LPMDE-0	Germany	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
6	TouchBoard G80-11900	G80-11900LPMDE-2	Germany	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
7	TouchBoard G80-11900	G80-11900LPMDK-0	Denmark	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
8	TouchBoard G80-11900	G80-11900LPMDK-2	Denmark	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
9	TouchBoard G80-11900	G80-11900LPMES-0	Spain	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
10	TouchBoard G80-11900	G80-11900LPMES-2	Spain	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
11	TouchBoard G80-11900	G80-11900LPMEU-0	US English with EURO symbol	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	104

Product name	Order number	Layout (country or language)	Housing colour	Key colour	Current Consumption	Interface	Product approvals	System requirements	Delivery Volume	Number of Keys
TouchBoard G80-11900	G80-11900LPMEU-2	US English with EURO symbol	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	104
TouchBoard G80-11900	G80-11900LPMFR-0	France	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMFR-2	France	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMGB-0	UK	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMGB-2	UK	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMGR-0	Greece	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMGR-2	Greece	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMIT-0	Italy	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMIT-2	Italy	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMNO-0	Norway	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMNO-2	Norway	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105

Product name	Order number	Layout (country or language)	Housing colour	Key colour	Current Consumption	Interface	Product approvals	System requirements	Delivery Volume	Number of Keys
TouchBoard G80-11900	G80-11900LPMPO-0	Portugal	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMPO-2	Portugal	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMRB-0	English (US) / Cyrillic	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	104
TouchBoard G80-11900	G80-11900LPMRB-2	English (US) / Cyrillic	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	104
TouchBoard G80-11900	G80-11900LPMSF-0	Sweden / Finland	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMSF-2	Sweden / Finland	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMTS-0	Czech Republic	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMTS-2	Czech Republic	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LPMUS-0	US English	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	104
TouchBoard G80-11900	G80-11900LPMUS-2	US English	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	104
TouchBoard G80-11900	G80-11900LTMBE-0	Belgium	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105

Product name	Order number	Layout (country or language)	Housing colour	Key colour	Current Consumption	Interface	Product approvals	System requirements	Delivery Volume	Number of Keys
TouchBoard G80-11900	G80-11900LTMBE-2	Belgium	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMCH-0	Switzerland	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMCH-2	Switzerland	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMDE-0	Germany	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMDE-2	Germany	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMDK-0	Denmark	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMDK-2	Denmark	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMES-0	Spain	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMES-2	Spain	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105

Product name	Order number	Layout (country or language)	Housing colour	Key colour	Current Consumption	Interface	Product approvals	System requirements	Delivery Volume	Number of Keys
TouchBoard G80-11900	G80-11900LTMEU-0	US English with EURO symbol	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	104
TouchBoard G80-11900	G80-11900LTMEU-2	US English with EURO symbol	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	104
TouchBoard G80-11900	G80-11900LTMFR-0	France	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMFR-2	France	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMGB-0	UK	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMGB-2	UK	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMGR-0	Greece	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMGR-2	Greece	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMIT-0	Italy	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105

Product name	Order number	Layout (country or language)	Housing colour	Key colour	Current Consumption	Interface	Product approvals	System requirements	Delivery Volume	Number of Keys
TouchBoard G80-11900	G80-11900LTMIT-2	Italy	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMNO-0	Norway	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMNO-2	Norway	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMPO-0	Portugal	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMPO-2	Portugal	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMRB-0	English (US) / Cyrillic	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	104
TouchBoard G80-11900	G80-11900LTMRB-2	English (US) / Cyrillic	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	104
TouchBoard G80-11900	G80-11900LTMSF-0	Sweden / Finland	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
TouchBoard G80-11900	G80-11900LTMSF-2	Sweden / Finland	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105



Product name	Order number	Layout (country or language)	Housing colour	Key colour	Current Consumption	Interface	Product approvals	System requirements	Delivery Volume	Number of Keys	
61	TouchBoard G80-11900	G80-11900LTMTS-0	Czech Republic	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
62	TouchBoard G80-11900	G80-11900LTMTS-2	Czech Republic	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
63	TouchBoard G80-11900	G80-11900LTMUS-0	US English	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	104
64	TouchBoard G80-11900	G80-11900LTMUS-2	US English	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	104
65	TouchBoard G80-11900	G80-11900LUMBE-0	Belgium	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
66	TouchBoard G80-11900	G80-11900LUMBE-2	Belgium	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
67	TouchBoard G80-11900	G80-11900LUMCH-0	Switzerland	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
68	TouchBoard G80-11900	G80-11900LUMCH-2	Switzerland	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
69	TouchBoard G80-11900	G80-11900LUMDE-0	Germany	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
70	TouchBoard G80-11900	G80-11900LUMDE-2	Germany	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
71	TouchBoard G80-11900	G80-11900LUMDK-0	Denmark	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
72	TouchBoard G80-11900	G80-11900LUMDK-2	Denmark	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
73	TouchBoard G80-11900	G80-11900LUMES-0	Spain	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105

Product name	Order number	Layout (country or language)	Housing colour	Key colour	Current Consumption	Interface	Product approvals	System requirements	Delivery Volume	Number of Keys
TouchBoard G80-11900	G80-11900LUMES-2	Spain	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LUMEU-0	US English with EURO symbol	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	104
TouchBoard G80-11900	G80-11900LUMEU-2	US English with EURO symbol	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	104
TouchBoard G80-11900	G80-11900LUMFR-0	France	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LUMFR-2	France	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LUMGB-0	UK	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LUMGB-2	UK	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LUMGR-0	Greece	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LUMGR-2	Greece	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LUMIT-0	Italy	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LUMIT-2	Italy	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LUMNO-0	Norway	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LUMNO-2	Norway	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LUMPO-0	Portugal	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
TouchBoard G80-11900	G80-11900LUMPO-2	Portugal	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105

Product name	Order number	Layout (country or language)	Housing colour	Key colour	Current Consumption	Interface	Product approvals	System requirements	Delivery Volume	Number of Keys	
89	TouchBoard G80-11900	G80-11900LUMRB-0	English (US) / Cyrillic	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	104
90	TouchBoard G80-11900	G80-11900LUMRB-2	English (US) / Cyrillic	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	104
91	TouchBoard G80-11900	G80-11900LUMSF-0	Sweden / Finland	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
92	TouchBoard G80-11900	G80-11900LUMSF-2	Sweden / Finland	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
93	TouchBoard G80-11900	G80-11900LUMTS-0	Czech Republic	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
94	TouchBoard G80-11900	G80-11900LUMTS-2	Czech Republic	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105