Product Highlights

Manage your small and midrange business growing storage needs by deploying the next generation 6Gb SAS low cost, flexible tiered external storage system. Ideal for small application environments in SMBs, remote offices and departmental locations as well as tier 2 or 3 storage for enterprise customers. The new 6Gb SAS enclosures - Large Form Factor (LFF) D2600 with 12 drive bays and Small Form Factor (SFF) D2700 with 25 drive bays - offer modular solutions to simplify capacity expansion of HP ProLiant server environments to external storage without having to make the full move to SAN or NAS. This allows you to buy what is needed today and purchase additional capacity as data storage needs grow.

The D2000 enclosures support direct attach storage to ProLiant Servers with the HP Smart Array P411, P212 and the P812 Controllers. On HP ProLiant and Integrity servers Dual Domain support is available for the HP Smart Array P411 & P812 Controllers attached to a D2600/D2700. (Single initiator environment only.) HP UX 11iv3 and Windows 2008 R2 OS supported for HP Integrity servers (single initiator environment only).

NOTE: HP Integrity servers that are supported:

rx3600, rx6600, rx2600, rx2800i2, rx7640, rx8640, SuperDome (only the versions that support PCI-e cards)

Total support can grow as needed to up to 96 LFF drives or 100 SFF drives.

The D2700 is also supported when attached to a HP P2000 G3 Modular Smart Array System family.

What's New


- Adding support for new drives for the D2600 and the D2700:
 - O HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive
 - O HP 3TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive
 - O HP 200GB 6G SAS SLC SFF (2.5-inch) ENT SSD
 - O HP 400GB 6G SAS SLC SFF (2.5-inch) ENT SSD
 - O HP 200GB 6G SAS MLC SFF (2.5-inch) ENT SSD
 - O HP 400GB 6G SAS MLC SFF (2.5-inch) ENT SSD
 - O HP 800GB 6G SAS MLC SFF (2.5-inch) ENT SSD

M	O	d	е	ls

HP D2000 Disk	HP D2600 Disk Enclosure	AJ940A
Enclosures	HP D2700 Disk Enclosure	AJ941A
D2600 + Hard Drive	HP D2600 w/12 450GB 6G SAS 15K LFF Dual Port HDD 5.4TB Bundle	AW522A
Bundles	HP D2600 w/12 600GB 6G SAS 15K LFF Dual Port HDD 7.2TB Bundle	AW523A
	HP D2600 w/12 2TB 3G SATA 7.2K LFF HDD 24 TB Bundle	BK765A
	HP D2600 w/12 2 TB 6G SAS 7.2K LFF Dual Port MDL HDD 24 TB Bundle	BK766A
	HP D2600 w/6 2 TB 6G SAS 7.2K LFF Dual Port MDL HDD 12 TB Bundle	BK782A
	HP D2600 w/12 1TB 6G SAS 7.2K LFF Dual Port MDL HDD 12 TB Bundle	BV899A
	HP D2600 w/6 450GB 6G SAS 15K LFF Dual Port HDD 2.7 TB Bundle	BV900A
D2700 + Hard Drive	HP D2700 w/25 146GB 6G SAS 15K SFF Dual Port HDD 3.6TB Bundle	AW524A
Bundles	HP D2700 w/25 300GB 6G SAS 10K SFF Dual Port HDD 7.5TB Bundle	AW525A
	HP D2700 w/25 450GB 6G SAS10K SFF Dual Port HDD 11.2TB Bundle	BK767A
	HP D2700 w/25 600GB 6G SAS10K SFF Dual Port HDD 15TB Bundle	BK768A
	HP D2700 w/10 600GB 6G SAS10K SFF Dual Port HDD 6TB Bundle	BK783A
	HP D2700 w/25 500GB 6G SAS 7.2K SFF Dual Port MDL HDD 12.5TB Bundle	AW526A




Product Highlights

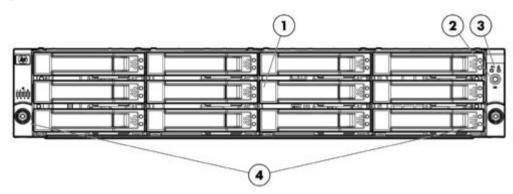

HP D2600 Disk Enclosure

Front panel LEDs and buttons


- 1. Disk drives
- 2. UID push button and LED
- 3. Enclosure LEDs
- 4. Rack-mounting thumb screw

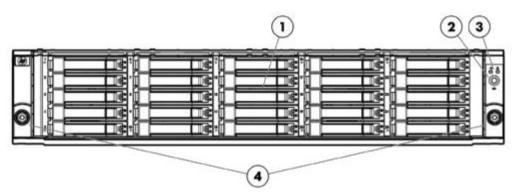

HP D2700 Disk Enclosure

Front panel LEDs and buttons

- 1. Disk drives
- 2. UID push button and LED
- 3. Enclosure LEDs
- 4. Rack-mounting thumb screw

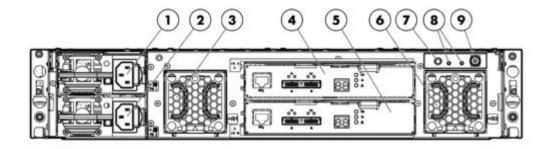

Rear Panel components

- Power Supply 1
- 2. Power Supply 2
- 3. Fan 1
- 4. I/O Module A
- 5. I/O Module B

- 6. Fan 2
- 7. Rear UID push button
- 8. Enclosure LEDs
- 9. Power on/standby button



At a Glance

Affordable, low cost Storage

- Purchase only what you need today and avoid up-front costs. Modular platform provides investment protection and by purchasing only what is needed today, allows for growth as storage requirements evolve. Buying storage only when needed simplifies planning and relieves budget pressures.
- D2700: Maximum storage capacity of 22.5 TB SAS (900GB SAS), 25 TB SAS MDL or SATA MDL (1 TB SATA MDL) per enclosure scalable to 90 TB SAS, 100 TB SAS MDL or SATA. MDL. D2700 also supports SAS and SATA Solid State Drives. Number of drives is limited to twenty five (25) per controller.
- D2600: Maximum storage capacity of 7.2 TB SAS (600GB SAS) or 36 TB SAS MDL or SATA per enclosure scalable to 57.6 TB SAS, or 288 TB SAS MDL or SATA.
- Enterprise-class dual port SAS or archival-class SATA drives as the need and budget dictates

Flexible/Scalable

- Grow storage capacity easily by attaching up to four D2600 enclosures from a single Controller port, for expansion of up to 8 enclosures or 96 drives, allowing for room to grow as storage demands increase
- Grow storage capacity easily by attaching up to two D2700 enclosures from a single Controller port, for expansion of up to 4 enclosures or 100 drives, allowing for room to grow as storage demands increase.
- Flexibility to mix and match SAS and SATA drives in the same enclosure

Easy to Manage

- Hassle free expansion little IT expertise required.
- Compatible with the latest HP Smart Array SAS controllers (P812, P411 & P212).
- Familiar ProLiant management tools provided via the Smart Controller SIM, ACU, ORCA.
- Easy removal of parts provides better serviceability.

High performance 6 Gb SAS host connectivity

- 6Gb SAS host connectivity enables a higher data transfer rate.
- End-to-end 6 Gb SAS connectivity ensures a high performance storage solution using a P212, P411 or a P812 Smart Array controller and the D2000 enclosures.
- Since storage is contained within the rack, latency is reduced as data does not travel over large distances.

HP reliability

- Deploy with confidence. HP offers a complete end-to-end storage solution including the D2000 storage enclosures, Smart Array P212, P411 or the P812 and HP ProLiant Servers
- Familiar Smart Array technology of the P212 or the P411 Smart Array Controller/512 MB and the P812 Controllers enable support for RAID levels 0, 1, 1+0, 5 and RAID 6 with ADG, 50 and 60. Optional battery-backed write cache.
- Advanced Data Guarding (RAID 6): This is the highest level of fault tolerance. It allocates
 two sets of parity data across drives and allows simultaneous write operations. This level of
 fault tolerance can withstand two simultaneous drive failures without downtime or data loss.
- Distributed Data Guarding (RAID 5): This allocates parity data across multiple drives and allows simultaneous write operations.
- Receive pre-failure alerts with HP SIM. When drives installed in D2000 disk enclosures are
 used in conjunction with the P212, P411 or the P812 Smart Array Controller and Systems
 Insight Manager, the Smart Array firmware in HP hard drives enables extensive fault
 prediction capabilities. If potential problems develop in one of the drives, the Smart Array
 Controller, Systems Insight Manager and/or Smart hard disk drive lets you know in advance
 so you can have the drive replaced, before it fails, under warranty.
- Remove / replace/ add components when system is running without service disruption with hot Plug drives, power and cooling
- Redundant power and cooling provides increased reliability as failure of a power supply or fans does not interrupt system functioning
- Dual domain SAS creates redundant pathways from servers to storage devices. The
 redundant paths created by these configurations reduce or eliminate single points of failure
 within the storage network. This provides increased levels of high availability with redundant
 paths from the controller to the drives. Dual domain SAS implementations make it possible



HP D2000 Disk Enclosures

QuickSpecs

At a Glance

to tolerate host bus adapter (HBA) failure, external cable failure, expander failure, failure in a spanned disk (JBOD) environments.



D2000 Enclosure Components

HP D2000 Disk Enclosures

The HP D2000 Disk Enclosures (hereafter referred to as "D2000") is a family of disk drive storage enclosure with 6 Gb SAS host connectivity. The D2000 is a 2U direct attach, external storage solution designed for small to medium size deployments or remote locations. These enclosures deliver industry-leading availability, storage density, and upgradeability to meet customers' demanding and growing storage needs. The D2000 delivers the ideal mix of low-cost and high capacity, for minimum I/O workloads such as reference data, archival, and disk-to-disk backup.

High Levels of Storage Density, Data Protection, and Functionality

- Storage Capacity The SFF D2700 disk enclosure supports up to 25 (twenty five) 6Gb SFF SAS drives for a maximum capacity of 22.5 TB with 6G 900GB SAS drives or 25TB with 1TB 6G SAS MDL or 1TB 3G SATA MDL drives. D2700 also supports SAS and SATA Solid State Drives. Number of drives is limited to twenty five (25) per controller. The LFF D2600 disk enclosure supports up to 12 (twelve) 6G LFF SAS drives for a maximum capacity of 7.2 TB with 6G 600GB SAS drives or 36 TB with 6G 3 TB SAS MDL or 3G 3 TB SATA MDL drives.
- Data Protection D2000 is designed for a high level of data protection. It includes redundant fans and power supplies (standard), and supports various RAID levels including RAID6 with ADG, 50 & 60 (depending upon the Smart Array Controller used)
- Storage Manageability The D2000 features familiar configuration and management tools such as Array Configuration Utility (ACU) and HP Systems Insight Manager (SIM). Online Management Features include: Online Capacity Expansion, Online RAID Level Migration, Online Stripe Size Migration, Online Spares (Global)
- Choice of Computing Platform The D2000 is designed and qualified for HP ProLiant servers
- Advanced Data Guarding (RAID 6 with ADG)
- Fault Tolerance It allocates two sets of parity data across drives and allows simultaneous
 write operations. This level of fault tolerance can withstand two simultaneous drive failures
 without downtime or data loss.

Low Total Cost of Ownership

The modular, scalable design of the D2000 disk enclosure family provides an extremely flexible platform. You can buy what you need today and purchase additional capacity as your data storage needs grow, instead of making a large up-front investment. Additional drives and enclosures can be easily added as your needs dictate.

- Cascading The D2700 has the unique capability of cascading up to two (2) enclosures behind a single SAS port (depends on the Smart Array Controller). The D2600 has the capability of cascading up to four (4) enclosures behind a single SAS port (depends on the Smart Array Controller).
- Pre-Failure Warranty Drives installed in either the D2600 or the D2700 and monitored under HP Systems Insight Manager are supported by a Pre-Failure (replacement) Warranty (3 years for SAS drives). Pre-Failure Warranty allows for the replacement of designated drives in the D2600 or the D2700 before they actually fail when using HP Systems Insight Manager on HP ProLiant servers.
 - **NOTE:** Some operating systems may not support all of these features.
- Integrated Configuration and Management Tools The D2000 family utilizes the standard, integrated set of Smart Array management and utility software for HP ProLiant Servers. These tools consistently lower the cost of ownership by reducing training and technical expertise necessary to install and maintain HP server storage.



D2000 Enclosure Components

D2000 Disk Enclosures D2600 Disk Enclosure

The 2U array houses up to twelve (12) 3.5 inch Universal hot pluggable SAS drives.

Each D2600 includes the following standard components:

- D2600 base enclosure with redundant power supplies and fan modules
- Rack mounting hardware kit
- Two (2) 0.5m mini-SAS cables
- Two (2) PDU interconnect cords

D2700 Disk Enclosure

The 2U array houses up to twenty five (25) 2.5 inch Universal hot pluggable SAS drives.

Each D2700 includes the following standard components:

- D2700 base enclosure with redundant power supplies and fan modules
- Rack mounting hardware kit
- Two (2) 0.5m mini-SAS cables
- Two (2) PDU interconnect cords

Smart Array P411 Features

- The HP Smart Array P411 is HP's PCI Express (PCIe) Serial Attached SCSI (SAS) RAID controller
- Low profile, half height card has 8 ports and utilizes DDR2-800 memory
- The P411 is ideal for RAID 0/1, 5, 1+0 & 5+0 and can be upgraded with the 512MB battery-backed write cache (BBWC) module and Smart Array Advanced via license key for RAID 6 & 6+0, 50 and 60
- For more information see: http://h18004.www1.hp.com/products/guickspecs/13202 div/13202 div.html

Smart Array P212 Features

- The HP Smart Array P212 is HP's entry level PCI Express (PCIe) Serial Attached SCSI (SAS) RAID controller
- The Low Profile, Half height card has 8 ports and utilizes DDR2-266 memory
 The P212 is ideal for RAID 0/1, 1+0 and can be upgraded with the 256MB battery-backed write cache (BBWC) module for RAID 5, 5+0
- For more information see: http://h18004.www1.hp.com/products/quickspecs/13203 div/13203 div.html

Smart Array P812 Features

- The HP Smart Array P812 provides superior RAID performance, while delivering high levels
 of connectivity, reliability, and many advanced features
- Increased connectivity with 8 internal ports and 16 external ports.
- 1 G 72-bit wide DDR2-800 flash-backed write cache (FBWC).
- Smart Array Advanced Pack (SAAP) license key included standard
- For more information see: http://h18004.www1.hp.com/products/quickspecs/13558_div/13558_div.html



D2000 Enclosure Components

RAID

Several fault tolerant configurations keep data available and servers running while drives are being replaced - RAID levels that offer fault tolerance include:

- RAID 50 (RAID 5+0) protects against failure of one drive (and failure of particular multiple drives). RAID 50 is a nested RAID method that uses RAID 0 striping across RAID 5 arrays. RAID 50 tolerates one drive failure in each spanned array without loss of data. RAID 50 requires less rebuild time than single RAID 5 arrays RAID 50 requires a minimum of six drives.
- RAID 60 (RAID 6+0) allows administrators to split the RAID 6 storage across multiple
 external boxes. RAID 60 requires a minimum of eight drives. RAID 60 is a nested RAID
 method that uses RAID 0 block-level striping across multiple RAID 6 arrays with dual
 distributed parity. With the inclusion of dual parity, RAID 60 will tolerate the failure of two
 disks in each spanned array without loss of data.
- RAID 6 with ADG: Allocates the equivalent of two parity drives across multiple drives and
 allows simultaneous write operations Distributed Data Guarding (RAID 5): Allocates parity
 data across multiple drives and allows simultaneous write operations. Drive Mirroring (RAID
 1 and 1+0 Striped Mirroring): Allocates half of the drive array to data and the other half to
 mirrored data, providing two copies of every file.

Dual Domain (NEW)

Dual domain SAS creates redundant pathways from servers to storage devices. The
redundant paths created by these configurations reduce or eliminate single points of failure
within the storage network. This provides increased levels of high availability with redundant
paths from the controller to the drives. Dual domain SAS implementations make it possible
to tolerate external cable failure, expander failure, failure in a spanned disk (JBOD)
environments. Requires FW v 3.x

Common Slot Power Supply

The D2000 Disk enclosures use the 460W Common Slot Power supply.

HP's Common Slot Power supplies meet multiple Energy Efficiency Initiatives:

 460W, 92%: Climate Savers Computing Initiative GOLD and ECOS Consulting 80PLUS GOLD

NOTE: The 80 PLUS program is a unique forum that unites electric utilities, the computer industry, and consumers in an effort to bring energy efficient technology solutions to the marketplace. 80 Plus independently tests power supply efficiency and publicly posts the results on 80Plus.org.



D2000 Disk Enclosure - Software Components

Utilities

The D2000 disk enclosure family utilizes a single, consistent set of utility software for storage and RAID management, setup, configuration and troubleshooting. This consistency reduces the cost of ownership by reducing the training and technical expertise necessary to install and maintain your HP server storage solution.

Configuration Utilities Array Configuration Utility (ACU) [On-line for Microsoft and Linux,

Remote Web-Based & Off-line1

Option ROM Configuration for Arrays (ORCA), NetWare ACU CPQONLIN (only online support no Web based support)

Management/Health **Utilities**

HP Systems Insight Manager

Array Configuration Utility (ACU)

- Provides a graphical view of HP drive array configurations.
- Easy to use Wizards for configuration.
- Web Based ACU supports On-Line, Remote Web Based and Offline configuration.
- Supports on-line configuration for Microsoft, NetWare and Linux.
- **HP Systems Insight** Manager (SIM)
- Powerful storage, server and server option management tool.
- Monitor storage from a remote central location.
- Browser based Insight Manager 7 provides full access from anywhere on the Intranet, eliminating the need for a dedicated Insight Manager console.

Supported Operating Systems

HP ProLiant Servers

NOTE: For information on supported Operating Systems, please see the following Smart Array Quickspecs:

P212: http://h18004.www1.hp.com/products/quickspecs/13203 div/13203 div.html P411: http://h18004.www1.hp.com/products/quickspecs/13202 div/13202 div.html P812: http://h18004.www1.hp.com/products/quickspecs/13558_div/13558_div.html

HP P2000 G3 FC Modular Smart Array System

NOTE: For up to date compatibility, please see the following URL for complete Smart Array Controller compatibility and support information:

http://h18006.www1.hp.com/products/servers/proliantstorage/arraycontrollers/index.html

HP Integrity Servers

HP-UX 11iv3

Microsoft Windows 2008 R2

NOTE: HP Integrity Servers supported: rx3600, rx6600, rx2600, rx2800i2, rx7640, rx8640,

SuperDome (only the versions that support PCI-e cards)



Service and Support, HP Care Pack, and Warranty Information

Warranty

Three-year limited parts only warranty, including hardware diagnostic support, pre-failure warranty (coverage of hard drives, memory and processors). The warranty is fully supported by HP Services and a worldwide network of resellers and service providers. In addition 90-day's getting started software telephone support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services.

NOTE: The D2000 family has a limited 3 year parts only warranty. SAS drives have 3 year warranty. SAS MDL, SATA MDL, and Solid State Drives have 1 year warranty.

The D2600/D2700 has been designed with customer self repairable parts to minimize repair time and provide greater flexibility in performing defective parts replacement. Please refer to HP's limited warranty Statement and parts replacement instructions for further details. http://h18006.www1.hp.com/products/storageworks/warranty.html

HP Care Pack Services: Packaged server and storage services for increased uptime, productivity and ROI

When you buy HP server and storage products and solutions, it's also a good time to think about what levels of support you may need. Our portfolio of service options reduce deployment and management worries while helping you get the most out of your server and storage investments. We take a holistic approach to your environment, bridging servers, blades, storage, software and network infrastructures with our packaged HP Care Pack Services for servers and storage.

Protect your business beyond warranty

When it comes to robustness and reliability, standard computing equipment warranties have matured along with technology. Good news that can also create problems stemming from depending on standard warranties designed to only protect against product defects and some downtime causes. Using a standard approach to warranty uplifts, such as HP Care Pack Services, helps reduce downtime risks and provides operational consistency for mission-critical and standard business computing.

HP Care Pack Services: Upgrading or extending standard server and storage warranties cost effectively

HP Care Pack Services offer a standard reactive hardware and software support services suite sold separately, or combined with our Support Plus and Support Plus 24 services. The portfolio also provides a combination of integrated proactive and reactive services, such as Proactive 24 Service and Critical Service. In addition with HP Proactive Select, you can acquire the specific proactive constancy and technical services. HP Proactive Select menu offers a broad set of service options that you can mix and match depending on your specific requirements. Proactive service options include offers for server, storage, network, SAN device, software, environment and education services.

HP server and storage lifecycle support services offers a full spectrum of customer care-from technology support to complex migrations to complete managed services. HP Factory Express provides customization, integration and deployment services for turnkey solutions. HP Education Services offer flexible, comprehensive training on to help your IT staff get the most out of your server and storage investments. HP Financial solutions extend innovative financing and cost-effective asset management programs-from purchase to equipment retirement.

Learn more: www.hp.com/services/servers and www.hp.com/services/storage

NOTE: Care Pack Services availability may vary by product and country.

HP Care Pack Services are sold by HP and HP Authorized Service Partners:

- Services for customers purchasing from HP or an enterprise reseller are quoted using HP order configuration tools.
- Customers purchasing from a commercial reseller can find HP Care Pack Services at http://www.hp.com/go/lookuptool



Service and Support, HP Care Pack, and Warranty Information

Recommended HP Care Pack Services for optimal satisfaction with your HP product.

3-Year HP Support Plus 24

For a higher return on your server and storage investment, HP Support Plus 24 provides integrated hardware and software support services designed specifically for your technology. Available 24x7, this 3-year combined reactive support option delivers onsite hardware support and over-the-phone software support around-the-clock. Leverage the full strength of HP Technology Services - customers can trust the services professionals at HP to work collaboratively with them, putting our strategic and technical know-how to work across their entire infrastructure.

- Improve uptime with responsive hardware and software services
- Enjoy consistent service coverage across geographically dispersed sites
- Update HP software at a predictable cost
- Increase customer satisfaction-with no interoperability gaps

http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6638EEE

HP Proactive Select Service

HP Proactive Select Service improves your IT performance and manageability through the use of cost effective flexible services. HP provides technical expertise and best practices to accelerate ROI of your technology investment. Selectable proactive services span a wide range of technology and process services - a flexible way to purchase proactive services that fit your particular environment and situation.

HP Proactive Select Service is technology agnostic and purchased in addition to your choice of underlying reactive support.

- Access to a list of flexible and customizable proactive service activities
- Enhance customers' in-house IT team with complementary assistance from HP
- Improved time to solution
- Reduce business risk and project costs by accessing HP specialists
- Simplify IT operational procedures by leveraging HP best practices

http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA2-3842ENN.pdf

Optional HP Care Pack Services that will enhance your HP product experience.

HP Entry Storage Data Migration Service for Windows

For customers who need to safely migrate Windows data within their TCP/IP networks with minimal impact to their operations:

You have a need to migrate data between Windows servers within your TCP/IP network. Or you have a need to migrate storage for your Windows servers. Or both. And you need to accomplish these migrations efficiently while minimizing risk at the same time.

HP Entry Storage Data Migration Service for Windows offers you a cost competitive and convenient way to accommodate data migration triggered by a need to refresh or consolidate storage, or to create different storage tiers. This service offers a migration cost in line with the costs of storage products in small and medium-sized storage environments. The service is delivered via a skilled HP service specialist with special consideration for data availability, integrity, and ongoing operational performance during the transfer process.

http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA2-4734ENW.pdf



Service and Support, HP Care Pack, and Warranty Information

eSupport

HP eSupport is a portfolio of technology-based services that assist you with managing your business environment - from the desktop to the data center.

Support Portal

The HP support portal provides one-stop access to the information, tools and services you need to manage the daily operations of your IT environment.

Features include:

- Access to self-solve tools (including search technical knowledge base)
- Efficient logging and tracking of support cases
- Collaboration with other business and IT professionals
- Download of patches and drivers
- · Access to diagnostic tools
- Proactive notification of relevant information

Access to certain features of the support portal requires an HP service agreement. To access the support portal, visit: http://www.hp.com/support

HP Insight Remote Support software delivers secure remote monitoring and support for your HP Servers and Storage, 24 x 7, so you can spend less time solving problems and more time focused on your business. You can have your systems remotely monitored for hardware failure using secure technology that's been proven at thousands of companies around the world. In many cases, you can avoid problems before they occur.

Customer Technical Training

HP Education Services

http://www.hp.com/hps/storage

In today's cost-conscious business environment, IT professionals, developers, consultants and users face an interesting challenge: how to keep up with the latest technologies and expand important skills while delivering profitable results on current projects. To help address this challenge, HP offers innovative training solutions that help keep you up-to-date on virtualization, server, storage, Insight Control, Citrix, Microsoft® and open source/Linux-related topics-while spending less time away from business-critical activities.

HP Services Awards

HP Technology Services continues to be recognized for service and support excellence by customers, partners, industry organizations and publications around the world. Recent honors and award reflect our services team's dedications, technical expertise, professionalism and uncompromising commitment to customer satisfaction.

Additional Services Information

To learn more on HP ProLiant servers, HP BladeSystem servers and HP storage products, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: www.hp.com/services/proliant or www.hp.com/services/bladesystem or



Configuration Information

Step 1: Base Configuration

Model	Model Description	Part Number
D2600	HP D2600 Disk Enclosure	AJ940A
D2600 6G SAS Dual	HP D2600 w/12 450GB 6G SAS 15K LFF Dual Port HDD 5.4TB Bundle	AW522A
Port drives bundle	HP D2600 w/6 450GB 6G SAS 15K LFF Dual Port HDD 2.7TB Bundle	BV900A
	HP D2600 w/12 600GB 6G SAS 15K LFF Dual Port HDD 7.2TB Bundle	AW523A
D2600 6G SAS Dual	HP D2600 w/12 2 TB 6G SAS 7.2K LFF Dual Port MDL HDD 24 TB Bundle	BK766A
Port MDL drives	HP D2600 w/6 2 TB 6G SAS 7.2K LFF Dual Port MDL HDD 12 TB Bundle	BK782A
bundle	HP D2600 w/12 1 TB 6G SAS 7.2K LFF Dual Port MDL HDD 12 TB Bundle	BV899A
D2600 3G SATA Port drives bundle	HP D2600 w/12 2TB 3G SATA 7.2K LFF HDD 24 TB Bundle	BK765A
D2700	HP D2700 Disk Enclosure	AJ941A
D2700 6G SAS Dual	HP D2700 w/25 146GB 6G SAS 15K SFF Dual Port HDD 3.6TB Bundle	AW524A
Port drives bundle	HP D2700 w/25 300GB 6G SAS 10K SFF Dual Port HDD 7.5TB Bundle	AW525A
	HP D2700 w/25 450GB 6G SAS 10K SFF Dual Port HDD 11.2TB Bundle	BK767A
	HP D2700 w/25 600GB 6G SAS 10K SFF Dual Port HDD 15TB Bundle	BK768A
	HP D2700 w/10 600GB 6G SAS 10K SFF Dual Port HDD 6TB Bundle	BK783A
D2700 6G SAS Dual Port MDL drives bundle	HP D2700 w/25 500GB 6G SAS 7.2K SFF Dual Port MDL HDD 12.5TB Bundle	AW526A

Configure to Order Program Information

The D2600/D2700 models and options may or may not be factory installed in a rack with add-on controllers, and hard drives. The D2600/D2700 enclosures may be integrated with ProLiant servers or as standalone storage.

Model	Model Description	Part Number
D2600	HP D2600 Disk Enclosure	AJ940A-#0D1
D2700	HP D2700 Disk Enclosure	AJ941A-#0D1

Step 2: Array Co	ntrollers				
	Description	Part Number			
Smart Array Controllers Supported (Single Domain)	HP ProLiant Servers				
	HP Smart Array P812/1G FBWC 2-ports Int/2-ports Ext PCIe x8 SAS Controller	487204-B21			
	HP Smart Array P411/1G FBWC 2-ports Ext PCIe x8 SAS Controller	572531-B21			
	HP Smart Array P411/256 2-ports Ext PCIe x8 SAS Controller HP Smart Array P411/512 BBWC 2-ports Ext PCIe x8 SAS Controller HP Smart Array P212/256 1-ports Int/1-ports Ext PCIe x8 SAS Controller	462830-B21 462832-B21 462834-B21			
			NOTE: Firmware version 2.0 or higher required on the listed Smart Array Controllers		
			Smart Array Controllers Supported	HP Integrity Servers	
	HP Integrity Smart Array P411/256 2-port External PCIe 6Gb SAS Controller			AM311A	
(Single Domain)	HP PCIe SAS SA P812 1G flashlight Controller	AM312A			



and Microsoft Windows Server R2 for Integrity.

NOTE: Supported for rx2660, rx2800i2, rx3600, rx6600 rx7640, rx8640 and SuperDome on HP-UX11iv3, Microsoft Windows Server 2008 SP2 for Integrity

Configuration Information

Smart Array Controllers Supported (Dual Domain)

HP ProLiant & Integrity Servers

HP Smart Array P812/1G FBWC 2-ports Int/2-ports Ext PCIe x8 SAS Controller
HP Smart Array P411/1G FBWC 2-ports Ext PCIe x8 SAS Controller
572531-B21
HP Smart Array P411/256 2-ports Ext PCIe x8 SAS Controller
462830-B21
HP Smart Array P411/512 BBWC 2-ports Ext PCIe x8 SAS Controller
462832-B21

NOTE:

- Requires DP SAS or SAS DP MDL drives
- Up to eight (8) D2600 or four (4) D2700 enclosures can be cascaded in a dual domain configuration behind a P411 or P812
- Even though the P812 has two additional ports the number of drives supported by the Smart array controller is limited to 108.
- Drive count is per controller, so behind the P812 even though there are 4 ports the maximum enclosure supported in a Dual Domain configurations is (8) D2600 - 96 drives or (4) D2700 - 100 drives.
- Integrity Servers Supported for rx2660, rx2800i2, rx3600, rx6600 rx7640, rx8640 and SuperDome on HP-UX11iv3, Microsoft Windows Server 2008 SP2 for Integrity and Microsoft Windows Server R2 for Integrity

Step 3: Choose HP ProLiant Servers/MSA Arrays/HP Integrity Servers

HP ProLiant Server Compatibility

HP ProLiant Servers: For up to date compatibility, please see the following URL for complete Smart Array P411, P212 & P812 Controller compatibility and support information:

http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/index.html

Array Compatibility

HP P2000 G3 FC Modular Smart Array System

NOTE: For up to date compatibility, please see the following URL for complete Smart Array Controller compatibility and support information:

http://h18006.www1.hp.com/products/servers/proliantstorage/arraycontrollers/index.html

HP Integrity Server Compatibility

HP Integrity Servers supported:

HP Integrity Server rx2660 with combination PCIx/PCIe riser only

HP Integrity Server rx3600 with combination PCIx/PCIe backplane only HP Integrity Server rx6600 with combination PCIx/PCIe backplane only

HP integrity Server rx7640 with combination PCIx/PCIe only HP integrity Server rx8640 with combination PCIx/PCIe only HP integrity Server sx2000 with combination PCIx/PCIe only

NOTE: HP Integrity Server home:

www.hp.com/products1/serverconnectivity/support_matrices.html

Step 4: Choose Hard Drives

SAS Drives - LFF

D2600 - Large Form Factor (LFF)

HP 300GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty
Hard Drive

HP 450GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty

516814-B21
Hard Drive

516816-B21

Hard Drive

HP 600GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty

Hard Drive

SAS Drives - SFF D2700 - Small Form Factor (SFF)

HP 146GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty 507125-B21 Hard Drive



516828-B21

Configuration Information

•		
	HP 300GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	507127-B21
	HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581284-B21
	HP 600GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581286-B21
	HP 900GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	619291-B21
	HP 72GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512545-B21
	HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512547-B21
	NOTE: 900GB SAS HDDs have not yet been qualified on the on the P2000 G3 arrays. Until the 900GBAS HDDs are qualified on the MSA2000 G2 or P2000 G3 arrays, D2700 with 900GB SAS drives are for Direct Attach only.	
SAS Midline (MDL) - LFF	HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) Dual Port Midline 1yr Warranty Hard Drive	507614-B21
	HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) Dual Port Midline 1yr Warranty Hard Drive	507616-B21
	HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) Dual Port Midline 1yr Warranty Hard Drive	625031-B21
SAS Midline (MDL) - SFF	HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	507610-B21
	HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	605835-B21
SATA Drives - LFF	D2600 - Large Form Factor (LFF)	
	HP 500GB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	458928-B21
	HP 1TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	454146-B21
	HP 2TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive HP 3TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	507632-B21 628059-B21
SATA Drives - SFF	D2700 - Small Form Factor (SFF)	
	HP 500GB 3G SATA 7.2K rpm SFF (2.5-inch) Midline 1yr Warranty Hard Drive	507750-B21
	HP 1TB 3G SATA 7.2K rpm SFF (2.5-inch) Midline 1yr Warranty Hard Drive	625609-B21
	NOTE: 1TB SATA MDL HDDs are not supported on the P2000 G3 arrays. D2700 with 1 TB SATA MDL drives are for Direct Attach only	
	NOTE: SATA drives are single ported and therefore do not have a fail-over path intrinsic to their design. Only Dual Port (DP) SAS drives will work in the Dual Domain environment.	
Solid State Drives	HP 200GB 6G SAS SLC 2.5in ENT-main SSD	632492-B21
(SAS SLC-SFF)	HP 400GB 6G SAS SLC 2.5in ENT-main SSD	632494-B21
Solid State Drives	HP 200GB 6G SAS MLC 2.5in ENT-main SSD	632502-B21
(SAS MLC- SFF)	HP 400GB 6G SAS MLC 2.5in ENT-main SSD	632504-B21
	HP 800GB 6G SAS MLC 2.5in ENT-main SSD	632506-B21



Configuration Information

Solid State Drives (SFF)

HP 60GB 3G SATA SFF (2.5 inch) Midline 1yr Warranty Solid State Drive HP 120GB 3G SATA SFF (2.5 inch) Midline 1yr Warranty Solid State Drive

572071-B21 572073-B21

Number of drives is limited to twenty five (25) per controller.

Solid State Drive support in the D2700 is for direct attach storage only.

Solid State Drives have not yet been qualified on the MSA2000 G2 or the P2000

G3 arrays

Step 5: Choose Rack Option

Please refer to the HP Infrastructure products page for more information on HP racks and rack options: http://h18004.www1.hp.com/products/servers/platforms/rackandpower.html

Step 6: Choose Cables

Cable Options

Cables used for connecting the HP Smart Array P212, P411, P812 Controllers and P2000 G3 FC Modular Smart Array System

 Mini SAS 4x 2M Cable All
 407339-B21*

 Mini SAS 4x 4M Cable All
 432238-B21*

 Mini SAS 4x 6M Cable All
 432239-B21*

* #0D1 will appear after this part number on your sales order if factory integration is indicated.

Power Cord Options

If customers require a power cord other than the included PDU style cords, they can check the power cord matrix for the appropriate SKU. Please see the following power cord matrix for details: www.hp.com/products/powercords

NOTE: An optional longer 2meter PDU power cable (C14 to C13 style connector) for customers who would like additional length for connections to existing power distribution modules located on the right side of the rack. This is purely optional as the included .7meter power cables will also reach the right sides of the rack. (D2700 power supplies are on the left side of the enclosures). If desired, the quantity to order is 1 AF573A HP RDNT 2m,10A, C13-C14 JMPR CORD



Technical Specifications

LED Indicators for

Online (bottom)

HDDs

Drive Failure/ID (top)

LED Indicators on Front Panel

Heartbeat LED

Fault LED

UID button/LED

LED Indicators on **Rear Panel**

I/O Module LED (2) identify/On/Fault; Port (2) Link good/ link fault

UID button/LED Heartbeat LED

Fault LED

Power On/Standby button/system power LED

Fan LED

Power supply LED

Host Interface

4 x wide SAS 6 Gb/s ports

Maximum Number of Up to 12 3.5 inch (D2600) or 25 2.5 inch (D2700) SAS or SATA drives

Drives Up to 25 2.5 inch (2700) Solid State Drives

Temperature Range 50° to 95° F (10° to 35° C) Operating

> -40° to 150° F (-40° to 66° C) Shipping

> > NOTE: Rated 1°C per 1000 feet of elevation to 10,000 ft.

Relative Humidity

10% to 90% Operating Up to 95% Non-operating

Input Power Requirements

100 to 240 VAC Rated Input Voltage **Rated Input Frequency** 50 to 60 Hz

2.68A at115 VAC typical, 4A Maximum **Rated Input Current**

Input Power (max) 300 W

Heat Dissipation

(maximum)

964 Btu/hr*

* Input Power and Heat Dissipation specifications are maximum values and apply to worst-case

conditions at full rated power supply load. The power/heat dissipation for your installation will vary

depending on the equipment configuration.

RAID Support See Quickspecs for Smart Array Controllers P212, P411 & P812

http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/index.html

P2000 G3 FC Modular Smart Array System

NOTE: For up to date compatibility, please see the following URL for complete Smart Array

Controller compatibility and support information:

http://h18006.www1.hp.com/products/servers/proliantstorage/arraycontrollers/index.html

Upgradeable

Yes, Offline only. Firmware updates available through hp.com

Firmware Disk Drives and

Enclosure Protocol

Support

HP 3.5 inch (D2600) or 2.5 inch (D2700) SAS 6 Gb/s

I/O Module **Connector Type** IPass (mini-SAS)

> **Number of Ports** Two (one IN, other is OUT)

D2700 Disk Enclosure 2U Rack Form Factor

Dimensions (HxWxD) 3.47 x 17.99 x 22.3 in (8.8 x 45.0 x 56.7 cm)

Weight (base unit) 38 lb (17.2 kg) Weight (with all drives) 50 lb (22.6 kg)



Technical Specifications

© Copyright 2011 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.

