

RCA 2610 SERIES DIGITAL ATTITUDE INDICATORS The RCA2610 is the updated version of the popular RCA2600 Electric Digital Attitude Indicator.

It is the perfect companion to the RCA1510 Digital Heading Indicator. This version has the same form, fit, and function as the original but has dual processors, improved screen resolution and updated software. The optional Pitch Sync feature allows pilots to instantly synchronize the airplane symbol to the horizon line when flying in a pitch up or pitch down attitude. The RCA2610-G version comes without the Pitch Sync feature and functions like the original metal with the hirplane symbol.

model with the brightness controls only. The RCA2610 is designed to handle the high vibration environment found on helicopters and

yet, their light weight makes them perfect for soaring. This makes the RCA2610 the most versatile and dependable Digital AI on the market today. With no moving parts to wear out, this instrument will provide years of reliable service - that's why it includes a full two-year warranty! All RCA2610 models can be ordered with an optional slip indicator (inclinometer) which satisfies FAA AC 91-75 for even greater versatility.

The panel tilt angle can be set from 0 to 90 degrees in one degree increments, but must be specified at time of order. Operating Voltage: 9 to 32VDDC.

Made in the USA.

Features:

• Fast Dual Processors • Pitch Sync Feature • Sharp Anti-Aliased Screen • Black Anodized Bezel • Fast Response in Roll & Pitch • 2 Year Warranty Vibration Resistant • Multi-volt plug & fly • Lighter weight • FAA/EASA Certified

Specifications:

• Operating Voltage: 9 to 32VDDC • Starting Current: 9VDC: 0.18 to 0.22 AMPS MAX • Running Current: (14VDC system) 0.20 AMPs MAX, (28VDC system) 0.18 AMPs MAXa • Circuit Breaker Size: 2AMP • Settling Error: 1 Degree Maximum in Roll and Pitch • Operating Temperature Range: -30° to +50° C • Dimensions: Please see specifications document. • FAA Specification Conformance: TSO-C4c, TSO-C113a, DO-160F & DO-178B • EASA Specification Conformance: ETSO-C4c and ETSO-C113a

RCA 2610-2 SERIES DIGITAL ATTITUDE INDICATORS - 2 INCH - FAA TSO

Pitch Sync	Slip / Turn	Part Number	Price
With Pitch Sync	Standard (No Digital Slip / Turn)	10-06428	\$2,595.00
With Pitch Sync	With Slip Indicator + Turn Rate	10-06996	\$2,650.00
With Pitch Sync	With Slip Indicator Only	10-06997	\$2,595.00
No Pitch Sync	Standard (No Digital Slip / Turn)	10-06434	\$2,595.00
No Pitch Sync	With Slip Indicator + Turn Rate	10-07003	\$2,595.00
No Pitch Sync	With Slip Indicator Only	10-07004	\$2,595.00
With Pitch Sync + Pitot Static	Standard (No Digital Slip / Turn)	10-06440	\$2,889.00
With Pitch Sync + Pitot Static	With Slip Indicator + Turn Rate	10-07015	\$2,795.00
With Pitch Sync + Pitot Static	With Slip Indicator Only	10-07016	\$2,795.00
Pitot Static / No Pitch Sync	Standard (No Digital Slip / Turn)	10-06447	\$2,889.00
Pitot Static / No Pitch Sync	With Slip Indicator + Turn Rate	10-07021	\$2,795.00
Pitot Static / No Pitch Sync	With Slip Indicator Only	10-07022	\$2,795.00

RCA 2610-3 SERIES DIGITAL ATTITUDE INDICATORS - 3 INCH - FAA TSO

Pitch Sync	Slip / Turn	Battery	Part Number	Price
With Pitch Sync	Standard (No Digital Slip / Turn)	Without Battery Backup	10-06431	\$2,650.00
With Pitch Sync	Standard (No Digital Slip / Turn)	With Battery Backup	10-07008	\$2,750.00
With Pitch Sync	With Slip Indicator + Turn Rate	Without Battery Backup	10-06993	\$2,625.00
With Pitch Sync	With Slip Indicator + Turn Rate	With Battery Backup	10-07006	\$2,795.00
With Pitch Sync	With Slip Indicator Only	Without Battery Backup	10-06994	\$2,625.00
With Pitch Sync	With Slip Indicator Only	With Battery Backup	10-07007	\$2,750.00
No Pitch Sync	Standard (No Digital Slip / Turn)	Without Battery Backup	10-06437	\$2,650.00
No Pitch Sync	Standard (No Digital Slip / Turn)	With Battery Backup	10-07011	\$2,755.00
No Pitch Sync	With Slip Indicator + Turn Rate	Without Battery Backup	10-06999	\$2,635.00
No Pitch Sync	With Slip Indicator + Turn Rate	With Battery Backup	10-07009	\$2,797.00
No Pitch Sync	With Slip Indicator Only	Without Battery Backup	10-07001	\$2,595.00
No Pitch Sync	With Slip Indicator Only	With Battery Backup	10-07010	\$2,750.00
With Pitch Sync + Pitot Static	Standard (No Digital Slip / Turn)	Without Battery Backup	10-06444	\$2,889.00
With Pitch Sync + Pitot Static	Standard (No Digital Slip / Turn)	With Battery Backup	10-07026	\$2,945.00
With Pitch Sync + Pitot Static	With Slip Indicator + Turn Rate	Without Battery Backup	10-07012	\$2,795.00
With Pitch Sync + Pitot Static	With Slip Indicator + Turn Rate	With Battery Backup	10-07024	\$2,945.00
With Pitch Sync + Pitot Static	With Slip Indicator Only	Without Battery Backup	10-07013	\$2,795.00
With Pitch Sync + Pitot Static	With Slip Indicator Only	With Battery Backup	10-07025	\$2,945.00
Pitot Static / No Pitch Sync	Standard (No Digital Slip / Turn)	Without Battery Backup	10-06450	\$2,889.00
Pitot Static / No Pitch Sync	Standard (No Digital Slip / Turn)	With Battery Backup	10-07029	\$2,945.00
Pitot Static / No Pitch Sync	With Slip Indicator + Turn Rate	Without Battery Backup	10-07018	\$2,795.00
Pitot Static / No Pitch Sync	With Slip Indicator + Turn Rate	With Battery Backup	10-07027	\$2,945.00
Pitot Static / No Pitch Sync	With Slip Indicator Only	Without Battery Backup	10-07019	\$2,795.00
Pitot Static / No Pitch Sync	With Slip Indicator Only	With Battery Backup	10-07028	\$2,945.00
With Pitch Sync + Pitot Static	Standard (No Digital Slip / Turn)	Without Battery Backup	10-06444	\$2,889.00
Pitot Static / No Pitch Sync	Standard (No Digital Slip / Turn)	Without Battery Backup	10-06450	\$2,889.00

RC ALLEN 2600 Series Screw on Inclinometer		\$149.95
RC ALLEN Digital Indicator Custom Tilt	P/N 10-07138	\$5.00
RC ALLEN Digital Indicator Night Vision NVIS	P/N 10-07139	\$650.00

YRC



RCA 1510 SERIES DIGITAL HEADING INDICATORS The RCA1510 Series Digital Heading Indicator

is the latest addition to the RC Allen Digital Instrument Lineup. It is the perfect companion to the RCA2610 Digital Attitude Indicator. The RCA1510 is designed as a fully FAA Certified direct replacement for your mechanical Directional Gyro. It is totally self-contained and fits in a standard 3-inch panel cut-out. There are no special external connections other than power and an external GPS antenna. The

Multi-Volt function (9-32V) allows installation in both 14 Volt and 28 Volt systems. The RCA1510 combines data from its own internal magnetometer and GPS receiver for a more stable and accurate heading reading which also eliminates the need to "cage" or "zero" the instrument. Because the RCA1510 has no mechanical gyroscope, it is much more accurate than traditional heading indicators. Unlike a mechanical gyroscopic unit, the RCA1510 is not affected by drifting or wandering. The unit is designed to work without GPS input if the GPS signal is lost. The highly visible screen has adjustable brightness controls. It has a traditional rotating dial display with digital numeric headings. The pilot can adjust the Heading Bug just like a mechanical instrument or use the Quick-Set Heading Bug; a doublepush of the HDG knob sets the Bug to the current heading. The panel tilt angle can be set from 0 to 90 degrees in one degree increments, but must be specified at time of order. Made in the USA

Features: • Totally self-contained • Quick-set Heading Bug • Internal Magnetometer and GPS • Sharp Dimmable Display • Dual Processor Performance • Multi-volt Operation (9 to 32 Volts) • Fits standard panel cutout • Vibration Resistant • All digital - No moving parts • Black anodized bezel · Lightweight - 8oz. Max · FAA Certified

Description	Part No.	Price
Dedicated Antenna (SMA) Standard	10-06580	\$2,835.00
Dedicated Antenna (SMA) With Backup Battery	10-07407	\$3,375.00
Dedicated Antenna (SMA) Standard NVIS	10-07408	\$3,059.00
Dedicated Antenna (SMA) NVIS w/Backup Battery	10-07409	\$3,825.00
RS232 Serial Standard	10-07410	\$2,875.00
RS232 Serial With Backup Battery	10-07411	\$3,437.50
RS232 Serial Standard NVIS	10-07412	\$3,062.50
RS232 Serial NVIS with Backup Battery	10-07413	\$3,625.00
RC Allen Digital Indicator Custom Tilt Option	10-07138	\$5.00

RC ALLEN DIRECTIONAL GYROS (ELECTRIC)



The RCA15 Series electric directional gyro employs and electrically driven gyro motor and is a direct reading, azimuth indicator. Rotor run up time is 3 min. They have a built in inverter which converts aircraft DC power to the required AC voltage and frequency. May be used in both fixed wing and rotor wing aircraft and is easily installed in standard 3 1/8" panel cut out. Power failure flag drops into view when supply voltage is lost or has dropped below a level for proper operation of

Pictured is RCA15AK-1 the gyro. Made in the USA Electrical Requirements: • Starting Current @ 14 VDC: 2.4A Max • Running Current @ 14 VDC: 1.2A • Starting Current @ 28 VDC: 1.4A Max • Running Current @28 VDC: .6A • Recommended Circuit Breaker 3A

Model	Description	Part No.	Price
RCA15AK-1	14 VDC, Lighted	10-01681	\$2,295.00
RCA15AK-2	14 VDC	10-01390	\$2,229.00
RCA15EK-2	12-30V, TSO	10-03454	\$2,229.00
RCA15BK-1	28 VDC, Lighted	10-01682	\$2,279.00
RCA15BK-2	28 VDC	10-00501	\$2,229.00
RCA15AK-16	14 Volt, 400HZ, 5K.	10-02530	\$2,955.00
RCA15AK-17	14 Volt, Heading Bug only.	10-02529	\$2,669.00
RCA15BK-16	28 Volt, 400HZ, 5K.	10-02533	\$2,955.00
RCA15BK-17	28 Volt, Heading Bug only.	10-02532	\$2,669.00
15BK-1	Factory Overhauled	10-05690	\$1,145.00
	Accessories		
MS3116E8-4S	4 Pin Connector	10-00791	\$42.50
444-0011-0	Mini Slip Indicator - Add this to your new or current Electric Gyro Horizon. Replaces 444-0007-01.	10-04623	\$149.85

RC ALLEN ATTITUDE GYROS (ELECTRIC) The RCA26 Series is the top of the line and

Description



has been designed for precision and reli-ability. The RCS26EK Series is a 10-30VDC instrument. You have a choice of a fixed or moveable pointer, and a 14 or 28 volt lighting. Performance characteristics include roll indication of 360° . Pitch $\pm 30^\circ$. Pitch trim range $\pm 7^\circ$. Slip Indicator can be added upon request. Mating connector (MS3116E8-4S) s also available

Model No.

Additional core charge added to pur-chase at time of checkout. Exchange core must be a like core and the core must be returned no later than 20 days from the invoice date to receive core credit.

Part No. Price

10-02524	

Model No.	Description	Part No.	Price
RCA26EK-11	Fixed Pointer, unlit. 0 Degree Tilt	10-02524	\$2,229.00
RCA26EK-11 Custom Tilt	Fixed Pointer, unlit. Specify Tilt	10-04984	\$2,229.00
RCA26EK-12	Fixed Pointer, lighted. 0 Degree Tilt	10-02526	\$2,279.00
RCA26EK-12 Custom Tilt	Fixed Pointer, lighted. Specify Tilt	10-04985	\$2,279.00
RCA26EK-13	Moveable pointer, unlit. 0 Degree Tilt	10-02527	\$2,229.00
RCA26EK-13 Custom Tilt	Moveable pointer unlit. Specify Tilt	10-04986	\$2,229.00
RCA26EK-14	Moveable pointer, lighted. Volt- age and tilt must be specified at time of order.	10-02528	\$2,279.00
RCA26AK-1	Standard look, 14V, Lighted, Moveable pointer, Stationary roll dial. 0 degree tilt.	10-00608	\$2,295.00
RCA26AK-1 Custom Tilt	Standard look, 14V, Lighted, Moveable pointer, Stationary roll dial. Specify tilt.	10-04989	\$2,279.00
RCA26AK-2	Standard look, 14V, Lighted, fixed pointer, moveable roll dial. 0 Degree Tilt	10-01683	\$2,279.00
RCA26AK-2 Custom Tilt	Standard look, 14V, Lighted, fixed pointer, moveable roll dial. Specify Tilt	10-04990	\$2,279.00
RCA26AK-3	Standard look, 14V, Moveable pointer, Stationary roll dial. 0 Degree Tilt.	10-01118	\$2,229.00
RCA26AK-3 Custom Tilt	Standard look, 14V, Moveable pointer, Stationary roll dial. Specify Tilt.	10-04991	\$2,229.00
RCA26AK-4	Standard look, 14V, Fixed Pointer, Moveable roll dial.	10-01392	\$2,225.00
RCA26BK-2	Standard look, 28V, Lighted, Moveable pointer, Stationary Roll Dial.	10-01119	\$2,279.00
RCA26BK-6	Standard look, 28V, Fixed Pointer, Moveable Roll Dial.	10-01393	\$2,229.00
RCA26BK-8	Standard look, 28V, Moveable pointer, Stationary Roll Dial.	10-01120	\$2,229.00
RCA26BK-9	Standard look, 28V, Lighted, Fixed pointer, Moveable Roll Dial.	10-00466	\$2,279.00
RCA26BK-12	5° Tilt, 28V, Lighted, Moveable pointer, fixed roll dial	10-01122	\$2,389.00
26BK-9	Factory Overhauled*	10-05685	\$1,145.00
26BK-2	Factory Overhauled*	10-05686	\$1,025.00
26AK-4	Factory Overhauled*	10-05687	\$1,375.00
MS3116E8-4S	4 Pin Connector MS3116E8-4S	10-00791	\$42.50
444-0011-01	Slip indicator/inclinometer for RCA26 & RCA22 Series manu- factured before 03/04/2011	10-04623	\$149.85

CORE CHARGES APPLY TO OVERHAULED GYROS.

YRO

RC ALLEN VACUUM HORIZON GYRO



The RCA22 Series of vacuum artificial horizon are controlled by air driven precision gyros to present the pilot with pitch and roll informa-tion. The attractive color scheme of blue sky and brown ground presents a realistic spherical display of flight. Unless otherwise indicated all instruments have a dark blue/brown display, fixed pointer and are unlighted. This is the "standard" display. Instruments equipped with a warning flag

will let you know when vacuum has dropped below 3.8 inch Hg. Flag retracts from view at 4.3 inch. Hg. Instrument fits in a standard 3 1/8 panel cutout.

Meets or exceeds all requirements of FAA TSO C4C and Aeronautical Standard AS396B. *Additional core charge added to purchase at time of checkout. Exchange core must be a like core* and the core must be returned no later than 20 days from the invoice date to receive core credit.

Model No.	Description	Part No.	Price
RCA22-7	Standard display, 0 Degree Tilt	10-01371	\$925.00
RCA22-7F	Standard Display with a warning flag. 0 Degree Tilt	10-00504	\$1,049.00
RCA22-7F	Standard Display with a warning flag. Specify Tilt	10-04996	\$1,035.00
RCA22-11	Standard display, lighted 14V, 0 Degree Tilt.	10-00502	\$1,035.00
RCA22-11	Standard display, lighted 14V, Custom Tilt.	10-04995	\$1,035.00
RCA22-11	Standard display, lighted 28V, 0 Degree Tilt	10-01391	\$1,035.00
RCA22-11	Standard display, lighted 28V, 8 Degree tilt	10-03635	\$1,035.00
RCA22-11	Standard display, lighted 28V, Custom Tilt	10-05011	\$1,035.00
RCA22-11F	Standard display, lighted, with a warning flag. (14V) 0 Degree Tilt	10-00094	\$1,159.00
RCA22-11F	Standard display, lighted, with a warning flag. (14V) Custom Tilt	10-04993	\$1,149.00
RCA22-11F	Standard display, lighted, with a warning flag. (28V). 0 Degree Tilt.	10-03574	\$1,149.00
RCA22-11F	Standard display, lighted, with a warning flag. (28V). Custom Tilt.	10-05009	\$1,149.00
RCA22-15	Display is blue over black 0 Degree Tilt.	10-01109	\$925.00
RCA22-15	Display is blue over black 8 Degree Tilt.	10-05007	\$915.00
RCA22-15	Display is blue over black. Custom Tilt.	10-04997	\$915.00
RCA22-7	Overhauled RCA22-7 Horizon Gyro*	10-05439	\$595.00
RCA22-7F	Overhauled RCA22-7F	10-05869	\$725.00
RCA22-11	Overhauled RCA22-11	10-05870	\$595.00
RCA22-11F	Overhauled RCA22-11F	10-05871	\$595.00
RCA22-15	Overhauled RCA22-15	10-05872	\$625.00

RC ALLEN DIRECTIONAL GYROS VERTICAL CARD (VACUUM) The RCA-11A series of vacuum



directional gyros utilize and air driven precision gyro that controls a vertical rotating azimuth gimbal. The R.C. Allen Model RCA11A has been designed to provide a long life of accurate operation even when subjected to severe operat-ing requirements. This instrument

is engineered with a minimum of machined parts, providing lower initial cost and lower maintenance cost through its lifetime. The RCA11A is non-tumbling within ±85° limits in pitch and roll and can be easily installed in any 3 1/8" panel cut out. Meets or exceeds all requirements of FAA TSO C5c and Aeronautical Standard AS397.

Dimensions	: Length: 6.7" Height: 3.4" Width: 3.4"	weight: 2	2.3 Pounds
Model No.	Description	Part No.	Price
RCA11A-8	Standard Display	10-01370	\$925.00
RCA11A-8F	Standard Display with Flag	10-01680	\$1,035.00
RCA11A-15	Cardinal Heading markers N., S., E., & W. (Piper/Cessna display)	10-00390	\$925.00
RCA11A-15F	Same as RCA11A-15 with flag	10-01116	\$1,035.00
RCA11A-16B	Standard Display, Lighted, 14 Volt.	10-01369	\$1,035.00
RCA11A-17B	Standard Display, Lighted, 28 Volt	10-01389	\$796.00
RCA11D-4	Single Pointer, 400hz Autopilot with heading bug.	10-01117	\$1,626.00
RCA11D-5	Dual Auto Pilot with Heading Bug	10-03430	\$1,626.00
RCA11D-7	With Heading Bug Only	10-02931	\$1,345.00
11A Series	Factory Overhauled 11A Series Gyro (Core Charges Apply)	10-05683	\$595.00
RCA11A-15	Factory Overhauled (Piper/Cessna Display)(Core Charges Apply)	10-06263	\$595.00

RC ALLEN MINI6 MULTIFUNCTION DIGITAL INSTRUMENT



The MINI6 indicator is the newest addition to RC Allen's groundbreaking line of digital instruments. It offers all the instrumentation of a traditional six-pack in one clean, customizable and easy to read presentation. The fully certified, easy to install indicator comes equipped with an internal battery backup providing an exceptional level of Easy to Install: • Fits standard 3" cutout • No

panel modifications • Rear mounted, matching the

installation of standard 3" mechanical units Customizable · Wide range of customization options including range marks, units and display features . Selectable Heading Type (Magnetic Heading or Ground Track)

Reliable · Internal battery backup · Self-contained · Solid state · 2 year warranty......P/N 10-07331 \$3,250.00



SIGMA-TEK 5000B SERIES STANDARD ATTITUDE GYROS

The 5000B is an air-driven gyro that has a pictorial horizon mask and fixed airplane. The mask moves to indicate climb, dive, and bank. Bank and pitch attitudes are displayed so that the pilot's sensing of the gyro indication is the same as the interpretation of the relation between the wings of the aircraft and

the natural horizon during visual flight. This instrument is FAA certified, and can be used to replace the aircraft's turn coordinator when equipped with an inclinometer.

The Standard configuration can replace most air driven gyros with the major difference being in the layout and colors of the display.

NOTE: Lighted instruments do not include lamp trays, please see accessories to purchase separately.

Sigma-Tek	Model	Display Colors	Inclino- meter	Lighted	Panel Tilt	Part Number	Price
1U149-010	5000E-13	Blue/Black	No	Yes	0	10-04790	\$1,874.00
1U149-010-1	5000B-37	Blue/Brown	No	Yes	0	10-01071	\$1,648.00
1U149-010-4	5000B-54	Blue/Brown	No	Yes	8	10-04655	\$1,870.00
1U149-010-5	5000B-64	Blue/Black	No	Yes	8	10-04660	\$1,879.00
1U149-013-1	5000B-45	Blue/Brown	Yes	Yes	0	5000B-45	\$2,237.00
1U149-013-3	5000B-53	Blue/Brown	Yes	Yes	8	5000B-53	\$2,237.00
23-501-06-9	5000B-20	Blue/Black	No	No	0	10-00389	\$1,543.00
23-501-06-12	500B-24	Blue/Black	No	No	8	10-04652	\$1,554.00
23-501-06-16	5000B-36	Blue/Brown	No	No	0	5000B	\$1,450.00
23-501-06-17	5000B-42	Blue/Brown	No	No	8	5000B-42	\$1,543.00
23-501-033-3	5000B-46	Blue/Brown	Yes	No	0	5000B-46	\$1,964.00
23-501-034-4	500B-51	Blue/Brown	Yes	No	8	5000B-51	\$2,006.00

Accessories

BA14-24-BW3G (14 Volt Lamp Tray)......P/N 10-02757\$95.75



SIGMA-TEK 5000B SERIES ATTITUDE GYROS WITH WARNING FLAG

This gyro is a variation of the popular 5000B airdriven attitude gyro. It includes a warning flag that drops into view upon the loss of vacuum. This can be a life saving feature during an emergency in a busy cockpit. The horizon mask moves to indicate

climb, dive, and bank attitudes, which are portrayed against a fixed airplane. The fluid movements and intuitive presentation provide the pilot with a realistic sense of the aircraft's attitude in relation to the natural horizon. This instrument is FAA certified, and can be used to replace the aircraft's turn coordinator when equipped with an inclinometer. This configuration includes a "Warning Flag" that is visible immediately upon Loss of vacuum or pressure. It is a very valuable upgrade as a safety feature. **Display Colors:** Blue/Brown **Note: Lighted instruments do** not include lamp trays, please see accessories to order separately.

······································						
Sigma-Tek	Model	Inclino- meter	Lighted	Panel Tilt	Part Number	Price
23-501-031-1	5000B-38	No	No	0	10-02078	\$1,679.00
1U149-012	5000B-40	No	Yes	0	10-00132	\$1,922.00
23-501-032-2	5000B-43	No	No	8	10-04653	\$1,921.00
1U149-012-2	5000B-52	No	Yes	8	10-04654	\$2,216.00
23-501-041-1	5000B-60	Yes	No	0	10-04656	\$2,217.00
23-501-042-2	5000B-61	Yes	No	8	10-04657	\$2,206.00
1U149-016-7	5000B-62	Yes	Yes	0	10-04658	\$2,237.00
1U149-016-8	5000B-63	Yes	Yes	8	10-04659	\$2,237.00
		A				

Accessories

		0000001100		
BA14-24-BW3G	(14 Volt Lamp	Tray)P/N	10-02757	\$95.75
BA28-24-BW3G	(28 Volt Lamp	Tray)P/N	10-02758	\$95.75

YKO

SIGMA-TEK 5000E/L SERIES **AUTOPILOT ATTITUDE GYROS**



The 5000E air-driven attitude gyro is another variation of our standard 5000B model. It includes inductive pickoffs that generate the signals necessary to drive an autopilot. The intuitive display has a moving horizon mask that indicates the position of the aircraft's wings in relation to the natural horizon. This attitude information is passed along to the autopilot system.

This is one of our most popular primary instruments. It is FAA approved, and can

replace the turn coordinator when equipped with an inclinometer. Many Sigma-Tek autopilot gyros are FAA PMA approved for use in ARC and Century CII, CIIB, CIII and CIV autopilot installations.

NOTE: Lighted instruments do not include lamp trays, please see

accessories to purchase separately. Specifications: • Height: 3.38" • Width: 3.38" • Depth: 7.51" • Weight: 2.2 Ibs. max. • Markings: Matte white • Finish: Dull black • Temperature:-30° to 50° C · Vibration: (CPS:5 to 50 / Maximum Double Amplitude:0.020 in./ Maximum Acceleration:1.5 G's) · Humidity:0% to 95% at 32° C Altitude:0 to 40,000 ft.

		Disp	lay Colors	Blue / B	lack			
Sigma-Tek	Model	Autopilot Model	Autopilot Output	Lighted	Panel Tilt	РМА	Part Number	Price
23-501-04-2	5000E-8	CFS 52D66	Roll	No	0	Yes	10-04892	\$2,522.00
23-501-05-2	5000E-9	CFS 52D67	Pitch & Roll	No	0	Yes	10-04894	\$3,210.00
1U149-006-1	5000E-10	CFS 52D66M	Roll	Yes	0	Yes	5000E-10	\$2,685.00
1U149-007-1	5000E-11	CFS 52D67M	Pitch & Roll	Yes	0	Yes	5000E-11	\$3,225.00
		Displ	ay Colors:	Blue / B	rown			
23-501-04-24	5000E-20	CFS 52D66	Roll	No	0	Yes	10-04893	\$2,553.00
23-501-05-25	5000E-21	CDS 52D67	Pitch & Roll	No	0	Yes	10-04895	\$3,279.00
1U149-006-8	5000E-22	CFS 52D66M	Roll	Yes	0	Yes	10-04890	\$2,915.00
1U149-007-9	5000E-23	CFS 52D67M	Pitch & Roll	Yes	0	Yes	10-04891	\$3,410.00

Accessories

SIGMA-TEK FACTORY OVERHAULED GYROS





5000B-36

4000B-30

These units are factory-overhauled gyros that are like new and carry the same warranty as a new units. Provided installation is within 6 months of factory ship date, full replacement warranty is 12 months from date of installation.

Exchange core must be a like core* and the core must be returned no later than 20 days from the invoice date to receive core credit.

*Like cores include: any 4000B series Sigma Tek core as exchange for a 4000B-30 any 5000B series Sigma Tek core as exchange for a 5000B-36

*All lighted units must order light tray separately.

Description	Sigma-Tek Model No.	Our Part No.	Price
Attitude Gyro	5000B-36	10-03360	\$814.00
Directional Gyro	4000B-30	10-03359	\$815.00



SIGMA-TEK 5000M SERIES CAGEABLE ATTITUDE **GYROS**

The 5000M is an air-driven gyro that has a pictorial horizon mask and fixed airplane. The mask moves to indicate climb, dive, and bank. Bank and pitch attitudes are displayed so that the pilot's sensing of the gyro indication is the same as the interpretation of the relation between the wings of the aircraft and

the natural horizon during visual flight. The instrument is provided with a caging system which is functional through 360° of roll and 90° of pitch. When caging is engaged, pitch and roll indices are aligned within two degrees. This instrument is FAA certified, and can be used to replace the aircraft's turn coordinator when equipped with an inclinometer. The caging feature is very useful for guick erection and display alignment; a high priority for occasional aerobatic maneuvers and operations with short stops

Display Colors: Blue/Brown

NOTE: Lighted instruments do not include lamp trays, please see accessories to purchase separately.

Sigma-Tek	Model	Warning Flag	Caging	Inclino- meter	Light- ed	Panel Tilt	Part Number	Price
1U149-021-1	5000M	No	Yes	No	Yes	0	10-02326	\$2,437.00
23-501-035-5	5000M-1	No	Yes	No	No	0	10-02327	\$2,448.00
23-501-036-6	5000M-2	No	Yes	No	No	8	10-02328	\$2,342.00
23-501-037-7	5000M-3	No	Yes	Yes	No	0	10-02329	\$3,211.00
23-501-038-8	5000M-4	No	Yes	Yes	No	8	10-02330	\$3,100.00
1U149-022-2	5000M-5	No	Yes	No	Yes	8	10-02331	\$2,437.00
1U149-023-3	5000M-6	No	Yes	Yes	Yes	0	10-02332	\$3,115.00
1U149-024-4	5000M-7	No	Yes	Yes	Yes	8	10-02333	\$3,189.00
1U149-025-5	5000M-8	Yes	Yes	Yes	Yes	0	10-04882	\$3,499.00
1U149-026-6	5000M-9	Yes	Yes	Yes	Yes	8	10-04883	\$3,332.00
23-501-039-9	5000M-10	Yes	Yes	Yes	No	0	10-04884	\$2,897.00
23-501-040-10	5000M-11	Yes	Yes	Yes	No	8	10-04885	\$2,897.00
23-501-043-3	5000M-12	Yes	Yes	No	No	0	10-04886	\$2,658.00
23-501-044-4	5000M-13	Yes	Yes	No	No	8	10-04887	\$2,658.00
1U149-027-7	5000M-14	Yes	Yes	No	Yes	0	10-04888	\$2,974.00
1U149-028-8	5000M-15	Yes	Yes	No	Yes	8	10-04889	\$3,039.00

Accessories

SIGMA-TEK 4000B SERIES STANDARD **DIRECTIONAL GYROS**



The 4000B is a standard air-driven directional gyro. As the aircraft turns left or right, gears on the sensing unit and dial shaft translate this rotation into rotation of the instrument's vertical dial. Left turns produce clockwise dial rotation and right turns produce counterclockwise rotation. The gyro is controlled by a heading selector knob located on the lower left of the instrument. Pressing and turning the knob first disengages the dial shaft and then resets the dial to a new heading, which

results in a new course indication. Releasing the selector knob reengages the dial shaft. The on-course position of the pointer is always at the top of the azimuth circle (0° on the dial with the aircraft headed north). The Standard configuration can replace most air driven gyros with the major difference being in the layout and colors of the display. NOTE: Lighted instruments do not include lamp trays, please see accessories to purchase separately.

	-							
Sigma-Tek	Model	Airplane Color	Index Markers		Letters @ 90°	Light- ed	Part Number	Price
1U262-001-9	4000B-8	White	White	White	No	No	10-05123	\$1,579.00
1U262-002-32	4000B-22	White	White	White	Yes	Yes	10-05124	\$1,874.00
1U262-001-39	4000B-30	Orange	Orange	White	Yes	No	4000B	\$1,450.00
1U262-002-42	4000B-31	Orange	Orange	White	Yes	Yes	10-00588	\$1,606.00

GYROS



SIGMA-TEK 4000C / **D SERIES AUTOPILOT** DIRECTIONAL GYROS

The 4000C/D is an air-driven directional gyro with A.C. autopilot pickoffs. Left turns produce clockwise dial rotation and right turns produce counter-clockwise rotation. Two knobs control the gyro. The left knob is used to cage the unit,

and the right knob is used to select the instrument's heading. To change course, the right selector knob is pressed and turned to disengage the dial shaft and set the pointer to a new heading. Releasing the selector knob re-engages the pointer with the dial shaft. As the aircraft turns onto a new course, the pointer returns to its original position. The on-course position of the pointer is always at the top of the azimuth circle (0° on the dial with the aircraft headed north).

Some Auto-Pilot gyros are FAA PMA approved for use in several models of the Century and S-Tec Auto-Pilot systems.

Sigma- Tek	Model	Autopilot Model	Airplane Index	Dial @ 30°	Letters @ 90°	Light- ed	РМА	Part Number	Price
1U262- 003-14	4000C	52D54	White	White	No	No	Yes	11-05908	\$2,511.00
1U262- 004-15	4000C-1	52D54M	White	White	Yes	Yes	Yes	10-02929	\$2,711.00
1U262- 042-3	4000C-17	King	White	White	Yes	Yes	No	10-05137	\$3,027.00
1U262- 003-65	4000C-18	52D54	Orange	White	No	No	Yes	10-05138	\$2,578.00
1U262- 004-66	4000C-19	52D54M	Orange	White	Yes	Yes	Yes	10-05139	\$2,816.00
1U262- 005-20	4000D-1	ARC 40760-0114 (G502A)	Yellow	White	Yes	No	No	10-05141	\$3,269.00
1U262- 006-45	4000D-6	S-TEC (6404)	White	White	Yes	Yes	Yes	10-00049	\$3,121.00



SIGMA-TEK 4000H SERIES XYZ BOOTSTRAP DIRECTIONAL GYROS

A cost effective link to "bootstrap" other instruments requiring heading information for: display orientation to aircraft heading, heading stabilization functions, and other navigational calculations and/or solutions. Specific applications include:

Argus Moving Map Display®, L-3 Avionics Stormscope®, and Insight Strike Finder®. The heading output exactly tracks the aircraft heading as depicted under the index pointer on the Directional Gyro. The synchro index and rotation reference is set to ARINC characteristics. The 26 VAC, 400 HZ heading synchro requires a readily available external excitation, preferable from the instrument/system receiving the heading output or from an independent inverter. Sigma Tek's Directional "Bootstrap" gyro includes options for lighting and interfaces for ARC, Century Flight System, and S-Tec autopilots.

Airplane Index: Orange; Dial: White at 30°

Sigma-Tek	Model	Autopilot Interface	Letters @ 90°	Lighted	Part Number	Price
1U262-031-1	4000H	None	Yes	Yes	10-05142	\$3,246.00
1U262-033-3	4000H-2	ARC	Yes	Yes	10-05143	\$4,532.00
1U262-034-4	4000H-3	ARC	Yes	No	10-05144	\$4,447.00
1U262-033-5	4000H-4	S-TEC	Yes	Yes	10-05145	\$4,447.00
1U262-034-6	4000H-5	S-TEC	Yes	No	10-02106	\$4,342.00
1U262-035-7	4000H-6	CFS	Yes	Yes	10-05146	\$4,521.00
1U262-036-8	4000H-7	CFS	Yes	No	10-05147	\$4,199.00
1U262-039-11	4000H-10	KING (DC)	Yes	Yes	10-05149	\$4,273.00
1U262-040-12	4000H-11	KING (DC)	Yes	No	10-05150	\$4,184.00
1U262-237-9	4000H-8	CFS (DC)	Yes	Yes	10-05148	\$4,183.00

Accessories for the above gyros

SIGMA-TEK 4000HR-SERIES HEADING **REFERENCE DIRECTIONAL GYROS**



The 4000HR air-driven directional gyro offers some of the best features of our other popular models. It inherited all of the functionality and reliability of the industry standard 4000B upon which it's based, and it picked up a heading reference bug from the 4000C autopilot model.

Many pilots find the heading reminder a valuable feature whenever the cockpit is busy, such as during an approach with heavy ATC traffic. Setting a new heading during a long, cross-country flight eliminates the

tedious math associated with frequent navigational crosschecks. A quick glance at the instrument instantly reminds the pilot of his heading. The heading bug can be positioned anywhere around the heading card by turning the right knob. Dial: White at 30°; Letters at 90°

Sigma-Tek	Model	Airplane Color	Index Markers	Lighted	Heading Reminder	Part Number	Price
1U262-007-33	4000HR-1	White	White	No	Yes	10-05151	\$1,934.00
1U262-007-40	4000HR-2	Orange	Orange	No	Yes	10-00469	\$1,735.00
1U262-010-41	4000HR-3	Orange	Orange	Yes	Yes	10-00095	\$1,974.00

		instruments	do	not	include	lamp	trays,	please	
specif	y aircraft	voltage:							
DA 4 4 4		14431 111	-	\	D /1 / /	0.075	-	AAE 75	

SIGMA-TEK 4000B ARINC-STYLE DIRECTIONAL GYROSCOPES



This instrument was developed for those pilots ARINC-styled cockpit. It is identical to the stan-dard 4000B model differing mainly in aesthetics. Besides its distinct bezel and airplane, the display graphics and colors differentiate it from the standard model. A heading reminder bug is available as an option.

The ARINC gyros have a 3" bezel that matches existing ARINC flight director systems.

Airplane Color: Orange; Dial: White at 30°;

Sigma-Tek	Model	Index Markers	Letters @ 90°	Lighted	Part Number	Price
1U262-011-1	4000B-23	White	Yes	14 or 28V	10-05128	\$3,636.00
1U262-012-2	4000B-24	White	No	5V	10-05129	\$3,636.00
1U262-013-3	4000B-25	White	Yes	No	10-05136	\$3,562.00




SIGMA-TEK 1U367 ARINC-STYLE ATTITUDE GYRO

The 1U367 has a pictorial horizon mask and a fixed airplane. The mask moves to indicate climb, dive, and bank. Bank and pitch attitudes are displayed so that the pilot's sensing of the gyro's horizon indication is the same as the interpretation of the relationship between the wings

of the aircraft and the natural horizon during visual flight. The instru-ment is operable following maneuvers of 360° in roll and 360° in pitch. Controlled precession is employed to achieve the 360° in pitch. Note: Arinc-bezel lighted gyros have integral lighting as noted. Display Colors: Blue/Brown

	Sigma-Tek Part No.	Model	Lighted	Panel Tilt	Our Part No.	Price
1	1U367-205-5	1U367	none	0	10-05117	\$2,764.00
	1U367-210-11	1U367	14V or 28V	8	10-05118	\$3,027.00

SIGMA-TEK HIGH-FLOW FITTINGS



53B423-002 - A 3/8" 45° fitting used for either inlet or outlet ports with installations having 5/8" hoses.

P/N 10-01151\$63.75



53B423-003 - A 3/8" 90° short high-flow fitting used for either inlet or outlets with installations having 5/8" hoses. P/N 10-01152 \$63.75



53B423-004 - A 3/8" 90° short high-flow fitting used for either inlet or outlets with installations having 5/8" hoses. P/N 10-01153\$63.75

542

YROS



MID-CONTINENT INSTRUMENTS AND AVIONICS ELECTRIC ATTITUDE INDICATOR

Engineered as a primary or standby artificial horizon in fixed-wing aircraft and helicopters, this indicator's single connection makes installation a snap. This indicator is standard equipment on many OEM aircraft including the Beech Baron

and Bonanza. Featuring 10-32 volt DC operation, anti-reflective glass, long-life lighting and 7,500 hours MTBF, this is a cost-effective and safe alternative to unreliable vacuum systems.

4300-311 - 10/32V, lighted, 0-20°, Delta ...P/N 10-00751\$3,475.00 4300-313 - 10/32V, Lighted, 0-20°, Delta ...P/N 10-03899\$3,695.00 Emergency power supply TS420P/N 11-05540 \$2,679.00P/N 10-06803.......\$60.75 Knob Cover

MID-CONTINENT INSTRUMENTS AND AVIONICS 3300 ELECTRIC DIRECTIONAL GYRO



Features: • Weighs just 1.9 lbs. - One pound less than most electric directional gyros · Multi-voltage than most electric directional gyros • Multi-voltage 10–32 volt DC, remains valid until the aircraft main battery discharges to 10VDC • Direct replacement for many AIM205 and RC Allen RC15A units • Designed specifically for use in high vibration applications • Warning flag monitors rotor speed and power input • Anti-reflective glass enhances visibility and reduces fatigue • Approved to FAA TSO-C5e and RTCA DO-160E • Requires less than half the power of standard DG units • Long-

3300-10 no lighting	P/N 10-02821	\$2.995.00
3300-11 14V LED Lighting		
3300-11 28V LED Lighting		
4 Pin Connector MS3116E8-4S		

MID-CONTINENT INSTRUMENTS AND AVIONICS "LIFESAVER" ELECTRIC ATTITUDE INDICATOR

Fly with confidence and peace of mind with the Lifesaver® gyro. Even if every other system in your aircraft's avionics panel goes dark, the Lifesaver powers on. The only attitude indicator with a self-contained battery backup, it delivers one full hour of emergency attitude reference. 1 hr of precious time to pull you through

when trouble strikes and all other power fails. Optional slip indicator can be installed anytime. No removal of gyro necessary. Benefits: Field replaceable lighting, Anti-reflective glass enhances visibility and reduces fatigue, Battery life 3 years in average aircraft environment, 10-32 VDC replacement for use in either 14 or 28V aircraft, May be installed in place of an existing turn coordinator or turn, and slip indicator per FAA advisory circular AC91-75. Lighted, 0–20°...P/N 10-00750......\$3,695.000 Beechcraft (Inclinometer)P/N 10-06794\$4,885.00 ...\$3,816.00 P/N 10-06707

Delta	P/N 10-06798 \$4,395.00
Slip Indicator Kit	P/N 10-00764 \$282.95
	P/N 10-00763
	P/N 10-01054\$295.00
3/32" Front Mount Adapter	P/N 10-00765
	P/N 10-00766\$491.00



CASTLEBERRY ELECTRIC ATTITUDE INDICATOR

The high quality electric attitude indicator replaces the turn and bank and may be installed in the same panel location, freeing up crowded panel space. Installation of these units is straight-forward. It has an inclinometer for use in standard rate turns and a failure warning flag to indicate loss of gyro RPM.

When used together with the Castleberry Emergency Power Unit, Model EPU 28-24RMT, this instrument provides the pilot with a welcome margin of insurance in case of aircraft electrical power failure. Features: • Inclinometer • Power failure flag • Pull to cage knob • Backlit

Standard 3 1/8 in. diameter

Model No.	Description	Part No.	
300-14EL	14V Gyro **	10-02823	\$3,195.00
			\$3,295.00
300-14ELP	300-14EL With Auto Pilot outputs.*	10-02826	\$4,125.00
*Please Specify	at time of order 10-32V or tilt if desired.		

**Light Tray required.

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

FALCON ATTITUDE GYRO (VACUUM) This Gyro Horizon is controlled by an air driven



precision gyroscope to present the pilot with pitch and roll information, through the full 360° "picto-rial" presentation leads to faster interpretation of airplane attitude. A zero pitch adjustment knob is provided. Dims: 3-1/8 x 3-1/8 x 8 max. Non-TSO'd for Experimental Aircraft Only

Non-TSO'd

......P/N 10-22955\$798.00 Gyro with 8° tilt Falcon P/N 10-02242 \$894.00



FALCON ATTITUDE GYRO (ELECTRIC)

This factory new electric attitude gyro fits the standard gyro instrument cut-out. Features pushto-cage knob, low power/power failure flag, longer life & reliability due to lower operating temp.; Black case, black adjustment knob, & bright yellow/green case, black adjustment knob, & bright yellowigreen airplane marker with sky blue/brown ground dial. Roll & loop without worry. Size: 6.4", Wt: 2.4 lbs., Power: 14VDC req. MS3116E8 connector (includ-ed). Non-TSO'd for Experimental Aircraft Only.

Size	Model No.	Description	Part No.	Price
3-1/8"	GH02E-3	Non-TSO'd, 14V	10-04671	\$1,596.00
4 Pin	MS3116E8-4S	4 Pin Connector MS3116E8-4S	10-00791	\$42.50



FALCON DIRECTIONAL GYRO (VACUUM)

The vertical rotating azimuth card is controlled by a precision gyroscope air-driven. The directional gyro will give correct heading information through ±60° of aircraft attitude in roll and pitch, 360° in yaw. A caging knob is provided to reset the gyro to the magnetic compass. Similar to Air Italia

Falcon gyros can tolerated some aerobatic flight, but aerobatics can reduce the life of the gyro. It is recommended that the gyros be rem oved when the aircraft will be performing extensive aerobatic maneuvers. The Falcon electric gyros have caging knobs, but the vacuum gyros do not. Made in china.

MPL 503 AIR PRESSURE SWITCHES



MPL 503 Series pressure switches sensitive inches/H 2 O or Knots. Accuracy and reliability offer the designer an excellent general purpose low pressure to electric interface for monitoring and control applications. The miniature size make the 503 Series ideal for OEM applications.

Description	Part No.	Price
MPL503E Air Pressure Switch Adjustable: 40-100" of H2O	11-02379	\$45.50
MPL503DO Air Pressure Switch Normally Open Setting	11-13476	\$43.95
MPL503DC Air Pressure Switch Normally Closed Setting	11-13477	\$44.50

CASTLEBERRY EMERGENCY POWER BACK-UP EPU-2



TSO'd emergency power supply, Model EPU 28-24RMT that can replace some older non TSO'd units made by Terra and AIM that are no longer in production. This unit provides a 24 VDC output up to 5 Amps for 30 minutes for emergency buss power to operate the standby attitude gyro with extra capacity of up to 4 amps for other critical instrument or avionics. This is economical insurance in a 7.5 pound package for aircraft frequently involved in IFR operations.

Emergency Power Supply EPU-2	P/N 11-05822	\$2,235.00
EPU Connector	P/N 11-07713	\$71.00
Rack Mount and Connector for EPU-2	P/N 11-05823	\$286.00
Component Maintenance Manual	P/N 11-00187	\$895.00

<u> ROS – STANDBY VACUUM SYST</u>

MID-CONTINENT INSTRUMENTS AND **AVIONICS MINI 2-INCH ATTITUDE INDICATORS**



The Mini Gyro offers big features in a compact package. At half the cost of the competition, the Mini Gyro not only saves panel space, but also time and money. An ideal standby instrument, this TSO-approved indicator has 10-32 volt DC operation and is an attractive alternative to vacuum systems. It features unique LED lighting selectable to 5, 14 or 28 volts. Remote emergency power supply available for this indicator (P/N 11-05540).

Standard airplane display	
Delta airplane display	P/N 10-01722 \$3,795.00
Slip indicator (inclinometer)	P/N 10-04775\$290.95
Emergency Power Supply	P/N 11-05540 \$2,679.00

MID-CONTINENT INSTRUMENTS & AVIONICS STANDBY ATTITUDE MODULE MD302



SAM® is the industry's first digital standby instrument to provide attitude, altitude, airspeed and slip information to the pilot in an advanced, 2-inch format. SAM delivers an easy-to-fit, compact design with selectable orientation (horizontal and vertical) like no other, ensuring a perfect fit within any panel. The unique two-screen display

features high-definition graphics and extra-wide viewing angles, and at 1.6 pounds, SAM weighs less than just one of the three instruments it's designed to replace.

See www.aircraftspruce.com for complete list of features and specifications.

Model No.	del No. Configuration Part No.			
MD302 - 6420302-1	Digital, 10–32 VDC, Attitude, Altitude, Airspeed, Slip, Internal battery, Black bezel	10-05081	\$8,211.00	
MD302 - 6420302-2	Digital, 10–32 VDC, Attitude, Altitude, Airspeed, Slip, No battery, Black bezel	10-06017	\$8,212.00	
MD302 - 6420302-3	Digital, 10–32 VDC, Attitude, Altitude, Airspeed, Slip, Internal battery, Gray bezel	10-06018	\$8,340.00	
MD302 - 6420302-4	Digital, 10–32 VDC, Attitude, Altitude, Airspeed, Slip, No battery, Gray bezel	10-06019	\$8,340.00	
MD302 - 6420302-5	No display, 10–32 VDC, Remote mounted, ARINC output, No battery	10-06020	\$8,340.00	

MID-CONTINENT INSTRUMENTS



& AVIONICS MD32 MAGNETOMETER The MD32 Magnetometer is designed specifically for the MD302 Standby Attitude Module – SAM®. The MD32 is FAA TSOcertified and delivers independent heading reference without orientation limitations or the need for special installation hardware. Its compact size, unique mounting flexibility, and convenient cockpit calibration ensure easy, economical installation.

P/N 10-06594 \$1.284.00

VOLT & VAC ALERT



A gyro instrument can start giving false information in less than one minute, and it is important that the pilot become instantly aware of a vacuum loss. The Volt & Vac Alert monitors instrument vacuum and electrical voltage. Should either fall below set values, the system will provide an instantly recognizable voice warning directly in the pilots headset, and then flash a light posi-

tioned within the normal gyro scan area, providing him with instant recognition of a problem. The Volt & Vac Alert is STC - PMA approved P/N 10-00393 \$495.00

SIGMA TEK CAGEABLE ATTITUDE GYROS



Short stops (engine off less than twelve minutes) and some aerobatic maneuvers may cause your attitude gyro to tumble or pre-cess from its vertical reference. When the rotor is spinning, the gyros normal erection system is slow and can take several minutes to correct a large erection error. This non-locking caging feature allows the pilot to quickly align the gyro display and rotor to gyro case reference. The attitude gyro should only be caged for quick alignment during straight and level VFR flight using

well defined earth horizon for reference or prior to take off. All lighted gyros must order tray separately.

Part No.	Description	Price
5000B	Standard Gyro, Unlighted (non-cageable)	\$1,450.00
5000B-46	With Inclinometer, 0° Panel Tilt	\$1,964.00
5000B-45	With Inclinometer, 0° Panel Tilt, Lighted	\$2,237.00
5000B-51	With Inclinometer, 8° Panel Tilt	\$2,006.00
5000B-53	With Inclinometer, 8° Panel Tilt, Lighted	\$2,237.00
10-00111	5000B Light Tray 14V	\$116.85
10-00112	5000B Light Tray 24V	\$116.75

B&C LYCOMING VACUUM PUMP PAD ADAPTER INVERTED OIL PICKUP



This provides a direct replacement for the Lycoming vacuum pump pad adapter. Its unique design offers both a standard vacuum pump pad adapter AND provision for inverted oil pickup. The vacuum pump pad is often used for a B&C spline-driven alternator, such as the SD8 or SD20. Aircraft with oil systems using the standard "T" fitting on the firewall will typically experience a 3 to 5 second drop into the "yellow" oil pressure range after rolling inverted. However with this installed, the oil pressure will have a momentary blip or "wiggle" on the oil pressure gauge as the ball valve switches ends. As a result, the engine receives better lubrication and prop surges are lessened. The comes with oil seal installed,

gaskets, and an MS20822-10D 90 degree fitting. Just slip the existing vacuum pump gear and thrust washer in, and it is ready for installation wild fit (gear and washer not included). Alternate PN: VAC-2/4

VENTURI

2" VENTURI

This small aluminum venturi provides 2" Hg vacuum for operating turn/bank indica-tor. Has 1/8" NPT port. Use 1/4" tubing for hookup.

4" VENTURI

This venturi develops 4" Hg suction from double-throat venturi and 10" long horn. Used to operate a directional gyro or gyro horizon. When operating a directional gyro there is sufficient capacity to also operate a turn/bank. All aluminum construction. May require a suction regulator. Wt. 0.9 lb.

P/N 15050\$89.75

9' VENTURI

This "super venturi" is similar in appearance to the 4" venturi but with redesigned air passages and a recontoured, long (11-1/4") horn. It pulls enough vacuum to operate a gyro horizon, directional gyro and a turn/ bank. Must be used with a suction regulator P/N 15052\$92.75

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

TURN COORDINATORS – TURN & BANKS

RC ALLEN TURN COORDINATOR 3 INCH INDICATORS



Used in many production aircraft. Incorporates an electrical Gyro Turn Indicator with an inclinometer. The inclinometer, by movement of a ball in relation to the lubber lines, indicates the slip angle of aircraft while in a turn. The airplane on the dial rotates with reference to the indices. A power failure flag drops into view whenever the supply voltage is lost or when voltage has dropped below a level acceptable for proper operation of the gyro. Operates on 14 to 28V DC. New manufacture. First installation requires electrical connector and clamp.

Dimensions: Length: 6 1/5 in. Max, Width: 3 3/8 in Max, Height:3 3/8 in Max, Weight: 1.9 lbs. Meets or exceeds requirements of FAA TSO C3b

Description	Model	Part No.	Price
Unlighted - Mating Connector: MS3106A-10SL-3S	RCA82A-11	10-01372	\$949.00
Lighted (14V) - Mating Connector: MS3106A-10SL-3S	RCA83A-11-14	10-00485	\$1,075.00
Lighted (28V) - Mating Connector: MS3106A-10SL-3S	RCA83A-11-28	10-01685	\$1,065.00
Mating Connector	MS3106A-10SL-3S	10-00789	\$26.50



WINTER SLIP INDICATORS

BANK INDICATORS (BALL TYPE)



In turning, instantly register slightest departure from the correct banking angle. Bank scale has white markings on black background. New manufacture. Available in 2 models:

10°-10° Scale, 2.25" between mounting holes. P/N 10-00600**\$127.75** 20° - 20° Scale, 5" between mounting holes.

P/N 10-00700\$75.75

SWIFT BANK INCLINOMETER



The bank indicator has the function of slip indication. A very practical and simple instrument. It can be installed on an LSA, it is particularly useful in flight training.

Center distance of two Installation Holes is 48.6mm.

P/N 10-06984 \$153.80

MID-CONTINENT INSTRUMENTS TURN & SLIP INDICATOR



2 Inch - Widely used in the turbo-prop market as standard equipment, this dependable instrument fits into the tightest panel space. The AC brushless rotor offers great reliability. Internal lighting options of 5, 14 and 28 volt offer greater flexibility. These were factory installed on the DeHavilland Dash 8 and Boeing Chinook CH47

14V Turn & Slip...P/N 10-00305......**\$2,550.00** 28V Turn & Slip...P/N 10-00310.....**\$2,550.00**

CABLE CLAMP MS3057-4A

MID-CONTINENT INSTRUMENTS TURN & SLIP (ELECTRIC)



Built-in voltage regulator allows it to be used in either 14V or 28V systems. Small, compact unit and weighs only 1.2 lbs. Incorporates a small "power out" warning window which is black when normal current is being supplied but turns red in the case of electrical power failure. This turn and bank is now being used in many production aircraft. New installation requires electrical connector and cable clamp. New manufacture by Electrical Gyro Corp. Size: 3-3/8" x 3-3/4" long.

	0120. 0 0/0		on iong.	
Unlighted		P/N	1234T100.3	\$1,317.00
14V Bezel-Lit				
28V Bezel-Lit				
MS3106A-10SL-3S Elect				. ,

MID-CONTINENT INSTRUMENTS TURN COORDINATORS (ELECTRIC)



Certified to FAA TSO C3b. OEM standard - proven reliability. Includes power warning indicator. Features: • 4500 hours MTBF, more than double the original "Z" design • Brushless AC rotor operates on 14 or 28 VDC • Proven reliability through HALT (Highly Accelerated Life Testing) requirements and OEM usage since 1999 • Improved "Off" warning flag pulls out of view when rotor is up to speed • Is a direct replacement for the popular 1394T100-pin ture geordinator.

7Z and most standard 3-pin turn coordinators.	
1394T100-7B Unlighted 12-32VP/N 10-02108\$976.00	
28V unit- 11-32V Bezel LightingP/N 10-01024\$1,295.00	
14V unit- 11-32V Bezel LightingP/N 10-01025\$1,228.00	
Unlighted G300A Autopilot, ARC P/N 10-02653\$1,922.00	
1394T100-10RB (Cessna, KAP 140, Autopilot)P/N 10-02311\$1,996.00	
1394T100-14RB Low Wing Turn Coordinator Autopilot -	
For use on low wing aircraftP/N 10-04022 \$1,997.00	
MS2106A 10SL 2S Electrical Plug Connector P/N 10.00780 \$26 50	

MS3106A-10SL-3S Electrical Plug Connector... P/N 10-00789......\$26.50

RC ALLEN TURN & BANK (ELECTRIC)



Instrument is powered by an electrically driven DC precision gyro with an inclinometer. It gives the pilot turn and bank information. The RCA56 series is an all volt instrument, with a power warning flag, a black or white ball inclinometer and either lighted or non-lighted. DIMENSIONS: Length: 6 1/4 in. Max Weight: 3 3/8 in. Max Height: 3 3/8 in. Max Weight: 1.9 lbs.

Meets or exceeds requirements of FAA TSO C3b. New manufacture by A.I.D. RC Allen.



AN5820-1 TURN & BANK (VACUUM) AN5820-1 Turn & Bank indicator completely

AN5820-1 Turn & Bank indicator completely overhauled and certified to FAA requirements. Fresh matte-white dial markings with "doghouses". Power: 1.8" to 2.2" Hg vacuum produced by a 2" venturi or vacuum pump. Size: 3.25"x 3.25"x 4.75" long. Weight: 1.5 lbs. 1 year warrantyP/N AN5820-1\$526.00



TURN & BANK KIT

IR PUN DRY A



TEMPEST TORNADO 3000 DRY AIR PUMPS

New revolutionary LRT oil drain, patent pending feature is designed to drain oil, caused by a leaking Garlock Seal, before it reaches the drive coupler. Provides a tell tale leak path. Closed front ends, designed to eliminate oil and oil residues from entering into the pump. Helps prevent pump failures caused by oil entering

into the drive mechanism or rotor and vanes. 3 year 1300 hour warranty Tempest Tornado 3000 Model AA3215CC P/N 10-00619...\$459.00 Tempest Tornado 3000 Model AA3216CW P/N 10-00610...\$457.00 Tempest Tornado 3000 Model AA3215CC-9.... P/N 10-00611...\$457.00 Tempest Tornado 3000 Model AA3226CW P/N 10-06598...\$498.00

VACUUM PUMP APPLICATION See www.aircraftspruce.com

for complete listing of vacuum pump applications for most general aviation aircraft.

VACUUM PUMP COOLING SHROUDS FOR AIRBORNE AND TEMPEST



Cooling shrouds have been proven to reduce pump operating temperature and therefore extend service life. Testing has proven reduction in operating temperature by as much as 15%. Saves money - extends service life of dry air pumps. AA20T fits all 200/240 series pumps. AA40T fits all 400 series



TEMPEST WEAR INDICATOR TOOL KIT

Tempest Wear Indicator Tool Kit. Kit includes: 3 Star Lockwashers (82-50122-2A2), 3 Hole Plugs (82-50122-2A1), 1 WIP Tool (82-



TEMPEST ELECTRIC AUXILIARY DRY AIR PUMPS

Electric auxiliary dry air pumps are recommended for single engine aircraft flown in IFR conditions as a back-up in the event the primary vacuum pump fails. These pumps are FAA-PMA approved as direct replacements for Airborne pumps previously installed under STC eligibility and STC approval for these pumps for many additional aircraft is pending.

28VECElectric Auxiliary Dry Air Pump Model AA4A2-1	P/N 10-00585	
14VECElectric Auxiliary Dry Air Pump Model AA4A3-1	P/N 10-00584	\$2.310.00
· · · · · · · · · · · · · · · · · · ·		, , = = = =



TEMPEST DRY AIR PUMPS

Tempest dry air pumps, from Aero Accessories, are 100% new production and use all new components. They are FAA-PMA approved replacements for like and similar models on many installations. These pumps are available in the 200, 240, and 400 series.

The AA215CC series come with a 1-year, unlimited hour warranty and the AA241CC, AA242CW, and the AA441CC and AA442CW series come with a 1-year, 500 hour warranty. Warranties expire 2-years from date of manufacture. Addition Core Charge applied to Overhauled Pumps *Core Rebate available for new pumps.

ſ



216CWWIP Overhauled Dry Air Pump w/WIP 10-24600-1 \$ 241CC Overhauled Dry Air Pump 10-24700-1 \$ 243CC-13 Overhauled Dry Air Pump 10-01969 \$ 243CC-15 Overhauled Dry Air Pump 10-01968 \$ 242CW Overhauled Dry Air Pump 10-01968 \$ 244CW-4 Overhauled Dry Air Pump 10-01971 \$ 244CW-10 Overhauled Dry Air Pump 10-01971 \$ 244CC-0H Overhauled Dry Air Pump 10-01972 \$ 441CC-3 Overhauled Dry Air Pump 10-01974 \$	Price \$316.00
216CWWIP Overhauled Dry Air Pump w/WIP 10-24600-1 \$ 241CC Overhauled Dry Air Pump 10-24700-1 \$ 243CC-13 Overhauled Dry Air Pump 10-01969 \$ 243CC-15 Overhauled Dry Air Pump 10-01968 \$ 242CW Overhauled Dry Air Pump 10-01968 \$ 244CW-4 Overhauled Dry Air Pump 10-01971 \$ 244CW-10 Overhauled Dry Air Pump 10-01971 \$ 244CC-0H Overhauled Dry Air Pump 10-01972 \$ 441CC-3 Overhauled Dry Air Pump 10-01974 \$	\$316.00
241CC Overhauled Dry Air Pump 10-24700-1 \$ 243CC-13 Overhauled Dry Air Pump 10-01969 \$ 243CC-15 Overhauled Dry Air Pump 10-01968 \$ 242CW Overhauled Dry Air Pump 10-24800-1 \$ 244CW-4 Overhauled Dry Air Pump 10-01971 \$ 244CW-10 Overhauled Dry Air Pump 10-01972 \$ 441CC-0H Overhauled Dry Air Pump 10-23500-1 \$ 441CC-3 Overhauled Dry Air Pump 10-01974 \$	
243CC-13Overhauled Dry Air Pump10-01969\$243CC-15Overhauled Dry Air Pump10-01968\$242CWOverhauled Dry Air Pump10-24800-1\$244CW-4Overhauled Dry Air Pump10-01971\$244CW-10Overhauled Dry Air Pump10-01972\$441CC-0HOverhauled Dry Air Pump10-23500-1\$441CC-3Overhauled Dry Air Pump10-01974\$	6316.00
243CC-15 Overhauled Dry Air Pump 10-01968 \$ 242CW Overhauled Dry Air Pump 10-24800-1 \$ 244CW-4 Overhauled Dry Air Pump 10-01971 \$ 244CW-10 Overhauled Dry Air Pump 10-01972 \$ 441CC-0H Overhauled Dry Air Pump 10-23500-1 \$ 441CC-3 Overhauled Dry Air Pump 10-01974 \$	\$520.00
242CWOverhauled Dry Air Pump10-24800-1\$244CW-4Overhauled Dry Air Pump10-01971\$244CW-10Overhauled Dry Air Pump10-01972\$441CC-OHOverhauled Dry Air Pump10-23500-1\$441CC-3Overhauled Dry Air Pump10-01974\$	\$525.00
244CW-4Overhauled Dry Air Pump10-01971\$244CW-10Overhauled Dry Air Pump10-01972\$441CC-0HOverhauled Dry Air Pump10-23500-1\$441CC-3Overhauled Dry Air Pump10-01974\$	\$525.00
244CW-10Overhauled Dry Air Pump10-01972\$441CC-OHOverhauled Dry Air Pump10-23500-1\$441CC-3Overhauled Dry Air Pump10-01974\$	\$520.00
441CC-OH Overhauled Dry Air Pump 10-23500-1 \$ 441CC-3 Overhauled Dry Air Pump 10-01974 \$	\$525.00
441CC-3 Overhauled Dry Air Pump 10-01974 \$	\$700.00
·····	699.00
441CC-7 Overhauled Dry Air Pump 10-01975 \$	688.00
	\$725.00
441CC-9 Overhauled Dry Air Pump 10-01977 \$	655.00
441CC-11 Overhauled Dry Air Pump 10-01978 \$	688.00
441CC-17 Overhauled Dry Air Pump 10-01979 \$	\$725.00
441CC-23 Overhauled Dry Air Pump 10-01980 \$	655.00
442CW Overhauled Dry Air Pump 10-23600-1 \$	699.00
442CW-4 Overhauled Dry Air Pump 10-01981 \$	\$715.00
442CW-6 Overhauled Dry Air Pump 10-01982 \$	\$715.00
442CW-8 Overhauled Dry Air Pump 10-01983 \$	\$715.00
442CW-10 Overhauled Dry Air Pump 10-01984 \$	688.00
442CW-12 Overhauled Dry Air Pump 10-01146 \$	\$734.00
442CW-14 Overhauled Dry Air Pump 10-01985 \$	688.00
442CW-20 Overhauled Dry Air Pump 10-01986 \$	688.00

TEMPEST DRY AIR PUMPS - OVERHAULED

TEMPEST DRY AIR PUMPS - NEW			
Model	Description	Part No.	Price
AA241CC	New Dry Air Pump	10-24700	\$770.00
AA243CC-13	New Dry Air Pump	10-01987	\$803.00
AA243CC-15	New Dry Air Pump	10-01988	\$803.00
AA243CW	New Dry Air Pump	10-24800	\$770.00
AA244CW-4	New Dry Air Pump	10-01989	\$803.00
AA244CW-10	New Dry Air Pump	10-01990	\$803.00
AA3215CC	New Dry Air Pump	10-00609	\$459.00
AA3216CW	New Dry Air Pump	10-00610	\$457.00
AA3215CC-9	New Dry Air Pump	10-00611	\$457.00
AA441CC	New Dry Air Pump	10-23500	\$1,165.00
AA441CC-3	New Dry Air Pump	10-01991	\$1,110.00
AA441CC-7	New Dry Air Pump	10-01992	\$1,145.00
AA441CC-9	New Dry Air Pump	10-01993	\$1,110.00
AA441CC-11	New Dry Air Pump	10-01994	\$1,133.00
AA441CC-17	New Dry Air Pump	10-01995	\$1,110.00
AA442CW	New Dry Air Pump	10-23600	\$1,075.00
AA442CW-4	New Dry Air Pump	10-01996	\$1,110.00
AA442CW-6	New Dry Air Pump	10-01997	\$1,165.00
AA442CW-8	New Dry Air Pump	10-01998	\$1,134.00
AA442CW-10	New Dry Air Pump	10-01999	\$1,132.00
AA442CW-12	New Dry Air Pump	10-02001	\$1,229.00
AA442CW-14	New Dry Air Pump	10-02002	\$1,110.00
AA442CW-20	New Dry Air Pump	10-02003	\$1,110.00

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

TEMPEST PNEUMATIC COMPONENTS

PNEUMATIC FITTINGS

	FILLOMATIC ITTTINGS			
Model	Description	Part No.	Price	
AA1K1-4-6	Fitting -1/4 NPT x 3/8 Hose	10-00914	\$47.50	
AA1K1-4-8	Fitting -1/4 NPT x 1/2 Hose	10-01923	\$79.75	
AA1K1-6-6	Fitting -3/8 NPT x 3/8 Hose	10-01924	\$328.40	
AA1K1-6-8	Fitting -3/8 NPT x 1/2 Hose	10-00915	\$69.80	
AA1K1-6-10	Fitting -3/8 NPT x 5/8 Hose	10-00916	\$42.75	
AA1K1-8-10	Fitting -1/2 NPT x 5/8 Hose	10-00917	\$66.75	
AA1K1-8-12	Fitting -1/2 NPT x 3/4 Hose	10-01925	\$89.95	
AA1K8-6-8	Fitting -3/8 NPT x 1/2 Hose	10-01926	\$126.75	
AA1K8-6-10	Fitting -3/8 NPT x 5/8 Hose	10-01147	\$84.75	
AA1K9-4-6	Fitting -1/4 NPT x 3/8 Hose (A-450)	10-01927	\$49.50	
AA1K9-6-10	Fitting -3/8 NPT x 5/8 Hose (A-450)	10-01928	\$58.75	
AA1K10-2-4	Fitting -1/8 NPT x 1/4 Hose	10-01929	\$65.75	
AA1K10-4-6	Fitting -1/4 NPT x 3/8 Hose	10-00918	\$36.95	
AA1K10-4-8	Fitting -1/4 NPT x 1/2 Hose	10-01932	\$69.80	
AA1K10-6-10	Fitting -3/8 NPT x 5/8 Hose	10-01933	\$55.75	
AA1K10-6-12	Fitting -3/8 NPT x 3/4 Hose	10-01934	\$141.90	
AA1K10-8-12	Fitting -1/2 NPT x 3/4 Hose	10-01935	\$121.75	
AA1K14-6-6-6	Fitting -3/8 NPT x 3/8 x 3/8 Hose	10-01936	\$80.75	
AA1K22-10-10	Fitting -5/8 NPT x 5/8 Hose	10-01148	\$117.75	
AA1K24-2	Fitting -3/4 Hose Flange	10-01939	\$249.95	
AA1K30-6-6-4	Fitting -3/8 x 3/8 x 1/4 Hose	10-01940	\$112.75	
AA1K30-10-6-6	Fitting -5/8 x 3/8 x 3/8 Hose	10-01942	\$91.75	
AA1K31-4-6-4	Fitting -1/4 NPTx1/2x3/8x1/4 Hose	10-01943	\$76.99	
AA1K43-10-10	Fitting -5/8 x 5/8 Hose	10-01949	\$64.75	

PNEUMATIC FILTERS

Model	Description	Part No.	Price
AAD9-14-3	Filter	10-00923	\$23.50
AAD9-14-5	Filter	10-00924	\$22.60
AAD9-18-1	Filter	10-01354	\$23.50
AA2J4-4	Filter	10-01945	\$44.95
AA2J4-6	Line Mounted Filter	10-01946	\$41.90
AA2J4-7	Line Mounted Filter	10-01947	\$42.75
AA1J7-1	Gyro Filter Assembly	10-01948	\$49.50
AA1J7-2	Gyro Filter Assembly	10-01949	\$64.75
ARB3-5-1	Garter Filter	10-01333	\$3.60

MISCELLANEOUS PARTS

Model	Description	Part No.	Price
82-06768	Coupling	10-01951	\$86.90
82-50130B	Flange Gasket	10-01952	\$3.55
82-50195	WIP Plug-New Pumps Only	10-01954	\$7.90
82-50195P	WIP Plug-New Pumps Only-Pkg. of 10	10-01955	\$64.85
82-50195A	WIP Plug-O/H Pumps Only	10-01958	\$11.50
82-50195AP	WIP Plug-O/H Pumps Only-Pkg. of 10	10-01959	\$91.75
82-50155DP	LRT Diverter Kit	10-01961	\$15.50
AA9144	Prop Governor Gasket	10-01962	\$20.50
AAD5-77-1	WIP Plug-O/H Pumps Only-Pkg. of 10	10-01963	\$69.75
AAF7-236-1	Aux. Switch 14 Volt DC	10-01964	\$343.00

NEW VACUUM REGULATORS

Model	Description	Part No.	Price
AA1H5-25A	Regulating Valve	10-03457	\$854.00
AA2H3-2	Regulating Valve	10-03458	\$354.00
AA2H3-5	Regulating Valve	10-03459	\$342.00
AA2H3-6	Regulating Valve	10-03460	\$277.95
AA2H3-12	Regulating Valve	10-03461	\$334.00
AA2H3-23	Regulating Valve	10-03462	\$331.00
AA2H3-48	Regulating Valve	10-03463	\$372.00
AA2H3-27	Piper Aircraft (PA44-180 and PA44-180T) Vacuum Regulator	10-06257	\$380.00

PNEUMATIC CHECK VALVES

Model	Description	Part No.	Price
AA1H37-1	Tempest Check Valve	10-06618	\$1,060.00
AA1H37-3	Tempest Check Valve	10-06619	\$908.00
AA1H37-4	Tempest Check Valve	10-06620	\$1,040.00

OVERHAULED AIRBORNE SOLENOIDS

Model	Description	Part No.	Price
1H15-6	Solenoid	10-01860	\$851.00

OVERHAULED AIRBORNE VACUUM MANIFOLDS

Model	Description	Part No.	Price
1H5-1	Vacuum Manifold	10-01861	\$586.00
1H5-2	Vacuum Manifold	10-01862	\$733.00
1H5-3	Vacuum Manifold	10-01863	\$806.00
1H5-4	Vacuum Manifold	10-01864	\$831.00
1H5-6	Vacuum Manifold	10-01865	\$919.00
1H5-8	Vacuum Manifold	10-01866	\$917.00
1H5-9	Vacuum Manifold	10-01867	\$690.00
1H5-10	Vacuum Manifold	10-01868	\$833.00
1H5-13	Vacuum Manifold	10-01869	\$1,142.00
1H5-14	Vacuum Manifold	10-01870	\$869.00
1H5-18	Vacuum Manifold	10-01871	\$644.00
1H5-19	Vacuum Manifold	10-01872	\$1,053.00
1H5-20	Vacuum Manifold	10-01873	\$899.00
1H5-21	Vacuum Manifold	10-01874	\$1,265.00
1H5-22	Vacuum Manifold	10-01875	\$1,036.00
1H5-23	Vacuum Manifold	10-01876	\$656.00
1H5-24	Vacuum Manifold	10-01877	\$833.00

OVERHAULED AIRBORNE PRESSURE MANIFOLDS

Model	Description	Part No.	Price
1H24-3	Pressure Manifold	10-01879	\$995.00
1H24-6	Pressure Manifold	10-01880	\$1,097.00
1H24-7	Pressure Manifold	10-01881	\$1,265.00
1H24-8	Pressure Manifold	10-01882	\$1,097.00
1H24-10	Pressure Manifold	10-01883	\$1,038.00
1H24-11	Pressure Manifold	10-01884	\$1,357.00
1H24-12	Pressure Manifold	10-01885	\$1,696.00
1H24-18	Pressure Manifold	10-01886	\$1,290.00
1H24-20	Pressure Manifold	10-01887	\$1,543.00

OVERHAULED AIRBORNE CHECK VALVES

Model	Description	Part No.	Price
1H37-1	De-Ice Valve	10-01888	\$559.00
1H37-3	De-Ice Valve	10-01889	\$558.00
1H37-4	De-Ice Valve	10-01890	\$563.00
1H43-11	De-Ice Valve	10-01891	\$2,310.00
1H43-12	De-Ice Valve	10-01892	\$2,348.00
1H43-13	De-Ice Valve	10-01893	\$1,997.00
1H43-14	De-Ice Valve	10-01894	\$2,225.00
1H43-15	De-Ice Valve	10-01895	\$1,980.00
1H43-16	De-Ice Valve	10-01896	\$1,909.00
1H43-20	De-Ice Valve	10-01897	\$2,582.00
1H43-21	De-Ice Valve	10-01898	\$2,435.00
1H44-12	De-Ice Valve	10-01899	\$2,243.00
1H44-16	De-Ice Valve	10-01906	\$2,119.00
1H44-17	De-Ice Valve	10-01907	\$2,856.00
1H44-18	De-Ice Valve	10-01908	\$2,856.00
2H22-11	De-Ice Valve	10-01909	\$1,821.00
2H22-16	De-Ice Valve	10-01910	\$2,765.00
2H48-14	De-Ice Valve	10-01911	\$1,396.00
2H48-22	De-Ice Valve	10-01913	\$1,507.00
2H48-23	De-Ice Valve	10-01914	\$1,277.00
2H48-24	De-Ice Valve	10-01916	\$1,625.00
2H59-3	De-Ice Valve	10-01917	\$2,494.00
2H59-4	De-Ice Valve	10-01919	\$2,577.00
2H59-8	De-Ice Valve	10-01920	\$2,374.00
2H59-16	De-Ice Valve	10-01921	\$2,577.00

Prices Subject to Change Without Notice - Valid as of June 3, 2022.

EMPEST PNEUMATIC COMPONENTS

TEMPEST OVERHAULED AIRBORNE VACUUM REGULATORS

Model	Part No.	Price
2H3-1	10-02970	\$1,264.00
2H3-2	10-05733	\$1,204.00
2H3-12		\$276.95
	10-05734	
2H3-4	10-02972	\$963.00
2H3-7	10-02976	\$748.00
2H3-25	10-03013	\$732.00
2H3-11	10-02980	\$310.00
2H3-13	10-02982	\$945.00
2H3-14	10-02983	\$833.00
2H3-22	10-03007	\$805.00
2H3-8	10-02977	\$747.00
2H3-9	10-02978	\$727.00
2H3-5	10-02973	\$278.95
2H3-10	10-02979	\$805.00
2H3-23	10-05737	\$277.95
2H3-15	10-02984	\$349.00
2H3-27	10-03015	\$314.00
2H3-32	10-03017	\$874.00
2H3-35	10-03018	\$928.00
2H3-38	10-03019	\$963.00
2H3-44	10-03022	\$1,126.00
2H3-45	10-03023	\$1,180.00
2H3-46	10-03024	\$745.00
2H3-48	10-03025	\$314.00
2H3-19	10-03006	\$523.00
2H3-1	10-06901	\$1,384.00
2H3-9	10-06912	\$726.00
2H3-10	10-06902	\$801.00
2H3-13	10-06903	\$1,036.00
2H3-16	10-06904	\$664.00
2H3-10	10-06905	\$805.00
2H3-22	10-06906	\$805.00
2H3-22 2H3-25	10-06908	\$805.00
2H3-25 2H3-39	10-06907	1
2H3-39 2H3-47	10-06908	\$1,178.00
-		\$1,178.00
1E15-4	10-06876	\$850.00
1E15-7	10-06877	\$850.00
1H30-1	10-06882	\$738.00
1H30-2	10-06886	\$880.00
1H30-3	10-06887	\$726.00
1H30-6	10-06888	\$911.00
1H30-8	10-06889	\$1,678.00
1H30-9	10-06890	\$707.00
1H30-11	10-06883	\$887.00
1H30-13	10-06884	\$834.00
1H30-14	10-06885	\$988.00
1H30-16	10-06898	\$1,269.00
1H30-25	10-06899	\$761.00

TEMPEST OVERHAULED VACUUM MANIFOLD

Model	Description	Part No.	Price
2H3-1	Vacuum Manifold	10-02970	\$1,264.00
2H3-4	Vacuum Manifold	10-02972	\$963.00
2H3-5	Vacuum Manifold	10-02973	\$278.95

TEMPEST OVERHAULED PRESSURE MANIFOLD

Model	Description	Part No.	Price
2H3-7	Pressure Manifold	10-02976	\$748.00
2H3-8	Pressure Manifold	10-02977	\$747.00
2H3-10	Pressure Manifold	10-02979	\$805.00
2H3-11	Pressure Manifold	10-02980	\$310.00
2H3-13	Pressure Manifold	``	\$945.00
2H3-14	Pressure Manifold	10-02983	\$833.00
2H3-15	Pressure Manifold	10-02984	\$349.00
2H24-8	Pressure Manifold	10-06897	\$1,098.00
1H24-16	Pressure Manifold	10-06879	\$1,278.00
1H24-19	Pressure Manifold	10-06880	\$1,150.00
1H24-21	Pressure Manifold	10-06881	\$1,278.00

TEMPEST OVERHALLED CHECK VALVE

Model	Description	Part No.	Price
2H3-19	Check Valve	10-03006	\$523.00
2H3-22	Check Valve	10-03007	\$805.00

TEMPEST OVERHAULED DE-ICE VALVE

Model	Description	Part No.	Price
O/H 2H3-20	Overhauled Regulating Valve	10-03399	\$847.00
2H3-25	De-Ice Valve	10-03013	\$732.00
2H3-27	De-Ice Valve	10-03015	\$314.00
2H3-32	De-Ice Valve	10-03017	\$874.00
2H3-35	De-Ice Valve	10-03018	\$928.00
2H3-38	De-Ice Valve	10-03019	\$963.00
2H3-44	De-Ice Valve	10-03022	\$1,126.00
2H3-45	De-Ice Valve	10-03023	\$1,180.00
2H3-46	De-Ice Valve	10-03024	\$745.00
2H3-48	De-Ice Valve	10-03025	\$314.00
1H22-11	De-Ice Valve	10-06878	\$1,731.00
1H43-11	De-Ice Valve	10-06891	\$2,232.00
1H43-23	De-Ice Valve	10-06892	\$2,232.00
1H44-11	De-Ice Valve	10-06893	\$2,239.00
1H44-20	De-Ice Valve	10-06894	\$2,853.00
1H44-22	De-Ice Valve	10-06895	\$2,853.00

TEMPEST AA1H43 SERIES DE-ICE VALVES

Model	Description	Part No.	Price
AA1H43-13	De-Ice Valve	10-07099	\$2,457.00
AA1H43-14	De-Ice Valve	10-07101	\$2,692.00
AA1H43-15	De-Ice Valve	10-07102	\$2,438.00
AA1H43-16	De-Ice Valve	10-07103	\$2,366.00
AA1H43-20	De-Ice Valve	10-07104	\$3,068.00
AA1H43-21	De-Ice Valve	10-07105	\$2,924.00

TEMPEST OVERHAULED AIRBORNE PRESSURE REGULATORS **CROSS-REFERENCE**

Model	Description	Superseded by
1H30-1	Overhauled Airborne Pressure Regulators	2H30-1
1H30-2	Overhauled Airborne Pressure Regulators	2H30-2
1H30-3	Overhauled Airborne Pressure Regulators	2H30-3
1H30-6	Overhauled Airborne Pressure Regulators	2H30-6
1H30-8	Overhauled Airborne Pressure Regulators	2H30-8
1H30-9	Overhauled Airborne Pressure Regulators	2H30-9
1H30-11	Overhauled Airborne Pressure Regulators	2H30-11
1H30-13	Overhauled Airborne Pressure Regulators	2H30-13
1H30-14	Overhauled Airborne Pressure Regulators	2H30-14

TEMPEST OVERHAULED PRESSURE REGULATORS

Model	Description	Part No.	Price
2H30-1	Pressure Regulators	10-03029	\$786.00
2H30-2	Pressure Regulators	10-03037	\$927.00
2H30-3	Pressure Regulators	10-03039	\$761.00
2H30-6	Pressure Regulators	10-03042	\$964.00
2H30-8	Pressure Regulators	10-03043	\$1,765.00
2H30-9	Pressure Regulators	10-03045	\$783.00
2H30-11	Pressure Regulators	10-03047	\$936.00
2H30-13	Pressure Regulators	10-03053	\$880.00
2H30-14	Pressure Regulators	10-03054	\$1,042.00
2H30-17	Pressure Regulators	10-03056	\$1,268.00
2H30-27	Pressure Regulators	10-03057	\$765.00
2H30-28	Pressure Regulators	10-03060	\$767.00
2H30-32	Pressure Regulators	10-03066	\$710.00
2H30-35	Pressure Regulators	10-05944	\$732.00

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

VACUUM PUMP FITTINGS – VACUUM PUMPS

RAPCO FAA APPROVED FITTINGS



RA1K1-6-10 - This 90° fitting with 5/8" hose and 3/8" NPT is used in most inlet threaded ports of 200 series vacuum pumps and is a FAA PMA direct replacement for the Airborne Model 1K1-6-10. This 90° fitting has superior flow and low pressure loss.

P/N 10-00395 \$38.75

RA1K8-6-10 - This 152° fitting with 5/8" hose and 3/8" NPT is used in most outlet threaded ports of 200 series vacuum pumps and is a FAA PMA direct replacement for the Airborne. P/N 10-00396......\$68.75





RA1K31-4-6-4 - This 3/8" and 1/4" hose, 1/4" NPT, "T" fitting is used in most threaded ports of the flight instruments and is a FAA PMA direct replacement for the Airborne Model 1K31-4-6-4.P/N 10-00397\$55.75

RA1K10-4-6 - This 3/8" hose, and 1/4" NPT fitting is used in most inlet threaded ports of the flight instruments and is a direct replacement for the Airborne Model 1K10-4-6.

P/N 10-00398..... \$36.50



RA1K10-6-10 - This fitting with 5/8" hose and 3/8" NPT is used in most inlet and outlet threaded ports of the 200 series vacuum

pump. The fitting is 5/8" hose with 3/8" NPT threads. The Rapco, Inc. fitting is a FAA PMA direct replacement for the Airborne Model 1K10-6-10 P/N 10-01849\$41.75

RA1K1-4-6 - This 90° fitting with 3/8 hose, 1/4" NPT is used in most threaded ports of the flight instruments and is a FAA PMA direct replacement for the airborne......P/N 10-01130......\$42.70





RAPCO RA1H5-1 MANIFOLD CHECK VALVE

This valve is used in many Multi-Engine General Aviation applications. The Rapco, Inc. FAA PMA Multi-Engine manifold check valve is a direct replacement for the Airborne Model 1H5-1.

P/N 10-01131\$557.00




AIRBORNE VACUUM PUMP REPAIR KITS

Basic Kits - These FAA/PMA kits include rotor, vanes, gasket, and drive coupling. For Airborne 211/212 Pumps

P/N 10-00901\$118.75 For Airborne 200 cc/cw Pumps

P/N 10-00902 \$148.75 For Airborne 241/242 PumpsP/N 10-00903\$124.75

spline, bushing, blades, nut, cushion washer and band gaskets. Washer and gaskets not included on 200CC kits. Installation instructions included. For Airborne 211/212 pumpsP/N 10-01901\$173.75 For Airborne 241/242 pumpsP/N 10-01903\$172.75 For Airborne 441/442 pumpsP/N 10-01904\$249.95



Prices Subject to Change Without Notice - Valid as of June 3, 2022.

TEMPEST RUDDER **BOOST FILTER**

The AA101-524009-0163 is approved on the Beechcraft B200, B200C, B200CT, B200T and B200GT. This filter is manufactured using a stainless steel housing and .3 micron media. Designed to withstand the toughest environments, the AA101-524009-0163 rudder boost filter continues

the long line of dependable and pilot preferred Tempest pneumatic products......P/N 08-17160\$73.75

RAPCO VACUUM SYSTEM KIT



This Vacuum System Kit is ideal for use on experimental aircraft, allowing the kit builder to obtain all of the necessary components of their vacuum system in one convenient kit. The price of this kit reflects a substantial discount over the individual prices of the components if purchased separately. This Kit Includes

- 1 RAP215CC Vacuum Pump w/Gasket
 1 5/8" x 3' Hose
 1 RA2H3-12 Vac. Regulator w/Garter Filter
 1 3/8" x 5' Hose • 1 - 1/4" x 6' Hose
- 1 RAIJ7-1 Filter Assembly
- 1 RA1K1-6-10 90° 5/8" Fitting 1 RA1K8-6-10 152° 5/8" Fitting
- · 4 #4 Hose Clamps • 1 Installation Diagram
- 2 RA1K31-4-6-4 3/8" and 1/4" T-Fitting • 2 RA1K10-4-6 3/8" Fitting
 - 1 Suction Gauge

• 10 - #8 Hose Clamps

Kit with RAP215CC Pump - For engines with COUNTER CLOCKWISE



SHAFT / COUPLER Rapco Shear Shaft / Coupler. P/N 08-13898\$17.50

RAPCO SHEAR

IN



RAPCO VACUUM MEASURE KIT



Includes: Caliper, Screw, Washer Kit. Rapco PN RA-Vac Measure Kit. P/N 08-13900 \$19.90

GARWIN / PESCO REMANUFACTURED WET PUMPS

Our supplier remanufactures run-out Pesco and Garwin wet pumps to factory specifications. FAA Approved. Noto: Rump Drive is included

Note: Pump Drive is in	ciudea.	
Pesco 194 pumpF	P/N 10-00028	\$559.00
Pesco 207 pumpF	P/N 10-00029	\$725.00
Garwin G455 pumpF	P/N 10-00027	\$559.00
Garwin G450 pumpF	P/N 10-00026	\$559.00

VACUUM RESTRICTOR VALVE



AN5829-2 manually adjustable needle valve complete with locking collar and mounting flange. For reducing vacuum to 2" Hg for operation of turn/bank. Manufactured by ACS Products Co. P/N AN5829-2 \$56.95

RAPCO DRY AIR PUMPS - VACUUM / PRESSURE



RAPCO FAA approved quality dry air pumps are available in brand new replacement models or overhauled. All are backed by warranty BRAND NEW RAPCO DRY AIR PUMPS are FAA-

PMA approved and come with an inspection port to help determine replacement time. An exclusive internal shaft seal helps to keep out destructive oil

and solvents. Mounting gasket included. Warranty period for 200 series is three year 1300 hours, 240 and 400 series is 1 year 500 hours, whichever comes first. No core charge on new pumps. Core rebate available.

Rapco New Dry Air Vacuum Pumps			
Description	Rapco Part Number	Our Part Number	Price
RAP215CC	RAP215CC	10-23925	\$395.00
RAP215CC-9	RAP215CC-9	10-03401	\$398.00
RAP216CW	RAP216CW	10-23935	\$393.00
RAP241CC	RAP241CC	10-23950-1	\$695.00
RAP241CC-13	RAP241CC-13	10-03447	\$697.00
RAP241CC-15	RAP241CC-15	10-03448	\$695.00
RAP242CW	RAP242CW	10-23960-1	\$699.00
RAP242CW-4	RAP242CW-4	10-03449	\$695.00
RAP242CW-10	RAP242CW-10	10-03450	\$695.00
RAP441CC	RAP441CC	10-01126	\$995.00
RAP441CC-3	RAP441CC-3	10-03074	\$967.00
RAP441CC-7	RAP441CC-7	10-03075	\$995.00
RAP441CC-9	RAP441CC-9	10-03076	\$967.00
RAP441CC-17	RAP441CC-17	10-03077	\$995.00
RAP441CC-23	RAP441CC-23	10-03078	\$995.00
RAP442CW	RAP442CW	10-01127	\$995.00
RAP442CW-4	RAP442CW-4	10-03079	\$995.00
RAP442CW-6	RAP442CW-6	10-03080	\$995.00
RAP442CW-8	RAP442CW-8	10-03081	\$995.00
RAP442CW-12	RAP442CW-12	10-01128	\$1,065.00
RAP442CW-14	RAP442CW-14	10-03082	\$967.00
RAP442CW-20	RAP442CW-20	10-03083	\$967.00

SIGMA-TEK DRY AIR PUMP The Sigma-Tek 1U128-006 is a pump which car-



ries a warranty for 2-years or 1000 hours. It uses an aluminum rotor and rotor housing, making the pump very resistant to damage from ingestion of foreign objects, excessive loads or engine oil. It provides clean, dry air for operation of air driven instruments in aircraft operating at medium altitudes. Pump rotates clockwise or counterclock-

wise in vacuum or pressure mode. May be mounted in either a vertical or horizontal position. FAA approved as a direct replacement for all instrument pumps but is not intended for supplying air to deicing boots. Mount-ing gasket furnished. Install suction regulator in line to instruments. Delivers 6 In. Hg vacuum (2.9-8.5 minimum CEM) or 6 In. Hg pressure (3.7-8.5 minimum CEM) from 1500 to 4000 RPM. No core charge. Specifications: • Height: 3.825" ± .03" • Width: 3.55" ± .03" • Depth:

3.91" ± .06" • Weight: 2.2 lbs. (max)

Environmental: • Ambient Temperature: -40° C to 93° C (typ.) • Exhaust Temp. (Intermittent): 375° F for 5 mins. (max) • Exhaust Temp. (Continuous): 300° F • Vibration:CPS: 5 to 150 • Maximum Double Amplitude: 0.100 in. • Maximum Acceleration: 10 G's • Humidity (Dewpoint): -70° C • Altitude: -1,000 to 30,000 ft.

P/N 10-02778 \$875.00

VACUUM PUMP SHEAR COUPLINGS parts fit Airborne 200 & 400 series pumps

These parts in Airborne 200 & 400 sen	
Shear Coupling	P/N 07-03568 \$18.90 ea.
Standard Bushing	



OVERHAULED DRY AIR PUMPS by RAPCO are FAA approved and shipped with FAA form 8130-3. Mounting gasket included. Warranty period for 200 series is two years 1000 hours, 240 and 400 series is one year 400 hours, whichever comes first.

Mounting flange gasket is included.

Rapco Overhauled Dry Air Vacuum Pumps			
Description	Rapco Part Number	Our Part Number	Price
211CC	211CC	10-23930	\$266.95
211CC-9	211CC-9	10-23931	\$269.00
212CW	212CW	10-23940	\$269.00
215CC	215CC	10-03084	\$269.95
216CW	216CW	10-03085	\$269.95
241CC	241CC	10-23950	\$449.00
241CC-13	241CC-13	10-03086	\$465.00
241CC-15	241CC-15	10-03087	\$440.00
242CW	242CW	10-23960	\$465.00
242CW-4	242CW-4	10-03088	\$440.00
242CW-10	242CW-10	10-03089	\$440.00
441CC	441CC	10-02349	\$597.00
441CC-3	441CC-3	10-03090	\$585.00
441CC-7	441CC-7	10-03091	\$654.00
441CC-9	441CC-9	10-03092	\$585.00
441CC-11	441CC-11	10-03093	\$585.00
441CC-17	441CC-17	10-03095	\$619.00
441CC-23	441CC-23	10-03096	\$585.00
442CW	442CW	10-02350	\$615.00
442CW-4	442CW-4	10-03097	\$615.00
442CW-6	442CW-6	10-03098	\$619.00
442CW-8	442CW-8	10-03099	\$619.00
442CW-10	442CW-10	10-03101	\$585.00
442CW-12	442CW-12	10-02351	\$645.00
442CW-14	442CW-14	10-03102	\$615.00
442CW-20	442CW-20	10-03105	\$594.00


TEMPEST VACUUM FILTERS

FAA-PMA Approved			
AAD9-14-3	P/N 10-00923	\$23.50	
AAD9-14-5	P/N 10-00924	\$22.60	
AAD9-18-1	P/N 10-01354	\$23.50	

TEMPEST VACUUM PUMP WRENCH

Case hardened steel, with nickel-chrome plating for corrosion resistance. Slip resistant vinyl grip. Rare earth magnet allows efficient and easy installation of hard-EMPEST NATIO to-get-to install nuts. Eligibility: Fits all 200, 240, 400 and 3200 series vacuum pumps.......P/N 10-02654.........\$35.50

RAPCO VACUUM PUMP REMOVAL & INSTALLATION TOOL

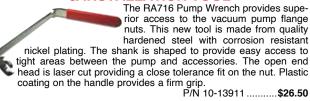

ION REGULATORS – PNEUMATIC FIL



RAPCO VACUUM REGULATORS

RAPCO RA2H3-2 VACUUM REGULATOR

This FAA Approved Rapco vacuum regulator is designed to maintain a constant setting at various pressure altitudes. Adjustable RAB3-5-1 garter filter. 5/8" Hose Fitting (Pump), 1/2" Hose Fitting (instruments). Replaces - Airborne PN, 2H3-2, 133A3, Aero Accessories PN. 2H3-2

P/N 10-03895 \$297.95



RAPCO RA2H3-5 VACUUM REGULATOR This FAA Approved Rapco vacuum regulator is designed to maintain a constant setting at various pressure altitudes. Adjustable setting. Vacuum regulators come with the RAB3-5-1 garter filter. 5/8" Hose Fitting (Pump), 5/8" Hose Fitting (instruments). Replaces - Airborne PN. 2H3-5, 133C1, Aero Accessories PN. 2H3-5

P/N 10-03894 \$292.95



RAPCO RA2H3-6 VACUUM REGULATOR

This FAA Approved Rapco vacuum regulator is designed to maintain a constant setting at various pressure altitudes. Adjustable setting. Vacuum regulators come with the RAB3-5-1 garter filter. 5/8" Hose Fitting (Pump), 5/8" Hose Fitting (instruments). Replaces - Airborne PN. 2H3-6, 133B3, Aero Accessories PN. 2H3-6, Piper PN. 584-324.......P/N 10-03918.......**\$297.95**



RAPCO RA2H3-11 VACUUM REGULATOR

This FAA Approved Rapco vacuum regulator is designed to maintain a constant setting at various pressure altitudes. Adjustable setting. Vacuum regulators come with the RAB3-5-1 garter filter. AN-10A Flared Tube Fitting (Pump), AN-10A Flared Tube Fitting (instruments) Replaces - Airborne PN. 2H3-11, 133A13P/N 10-03919 \$330.00



RAPCO RA2H3-12 VACUUM REGULATOR This FAA Approved Rapco vacuum regulator is designed to maintain a constant setting at various pressure altitudes. Adjustable setting. Vacuum regulators come with the RAB3-5-1 garter filter. 5/8" Hose Fitting (Pump), Two 3/8" Hose Fitting (instru-ments). Replaces - Airborne PN. 2H3-12, 2H3-16, 133A16, Cessna PN. C482001-0401......P/N 10-00289......\$289.95

AIRBORNE CENTRAL

Prices Subject to Change Without Notice - Valid as of June 3, 2022.

AIR FILTERS Increase gyro life with Airborne gyro air filter. Incorporates a 0.3 micron filter element that protects gyro instruments by filtering out tobacco smoke and cabin dust. Small, lightweight, easily installed. Fits most planes. Dual 3/8" beaded tubes simplify 2-gyro installations.

Part No.	Description	Price	
1J7-1	Vacuum Instrument Central Gyro Air Filter: 0.3 micron pleated paper element with two 3/8" installation tubes.	\$88.75	
1J10-1	Line mounted Filter 3/8"x3/8" non-beaded tube. 5-3/4"long.	\$49.75	
	REPLACEMENT FILTERS		
Part No.	Description	Price	
10-05902	Replacement Filter 2J4-4	\$84.50	







RAPCO RA2H3-15 VACUUM REGULATOR

This FAA Approved Rapco vacuum regulator is designed to maintain a constant setting at various pressure altitudes. Adjustable setting. Vacuum regulators come with the RAB3-5-1 garter filter. One AN-10A Pump fitting. . Replaces - Airborne PN. 2H3-15. P/N 10-04842 \$371.00

RAPCO RA2H3-19 VACUUM REGULATOR This FAA Approved Rapco vacuum regula-tor is designed to maintain a constant setting at various pressure altitudes. Adjustable setting. Vacuum regulators come with the RAB3-5-1 garter filter. 5/8" Hose Fitting (Pump),Two 3/8" Hose Fittings (Instrument) Replaces - Airborne PN.2H3-19, Piper PN.



492-240......P/N 10-04780......\$553.00

This FAA Approved Rapco vacuum regulator is designed to maintain a constant setting at various pressure altitudes. Adjustable setting. Vacuum regulators come with the RAB3-5-1 garter filter. 5/8" Hose Fitting (Pump), Two 3/8" Hose Fitting (instru-ments). Replaces - Airborne PN. 2H3-23, 133A4, Piper PN. 492-272 P/N 10-03009 \$292.95



RAPCO RA2H3-48 VACUUM REGULATOR

This FAA Approved Rapco vacuum regulator is designed to maintain a constant setting at various pressure altitudes. Adjustable setting. Vacuum regulators come with the RAB3-5-1 garter filter. 5/8" Hose Fitting (pump), AN-10A Flared Tube (instrument). Replaces - Airborne PN. 2H3-48, Aero Accessories PN. AA2H3-48

P/N 10-03921 \$337.00



TEMPEST VACUUM REGULATORS **FAA/PMA** Approved

)	AA 2H3-2	P/N	10-03458	\$354.00
	AA 2H3-6	P/N	10-03460	\$277.95
	AA 2H3-1	2P/N	10-03461	\$334.00
	AA 2H3-2	3P/N	10-03462	\$331.00

RAPCO REPLACEMENT PNEUMATIC FILTERS

Part No.	Description	Recommended Replacement	OEM Number	RAPCO Number	Price
10-23810	Line Mounted Filter, 1/2"x1/2" Tube	1 yr / 500 Hrs	2J4-4	RA2J4-4	\$48.50
10-23820	Line Mounted Filter, 5/8"x5/8" Tube	1 yr / 500 Hrs	2J4-6	RA2J4-6	\$48.75
10-23830	Line Mounted Filter, 5/8"x5/8" Tube Overall length 5-1/2"	1 yr / 500 Hrs	2J4-7	RA2J4-7	\$48.50
10-23840	Vacuum Central Gyro Air Filter Assy.	1 yr / 500 Hrs	1J7-1	RA1J7-1	\$42.50
10-00287	Line Mounted Filter 3/8" x 3/8"	1 yr / 500 Hrs	1J10-1	RA1J10-1	\$41.50
05-15253	Rudder Boost Filter. Two 5/8" hose fit- tings, overall length 5-1/2" x 3-1/4" dia.		101-524009- 0163, 101- 524009-0161, 101-524009-91	RA101- 524009- 0163	\$67.75
10-23850	Vacuum Pump Inlet Garter Filter	1 yr / 100 Hrs	B3-5-1	RA-B3-5-1	\$2.95
10-23860	Replacement Element, 1J2-2 filter	1 yr / 100 Hrs	D9-14-3	RA-D9- 14-3	\$22.50
10-23870	Rep. Element for 1J2 series (except 1J2-2)	1 yr / 100 Hrs	D9-14-5	RA-D-9- 14-5	\$22.50
10-23880	Replacement Element, 1J7-1 Filter	1 yr / 500 Hrs	D9-18-1	RA-D9- 18-1	\$23.50

UMA GAUGES



UMA 1" GYRO SUCTION GAUGES Case: Molded ABS Plastic. Weight: 1.4 oz.

Part No.	Range	Dial Markings	Price
10-02361	3-7 IN.HG	B & W	\$187.75
10-00311	3-7 IN.HG	GA 4.5-5.4	\$206.00
10-02464	3-7 IN.HG	GA 3.5-5.0, RR 3.5 & 5.0	\$193.75



UMA 1-1/4" GYRO SUCTION GAUGES Case: Molded ABS Plastic. Weight: 1.4 oz.

Part No.	Range	Dial Markings	Price
10-01010	3-7 IN. HG.	GA 4.5-5.2, RR 4.5 & 5.2	\$211.95
10-02465	3-7 IN. HG.	GA 4.75-5.25, RR 4.75 & 5.25	\$231.95
10-02466	3-7 IN. HG.	GA 4.5-5.0	\$230.95
10-02467	2-6 IN. HG.	GA 3.8-4.4, RR 3.8 & 4.4	\$230.95
10-02358	3-7 IN. HG.	B & W	\$224.95
10-02468	2-6 IN. HG.	GA 4.0-5.0	\$230.95
10-02469	2-6 IN. HG.	GA 4.5-5.4, YA 2.0-4.5, RR 6.0	\$230.95
10-02470	2-6 IN. HG.	GA 3.5-5.0, RR3.5	\$230.95
10-02471	0-10 IN. HG.	B & W	\$230.95

SUCT

UMA 2-1/4" UMA GYRO SUCTION

Case: Cast Aluminum. Weight: 4.7 oz.

Part No.	Range	Dial Markings	Price
10-00090	2-8 IN. HG.	GA 4.6-5.4	\$225.95
10-01000	0-10 IN. HG.	B & W	\$219.95
10-02359	0-10 IN. HG.	GA 4-5, RR 5	\$225.95
10-02360	0-10 IN. HG.	GA 4.2-4.4, RR 4.2 & 5.3	\$225.95

PREUMATIC	UMA 1
PRESS	PNEUMATIC I
20	Case: Molded ABS Pla

UMA 1-1/4"
PNEUMATIC PRESSURE Case: Molded ABS Plastic. Weight: 1.4 oz.

Part No.	Range	Dial Markings	Price	
10-02364	0-25 PSI	GA 5.0-10, YA 10-21	\$287.95	
10-02365	0-25 PSI	GA 15-21, YA 21-25, RR 14.9	\$286.95	
10-12305	0-25 PSI	GA 15-21, RR 24	\$286.95	
10-02366	0-25 PSI	GA 2.5-7.5, YA 7.5-21	\$287.95	



1-1/4 INCH GYRO PRESSURE GAUGE

These units are designed to save space in cockpit panels. These gauges utilize an internal diaphragm for accuracy and reliability. Miniature 1-1/4" instrument. Case: Molded ABS Plastic. Weight: 1.4 oz.

Part No.	Range	Dial Markings	Price
10-01105	3-7 IN. HG.	GA 4.25-6.25	\$227.95
10-02462	3-7 IN. HG.	GA 4.25-5.2, RR 4.25 & 5.2	\$225.95
10-02463	3-7 IN. HG.	GA 4.5-5.2, YA 3.8-4.5, RR 3.8 & 5.2	\$225.95



UMA 2-1/4" GYRO PRESSURE GAUGES

These units are designed to save space in cockpit panels. These gauges utilize an internal diaphragm for accuracy and reliability. Case: Cast Aluminum. Weight: 4.7 oz.

Part No.	Range	Dial Markings	Price
10-02362	2-8 IN. HG.	B & W	\$218.95
10-02363	2-8 IN. HG.	GA 4.5-5.5	\$225.95



UMA 2-1/4" CABIN ALTITUDE DIFFERENTIAL **PRESSURE GAUGE** Case: Valox 420 Plastic Weight: 7.4 oz.

Part No.	Range	Dial Markings	Price
10-02370	0-25,000 Ft. 0-6 PSI	B & W	\$603.00
10-02371	0-30,000 Ft. 0-6 PSI	GA 0-10, YA 10-28	\$603.00
10-02460	0-30,000 Ft. 0-6 PSI	GA 0-10, YA 10-28	\$603.00
10-02461	0-35,000 Ft. 0-8 PSI	B & W	\$603.00

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

AIRSPEED INDICATORS



UMA AIRSPEED INDICATORS (NON-TSO'D)

These quality UMA, non-TSO'd airspeed indicators are available in MPH, Knots or Dual Scales. Note: An inverter is required for the Internal Lighting Option (P/N 10-02083 UMA 14V LIGHT INVERTER)

Description	Dial	Part No.	Price
3-1/8"	20-80 mph	10-04905	\$237.95
3-1/8"	20-100 mph	10-04910	\$238.95
3-1/8"	20-120 mph	10-04915	\$238.95
3-1/8"	20-140 mph	10-04920	\$238.95
3-1/8"	20-160 mph	10-04925	\$238.95
3-1/8"	40-180 mph	10-04930	\$238.95
3-1/8"	40-200 mph	10-01029	\$238.95
3-1/8"	40-240 mph	10-00512	\$238.95
3-1/8"	40-260 mph	10-01030	\$238.95
3-1/8"	40-280 mph	10-01031	\$237.95
3-1/8"	40-300 mph	10-01032	\$252.95
3-1/8"	20-80 Knots	10-01033	\$237.95
3-1/8"	20-100 Knots	10-01034	\$237.95
3-1/8"	20-120 Knots	10-04950	\$237.95
3-1/8"	20-140 Knots	10-04955	\$237.95
3-1/8"	20-160 Knots	10-01035	\$237.95
3-1/8"	40-180 Knots	10-04965	\$237.95
3-1/8"	40-200 Knots	10-04970	\$238.95
3-1/8"	40-240 Knots	10-00514	\$238.95
3-1/8"	40-260 Knots	10-01036	\$237.95
3-1/8"	40-280 Knots	10-01037	\$237.95
3-1/8"	40-300 mph	10-01038	\$252.95
3-1/8" Dual	20-140 mph/20-120 Knots	10-00511	\$264.95
3-1/8" Dual	40-160 mph/20-135 Knots	10-02200	\$263.95
3-1/8" Dual	40-180 mph/20-150 Knots	10-02300	\$263.95
3-1/8" Dual	40-200 mph/40-170 Knots	10-02400	\$264.95
3-1/8" Dual	40-240 mph/40-205 Knots	10-02600	\$264.95
3-1/8" Dual	40-260 mph/40-225 Knots	10-01039	\$262.95
3-1/8" Dual	40-300 mph/40-250 Knots	10-01040	\$262.95
3-1/8" Dual	40-350 mph/40-300 Knots	10-01041	\$262.95
3-1/8" Dual	40-260 Knots/50-300 mph	10-01042	\$262.95
3-1/8" Dual	40-300 Knots/40-340 mph	10-01043	\$264.95
Range Markings	UMA Range Markings on NON-TSO Units	10-02792	\$125.00

UMA 3-1/8" AIRSPEED INDICATORS (TSO'd)



These quality UMA airspeed indicators are available in MPH, Knots or Dual Scales.

3-1/8" TSO'd Single Scale	Part No.	Price	3-1/8" not TSO'd Single Scale	Part No.	Price
40-160 MPH	10-03250	\$664.00	40-160 Knots	10-03257	\$664.00
40-180 MPH	10-03251	\$595.00	40-180 Knots	10-03258	\$592.00
40-200 MPH	10-03252	\$665.00	40-200 Knots	10-03259	\$592.00
40-240 MPH	10-03253	\$665.00	40-240 Knots	10-03260	\$664.00
40-260 MPH	10-03254	\$664.00	40-260 Knots	10-03261	\$664.00
40-280 MPH	10-03255	\$664.00	40-280 Knots	10-03262	\$664.00
40-300 MPH	10-03256	\$664.00	40-300 Knots	10-03263	\$664.00
3-1/8" TSO'd Dual Scale	Part No.	Price	3-1/8" not TSO'd Dual Scale	Part No.	Price
	Part No. 10-03270	Price \$572.00		Part No.	
Dual Scale 40-160 MPH/			Dual Scale 40-240 MPH/		\$572.00
Dual Scale 40-160 MPH/ 40-135 Knots 40-180 MPH/	10-03270	\$572.00	Dual Scale 40-240 MPH/ 40-205 Knots 50-270 MPH/	10-03276	\$572.00 \$572.00
Dual Scale 40-160 MPH/ 40-135 Knots 40-180 MPH/ 40-150 Knots 40-200 MPH/	10-03270 10-03271	\$572.00 \$591.00	Dual Scale 40-240 MPH/ 40-205 Knots 50-270 MPH/ 40-240 Knots 50-300 MPH/	10-03276 10-03277	\$572.00 \$572.00 \$572.00



UNITED AIRSPEED INDICATORS (TSO'D) These 8000 series United airspeeds are

These 8000 series United airspeeds are TSO'd for installation on certificated aircraft. Factory new. Available in dual scale MPH/ knots, or in MPH or knots only. Fits standard 3-1/8" panel hole. Wt: 0.7 lb.

Part No.	Range	Lighted	Price
10-00190	40-200 mph/40-170 knots	No	\$955.00
10-00190-1	40-200 mph/40-170 knots	Yes	\$1,095.00
10-00191	40-250 mph/40-200 knots	No	\$954.00
10-00191-1	40-250 mph/40-200 knots	Yes	\$1,095.00
10-00192	40-300 mph/40-260 knots	No	\$954.00
10-00192-1	40-300 mph/40-260 knots	Yes	\$1,095.00
10-00198	0-170 knots	No	\$963.00
10-00198-1	0-170 knots	Yes	\$1,102.00
10-00201	0-260 knots	No	\$954.00
10-00201-1	40-260 knots	Yes	\$1,038.00

Available with custom range marksP/N 10-02614 \$215.95



UNITED TRUE AIRSPEED INDICATORS

The true airspeed indicator corrects the indicated airspeed for changes in temperature and pressure encountered as aircraft changes altitude. By aligning outside temperature and pressure altitude with setting knob, movable airspeed scale is rotated proper amount so pointer registers true airspeed. Factory new 8100 series by United. TSO'D for certificated aircraft. Dual scale. Not Lighted. Add \$215.95 for custom range marks & specify exact range marks needed.

Series	Range	Part No.	Price
8100	40-200 mph/40-160 knots	10-00203	\$1,042.00
8125	55-250 mph/55-215 knots	10-00204	\$1,042.00
8100	40-170 knots	10-00216	\$1,042.00
8125	40-210 knots	10-00217	\$1,042.00
8130	55-260 knots	10-00218	\$1,015.00
8140	60-350 Knots	10-00219	\$1,010.00

LIGHTED UNITED AIRSPEEDS Add -1 to P/N's above for internally lighted airspeed indicators



UMA 2-1/4" MINIATURE AIRSPEEDS

A fine quality instrument of new manufacture for the exceptional homebuilt aircraft. Matte-white dial markings. Fits standard 2-1/4" instrument panel opening. Space saving dims: 2-3/8"x2-3/8"x3.25"L. All ranges available in knots.

Range	Part No.	Part No.
20-100 MPH	10-03992	\$244.95
20-120 MPH	10-03993	\$244.95
20-140 MPH	10-03994	\$244.95
0-120 Knot	10-03995	\$244.95
40-180 Knot	10-00508	\$245.95
40-160 MPH	10-03996	\$245.95
40-180 MPH	10-03997	\$244.95
40-200 MPH	10-03998	\$245.95
40-140 Knot	10-00507	\$244.95
40-200 Knot	10-00509	\$244.95
40-240 MPH	10-04000	\$244.95
40-260 MPH	10-04001	\$244.95
40-300 MPH	10-04002	\$245.95
40-160 Knot	10-01787	\$245.95
40-240 Knot	10-00510	\$245.95

FALCON 3 1/8" SINGLE RANGE AIRSPEEDS These Airspeed Indicators have been one of the



most chose flight instruments by kit plane builders and pilots. There are many great advantages to using these gauges: excellent slow speed characteristics; very progressive increments; a variety of ranges, light weight; short length, and affordable price. All Airspeed Indicators are housed in an aluminum case and consist of all metal parts. Available ranges: mph, knots, km/hr; single range reading or dual range readings.

Non-Tso'd.

Model No.	Length	Range	Part No.	Price
ASI200M-3	3.5"/97.3mm	30-200 MPH	10-02918	\$257.95
ASI180M-3	3.5"/97.3mm	30-180 MPH	10-03000	\$257.95
ASI080M-3	2.2"/56.5mm	0-80 MPH	10-02905	\$239.95
ASI100M-3	2.2"/56.5mm	0-100 MPH	10-02910	\$239.95
ASI120M-3	2.2"/56.5mm	0-120 MPH	10-02915	\$239.95
ASI140M-3	3.5"/97.3mm	0-140 MPH	10-02916	\$257.95
ASI150M-3	2.2"/56.5mm	0-150 MPH	10-02225	\$239.95
ASI160M-3	3.5"/97.3mm	0-160 MPH	10-02917	\$257.95
ASI080N-3	3.5"/97.3mm	0-80 Knots	10-02896	\$239.95
ASI100N-3	2.2"/56.5mm	0-100 Knots	10-02897	\$239.95
ASI120N-3	2.2"/56.5mm	0-120 Knots	10-02898	\$239.95
ASI140N-3	3.5"/97.3mm	0-140 Knots	10-02899	\$257.95
ASI160N-3	3.5"/97.3mm	0-160 Knots	10-02900	\$257.95
ASI180N-3	3.5"/97.3mm	0-180 Knots	10-02217	\$257.95
ASI200N-3	3.5"/97.3mm	0-200 Knots	10-02218	\$258.95
ASI220N-3	3.5"/97.3mm	0-220 Knots	10-02219	\$258.95
ASI120K-3	2.2"/56.5mm	0-120 KPH	10-02625	\$239.95
ASI150K-3	2.2"/56.5mm	0-150 KPH	10-02221	\$239.95
ASI200K-3	2.2"/56.5mm	0-200 KPH	10-02222	\$257.95
ASI300K-3	2.2"/56.5mm	0-300 KPH	10-02223	\$257.95

FALCON 3 1/8" DUAL RANGE AIRSPEEDS These Airspeed Indicators have been one of the



most chose flight instruments by kit plane builders and pilots. There are many great advantages to using these gauges: excellent slow speed characteristics; very progressive increments; a variety of ranges, light weight; short length, and affordable price. All Indicators are housed in an aluminum case and consist of all metal parts.

Falcon Gauge Dual Dial Airspeed Indicators provide dual readings and are suitable for higher performance type aircraft flying at moderate to high speeds. Matte-white dial markings, housed in a sturdy protective aluminum case. Weight: approx. 10.5 oz./301g. Length: 3.5" or 97.3mm Size: 3-1/8"

Model No.	Range	Part No.	Price
ASI164MN-3	20-160 MPH/20-140 Knots	10-02227	\$257.95
ASI186MN-3	30-180 MPH/30-160 Knots	10-02228	\$257.95
ASI208MN-3	30-200 MPH/30-180 Knots	10-02901	\$255.95
ASI252MN-3	30-250 MPH/30-220 Knots	10-02229	\$257.95
ASI306MN-3	40-300 MPH/40-260 Knots	10-02230	\$252.95
ASI316KN-3	30-300 KPH/30-160 Knots	10-02231	\$257.95

SIGMA-TEK RESTRAINED AIRSPEEDS



These airspeed indicators have restrained movements. These instruments are actuated by ram air and ambient atmospheric pressure obtained from the aircraft pitot and static pressure systems. A moveable pointer and a fixed dial indicate airspeed with the zero index at the 12 o'clock position. Temperature compensation is internal and there is no external zero adjustment. Pointer damping is

internally adjustable. Note: Lighted Instruments do not include lamp trays, see website for accessories.

Model No.	Lighted	MPH	Knots	Part No.	Price
EA5174-()L	Х	40-200	40-170	10-05158	\$1,027.00
EA5175-()		40-250	40-200	10-05159	\$843.00
EA5175-()L	Х	40-250	40-200	10-05160	\$1,059.00
EA5176-()		40-300	40-260	10-05162	\$995.00
EA5176-()L	Х	40-300	40-260	10-05163	\$1,043.00



UMA 2-1/4 TSO'D **AIRSPEED INDICATORS**

UMA indicators are FAA TSO'd to C2d specifications. Installable in a fixed wing aircraft with a reciprocating or Turboprop Engine. Must be installed in a temperature controlled environment from -55 to +85 °C, to a max altitude of 25,000 ft. UMA offers indicators with full scale ranges available, from 160 to 300 in MPH or Knots.

(MPH/Knots) with multicolor markings

markings			
UMA Part No .	Range	Part No.	Price
T16-210-121	20-120 MPH	10-03577	\$664.00
T16-211-121	20-120 Knots	10-03578	\$664.00
T16-210-141	20-140 MPH	10-03579	\$585.00
T16-211-141	20-140 Knots	10-03580	\$664.00
T16-210-142	30-140 MPH	10-03582	\$664.00
T16-211-142	30-140 Knots	10-03583	\$664.00
T16-210-160	40-160 MPH	10-03584	\$664.00
T16-211-160	40-160 Knots	10-03585	\$664.00
T16-210-161	20-160 MPH	10-03586	\$664.00
T16-211-161	20-160 Knots	10-03587	\$589.00
T16-210-180	40-180 MPH	10-03588	\$664.00
T16-211-180	40-180 Knots	10-03589	\$664.00
T16-210-200	40-200 MPH	10-03590	\$665.00
T16-211-200	40-200 Knots	10-03591	\$664.00
T16-210-240	40-240 MPH	10-03592	\$664.00
T16-211-240	40-240 Knots	10-03593	\$664.00
T16-210-260	40-260 MPH	10-03594	\$664.00
T16-211-260	40-260 Knots	10-03595	\$664.00
T16-210-300	40-300 MPH	10-03596	\$664.00
T16-211-300	40-300 Knots	10-03597	\$662.00
T16-210-400	40-400 MPH	10-03598	\$664.00
T16-211-400	40-400 Knots	10-03599	\$664.00
T16-212-240	40-240 KmH	10-03602	\$664.00
T16-212-260	40-260 KmH	10-03603	\$664.00
T16-212-280	40-280 KmH	10-03604	\$664.00
T16-212-300	40-300 KmH	10-03605	\$665.00
T16-212-320	40-320 KmH	10-03606	\$665.00
T16-212-380	40-380 KmH	10-03607	\$560.00
T16-212-400	40-400 KmH	10-03608	\$664.00
T16-212-440	40-440 KmH	10-03609	\$664.00



SIGMA-TEK AIRSPEEDS (TSO'D) Sigma-Teks precision airspeeds are original equip-ment on a variety of aircraft and over 144,000 have been delivered worldwide. Select from a single MPH

scale or dual scale showing MPH / Knots. New manufacture. TSOD for certificated aircraft unlit. Add \$95 for custom range markings. (Specify exactly)

Model	Lighted	MPH	Part No.	Price
Dual Scale Airspeed	No	40-250	10-03210	\$820.00
Dual Scale Airspeed	No	40-300	10-03215	\$816.00
Standard Airspeed	No	40-200	10-05152	\$799.00
Standard, Lit Airspeed	Yes	40-200	10-05153	\$1,051.00
Standard, Lit Airspeed	Yes	40-250	10-05154	\$1,005.00
Standard Airspeed with decal and calibration card	No	40-250	10-05155	\$1,361.00
Standard, Lit Airspeed	Yes	40-300	10-05156	\$974.00

SIGMATEK 3-1/8" TRUE AIRSPEEDS



These true speed indicators are differential pressure indicators that measure the difference between static and total pressure produced by ram air from the pitot. The indicated airspeed can be corrected for changes in altitude by turning the knob to align the outside air temperature with the altitude. The moveable airspeed scale will then show the actual, or true, airspeed. Model No.: EA5175-()PTL. Lighted.

MPH: 40-250. Knots: 40-200. Note: Lighted Instruments do not include lamp trays, see accessories......P/N 10-05161\$1,143.00

Sigmatek Accessories

Signater Acces		
14V Lamp Tray	P/N 10-02757	\$95.75
28V Lamp Tray		
Sigmatek Airspeed Range Markings		

IN

DICATORS



WINTER 2-1/4 INCH AIRSPEED INDICATORS

This precision instrument is enclosed in a compact housing and operates by means of a measuring tube. This ensures high accuracy even at very low speeds. EBF-series airspeed indicators are available with a pitot tube and static pressure connection.

Description	Part No.	Price
Winter 2-1/4 ASI 8020 EBF Various Range 360 Degree Dial	10-05625	\$374.00
Winter 2-1/4 ASI 8022 EBF Various Range 360 Degree Dial	10-05627	\$374.00
Winter 2-1/4 ASI 8026 EBF Various Range 510 Degree Dial	10-05629	\$455.00
Winter 2-1/4" ASI 7 FMS 213 Range 0 To 100 Knot 360 Dial	10-05908	\$603.00



WINTER 3 INCH **AIRSPEED INDICATORS**

This precision instrument is enclosed in a compact housing and operates by means of a measuring tube. This ensures high accuracy even at very low speeds. EBF-series airspeed indicators are available with a pitot tube and static pressure connection.

Diameter: 3". Depth: 3"

Description	Part No.	Price		
Winter 3" ASI 8021 EBF Various Range 360 Degree Dial	10-05626	\$375.00		
Winter 3" ASI 8023 EBF Various Range 360 Degree Dial	10-05628	\$374.00		
Winter 3" ASI 6 FMS 403 Range 0 to 100 Knots 510 Dial	10-05906	\$600.00		
Winter 3" ASI 6 FMS 213 Range 0 to 100 Knots 360 Dial	10-05907	\$603.00		

MID-CONTINENT INSTRUMENTS AND AVIONICS AIRSPEED INDICATORS



Customizable range markings can be added to match aircraft operating handbook. Affordable, certified 2-inch instrument which can be used as standby or primary indicator. Combine with a Mid-Continent MD15 Altimeter and 4200 Attitude Indicator for a complete standby package designed for tight panel applications. Approved to FAA TSO-C2d. Integral long life 5, 14 or 28 volt LED lighting. Anti-reflective glass enhances vis-ibility and reduces pilot fatigue. Rear-mounted in

standard 2 1/4" cutouts horizontally, vertically or individually. Designed and built in the USA. One year limited warranty.

Model	Nodel Description		Price
MD25-160	2-Inch 20-160 knots, Lighted	10-04761	\$1,895.00
MD25-200	2-Inch 40-200 knots, Lighted	10-04763	\$1,895.00
MD25-260	2-Inch 40-260 knots, Lighted	10-04764	\$1,895.00
MD25-300	2-Inch 40-300 knots, Lighted	10-04765	\$1,895.00

FALCON MINIATURE AIRSPEED INDICATORS WITH PITOT KIT



This package includes a ASI080M-2 airspeed indicator, as well as a pitot kit consisting of 1/4" aluminum tubing, vinyl tube, Polyethylene Hose Adapter, and Breeze Clamp.

Falcon Miniature airspeed indicators are designed for ultralights. They offer ultralight pilots an affordable alternative to other higher priced airspeed indicators. They have excellent slow speed features which make them perfect for ultralight flying.

Size	Range	Part No.	Price
3-1/8"	0-80 MPH	AS020	\$248.95
3-1/8"	3-1/8" 0-100 MPH		\$247.95
3-1/8"	0-120 MPH	AS022	\$248.95

WINTER 3-INCH ALTIMETERS



Standard Precision Altimeters 4 FGH 10. Airtight, black plastic housing. Connection via hose from static pressure sensor to hose connector on rear. Kollsman window with

millibar scale, reading from 940 to 1050 millibars. See scale drawing for installation dimensions.

Weight 0.330 kg. Linear scale The 4 FGH 10 altimeter can be fitted with a scale ring.

Description	Part No.	Price
Winter 3 Altimeter 4 FGH 10 1000-20000 FT MB	10-05621	\$1,202.00
Winter 3 Altimeter 4 FGH 10 1000-20000 FT INHG	10-05622	\$1,198.00

WINTER 2-1/4 INCH ALTIMETERS



The pressure-sensitive measuring element is a diaphragm capsule (aneroid capsule) which reacts to the effect of changing air pressure as the aircraft changes altitude. Tempered, aged copper-beryllium diaphragms ensure highly accurate readings. Diaphragm movement is transmitted to the instrument pointers by a linkage and gearwheels - the whole is insensitive to shock and vibration. A bimetal link compensates the effect of temperature change.

Description	Part No.	Price
Winter 2-1/4 Altimeter EBH 8032 0-5000 FT MB	10-24105	\$587.00
Winter 2-1/4 Altimeter EBH 8034 0-5000 FT INHG	10-05632	\$429.00
Winter 2-1/4 Altimeter EBH 8035 0-10000 FT INHG	10-05634	\$595.00



TASKEM 5000 DIGITAL ALTIMETER

Unlike mechanical altimeters, the Taskem 5000 is insensitive to the high vibration of 2-stroke engines frequently used on ultra-light aircraft. This has literally shaken many mechanical altimeters. The 5000 is all solid state and can withstand severe shock and vibration without damage. It has a full 4.5 digit liquid crystal (LCD) display with large, 1/2" high characters. Because the LCD uses direct drive, it is easily readable

from most viewing angles and does not disappear when viewed from an angle or does not washout in bright sunlight. Includes a backlight for night or dusk viewing. The altitude range extends from below sea level to well above the need for supplementary oxygen. The limits are -1000 to 19,990 ft. (-305 to 6,093 meters). Increments are in 10 ft./1m steps. The instrument is powered from DC in the range of 7–30V and is protected for accidental polarity reversal. A 9V battery is a common power source or the instrument with the in common power source or the instrument with the instrument of the instrum and a battery holder for this is provided on the back, external to the case. An alkaline battery will provide over 40 hours of operation, without the backlight illuminated. The backlight is not powered in the ON power switch position to conserve battery life.

Feet	P/N	10-24010	\$309.00
Meters	P/N	10-24020	\$331.00

2	1	
	10-	HALL WINDMETER
4	1	Designed for hang gliders but can be mounted on
-0		low speed aircraft as an airspeed indicator. Easy to
mai	- 44	read. Mounting bracket clamps to 7/8 or 1 1/8" dia.
20-44		tube. Short bracket is 3' long, Long bracket 15" long.
-	43+-1	Windmeter (0-55 mph) .P/N 10-04100\$19.75
	334-1	Windmeter (0-80 mph) .P/N 10-04105\$19.75
20-112		Windmeter (0-130 kph).P/N 15-04602\$18.50
april a	1021	Short Bracket
2-2-	10	Long BracketP/N 10-04300\$10.50
1		

UNITED SENSITIVE ALTIMETERS



Designed to help the pilot determine altitude by measuring existing atmospheric pressure, this altimeter translates this measurement into "height-abovesea-level." This is indicated on the dial of the instrument in feet, which requires setting the barometric pressure in the Kollsman window. Standard 3-1/8" size.

Specifications: • Typical Weight: 13 oz • Number of Pointers: 3 • Barometric Setting: 28.1 to 31.0 in HG / 946 to 1050 mb · Calibrated Ranges: -1,000 to +20,000 or +35,000 feet · Static Pressure Connection: 1/8-27 ANPT . Installation: Removable Spring Nuts and screws

Range	Scale	Manufacturer	Part No.	Price Ea.
0-20000 ft.	Inches	United (TSO)	10-04550	\$1,558.00
0-35000 ft.	Inches	United (TSO)	10-04570	\$1,725.00
0-20000 ft.	Millibar	United (TSO)	10-04560	\$1,558.00
0-20000 ft.	Inches	United (Lighted)	10-00929	\$1,805.00
0-35000 ft.	Inches	United (Lighted)	10-00930	\$1,972.00
0-20000 ft.	Millibar	United (Lighted)	10-00931	\$1,790.00
0-20000 ft.	In/Mil	United (Lighted)	10-00932	\$1,831.00
0-20000 ft.	In/Mil	United (Unlighted)	10-00933	\$1,555.00
0-35000 ft.	In/Mil	United (Unlighted)	10-02696	\$1,777.00
0-35000 ft.	In/Mil	United (Lighted)	10-02697	\$1,974.00
0-35000 ft.	Millibar	United (Lighted)	10-02698	\$1,925.00
0-35000 ft.	Millibar	United (Unlighted)	10-02699	\$1,715.00

UNITED ALTIMETER WITH CORRECTED **BAROMETRIC OUTPUT**



True airspeed all the time! No need to correct the barometer, the altimeter does it automatically for the pilot. · Compatible with most Air Data Systems • 35,000 ft., dual barometric scale • Internally lighted light trav included • TSO C10d certified • Standard D.C. voltage barometric output · Mounts in standard 3 1/8" panel cutout • Requires just 5" depth behind the panel • 1/8" NPT static port • Connector included · Manufactured by United Instruments.

P/N 10-02718 \$3.125.00

MID-CONTINENT INSTRUMENTS AND AVIONICS ALTIMETER, 2-INCH



Reliable for primary or standby use, these altimeters provide flight critical data with a three-pointer or counter drum pointer display. The compact, 2-inch size is ideal for complex panel installations. Lighting is included. These altimeters are used in many popular OEM and STC packages. Call for application assistance.

Model	Description	Part No.	Price	
MD15-212	20K, 3-ptr., Left-Hand knob, Millibars, lighted	10-04754	\$6,963.00	
MD15-221	20K, 3-ptr., Right-Hand knob, Inches, lighted	10-04755	\$6,969.00	
MD15-222	20K, 3-ptr., Left-Hand knob, Inches, lighted	10-04756	\$6,969.00	
MD15-322	35K, 3-ptr., Left-Hand knob, Inches, lighted	10-04760	\$7,495.00	

UMA 3-1/8" ALTIMETERS

This UMA standard altimeter utilizes a single pointer and is designed to meet the needs of the low-cost Non-IFR user. This altimeter utilizes a single pointer and adjustable barometric scale, viewed through a Kollsman Window. Can be ordered in inches of mercury or millibar. Available in feet or meters. Aluminum case.

Range	Dial Markings	Scale	Part No.	Price
0-20,000 Ft.	B &W	w/ IN HG	10-22965	\$193.85
0-10,000 Ft.	B &W	w/ IN HG	10-02436	\$191.75
0-5,500 Ft.	B &W	w/ IN HG	10-02369	\$191.75
0-5,500 Ft.	B &W	w/ Millibar	10-05120	\$213.95
0-10,000 Ft.	B &W	w/ Millibar	10-05125	\$213.95
0-20,000 Ft.	B &W	w/ Millibar	10-05126	\$213.95
0-3 000 M	B & W	w/ Millihar	10-05127	\$220.95



UMA 2-1/4" ALTIMETERS

This UMA standard altimeter utilizes a single pointer and is designed to meet the needs of the low-cost Non-IFR user. This altimeter utilizes a single pointer and adjustable barometric scale, viewed through a Kollsman Window. Can be ordered in inches of mercury or Millibar. Scale is available in feet or meters.

and the second				
Range	Dial Markings	Scale	Part No.	Part No.
0-10,000 Ft.	B & W	w/ IN HG	10-05131	\$376.00
0-20,000 Ft.	B&W	w/ IN HG	10-05132	\$376.00
0-10,000 Ft.	B&W	w/ Millibar	10-05133	\$396.00
0-20,000 Ft.	B & W	w/ Millibar	10-05134	\$396.00
0-3000 Mtrs.	B & W	w/ Millibar	10-05883	\$427.00

CON 3 1/8" NON-SENSITIVE ALTIMETERS



These light weight altimeters feature a non-sensitive altimeter on a 3-1/8", single pointer, and a barometric window. A setting knob allows the pilot to set the barometric reading to the correct field elevation or barometric pressure setting. They are weight conservative, economical, yet very precision and accurate instruments that provide excellent altitude measuring capabilities; designed for ultra-light airplanes. 3-1/8" is nonsensitive. Standard Types are either feet reading with

barometric window inches of mercury or millibars reading; or meters reading with barometric window millibars reading. Length: 2 3/8" Weight: 10.7 oz.

Part No.	Range	Price
10-03422	10,000 ft./20,000 ft. Inches	\$266.95
10-02251	6,000 ft., Millibars	\$266.95
10-02252	10,000 ft., Millibars	\$266.95

FALCON 2 1/4" SENSITIVE ALTIMETERS



2-1/4" is sensitive. Single Pointer, and a barometric window. A setting knob allows the pilot to set the barometric reading to the correct field elevation or barometric pressure setting. They are weight conser-vative, economical, yet very precision and accurate instruments. It is suitable where space and weight is a consideration. This type is available in Feet or Meter reading, the baro-metric window can be either in inches of mercury or in millibars reading. Length: 2 3/8" Weight: 3.6 oz.

	Longui. L c	10 11 olgini. 0.0 02.	
Model No.	Part No.	Range	Price
ALTN6INF-2	10-02205	5,500 ft, Inches	\$278.95
ALTN10INF-2	10-04510	10,000 ft, Inches	\$278.95
ALTN6MBF-2	10-04070	6,000 ft., Millibars	\$278.95
ALTN10MBF-2	10-04071	10,000 ft., Millibars	\$278.95
ALTN3ME-2	10-02207	3,000 Meters, Millibars	\$278.95
ALTN6ME-2	10-02254	6,000 Meters, Millibars	\$278.95

FALCON 3 1/8" SENSITIVE ALTIMETERS



1. Three Pointer Altimeter with Barometric Window and Low Altitude Warning Stripes is a modern type. The easy to read striped sector will show while fly ing below 16,000 ft. 2. Three Pointer Altimeter with a Barometric Window enables the pilot to adjust the altimeter to the barometric conditions existing at the point of landing. 3. Two Pointer Altimeter without Barometric Window. This type of altimeter is designed to meet the demands of some pilots who

either live or fly the area's barometric pressure beyond 28.1 to 31 inches of mercury, or 950 to 1050 millibars, or some pilots prefer to set the altimeter to"0" altitude before taking off without regard to the barometric pressure. By installing this altimeter, the pilot can fly anywhere in the world without having to care about the barometric pressure changes. Non-TSO'd.

Model No.	Part No.	Range	Barometric Window	Warning Stripes	Pointers	Price
ALT100F	10-02259	10,000 ft	No	No	2	\$599.00
ALT20INF-3	10-05327	20,000 ft, inches	Yes	Yes	3	\$598.00
ALT20MBF-3	10-04500	20,000 ft, Millibars	Yes	Yes	3	\$598.00
ALT20IMF-3	10-02260	20,000 ft, Inches & Millibars	Yes	Yes	3	\$633.00
ALT6MEMB-3	10-02257	6,000 meter, Millibars	Yes	No	3	\$598.00
ALT20INF-3N	10-02204	20,000 ft, Inches	Yes	No	3	\$577.00
ALT20MBF-3N	10-02256	20,000 ft, Millibars	Yes	No	3	\$577.00

556

Falcon Gauges are made in China. WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

ETERS – BUGS – REDUCING MASKS



STADIA AGL LIDAR LANDING ALTIMETER

Stadia is an AGL altimeter landing aid that uses LIDAR to measure the aircraft's height above ground with incredible precision. Stadia connects to the pilot's smartphone via Bluetooth and alerts the pilot to their altitude with audible cues. Stadia has a maximum altitude of 130ft, and a rechargeable

battery life of up to 12 hours. Per the manufacturer "Because Stadia is considered a temporary attachment it is not subject to FAA regulatory purview

Specifications: • Model A & Model B: 2.25 lbs, 8.5" x 6" x 3.75" • Model L: 12 oz, 4" x 5" x 4.75" Model A - Strut Braced - Struts with Thickness from 1-5/32" - 1-3/4

P/N 11-19068\$565.00 Model B - Strut Braced - Struts with Thickness from 1-3/4" - 2-3/8" P/N 11-19069 \$565.00

Model L - For Most Aircraft with Tie Down Ring P/N 11-19070 \$565.00



WINTER ALTIMETERS

Casing made of black plastic-airtight. Connection via hose line from static pressure pick-up point to connection coupling at the rear. Scale window with millibar or inch-HG scale.

Description	Part No.	Price
Winter 2-1/4 Altimeter 4 FGH 40 1000-20000 Ft Mb	10-05623	\$1,198.00
Winter 2-1/4 Altimeter 4 FGH 40 1000-20000 Ft INGH	10-05624	\$1,243.00
Winter 3 Altimeter EBH 8034 0-5000 FT INHG	10-05633	\$404.00
Winter 3 Altimeter EBH 8035 0-10000 FT INHG	10-05635	\$534.00
Winter 3 Altimeter EBH 8038 0-5000 FT MB	10-05636	\$404.00
Winter 3 Altimeter EBH 8039 0-10000 FT MB	10-05637	\$429.00
Winter 3 Altimeter 4 FGH 10 1000-20000 FT MB	10-05621	\$1,202.00
Winter 3 Altimeter 4 FGH 10 1000-20000 FT INHG	10-05622	\$1,198.00



INSTRUMENT BUGS

"Bugs" are perfect for pilots who rent aircraft, and for owners. The transparent suction cup works on all instruments. A thumb screw friction lock lets the yellow pointer tip rotate 360°. Fly with it day & night. Includes: 2 "Bugs" in a plastic reusable storage box with instructions and 4 disposable alcohol swabs, which are used to clean the instrument face and bugs so that they stick well.

P/N 10-00114 \$9.85

OPERATING RANGE DECALS

Yellow, red, green and white, pressure sensitive. Just pull off backing and place on instrument lens. P/N 10-03905\$2.95/set

AIRCRAFT INSTRUMENT COVER



The instrument cover is a plastic disk approximately 2 3/4" in diameter and 1/16" thick. By use of the attached suction cup, the cover will mask the face of most general aviation flight instruments. It is useful in many training situations one of which is partial panel work. As a safety aid, the cover can be used to mask an instrument when it is non-functional, as is required by Regulations. Each package has two covers.

P/N 13-04968 \$7.45

INOPERATIVE INSTRUMENT AID



Designed with static cling polyester, the IIA will stick to your glass instrument face without licking and will stay there until you want to remove it. Practicing instrument failures during flight is a requirement by the Federal Aviation Administration for your practical test. One package includes four Inoperative Instrument Aids.

Developed by a Certified Instrument Flight Instructor with the intent to improve instrument instruction. Measures 3" in diameter.

P/N 13-04173 \$5.75



REDUCING MASK

Precision die-cut black anodized aluminum masks simplify installation of small instruments in large instrument panel cut-outs. 3-1/8" size cut-out to 2-1/4" size

P/N 10-06100\$10.95







REDUCING PLATE FROM 2-1/4" DIA.

MOUNTING PLATE

Reduce from 2.25" to 2" diameter instrument. For oil pressure, ammeter gauge etc.

P/N 10-00155 \$9.80

P/N 10-00066 \$5.80

INSTRUMENT PANEL COVER-UPS These white stick on instrument size covers are ideal

for partial panel practice or to cover an actual failed instrument. These covers are reusable and are furnished in a package of 5 covers.



3ATI REDUCER PLATES 3ATI Reducers to 3 1/8" - Use a 3ATI hole cut out to mount 3 1/8" diameter instrument. Plate can be shimmed to instrument panel thickness. Simple installation. Heat-treated

aluminum .080 thick with black anodize finishP/N 07-01331\$20.80 3ATI Reducers to 2 1/4" - Use a 3ATI hole

cut out to mount 2 1/4' diameter instruments. Plate can be shimmed to instrument panel thickness, comes with 4 rivets. Simple installation. Heat-treated aluminum .080 thick with black anodize finish. BACK PLATE 3.8 X 3.8

07-01330

07-01331

P/N 07-01330\$20.80

IN

INSTRUMENT PANEL COVER-UPS FOR PFD / MFD

Cover ups for PFD and MFD screens for glass cockpit train-ing. For partial panel practice & actual instrument failures. • Reusable, 3 per pack • "Cling" type plastic covers, with lift tab • Zip lock plastic bag for convenient storage. P/N 13-06116.....\$9.50

INSTRUMENT HOLE COVER PLATES



Use these plates to attractively cover unused panel cut-outs. Aluminum and plastic plates have raised center, which brings the plug face about even with the front surface of the panel. Plastic plate for 2-1/4" Cut-Out No Holes

P/N 10-06900\$7.50

Plastic plate for 3-1/8" Cut-Out No Holes P/N 10-07000\$7.50

Predrilled

Plastic plate for standard altimeter hole P/N 10-07100 .. \$10.50 Aluminum plate for 2-1/4"hole, black wrinkle P/N 10-00427 .. \$12.80 Aluminum plate for 2-1/4"hole, no paint P/N 10-00428 .. \$12.90 Aluminum plate for 3-1/8"hole, black wrinkle P/N 10-00429 .. \$13.95 Aluminum plate for 3ATI hole, black wrinkle P/N 10-00434 . \$13.70 Aluminum plate for 3ATI hole, no paint...... P/N 10-00436 ...\$12.50 Plastic plate for half ATI hole, black fire resist.... P/N 10-00437\$9.75



INSTRUMENT PANEL LAYOUT TEMPLATE

Use this template for precise positioning of instrument holes and mounting screw holes in panel. For both 2-1/4" & 3-1/8" dia. instruments. With transfer punch for marking screw hole centers and instructions.

P/N 12-14600\$29.70

- 4

ED VERTICAL SPEED INDICATORS



The vertical speed indicator is a precision instrument which provides an accurate indication of rate of change of altitude. This instrument is temperature compensated and is provided with a zero adjustment screw on the face of the case in the seven o'clock position. Power: Static system. Manufactured by United Instruments. Used in most production aircraft. Size: 3-1/8" x 3-1/8" x 4", Wt. 0.7 lb. TSO-C8b.

Unlighted VSI's

0-2000 FPM	P/N 10-05200 \$885.00
0-3000 FPM	P/N 10-20400\$868.00
0-4000 FPM	P/N 10-20500\$868.00
	P/N 10-05250\$1,503.00
Lighted VSI's	
0-2000 FPM	P/N 10-00925 \$1,124.00
	P/N 10-00926\$1,124.00
	P/N 10-00927\$1.124.00
0-6000 EPM	P/N 10-00928 \$1 682 00

0-6000 FPM\$1,682.00 FALCON VERTICAL SPEED INDICATORS

These Vertical Speed Indicators (Rate of Climb), have been installed in thousands of planes. Available in climb ranges from 2,000 feet per minute to 3,000 feet per minute, and 10 meters per second. This precision aircraft instrument provides immediate climb and descent information with an easy to read dial and is extremely

reliable and durable. Over several decades, they have been servicing and satisfying pilots and kit plane builders worldwide.

The 2-1/4" altimeter is perfect for the ultra-light models and where space and weight are a factor of consideration. Made in China.

Specifications: • Model No: VS12FM-3 • Size: 3-1/8" • Length: 4.25"/105mm • Range: 2,000 - 4,000 ft/min • Weight: 12.7 oz

Part No.	Size	Range	Length	Weight	Price
10-05352	3 1/8"	2,000 ft/min	4.25"/105mm	12.7 oz	\$277.95
10-05210	3 1/8"	3,000 ft. / Min.	4.25"/105mm	12.7 oz	\$311.00
10-02246	3 1/8"	10 meter/second	4.25"/105mm	12.7 oz	\$277.95
10-01643	2 1/4"	2,000 ft. / Min.	4.8"/112mm	9.2 oz	\$364.00
10-00983	2 1/4"	10 Meters / Sec	4 8"/112mm	9.2 oz	\$365.00



3-1/8" UMA VERTICAL SPEED INDICATORS

The vertical speed indicator is a precision instrument which provides an accurate indication of rate of change of altitude. This instrument is temperature compensated and is provided with a zero adjustment screw on the face of the case in the seven oclock position. Power: Static system.

Part No.	Name	Range	Price
10-20505	Vertical Speed	0-2,000'	\$259.95
10-02368	Vertical Speed	0-3,000'	\$259.95
10-20506	Vertical Speed	0-4,000'	\$321.00
10-20508	Vertical Speed	0-6,000'	\$325.00
11-07239	Optional inte	ernal lighting	\$58.75



UMA MINIATURE 2 1/4" VERTICAL SPEED INDICATORS

This instrument mounts in a standard 2-1/4" instrument panel cutout. New manufacture with brilliant easy-to-read matte-white numerals on black background. Size: 23/8"x 23/8"x 31/4" long.

Part No.	Name	Range	Price
10-05500	Vertical Speed	0-2,000 Ft.	\$347.00
10-00079	Vertical Speed	0-3,000 Ft.	\$347.00
10-05550	Vertical Speed	0-4,000 Ft.	\$381.00
10-05560	Climb	0-4,000 Ft.	\$398.00
10-05570	Rate of Change	0-4,000 Ft.	\$398.00
10-05580	Cabin Climb	0-4,000 Ft.	\$398.00
10-05600	Vertical Speed	0-6,000 Ft.	\$381.00
10-05610	Climb	0-6,000 Ft.	\$398.00
10-06910	Rate of Change	0-6,000 Ft.	\$398.00
11-07239	Optional interr	nal lighting	\$58.75

FLIGHT DATA G-METER GT50 12/28



Note: Now FAA Approved as a replacement clock in non-transport category aircraft.

The GT-50 is a Six Function: Accelerometer -Clock - Voltmeter - Temperature for Experimental Aircraft.

G-Meter: · Continuous Instantaneous Display to +12/-10 G's · Records and Saves Max and Min G's • 30 Degree (Sonex) Tilted Panel Compatible Flight Timer: Automatically Records Flight Time Clock: 12 or 24 Hour Format

Timer/Stopwatch Voltmeter Features: · Best G-Meter Value Available • Extreme Operating Temperature Display • Soft Orange Backlight • 2-1/4" Panel Mounted • Weighs 2.5oz • Includes Pre-\$173.05

		10 00001	
With USB	P/N	10-07330	\$229.00
Flight Data OAT Probe GT50			



WINTER VARIOMETERS

The instrument consists of a cylindrical chamber with a precision-fit baffle plate (vane) rotating on shock proof jewel bearings and centered by a coil spring. The tiny housings mean that these instruments can be installed even where space is restricted. Available in 2-1/4" and 3" sizes.

Description	Part No.	Price
Winter 2-1/4 Variometer 1000 FT Min	10-05638	\$760.00
Winter 2-1/4 Variometer 10 Knots	10-05639	\$760.00
Winter 2-1/4 Variometer 2000 FT Min	10-05642	\$765.00
Winter 2-1/4 Variometer 1000 FT Min Log	10-05644	\$680.00
Winter 3 Variometer 1000 Ft Min	10-05640	\$760.00
Winter 3 Variometer 10 Knots	10-05641	\$760.00
Winter 3 Variometer 2000 Ft Min	10-05643	\$760.00
Winter 3 Variometer 1000 Ft Min Log	10-05646	\$680.00
Flask for Winter Variometer	10-03856	\$33.00

SKYSPORTS VACUUM ATTITUDE GYRO



The Skysports Vacuum Attitude Gyro is a standard artificial horizon gyro powered by the vacuum system in the aircraft. It is ideal for use in a wide variety of experimental aircraft. Non-TSO'd. Size: 3-3/8"x6.46/164m. Weight: 2.4lb/984g. Specifications: • Ambient temperature: -30 to +50 degree centigrade · Ambient relative humidity: no more than 95% · Anti-vibration tensity: 1.5g Height: 4600m • Driving power: 15 ~18K Pa for vacuum or air pressure • Pressure for starting: 7KPa......P/N 10-05423.......\$886.00

SKYSPORTS ELECTRIC ATTITUDE GYRO



The Skysports Electric Attitude Gyro is a high quality gyro which is excellent for a wide variety of experimental aircraft. It features a power failure flag which drops into view if voltage is below operational requirements. It also includes a "Pull to Cage" knob. Non-TSO'd. Power Supply: 14V. Dimension: 3-3/8" x 6.46/164mm Weight: 2.4lb/ 984q. Specifications: · Operating voltage: 14 ± 10% VDC · Ambient Temperature: -40 ~ +50°C · Relative Humidity: It can reach 95% at $20 \pm 5^{\circ}$ C • Vibration Strength: not more than 1.5g

P/N 10-05422 \$1,595.00

NON-TSO'D VERTICAL SPEED INDICATORS



Skysports vertical speed indicators are easy to read, lightweight, and durable. These rate of climb indicators are available in several different ranges and are in use in a wide variety of experimental aircraft worldwide. Non-TSO'd

Size: 3-1/8' Length: 4.25"/105mm Weight: 12.7 oz

Part No.	Size	Range	Length	Weight	Price
10-05361	3 1/8"	2,000 ft/min	4.25"/105mm	12.7 oz	\$364.00
10-05360	3 1/8"	10 meter/second	4.25"/105mm	12.7 oz	\$364.00

Skysports Instruments are made in China.

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

SKYSPORTS NON-TSO'D INSTRUMENTS



SKYSPORTS VACUUM DIRECTIONAL GYRO

The Skysports Vacuum Directional Gyro is a standard gyro powered by the vacuum system in the aircraft. It is ideal for use in a wide variety of experimental aircraft. Non-TSO'd. **Dimensions:** 3-3/8" x 5-5/16"/134.95mm. Weight: 2.25lb/984g.

Specifications: • Air-pressure for operation: 15 ~18Kpa • Air-pressure for starting: 7Kpa • Ambient temperature: -30 to +50 degree centigrade; • Relative humidity: 0-95% • Anti-



SKYSPORTS ELECTRIC DIRECTIONAL GYRO

The Skysports electric directional gyro is a high quality gyro providing smooth operation, long life, and reliability. It features a warning flag which is displayed when voltage drops below operation requirements, and the instrument is LED lighted with automatic dimming. A good choice for a wide variety of experimental aircraft. Non-TSO'd. **Dimensions:** 3-3/8".

Specifications: • Operating Voltage: DC. 14 \pm 1%V • Ambient Temperature: -40 ~ +50°C • Relative Humidity: It can reach 95% at 20 \pm 5°C • Vibration Strength: not more than 1.5g.......P/N 10-05077.....\$1,552.00



SKYSPORTS 3-1/8" SENSITIVE ALTIMETERS

Skysports sensitive altimeters feature three pointers and knob to set correct barometric pressure enroute and destination. High quality sensitive altimeters which are in use in thousands of experimental aircraft worldwide. Non-TSO'd

Size: 3 1/8" Weight: 1.4 lbs. or 592g Pointers: 3

Barometric Window	Range	Warning Stripes	Part No.	Price
Yes	20,000 ft, Inches	Yes	10-04400	\$649.00
Yes	20,000 ft, Millibars	Yes	10-05371	\$649.00
Yes	20,000 ft, Inches & Millibars	Yes	10-05374	\$649.00
Yes	20,000 ft, Inches	No	10-05372	\$844.00
Yes	20,000 ft, Millibars	No	10-05373	\$649.00



SKYSPORTS 3-1/8" NON-SENSITIVE ALTIMETERS

Skysports non-sensitive altimeters feature a single pointer and barometric window. These altimeters are lightweight, and very accurate, making them ideal for a wide variety of experimental and ultralight aircraft. The setting knob allows the pilot to set the barometric pressure or field elevation. Non-TSO'd **Length:** 2-3/8". **Weight:** 10.7 oz

Gauge Size	Range	Part No.	Price
3-1/8"	10,000 ft/ 20,000 ft, Inches	10-05367	\$372.00
3-1/8"	6,000 ft, Millibars	10-05366	\$285.95



SKYSPORTS 3 1/8" SINGLE RANGE AIRSPEEDS

Skysports airspeed indicators are lightweight, reliable, and are housed in short length aluminum cases. They give accurate indications at slow speeds and are available in a variety of ranges. These airspeed indicators are excellent for a wide range of experimental and ultralight aircraft. Non-TSO'd. Size: 3 1/8" Length: 3.5in/97.3mm Weight: 10.2oz/290g

Model No.	Length	Range	Part No.	Price
BK-33	97.3mm	20-180 MPH	10-05394	\$322.00
BK-9C	58mm	20-180 MPH	10-05409	\$285.95
BK-7B	58mm	20-120 MPH	10-05406	\$310.00
BK-31	97.3mm	20-140 MPH	10-05392	\$321.00
BK-6C	58mm	20-150 MPH	10-05405	\$404.00
BK-12	58mm	20-80 KNT	10-05381	\$310.00
BK-13A	58mm	20-100 KNT	10-05384	\$310.00
BK-14A	58mm	0-120 KNT	10-05386	\$278.95
BK-3A	97.3mm	20-140 KNT	10-05399	\$312.00
BK-15	97.3mm	0-160 KNY	10-05387	\$280.95
BK-34	97.3mm	30-180 KNT	10-05395	\$324.00
BK-5A	97.3mm	30-220 KNT	10-05404	\$322.00
BK150-1A	58mm	30-150 KPH	10-05388	\$322.00
BK200-1A	58mm	0-200 KPH	10-05389	\$318.00
BK300	58mm	40-300 KPH	10-05391	\$322.00



SKYSPORTS 2-1/4" SENSITIVE ALTIMETERS

Skysports sensitive altimeters feature three pointers and knob to set correct barometric pressure enroute and destination. High quality sensitive altimeters which are in use in thousands of experimental aircraft worldwide.

Non-TSO'd Length: 2-3/8" Weight: 3.6 oz.

Size	Range	Part No.	Price
2-1/4"	6,000 ft, Millibars	10-05369	\$332.00



SKYSPORTS NON TSO 2-1/4" ALTIMETER Skysports NON TSO 2-1/4". Barometric

SKYSPORTS 3-1/8" DUAL AIRSPEEDS Skysports dual dial airspeeds provide the

Skysports dual dial airspeeds provide the pilot with airspeed indications in MPH and Knots, and are housed in a lightweight, durable aluminum case. These airspeed indicators are ideal for a wide variety of experimental aircraft flying at higher cruise speeds. Non-TSO'd. Weight: 10.5 oz / 301g. Length: 2.2" or 56.5mm Size: 3 1/8" Length: 3.5" or 97.3mm Weight: 10.5 oz / 301g

	82 1 88 1 g		
Model No.	Range	Part No.	Price
BK-3	120-160 MPH/20-140 KNT	10-05390	\$320.00
BK-4	30-180 MPH/30-160 KNT	10-05400	\$327.00
BK-10	30-200 MPH/30-180 KNT	10-05380	\$327.00
BK-5	30-250 MPH/30-220 KNT	10-05402	\$325.00

Skysports Instruments are made in China.

KYSPORTS NON-TSO'D INSTRUMEI



SKYSPORTS VERTICAL CARD COMPASSES

The Skysports Vertical Card compass features a 2 inch vertical card dial which presents the entire 360 degree heading range at all times for easy interpretation. It is a dry compass which eliminates the leaking and much of the precessing common in wet compasses. Lighted 12VDC.

Non-TSO'd.

Description	Part No.	Price
Northern Hemisphere, Compass Only	10-04173	\$329.00
Northern Hemisphere, Compass & Mounting Bracket	10-05425	\$345.00
Southern Hemisphere, Compass Only	10-05426	\$338.00
Southern Hemisphere, Compass & Mounting Bracket	10-05427	\$270.95

FLYEFII DUAL SYSTEM32 ENGINE MANAGEMENT SYSTEM



The FlyEFii System32 Engine Management System Hardware is the first electronic engine management system ever designed specifically for the needs of experimental aviation. System32 is a state of the art, high speed, fully redundant system that represents the fulfillment of a ten year wish list of functionality. Dual 32 bit high speed ECUs and a sunlight readable graphical LCD Cockpit Controller combine for seamless power and efficiency in managing your engine's electronic fuel injection and electronic ignition functions. System32 will

be offered in ignition only and full ignition + injection versions.

Description	Part No.	Price
EFII System 32 4 Cylinder Lycoming	07-19980	\$6,795.00
EFII Dual Ignition Dual ECU 4 Cylinder Lycoming Ignition and Injection	07-19978	\$3,061.00
EFII System 32 6 Cylinder Lycoming	07-19981	\$8,295.00
EFII Dual Ignition Dual ECU 6 Cylinder Lycoming Ignition and Injection	07-19979	\$3,776.00



SKYSPORTS 2-1/4 CHT 50-150C 120-300°F



SKYSPORTS PANEL **MOUNT COMPASSES**

Skysports aircraft compasses are similar in design and function to the industry standard C2300 and C2400 series compasses. High quality and economically priced. Error of the compass is no more than 2.5 degree; Friction error is no more than 1 degree; When an aircraft tilts for 10,the error is no more than 4 degree; Ambient temperature is-55TO +60 degree centigrade. Non-TSO'd.

Size: 2-1/4"

Mount: Panel Mount (Lighted or unlighted) Weight: 6.9oz/198g

Description	Part No.	Price
Northern Hemisphere, Not Lighted	10-05412	\$108.75
Northern Hemisphere, 12V-24V Lighted	10-05413	\$114.85
Southern Hemisphere, Not Lighted	10-05415	\$113.95

SKYSPORTS 2-1/4 OIL TEMP 50-150C 120-300°F



2-1/4" Oil Temp Gauge, 50-150° C / 120-300°F

P/N 10-05950 \$77.95

SKYSPORTS 2-1/4 ROTOR TACHOMETER & SENDER 0-700 RPM



SKYSPORTS 2-1/4 OIL PRESSURE GAUGE 0-10 BAR 0-145 PSI



560

SKYSPORTS ROTAX 582 TACHOMETER 2-1/4 0-8000 RPM Tachometer 2-1/4", 0-8000 RPM, 9-30 VDC......P/N 10-05946\$100.85



2-1/4" Oil Pressure Gauge, 0-10 BAR 0-145 PSI

P/N 10-05951\$88.75

Skysports Instruments are made in China.

IN

INST RI

SWIFT AIRSPEED INDICATORS



2-1/4



3-1/8"

2-1/4 INCH

2-1/4 1101					
Model No.	Description	Part No.	Price		
ASI2-120M	0-120 MPH	10-06290	\$197.75		
ASI2-120N	0-120 Knots	10-06291	\$197.75		
ASI2-160K	0-160 KPH	10-06292	\$174.90		
ASI2-160M	0-160 MPH	10-06293	\$227.95		
ASI2-160N	0-160 Knots	10-06294	\$197.75		
ASI2-200K	0-200 KPH	10-06295	\$174.90		
ASI2-200M	0-200 MPH	10-06296	\$197.75		
ASI2-200N	0-200 Knots	10-06297	\$174.90		

3-1/8 INCH

0 1/0 mon				
Model No.	Description	Part No.	Price	
ASI3S-80M	0-80 MPH	10-06331	\$198.75	
ASI3S-100M	0-100 MPH	10-06311	\$227.95	
ASI3S-120M	0-120 MPH	10-06314	\$197.75	
ASI3S-140M	0-140 MPH	10-06316	\$227.95	
ASI3S-160M	0-160 MPH	10-06319	\$227.95	
ASI3S-180M	0-180 MPH	10-06321	\$174.90	
ASI3S-200M	0-200 MPH	10-06324	\$174.90	
ASI3S-120K	0-120 KPH	10-06313	\$174.90	
ASI3S-160K	0-160 KPH	10-06318	\$174.90	
ASI3S-200K	0-200 KPH	10-06323	\$174.90	
ASI3S-220K	0-220 KPH	10-06326	\$174.90	
ASI3S-250K	0-250 KPH	10-06327	\$174.90	
ASI3S-300K	0-300 KPH	10-06328	\$174.90	
ASI3S-350K	0-350 KPH	10-06329	\$174.90	
ASI3S-400K	0-400 KPH	10-06330	\$174.90	
ASI3S-80N	0-80 Knots	10-06332	\$174.90	
ASI3S-100N	0-100 Knots	10-06312	\$174.90	
ASI3S-120N	0-120 Knots	10-06315	\$174.90	
ASI3S-140N	0-140 Knots	10-06317	\$174.90	
ASI3S-160N	0-160 Knots	10-06320	\$174.90	
ASI3S-180N	0-180 Knots	10-06322	\$174.90	
ASI3S-200N	0-200 Knots	10-06325	\$174.90	

SWIFT SWITCHABLE AIRSPEED INDICATORS



These 3-1/8" Airspeed Indicators can be switched between MPH, KPH, and Knots scales.

Model No.	Description	Remarks	Part No.	Price
ASI3-80	0-80 MPH/KPH/Knots	Unit Switchable	10-06310	\$281.95
ASI3-100	0-100 MPH/KPH/Knots	Unit Switchable	10-06298	\$281.95
ASI3-120	0-120 MPH/KPH/Knots	Unit Switchable	10-06299	\$281.95
ASI3-140	0-140 MPH/KPH/Knots	Unit Switchable	10-06300	\$281.95
ASI3-150	0-150 MPH/KPH/Knots	Unit Switchable	10-06301	\$281.95
ASI3-160	0-160 MPH/KPH/Knots	Unit Switchable	10-06302	\$281.95
ASI3-180	0-180 MPH/KPH/Knots	Unit Switchable	10-06303	\$281.95
ASI3-200	0-200 MPH/KPH/Knots	Unit Switchable	10-06304	\$281.95
ASI3-220	0-220 MPH/KPH/Knots	Unit Switchable	10-06305	\$281.95
ASI3-240	0-240 MPH/KPH/Knots	Unit Switchable	10-06306	\$281.95
ASI3-260	0-260 MPH/KPH/Knots	Unit Switchable	10-06307	\$281.95
ASI3-300	0-300 MPH/KPH/Knots	Unit Switchable	10-06308	\$281.95
ASI3-400	0-400 MPH/KPH/Knots	Unit Switchable	10-06309	\$281.95

SWIFT ALTIMETER AND BAROMETERS





2-1/4'

3-1/8"

	2-1/4"		2-1/4 INCH	3-1/8"	
Model No.	Descriptio	n	Remarks	Part No.	Price
ALT2-10F1	10,000 FT 1 Pointer	•	Barometric unit switchable: mb/inHg	10-06284	\$238.95
ALT2-1.5M1	1,500 M 1 Pointer		Barometric unit switchable: mb/inHg	10-06283	\$210.95
ALT2-3M1	3,000 M 1 Pointer		Barometric unit switchable: mb/inHg	10-06285	\$210.95
ALT2-5F1	5,000 FT 1 Pointer		Barometric unit switchable: mb/inHg	10-06286	\$210.95
			3-1/8 INCH		
Model No.	Description		Remarks	Part No.	Price
ALT3-40f3	40,000 FT 3 Pointer		arometric unit switch- able: mmHg/inHg/mb	10-06256	\$437.00
ALT3-10F2	10,000 FT 2 Pointer	_	arometric unit switch- able: mmHg/inHg/mb	10-06287	\$515.00
ALT3-10M2	10,000 M 2 Pointer		arometric unit switch- able: mmHg/inHg/mb	10-06288	\$450.00

SWIFT VERTICAL SPEED INDICATORS

Barometric unit switch-

able: mmHg/inHg/mb, 100m/circle



10,000 M 3 Pointer

ALT3-10M3



10-06289 \$437.00

2-1/4 INCH

Model No.	Description	Part No.	Price
VSI2-10MS	2000 ft/min	10-06348	\$327.00
VSI2-20FM	10 m/sec	10-06349	\$317.00

3-1/8 INCH

Model No.	Description	Remarks/Depth	Part No.	Price
VSI3-10MS	10 m/sec	56mm	10-06350	\$240.95
VSI3-20MS	20 m/sec	Large Range/96mm	10-06352	\$240.95
VSI3-30MS	30 m/sec	Large Range/96mm	10-06354	\$240.95
VSI3-20FM	2000 ft/min	56mm	10-06351	\$239.00
VSI3-30FM	3000 ft/min	96mm	10-06353	\$240.95
VSI3-60FM	6000 ft/min	Large Range/96mm	10-06355	\$240.95
VSI3S-10MS	10 m/sec	56mm	10-06461	\$192.75
VSI3S-20FM	2000 ft/min	56mm	10-06462	\$217.95
VSI3S-30FM	3000 ft/min	56mm	10-06463	\$192.75

OUNTING **&** A

INSTRUMENT MOUNTING KITS MK-01 MK-03 MK-02 REAR VIEW 3 1/8" STD. 0000 0000 000 ALIGNMENT GUIDE

Kits come with "special" self-locking black pan head screws and nylon washers Precision machined "Nut Ring" instrument mounting kit. Designed to

slide on from the back side of the instrument using the alignment guide pin inserted through a screw hole. Pulling on the alignment pin from the front side of the panel allows you to hold the instrument in correct alignment in the panel. Specially designed self-locking pan head black brass mounting screws and nylon washers are then easily installed from the front. Countersunk self-locking black brass screws are also available. Extra screws & washers are sold in packs of 12. The nylon washer keeps from chipping the instrument panel. All self-locking screws are extra long to accommodate the extra thickness of light wedges and internally lighted instruments. Nut Rings can be installed without removing hoses, tubing, or electrical connections. Designed to replace "grasshopper nuts". PMA'd.

Alignment guide pin sold separately. (P/N 10-03696)

······································						
MKNR-05	Model	Description	Part No.	Price		
TTTT	MK-01	3-1/8" Std.	10-00335	\$16.70		
	MK-02	3-1/8" ALT/VSI	10-00336	\$16.70		
0000	MK-03	2-1/4" Std.	10-00337	\$16.70		
MKNR-06	MKNR-05	Pan Head Screws	10-00338	\$13.50		
	MKNR-06	Countersunk Screws	10-00339	\$15.50		
		Accessories				
100 Deg.	AP-01	Alignment Mounting Kit	10-03696	\$1.95		

"EZ NUTS" INSTRUMENT MOUNTING SYSTEM BY SPT



Take the frustration out of mounting instruments with the use of Superior Panel Technology's F7 Nuts. Adhesive tape securely holds nut ring in place. No realignment if instrument is later removed. Aluminum bezel is treated to prevent corrosion. The pressed in stainless steel

inserts eliminate the problem of striped threads. Simply cut off one corner if only three screws are needed. Save labor time when compared to "grasshopper nuts".

Includes four 1-1/2" non-magnetic black oxide stainless steel, pan-head screws. Stronger than brass. Includes four black nylon washers to prevent marring of the panel.

100 degree countersunk screws available and are sold in packs of eight. 2-1/4" BezelP/N 11-01831...\$9.90 2-1/4" BezelP/N 11-01831 Black-Oxide Stainless Steel Countersunk screw package

eight black nylon washers that will enhance the appearance of the panel and will prevent the marring and scratching of the panel during instrument installation and removal. (set of 8)P/N 11-09911\$2.95

PITOT TUBE PROTECTORS

These hinged pitot tube protectors open automatically in take off at speed of about 40 mph and close automatically at end of landing roll.


Model No.	Part No.	Fits Pitot Tube Sizes	Price
1	10-02000	1/4" O.D.	\$14.60
2	10-02100	1/2" O.D.	\$14.85
3	10-04968	3/16" O.D.	\$14.85

REMOVE BEFORE FLIGHT RIBBON

REMOVE BEFORE FLIGHT

This 3" x 24" orange vinvl streamer with black letters, features a grommet for a clip ring to attach anywhere on the aircraft. High visibility, fire resistant material......\$19.50

INSTRUMENT ADAPTER KITS

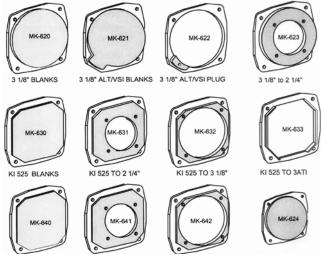

CNC Machined from aircraft grade aluminum. The adapter face is raised .075" to give the flush panel look. Easy to install and easily painted. See www.aircraftspruce.com for specifications

See www.ancranspruce.com for specifications.				
Model	Description	Part No.	Price	
MK-620	3-1/8" Blank	10-00340	\$18.75	
MK-621	3-1/8" ALT/VSI Blank	10-00341	\$18.75	
MK-622	3-1/8" ALT/VSI Plug	10-00342	\$23.95	
MK-623	3-1/8" to 2-1/4"	10-00343	\$23.95	
MK-624	2-1/4" Blank	10-00344	\$18.75	
MK-630	KI525 Blank	10-00345	\$18.75	
MK-631	KI525 to 2-1/4"	10-00346	\$21.85	
MK-632	KI525 to 3-1/8"	10-00347	\$23.95	
MK-633	KI525 to 3 ATI	10-00348	\$22.60	
MK-640	3 ATI Blank	10-00349	\$18.75	
MK-641	3 ATI to 2-1/4"	10-00350	\$23.95	
MK-630	3 ATI to 3-1/8"	10-00351	\$23.95	

PITOT TUBE COVERS PITOT TUBE BOOTY - Durable leather-like cover provides optimum protection. Velcro strap attaches booty to 5/8" or 11/16" dia. L-shaped pitot tube. Bright red "Remove Before Flight" streamer. Made of flame-proof & weather-resistant above except is slip fit over 1/4" or 1/2" dia. pitot tube. Red "Remove Before Flight" streamer is attached to cover. Made of flame-proof and weather-resistant National Aerospace

DEGROFF'S PITOT SHIELDS



67)

EMOVE BEFORE FLIGH

PITOT SHIELDS are a "fail-safe" pitot tube cover that will protect the pitot tube from contamination by insects, debris and ice while the airplane is on the ground. It is friction-fit to the pitot tube and has a calibrated "flat-plate-forward" design that, upon reaching a specific velocity, will release from the pitot tube and fall harmlessly away, allowing for normal airspeed indications. The cover utilizes EVA foam that is UV

resistant and stable at temperatures reached by heated pitot tubes. It is a highly visible color with the words "REMOVE BEFORE FLIGHT" printed and visible from all directions. This pitot tube cover is soft, but tough. It will not damage aircraft surfaces when it comes off during ground roll, nor will it be a potentially hazardous foreign-object on the runway. For 5/

For 5/8" pitot tube	P/N	10-00491	\$25.50
For 3/4" pitot tube			
For Piper pitot tube			

ALUMINUM PITOT MAST



Custom manufactured aluminum pitot mast designed for the popular Van's Aircraft RV kit aircraft. Aluminum streamline tubing is correct size for all popular pitot tubes. Aluminum mounting plate is 070" thick aluminum, precision welded to the tubing. Mounting plate measures 3" wide X 4" long. Streamlined mast is 5" long. The mounting plate has a jog on the forward side to overlap the spar flange inside the wing. This mast can be used on other popular aircraft that require a mast for the pitot tube. Blue anodized finish. Mounting instructions and template included. Made in the USA.P/N 12-04764\$71.85

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

OT TUBES

UNHEATED PITOT TUBES



STRAIGHT TYPE - Flange-mounted through leading edge of spar. Aluminum tube 24" long, 1/4" dia. May be cut to shorten. P/N 15133\$22.50

L-SHAPED TYPE - Flange mounted L-shaped model for under-the-wing mounting. 1/4" dia. aluminum tube. P/N 15135\$31.75

L-SHAPED PITOT-STATIC TUBE - Same design with static tube added. For pitot tube cover order #15220 or 10-02100 (flip up)......P/N 15144\$37.80

STRAIGHT TYPE PITOT-STATIC TUBE

Clamp-mounted for leading edge of wing. 14-1/2" long. May be shortened, formed or shaped to best angle of attack. 1/4' dia. aluminum tubes. All installation hardware furnished.

P/N 10-01800 \$29.70

STRUT TYPE PITOT-STATIC TUBE - Simple L-shaped design for clamping to strut. 1/4" dia. aluminum tubes. P/N 10-01900 \$38.00

MAST-MOUNT PITOT TUBE

Designed for mounting in 3/4" O.D. x .049" wall aluminum tubing (not furnished). Machined from solid aluminum. Includes Polyethylene hose fitting for 1/4" I.D......P/N 15170\$39.95



RAVEN PITOT STATIC TUBE Pitot system combines pitot and static functions in one

tube. Used for years on many different aircraft. Comes complete with mounting block to install it. P/N 10-00476 \$323.00



PITOT STATIC SUMP BOTTLE

This pitot-static sump bottle collects moisture in the aircraft's static system which prevents water damage

STATIC PORTS

Aluminum static port for mounting through 9/16" dia. hole in side of fuselage. Base has 1/8" NPT female port for connecting to static line (polyethylene fitting included). Install

Aluminum static port mounts from outside of fuselage through 9/16" dia. hole. Secure to skin with 9/16" Pal nut & lock






Aluminum static port mounts from outside of fuselage through .560 dia hole. Secure with four countersunk 100o 3/32" rivets. Includes one 0700-153 polyethylene fitting. P/N 15175\$22.95

Aluminum single engine Cessna type static port. External mounted through a 19/64" hole. Can be used on fabric, compos-ite or aluminum. No need for rivets. 1-3/8" dia.x1" depth. Ideal for homebuilts of all types....P/N 10-00250\$17.75





Aluminum static ports mount 1-1/4" base OD from outside of fuselage through 5/16" ID hole. Secure with 4 countersunk 3/32" rivets to skin with pal nut & lock washer on inside. P/N 10-00659 \$18.55



BOND-IN STATIC PORT SET



This aluminum static port is designed for high performance composite aircraft. Simply bond through the fuse-lage from the outside. Base has a 1/8" NPT for connecting

WINTER PITOT TUBE



The pitot tube is the sensor for aircraft instruments. It consists of a cylindrical tube open at the front to sense total pressure (measuring pressure for airspeed indicators) and slotted along the sides to sense static pres-

sure. These pressures must then be carried to the instruments by hoses.

HEATED PITOT TUBES



Aviation aircraft, Glasair &	Glastar. Threaded ou	tlet fits 1/4"
size AN tube fittings. Use	2.023x.857x.049 4130	Streamline
Tubing to fabricate mount.		
(12)(1)(10) amp)	D/NLAN5912-12	\$3 155 00

(12V) (10 amp.)	
(24V) (15 amp.)	P/N AN5812-1\$2,095.00
Phenolic connector receptacle	P/N 10-00032 \$92.75



AN5813-1 PITOT TUBE - The AN5813-1(PH500) is the standard replacement heated pitot tube for twin Cessnas with 24V systems. Draws 3-4 amps and measures 93/4" long. Mounts in 1.18 diameter tube. Dull finishP/N 10-00064 \$3.395.00

....\$92.75

FALCON HEATED PITOT TUBES



The AN5812 heated pitot tube has been used on a wide variety of aircraft over the years and is now available for experimental aircraft. Made from brass and weighing 1.5 lbs, these imported pitot tubes meet the AN specifications. Made in China.

Model No.	Description	Part No.	Price		
12-AN5812	12V, standard	10-00984	\$689.00		
12-AN5812-1	12V, Long Pipe for RV's	10-04199	\$689.00		
24-AN5812-1	24V Long Pipe for RV	10-05820	\$880.00		
12-AN5812-2	12V, left and right drain holes	10-04201	\$880.00		
24-AN5812	24V, standard	10-00985	\$795.00		
24-AN5812-2	24V, left and right drain holes	10-04202	\$679.00		
PT-001	non-heated, 1 drain hole	10-04224	\$417.00		



FALCON GAUGE PITOT TUBE MOUNTING BRACKET

Works with heated and non-heated tubes. Aluminum Alloy Standard Mounting Bracket

P/N 10-01063......\$82.75 Mounting Bracket for RV's P/N 10-02276 \$116.75

GRETZ GA-1000 HEATED PITOT TUBE

Molded from a very high-tech polymer material. Electronics embedded in the Pitot tube. Comes with a small electronic control module to control the heat of the Pitot and information to the pilot regarding perfor-

mance. A LED board that will mount conveniently on the panel. Will fit the Gretz mounting bracket kits. Come with the electronic control module, the LED board and cable, Pitot mounting screws, electronic control module mounting hardware, and complete instructions for installation and use......P/N 10-01715......\$425.00

GRETZ GA-500 UNHEATED PITOT TUBE FOR EXPERIMENTAL AIRCRAFT ONLY

Same shape and color as the heated GA-1000 Pitot tube, but does not include the heater, electronic instructions, etc. It will mount into the same Gretz mounting bracket kits.P/N 10-01716\$149.85



WELDED PITOT TUBE ASSEMBLY This non-heated non-IFR welded pitot tube assembly. It is intended for the experimental VFR aircraft market. The tube and mast are from 4130 tube welded in a fixture to assure alignment. The orifice is produced from aircraft grade aluminum. The pressure tube is polyethylene for easy connection to

the aircraft pitot system. Dimension: 6" x 5" x 2-1/2".....P/N 10-03637\$175.75



PITOT TUBE KIT 1/4" Aluminum Tubing (03-39300). Vinyl Tube for ASU (AS010.2). 1/4T x 1/8P Polyethylene Hose Adapter (0700-153). 3/8" ID Snapper Clamp (05-

PNEUMATIC TOGGLE SWITCHES



2-Way Toggle Switch, (1/8" NPT Male Inlet) for alternate static air source.

nato statio an source.		
Steel	P/N 11-12169	\$25.70
Plastic	P/N 11-12168	\$22.50

E OF ATTACK INDICATO

BENDIX KING KLR 10 LIFT RESERVE INDICATOR



The easiest stall to recover is the one that never happens. The KLR 10 Lift Reserve Indicator provides at-a-glance awareness and audible cues of remaining lift, in an easy-toinstall, easy-to-read device that's ready for your experimental aircraft. Mounted on the glare shield, it's at eye-level, exactly where you need it. Helping you takeoff with confidence,

grease more landings and fly with better Angle of Attack. The KLR 10 Advantage: Lightweight, Low-cost, easy installation with low power consumption. Accurate and instantaneous displays of lift reserve, which is the safety margin above a stall. Visual and audible cues alert you of decaying lift much earlier than traditional warning systems. Allows for guick and timely reactions. Independent of pilot-static systems, so it can be used even if the existing air-data system is compromised by ice, water or other contaminants. Optional heated probe.

rater er etner eentaminante. Optional neater	51000.		
12V Standard Probe, Swivel Mount	11-12949	\$2,825.00	
12V Heated Probe, Swivel Mount	11-12945	\$1,755.00	
24V Heated Probe, Swivel Mount	11-12946	\$3,062.00	
12V Heated Probe, Standard Mount	11-12947	\$2,286.00	
24V Heated Probe, Standard Mount	11-12948	\$1,595.00	
Accessories			
Heated Probe Option, +12vDC	11-12024	\$269.95	
Angle of Attack Probe Cover with flag	11-12027	\$37.95	
Swivel Mount	11-12028	\$86.75	

ANGLE OF ATTACK CYA 100 The CYA-100 Angle of Attack system is the only affordable FAA APPROVED TRUE Angle of Attack system on the market today! Extremely light, and extremely small, the CYA-100 is easy to install, with no extra computer boxes or hoses. The vane driven sensor is magnetically coupled. There are no small pressure ports to plug and no ball bearings to seize.

P/N 10-05682 \$625.00



IN

RITEANGLE™ BASIC SYSTEM AOA

The RiteAngle Basic, is a high quality AOA system for AOA system available to customers today.

Note: The Basic system is for aircraft without flaps only. The RiteAngle™ Basic uses electronics not available during earlier designs of RiteAngle™ systems. Although operationally similar to prior RiteAngle products, the RiteAngle Basic is a totally new, more efficient, economical design. It is a modern up to date system, that accurately determines your aircraft's angle of attack. This series uses our proven, easy-to-understand, five LED display. Green indicates Safe, Amber indicates Caution, and Red indicates Danger. The "On Speed" AOA, 1.3 Vso will be correct, regardless of bank angle, density altitude, or any of the other variables where the airspeed might be inaccurate. P/N 11-10388\$395.00



RITEANGLE™ BUDDY AOA The RiteAngle™ Buddy also uses electronics not available

during design of the initial RiteAngle™ systems. Although it is similar to the prior RiteAngle systems, for aircraft with no flaps, The RiteAngle Buddy operationally, is a totally

new design using an enhanced display. Note: The Buddy is for aircraft without flaps only. The RiteAngle™ Buddy is a modern, up to date system that accurately determines your aircraft's angle of attack. This series uses an improved easy-to-understand LED display. This instrument is designed to FAA standards. Green indicates safe, amber indicates caution, and red indicates danger.

P/N 11-06626 \$549.00 Ema AOA Basic And Buddy Sensor P/N 11-10392 \$50.00



RITEANGLE™ ELITE SYSTEM AOA

With the RiteAngle Elite system you have the advantage of having a system which was designed to the FAA quidelines for use on certified aircraft, without all the

expense of tracking of parts and having it assembled by a PMA facility, and of course not having to pay for the time, effort, and work involved in getting the STC!

The RiteAngle™ Elite is a modern, up dated system that accurately determines your aircraft's angle of attack. Easy to understand - Green Safe, Amber Caution, Red Danger. There are no computed values, the vane actually measures the relative wind.

Elite+ AOA Šystem	P/N 11-10389\$995.00
Ema AOA Small Vane Option	P/N 11-10390\$85.95
Ema Elite Enhanced Display Opt	P/N 11-10391\$200.00

LIFT MONITOR SYSTEM



Lift Monitor is FAA approved for installation on all GA aircraft, not just experimentals. The low cost of the Lift Monitor and simplicity of installation leave little excuse for not availing yourself of the safety and performance afforded by an AOA system. Working completely independently of all other aircraft systems, installation requires only a log book entry on the part of your mechanic.

Lift Monitor models are available as either a panel mount or glare shield installation. Adapters are provided for existing 2/14" and 3-18" instrument holes. A "Remove Before Flight" protective cover for the probe is included with each system.

Description	Part No.	Price
Monitor System With Panel Mount Kit	05-14964	\$389.00
Monitor System With Glare Shield Mount Kit	05-14966	\$389.00

SAFE FLIGHT PRE-STALL WARNER



Warns by light and horn of any danger of an approaching stall regardless of the flight maneuver. Never signals unless a stall is imminent. Consists of an instrument panel unit (fits standard 2.25" hole) containing a warning horn & signal light, and a small vane wing unit which operates a relay. Operation of the instrument doesn't depend upon air speed but rather on the air flow conditions of the wing. Complete with installation kit & instructions. Installation time: 2-6 hours.

Description	Model	Part No.	Price
Horn & Light	R (12V)	10-22712	\$2,449.00
	S (24V)	10-22724	\$2,465.00



SAFE FLIGHT SCC LEADING EDGE AOA SYSTEM

The SCc system is tailored specifically for certified aircraft in the general aviation market. In designing the SCc, Safe Flight built on its nearly 70 years of experience in providing aircraft manufacturers primary stall warning and AoA utilizing our patented wing lift sensor technology. The SCc system is comprised of a Lift Transducer mounted on the leading edge of

the wing and an Indexer Computer that provides a heads-up display of AoA. The SCc system delivers precise AoA information to help achieve consistent takeoff, climb, cruise, and landing approach performance through an innovative visual display and audio output. Simply stated, the SCc was designed by pilots, for pilots. The system is the most accurate and comprehensive Angle of Attack system available for your aircraft.

Note: The SCc was recently approved for use in certified aircraft. There are no STC's available. Approval is limited to single engine aircraft. Check "Application Guide" located on our website to verifiedP/N 11-13582\$2,875.00 eliaibility

STALL HORN TESTER



Quickly and easily test your stall warning horn without inhaling bugs or putting your mouth on a freezing wing. With the stall warning horn tester you no longer need a ladder to test stall horn on high wing aircraft.

It is an FAA requirement that you test the stall warning device before flight. This effective device eliminates the old way of testing the stall horn - by simply depressing the bellow and releasing the bellow "quickly". Instantly, you can tell if the stall warning horn is functioning. Thousands of this product have been sold throughout the world. The compact size allows you to store it in your flight bag or aircraft compartment.

P/N 14-01021\$9.95

THE REDDISH STALL WARNER



Developed in the UK by Nigel Reddish, these stall warners have been installed in many RV series aircraft. the vane is ground adjustable and installation is simple. Includes a micro switch and vane. For experimental aircraft only.

Note: The Mark 2 Version is practically the same as the Mark 1, the only difference is the vane on the Mark 2 is longer. The installation is the same as the Mark 1.only.

Mark I	P/N	10-00189.	\$105.75	
Mark II	P/N	10-02686.	\$104.95	

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

E OF ATTACK INDICATC



ALPHA SYSTEMS AOA FALCON KIT

(H: 2.5" D: 1.25" W: 0.865" Weight: Less than 3.00 lbs) Kit Features The Falcon display is a Light Bar Style display with a remote switch panel. With the Falcon display, when you come in for a landing you want to fly to the blue LED (on speed for landing). Should you come in with too low of an angle of attack, the display will illuminate into the yellow, telling you to put your nose up. Should you come in with too high of an angle of attack, the display with illuminate red, telling you to put vour nose down

Standard	P/N 11-12667 \$2.173.00
Pressurized	
Pressurized Kit With Hud	P/N 11-17380\$3,261.00
Pressurized Kit With Hud & Mount	P/N 11-17379 \$2,799.00

ALPHA SYSTEMS



AOA EAGLE KIT (H: 2.5" D: 1.25" W: 0.865" Weight: Less than 3.00 lbs) Kit Features - The Eagle Display is a Chevron plus Diamond Style display with a remove switch panel. With the Eagle Display, when you come in for a landing you want to fly to the blue donut (on speed for landing). Should you come in with too low of an angle of attack the yellow chevron will low of an angle of attack, the yellow chevron will light up and tell you to put your nose up. Should you come in with too high of an angle of attack, the red chevron will light up and tell you nose down. StandardP/N 11-12666 \$2,174.00 Pressurized......P/N 11-13466\$2,898.00

RITEANGLE™ INTEGRITY AOA SYSTEM FAA



Does the AOA system you are considering auto-matically correct for 5 positions of flaps? When you lower flaps you lower stalling AOA! Uses a vane like military and airliners. Automatically cor-rects for up to 5 flap positions. Designed to install easily. Many parts prefabricated. Nothing required to set up you didn't practice prior to solo! Accurate within 1 degree. Enhanced display. Modify your aerodynamics - Simply plug in set-box and reset i.e.: s.t.o.l. modification with stc. A "stand alone system". Does not tie into pitot or static lines.

P/N 11-14300 \$1,675.00

CALL OR VISIT WWW.AIRCRAFTSPRUCE.COM FOR ADDITIONAL ALPHA SYSTEMS PARTS AND KITS.

GARMIN AOA SYSTEMS



Provides AOA with a single glance during critical flight phases. Intuitive display provides both visual and audible indications of AOA. Normalized AOA provides superior performance in all flight phases. Works with G3X[™] systems with GSU 25 and GAP 26 – just add the indicator. Available for installation as a standalone system for GA aircraft.

The GI 260 receives AOA input from a GSU 25 air data computer connected to a GAP 26 probe. Since these are key components of the G3X^m flight display system, pilots of experimental/amateur built aircraft can add the dedicated AOA indicator to their aircraft by connecting as few as 4 wires. For pilots of general aviation aircraft, the GI 260, GAP 26 and GSU 25 can be added as a complete package. A universal inspection plate mount is included to aid in installation.

Description	Part No.	Price
AOA System 14/28 Volt Unheated GAP 26, GI 260, GSU 25	10-05793	\$1,549.00
AOA System 14 Volt Heated GAP 26, GI 260, GSU 25	11-13453	\$1,699.00
AOA System 28 Volt Heated GAP 26, GI 260, GSU 25	11-16608	\$1,699.00

AOA EAGLE STANDARD KIT WITH HUD



The Eagle kit has a display that is a chevron plus diamond style display. With the chevron plus dia-mond display, when you come in for a landing you want to fly to the blue donut (on speed for landing). Should you come in with too low of an angle of attack, the yellow chevron will light up and tell you to put your nose up. Should you come in with too high of an angle of attack, the red chevron will light up and tell you nose down. This kit comes with the HUD (Heads Up Display) adapter kit.

Pressurized Kit with HUD......P/N 11-17378\$3,261.00

AOA FALCON KIT WITH HUD



The Falcon kit has a vertical light bar style display. With the vertical light bar display, when you come in for a landing you want to fly to the blue LED (on speed for landing). Should you come in with too low of an angle of attack, the display will illuminate into the yellow, telling you to put your nose up. Should you come in with too high of an angle of attack, the display will illuminate red, tell-ing you to put your nose down. This kit comes with the HUD (Heads Up

Display) adapter kit.

ALPHA SYSTEMS ANGLE OF ATTACK



Model Number	Description	Part No.	Price
DSTR-AOA-7000K	12VDC Heated AOA Probe	11-14694	\$435.00
DSTR-AOA-7001K	24VDC Heated AOA Probe	11-14693	\$200.00
DSTR-AOA-7001K-12V	12VDC Heated AOA Probe	11-17382	\$450.00
DSTR-AOA-7001K-24V	24VDC Heated AOA Probe	11-17383	\$400.00
AOA-4051	6" Round + 11ft. Additional Hose	11-09304	\$408.00
AOA-4046	3.5" Round	11-09303	\$408.00
AOA-4150	8" x 4.5" Elliptical + 11ft. Additional Hose	11-09305	\$408.00
AOA-4030E	AOA Probe Installation Kit (AOA Kit Standard Wing Components)	11-12677	\$271.95

ALPHA SYSTEMS MERLIN AOA KIT



The Merlin Display is a Light Bar Style display. With the Merlin display, when you come in for a landing you want to fly to the blue LED (on speed for landing). Should you come in with too low an angle of attack, the display will lit into the yellow, telling you to put your nose up. Should you come in with too

high an angle of attack, the display will be lit into the red, telling you to put your nose down.

AOA HEATED PROBES




Heated Probe has a built in heater of 12V DC that minimizes the potential for ice build up on the leading edge of the probe. Probe comes complete with high temperature fittings and tubing. It

is a drop in replacement and can be used or upgraded in the existing Alpha Systems AOA mounting plate.

Prices Subject to Change Without Notice - Valid as of June 3, 2022.

MPASSES

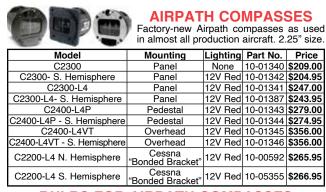

BULBS FOR AIRPATH COMPASSES 14VP/N 11-04016 \$0.95 ea 28V P/N 11-04015........\$0.50 ea

AIRPATH COMPASS REPAIR KITS

		·
Kit consists of diaphragm, 1/2pt of c	compass fluid & face glass	gasket.
Repair Kit (with fluid)	P/N 10-08000	\$12.50
Repair Kit (without fluid)	P/N 10-08020	\$10.50
Compass Fluid: 1/2 Pint	P/N 10-08100	\$2.40
Quart	P/N 10-08200	\$9.50
Airpath Compass Deviation Card Ho	older P/N 10-01658	\$2.26
Deviation Card	P/N 10-01659	\$0.95
CB21-914H - Inner gasket	P/N 10-00505	\$11.65
C21-915G Spacer gasket	P/N 10-00368	\$2.35
Diaphragm Only		
Glass Compass Lens for C2300/C2		

Glass Compass Lens for C2300/C2400 se

P/N 10-08010 \$27.90

ECONOMY COMPASS SEAL KITS

Card, (1) Diaphragm, (1) 1/2pint Compass Fluid ... P/N 10-04944...\$12.50

C2400 SERIES COMPASS HOUSINGS

C24-730A Housing for C2400L4P Top Panel Mount

P/N 10-04696\$33.50 C24-727A Housing for C2400L4VT Windshield Mount.

P/N 10-04697 \$33.55

C2400 W/R INNER CASE

This is inner case compass only. Designed to fit Airpath

FALCON AIRCRAFT COMPASSE

These compasses are very similar to the Airpath C2300 & C2400 style compasses above but are priced more eco-nomically. New manufacture. Not certified. Made in China.

Size	Model No. Description		Part No.	Price		
	Northern Hemisphere					
2-1/4"	MCPN-2L	Panel Mount, Lighted	10-02069	\$123.75		
2"	MCDN-2	Pedestal Mount	10-02071	\$127.85		
2"	2" MCDN-2L Pedestal Mount, Lighted		10-02070	\$132.95		
	Southern Hemisphere					
2-1/4"	MCPS-2	Panel Mount	10-02068	\$120.95		
2-1/4"	2-1/4" MCPS-2L Panel Mount, Lighted		10-02243	\$126.95		
2"	2" MCDS-2 Pedestal Mount		10-01704	\$127.85		
2"	MCDS-2L	Pedestal Mount, Lighted	10-05220-SO	\$134.85		

FALCON VERTICAL CARD COMPASSES

It is easy to read presentation and see the complete 360 degree dial in proper relation to your aircraft heading. 14V, lighting. 2-1/4". Made in China.

J ·	5		
Model	Description	Part No.	Price
MCVC-2L-A	N. Hemisphere Compass Only	10-05276	\$289.00
MCVC-2L-A-M	N. Hemisphere Compass & Bracket	10-04174	\$315.00
MCVC-2SL-A	S. Hemisphere Compass Only	10-04489	\$285.95
MCVC-2SL-AM	S. Hemisphere Compass & Bracket	10-04490	\$303.00
30-V-0001	Vertical Card Compass Universal Mounting Bracket	10-04175	\$31.50

PRECISION AVIATION

COMPASS KEY Precision Aviation PD-1 Compass Key. P/N 10-06424\$1.94

PRECISION VERTICAL CARD COMPASS



It is a dry compass, designed to replace the float/liquid type compass; no more leaking fluid or backward azimuth readings. It uses eddy current damping and as such has no overshoot. It consists of a 2"vertical rotating dial which is compared with a fixed miniature airplane (lubber line) to present the magnetic heading of the aircraft at all times.

Heading information is more natural because the heading is read at the 12 o'clock position and off the nose of the miniature aircraft. The compass card rotates and presents all quadrants in their true relation to line of flight. Requires no power (except for lighting) to operate. Fully TSO'd. Installed in many current production aircraft and helicopters. Size: 2-7/8"H x 2-3/8"W x 2-1/8"D. Wt. 0.6 lb. After installation, compass must be compensated using standard compensation procedures.

Bracket / mount is required for installati	on and is not included wit	h unit.
Northern Hemisphere 14V	P/N 10-00421	\$445.00
Northern Hemisphere 28V	P/N 10-00423	\$445.00
Southern Hemisphere 14V	P/N 10-00422	\$462.00
Southern Hemisphere 28V		

PAI-700 COMPASS REPLACEMENT LIGHT ASSEMBLY

14V	P/N 10-00092\$	41.50
28V	P/N 10-00093\$	41.50
5V Light Assy	P/N 10-02956\$	42.75

PRECISION COMPASS MOUNTS

PACMG-2 - Universal mount for many aircraft using a glare shield or deck mount. Models include Beech Baron and Bonanza, Cessna


 or deck mount. Models include beech baron and bohanza, Cessna Skyhawk, Skylane and Cardinal......P/N 10-07500\$48.70
 PACMO-U – Universal overhead bracket kit for customer adaptation. P/N 10-07600\$36.50
 PACMO-CESNO – Custom mount for several Cessna models using one-piece windshield & compass mounting block. Models include Cessna 150, 152, 170, 180, 182, 185 & 210...P/N 10-07700\$73.75
 PACMO-DIPER Custom mount for several Disor models with 5/0" bat PACMO-PIPER – Custom mount for several Piper models with 5/8" hat-section center windshield post. Models include Piper Cherokee, Warrior, Arrow, Archer, Lance, Comanche, Navajo & Cherokee Six.

P/N 10-07800 \$61.80
PACMO-APZ21 - Custom mount for use in Piper Apache, Aztec, &
Cessna 421
Cessna 421
mountP/N 10-07920
mountP/N 10-07920\$61.80 PACMO-KA – Beech King AirP/N 10-07921\$59.75
PACMO-EB – Early Bellanca. Compass mounted overhead.
PACMO-EB – Early Bellanca. Compass mounted overhead. P/N 10-07922\$68.75
PACMO-LB – Late Bellanca. Compass mounted on windshield.
P/N 10-07923
PACMO-2CN - Cessna early 172, 182 with compass mounted on wind-
shield with 1" center with 1" divider stripP/N 10-07924\$61.80
PACMO-340R - Cessna 340 TwinP/N 10-07925
PACMO-310R - Cessna 310P/N 10-07926\$71.75
PACMO-GTR – Grumman Tiger, Cheetah .P/N 10-07936
PACMO-MHN – Mooney compass mounted on housing covering center
postP/N 10-07927\$60.75
PACMO-HMN - Mooney compass mounted on center post with horizon-
tal screws
PACMO-VMN – Mooney compass mounted on center post with vertical
screwsP/N 10-07929\$60.75
screwsP/N 10-07929\$60.75 PACMO-PCN – Comanche with no center post use PACMG-2, twin, SE.
P/N 10-07931 \$61.80
PACMO-R22 – Robinson R22P/N 10-07932\$69.75
PACMO-R44 – Bobinson B44 P/N 10-07933 \$69 75
PACMO-RV6C – RV6 kit. (Sliding Canopy only, not tip-up) P/N 10-07934
P/N 10-07934\$68.75
PACMO-HSN3A - 32.50 40.63 Schweizer 300 & 300 CB.
P/N 10-07935
PACMO-3/4P – w/ a 3/4" postP/N 10-00426\$68.75
PACMO-5/8P – w/ a 5/8" postP/N 10-00431\$68.75
PACMO-7/8P – w/ a 7/8" postP/N 10-00432\$68.75

COMPASS COMPENSATOR

Very sensitive to stray magnetic fields within the aircraft. If the compensators of the compass will not bring the compass within tolerances, it will be necessary to install the PBB475 compensator ("balanced balls"). These balls contain magnets which permit the compass to be properly compensated. Instructions furnished. P/N 10-07900 \$61.80

MAGNETIC COMPASS SHIELD



Use this .005" x 5" x 12" metal strip to shield the precision PAI-700 compass from magnetic interference in the instrument panel P/N 11-00973 \$27.50

NON-MAGNETIC SCREWDRIVER FOR COMPASSES

This small non-magnetic screwdriver blade is ideal for adjusting magnetic compasses. This blade is durable, corrosion resistant, & can be put on a key chain until

S – ENGINE GAUG



SIRS "PEGASUS" LIT (TSO'D)

Utilizes high quality components throughout, including Silicone rubber seals, metal expansion bellows, and Tungsten Carbide pivots. Has a high-visibility spherical dis-play, and can be viewed over a 140° arc instead of the standard 90°. Fits standard 2-1/4" panel hole (by 2-1/4" deep) and weighs only 30% of a typical liquid compass. Blue/white lighted or unlighted versions, and has a 3-yr. warranty.

U ,	, ,			
NORTHERN HEMISPHERE				
Voltage	Part Number	Price		
12V	10-00498	\$425.00		
28V	10-00946	\$425.00		
SOUTHERN HEMISPHERE				
Voltage	Part Number	Price		
12V	10-02136	\$495.00		
28V	10-02137	\$495.00		

SIRS "NAVIGATOR" (TSO'D

Delivers extremely accurate readings due to its fully integrated, 4 magnet correction facility. Same features as "Pegasus", but is mounted with a fully adjustable bracket. This allows the compass to be mounted in a variety of positions located away from magnetic influences. Size: 20-3/8"h x 2-1/4"w. "Navigator"

comes in lighted or unlighted versions; 3yr. warranty.					
NORTHERN HEMISPHERE					
Part No.	Light	Price	Part No.	Light	Price
10-00496	None	\$395.00	10-00949	28V Blue	\$425.00
SOUTHERN HEMISPHERE					
Part No.	Light	Price	Part No.	Light	Price
10-02120	None	\$452.00	10-02121	28\/ L it	\$455.00

NAVIGATOR MOUNTING BRACKETS & ACCESSORIES

		-
Description	Part No.	Price
Install Kit for Pegasus Compass	10-02124	\$60.00
MF1 Short foot (self adhesive)	10-00277	\$65.00
Glareshield Mount for SIRS Nav Compasses	10-00276	\$65.00

SIRS NAVIGATOR NV2-2400X



Designed to be installed on the glareshield using the same location holes required for other compass installations. Features silicone seals. The display shows 140° of heading, as opposed to the 90° view offered by standard compasses. TSO'd Navigator comes in 6, 12, & 28V configurations, with a 3 year warranty

Northern Hemisphere				
Description	Part No.	Price		
NV2A-2400 Unlit Compass	10-00401	\$395.00		
NV2C-2400 Lit Compass 28V	10-00468	\$425.00		
Southern Hemisphere				
Description	Part No.	Price		
NAV TSOD Compass 28VLIT SH	10-02131	\$455.00		
NAV NV2A-2400 Unlit Compass SH	10-02132	\$425.00		
NV2C-2400 Lit Compass 28V SH	10-02134	\$455.00		
NAV TSOD Compass Unlit SH	10-02129	\$452.00		
Accessories	Part No.	Price		
Install Kit Nav. Series Compass	10-02123	\$60.00		

SIRS MASTER COMPASS



Graduated in 1/2 degree intervals and the compass is supplied with a calibration chart indicating any deviations in minutes of arc. Ideal for use with larger aircraft. A special reverse-read version (954-2399REV) is available to indicate the same headings as those read from the aircraft instruments

during the compass swing operation, when viewing from the front of the aircraft. Magnetic headings are viewed through a magnified prism and a special mounting Tripod is available (non-magnetic tripod) to ensure steady readings PN 10-04231 Warranty: 3 years Accuracy: Better than 30 Minutes Tilt: 7 Degrees

Detter than 50 Minutes Tht. 7 Degrees	
Standard Compass	P/N 10-04230 \$3,775.00
Reverse Read Compass	P/N 10-04817 \$3.775.00
Tripod	

SIRS HAND HELD PRISMATIC MASTER COMPASS



Designed to meet demanding requirements of the Aviation and Military environments where accurate bearings are required. Supplied with a calibration certificate and can be configured with reversed readings to assist with aircraft wings. Ideal for use with small to medium aircraft. The liquid damped card is divided in 2 degree increments. Warranty: 3 years. Dial Markings:

Degrees hit: 15 Degrees.	
Standard Compass	P/N 10-04232 \$2,510.00
Reverse Read Compass	

BARFIELD SIGHT CALIBRATION COMPASS



The SC063 is used to check the mounted aircraft compass. Our sight compass, is a portable, self contained calibration device consisting of a modified aircraft compass which has been re-screened to indicate 180° from normal. Since the sight compass is 180° away from normal, it permits the operator to stand facing the aircraft, making it considerably easier to transmit signals to and from the aircraft cockpit. The SC063 is unique in

that the compensating magnets have been removed and a combination magnifying lens and collimating sight added. The compensator has been removed so the compass indicates magnetic direction at all times and is not subject to calibration offsets. The magnifying lens increases the readability of the dial and the collimating lens insures precise sighting alignment. Attached to the rear of the compass is an adjustable sight lens......P/N 10-05357\$1,520.00

ARP CARBURETOR ICE DETECTION SYSTEM



Made in USA. Available in three (3) different mounting configurations (Panel Mount, Remote Mount and Universal Mount) thus providing flexibility for any aircraft installation. GIVES UP TO 5 MINUTES WARNING TIME by illuminating a RED visual ice warning light. LIGHT WEIGHT less than 13 ounces. SIMPLIFIED INSTALLATION keeps installation cost

down - approx. 1 to 3 man-hours. WARRANTY 3-Years on Electronics Box and 1-Year on Probe. FAA-STC SA489EA APPROVED for normal, utility and acrobatic airplanes and helicopters equipped with Continental, Franklin and Lycoming type engines and Precision Air-Motive (Facet or Marvel-Schebler) MA-2, MA-3, MA-3A, MA-3SPA, MA-4, MA-4-5, MA-4SPA, MA-5, MA-6, MA-6AA and HA-6 series carburetors. Installation on other aircraft not specified on the STC may be performed via FAA Form 337. FAA-PMA APPROVED for installation on Type Certificated aircraft. Panel Mount, 12V (107AP-12).....P/N 10-09900\$454.00 Remote Mount, 12V (107AP-R-12)P/N 10-03708\$521.00 Remote Mount, 24V (107AP-R-24)P/N 10-03709\$527.00 Universal Mount, 12 (107AP-U-12)P/N 10-03697\$485.00 Universal Mount, 24 (107AP-U-24)P/N 10-03698\$537.00 Spare Probe (107AP-P)......P/N 10-03710\$206.95

FLIGHT DATA SYSTEMS FC-10 WITH FT-60 TRANSDUCER



Flow: Instantaneous Display of Fuel Flow • Used: Fuel Used • Remaining: Fuel Remaining • Endurance: Time or Distance Remaining • Required: Fuel Required to Active GPS Waypoint • Reserve: Fuel or Time Remaining at Active GPS Waypoint Efficiency: Miles Per Gallon (or Liter) Displays Fuel Flow and Fuel Used for Each Éngine (Two Engine Systems)

Features: Communicates with Handheld or Panel Mount GPS . User Selectable Units (Gallons, Liters, Nautical Miles, Statute Miles) . Low Fuel Warning • Best Fuel Computer Value Available • Large Extreme Operating Temperature Display • Soft Orange Backlight with Automatic Brightness • 2-1/4" Panel Mount • Weighs 2.6oz, 12-28 Volt Compatible • Includes EI FT 60 (less than 350 HP - Fuel Pump) • Includes Pre-Wired Harness • Connector is pin to pin compatible with many JPI, Hoskins, and Shadin Systems.

FC-10 Single Engine (additional	sender req.)P/N	10-03150	\$399.95
FC-10 Twin Engine	P/N	10-03151	\$589.00
FC-10 Without Sender	P/N	10-03152	\$249.00

FLIGHT DATA SYSTEMS AFP-30 FUEL COMPUTER



Designed for the experimental aircraft owner who wants instantaneous flight information previously reserved only for transports and private jets. Features

complete Winds Aloft information, Airspeed information including: True Airspeed and Mach number, Altitude information such as Density Altitude and Vertical speed, and both Total and Saturated Air Temperature. Complete with GPS communication enabling it to display fuel computer data. The Performance Computer function calculates, instantaneously, Percent Horsepower based on the engine manufacturer's power chart. Backup Tachometer and Manifold Pressure indications. Compatible with most handheld and panel mount GPS units .. P/N 10-03154 \$699.00

GINE GAUGE

MID-CONTINENT INSTRUMENTS AND AVIONICS **CARBURETOR TEMPERATURE INDICATORS**



The MD-11 carburetor temperature gauge & B-5 temp. probe are designed to help eliminate carburetor icing by early detection, reduce spark plug fouling, extend engine life, increase range & power, and maximize fuel economy. Designed for use with most Marvel-Schebler & Bendix float type carburetors. FAA approved. Mounts

in 2-1/4" instrument hole. 28V carb air temp indicator onlyP/N MD-11-4......\$543.00 \$395.00 1563\$17.50

B-5 probe only	P/N B-5	\$395.00
Mating Connector	P/N 10-01563	\$17.50
28V Carburetor Air Temperature Kit		

2-1/4" UMA MANIFOLD PRESSURE GAUGES



Manifold pressure is one factor used to obtain correct power setting of the engine. The indicators are temperature and altitude compensated. Matte-white dials.

ON 3 1/8" MANIFOLD GAUGE FALC



Falcon Gauge Manifold Pressure Gauge is designed and manufactured for use on aircrafts and is a standard diaphragm pressure instrument. This indicator is temperature and altitude compensated. Manifold pressure is one of the factors required to obtain the correct power setting of the aircraft engine. Made in China. 10-50 IN HG......P/N 10-02269.......\$237.95

10-35 IN HG......P/N 10-02270 \$237.95



3-1/8" UMA MANIFOLD **PRESSURE GAUGES**

3-1/8" Gauge, 10-35Hg..... P/N 10-00080 \$312.00

P/N 10-00080

UNITED TSO'D MANIFOLD PRESSURE GAUGES

Contraction of the local division of the loc	Range	Part Number	Price
20 25	10 TO 35	10-05452	\$1,172.00
15 mentan to	10 TO 35	10-05453	\$1,839.00
-10 35-	10 TO 50	10-05454	\$1,184.00
market and the second	10 TO 50	10-05455	\$1,839.00
	10 TO 75	10-05456	\$1,184.00
	10 TO 75	10-05457	\$1,839,00

UMA FUEL/AIRBOX DIFFERENTIAL PRESSURE GAUGE



Displays the differential pressure between the fuel system and air box on turbo charge engines where it is necessary to maintain constant fuel pressure that is above the airbox pressure. Sender sold separate. (Requires the use of a 1EU007D UMA different pressure sneder.) 1 1/4"......P/N 10-00979.......\$219.95 Sender 0-7 PSIP/N 10-00980\$160.75



ROCHESTER OIL PRESSURE GAUGE

Rochester oil pressure gauges have matte-white dial with black bezel. Mount in 2-1/16" dia. hole. 1/8" NPT port fits AN910-1D coupling. New mfg. 0-80 PSI*......P/N 10-00015......\$51.75 *Chrome Bezel

MINI WATER PRESSURE GAUGE

	Range	Part Number	Price
5.	(-5)-25 PSI	10-22241	\$248.95
34	(-15)-15 PSI	10-22248	\$248.95

ROCHESTER OIL TEMPERATURE GAUGES



568

Rochester oil temperature gauges have matte-white dial with black bezel. Mount in 2-1/16" dia. hole. New manufacture. Furnished with one 5/8-18UNF X 5/8-18UNF adapter nut. Available in the following temperature ranges and capillary lengths.

P/N 10-11900 100-250°F 48" Cap.\$114.75



MCI OVERHAULED MANIFOLD PRESSURE GAUGE

The manifold pressure indicator is used in aircrafts to indicate the absolute pressure of the aircrafts engine intake measured in inches of mercury.

• Model: 6111D.22 • Range: 10-35 inch hg • Size: 3-1/8" • Weight: 13.5oz or 386g. P/N 10-07284 \$695.00 MECHANICAL OIL

length Not FAA approved.

TEMPERATURE GAUGE

quality gauge which is complete with all installation fittings. Range is 100-250° F. 5/8"-18 female capillary adapter fitting. 60" lead

P/N 10-00954 \$118.75







MILITARY OIL PRESSURE GAUGE

OIL TEMPERATURE

BULB ADAPTER

AN5771-2 Military style gauge with sq. case. Mounts in 2-1/4" dia. hole. New surplus. Matte-White Dial (0-150 PSI)P/N 10-00955\$259.00



MECHANICAL OIL PRESSURE GAUGE

Scott's quality Oil Pressure Gauge features 0-120 PSI range and 1/8 NPT thread on flared tube fitting. Not FAĂ Approved......P/N 10-00956......\$259.95

OIL PRESSURE INSTALLATION KIT

This kit contains 4 Weatherhead brass fittings with 1/8" pipe thread & 6 ft. of 1/8" Nylo-Seal tubing. Compatible

RV-12 REMOTE OIL PRESSURE SENSOR MOUNTING KIT

A new remote oil sensor kit for the Rotax 912 engine. While the lengths of this package are designed specifically



MS28034-3 ENGINE TEMPERATURE SENSOR

Presently in use in government and general aviation industry under liquid and gaseous conditions, this sensing device exceeds stringent U.S. Military Specifications for response time, burst pressure, and AC high potential tests P/N 10-01668 \$793.00

KELLY MANUFACTURING TORQUE INDICATORS



Torque Indicators are a wet line, direct reading bourdon tube type instru-ment, housed in a 2" diameter case. Unit can be calibrated over a wide rage of PSI input to direct read torque. Units can be furnished to your specifications. Indicate needed pressure input and pressure-to-torque conversion. This unit cannot be damaged by oil back up in vent line. **Dimensions**: 2" diameter x 2.125" length, **Weight**: 0.4 lbs, **Power**: Wet line direct reading pressure gage

Model No	Description	Part No.	Price
27-3007-1	0 to 1800 FT/LB, Green Arc 0 - 1628, Red Line at 1628	10-03441	\$515.00
27-3007-7	0 to 75 PSI 0 to 53	10-03443	\$645.00



KELLY MANUFACTURING OIL TEMPERATURE INDICATOR

Housed in a 2" diameter case, this instrument can be calibrated in C° or F°. Oil Temperature is sensed by a MS28034-1 resistance bulb. Dimensions: 2" Dia. x 3.12" L Weight: 0.4 lbs Power: 28VDC Connector: MS3112E8-4P 29-1004-10 - Green Arc 0° C -110° C,

Yellow Arc -40° C - 0° C Red Line -40° & 110° C P/N 10-03445\$709.00



14

ENGINE GAUGES

UMA 2-1/4" SINGLE EGT GAUGES

These highly reliable and lightweight gauges are self-contained, requiring no external power source. Specify probe size and type. Standard markings are black and white.



2-1/4" EGT Gauge

111	700-1700°F- 90° SweepF 700-1700°F- 270° SweepF Type K EGT Probes			
	1-5/8" - 2-1/2" ClampF	P/N	10-04791	\$99.95
1.0	1-2" ClampF	P/N	10-00966	\$99.95
	8mm Bayonet-Botax F			

P/N 10-22275

Optional internal lighting for all UMA 2-1/4", 3-1/8" instruments (except altimeter)... P/N 11-07239.........\$58.75 UMA 2-1/4" CHT GAUGES



NON-TSO GAUGES			
Probe/Range	Part No.	Price	
	10-05709		
UMA Probe Range: 40-150°C	10-05710	\$207.95	
VDO Probe Range: 40-150°C	10-05712	\$207.95	
Thermocouple Type J Range: 100-600°F	10-05713	\$207.95	
Thermocouple Type J Range: 50-300°C	10-05714	\$207.95	

TSO GAUGES

100 4/104	-0		
Probe/Range	Part No.	Price	
MA 1BX Thermistor Probe Range: 40-150°F	10-05716	\$256.95	
MA 1BX Thermistor Probe Range: 100-300°F	10-05717	\$256.95	
VDO Probe Range: 100-300°F	10-05718	\$256.95	
Type J Thermocouple Probe Range: 50-300°C	10-05719	\$256.95	
Type J Thermocouple Probe Range: 100-600°F	10-05720	\$257.95	
Senders not included witht the above 2-1/4" CHT Gauges.			



UMA 2-1/4" EGT GAUGES NON-TSO GAUGES

Probe/Range Part No. Price 700-1700 F Type K Sender Req. 10-05699 \$208.95 1000-2000 F Type K Sender Req. 10-05701 **\$207.95** 100-900 C Type K Sender Req. 10-05698 **\$207.95 TSO GAUGES**

Probe/Range	Part No.	Price
2-1/4 TSO EGT 100-900 C Type K Sender Required	10-05706	\$256.95
2-1/4 TSO EGT 400-1700 F Type K Sender Required	10-05707	\$257.95

UMA 2-1/4 INCH EGT



GAUGE WITH OPTI ALERT The 2 1/4", 270°, Opti-Alert warning instruments. signal the pilot when there is a problem by illuminating a Light Emitting Diode (LED). This warning indicates that an improper range condition has

arisen. Operate with a 14V or 28V system. Pressure and temperature gauges use remote mounted sensors which are sold separate.

Description	Part No.	Price
100-900 C W/ Opti Alert Type K Sender Req.	10-05702	\$231.95
700-1700 F W/ Opti Alert Type K Sender Req.	10-05704	\$231.95
1000-2000 F W/ Opti Alert - Type K Sender Req.	10-05705	\$231.95

UMA 2-1/4" WATER TEMPERATURE GAUGE



This instrument is designed to be durable yet lightweight. Excellent for a wide variety of homebuilt aircraft applications. Made in USA. Order probe separately.P/N 10-02058\$184.95 0-300°F Probes

1/8" NPT (Rotax).....P/N 10-00968......\$86.75

UMA 2-1/4" OIL TEMPERATURE GAUGE



This instrument is designed to be durable yet lightweight. Excellent for a wide variety of homebuilt aircraft applications. Made in USA. Order probe separately.

100-300°FP/N 10-22285\$184.85 UMA OPTIONAL INTERNAL LIGHTING - Optional internal lighting for all UMA 2-1/4", 3-1/8" instruments (except altimeter). This is just a lighted option. Order the instrument in addition to the internal lighting.

P/N 11-07239\$58.75



UMA 2-1/4 INCH ELECTRICAL **OIL PRESSURE TACH** 0-130 PSI ROTAX 912/914

UMA 2-1/4 Inch Electrical Oil Press Tach 0-130 PSI Rotax 912/914. 2 1/4" Air Core (270° Sweep) P/N 10-05510 \$207.95

MECHANICAL UMA 2-1/4" FUEL PRESSURE GAUGE

These factory new fuel pressure gauges from UMA fit standard 2-1/4" panel hole. They are mechanical, wetline gauges and require no sending unit

	inte gauges and require r	
1	0-25 PSI	P/N 10-02356 \$238.95
1	0-50 PSI	P/N 10-00316 \$239.95
1	0-10 PSI	P/N 10-22201 \$238.95
3	0-30 PSI	P/N 10-22203 \$239.95
	0-100 PSI	P/N 10-22205 \$239.95

MECHANICAL UMA 2-1/4" OIL

PRESSURE GAUGE

	il pressure gauges from UMA fit hole. They are mechanical, wet-
line gauges and requi	ire no sending unit.
0-50 PSI	P/N 10-22240 \$238.95
0-130 PSI	P/N 10-22242 \$238.95
10-100 PSI	P/N 10-02357 \$238.95

UMA 1" PRESSURE GAUGES

This mechanical, direct hook-up pressure indicator is ideal for monitoring the engine pump cooling system. Suitable to a wide variety of homebuilt aircraft applications. Made in USA. 0-10 PSI (water)

P/N 10-22247 \$225.95

UMA 1" OIL PRESSURE GAUGE

Case is molded ABS plastic. Wt:1.4oz. Black and white dial markings. 25-125 PSI. P/N 10-22251\$225.95

UMA 1" FUEL PRESSURE GAUGE

Case is molded ABS plastic. Wt:1.4oz. Black and white dial markings. 0-10 PSI....P/N 10-22252\$227.95

MECHANICAL UMA 2 1/4" WATER PRESSURE GAUGE

This mechanical, direct hook-up pressure indicator is ideal for monitoring the engine pump cooling system. Suitable to a wide variety of homebuilt aircraft applications. Made in USA. -15 to +15 PSI

P/N 10-22249 \$239.95 2-1/4 INCH UMA WATER

TEMPERATURE 100-300F 2-1/4 inch UMA Electronic (UMA P/N 12-360-300F°)

Water Temperature Gauge, Range: 100-300 deg. F° P/N 10-02058\$184.95

UMA 2 1/4"

FLAP POSITION INDICATOR

This 2-14" flap indicator uses a resistance potentiometer as a flap position sensor. Transmitter required. W/+· 0 8 07

VVI. 9.0 UZ.		
Indicator (0-40°).	P/N 10-22250.	\$226.95
Indicator (0-60°).	P/N 10-02442.	\$226.95
Transmitter	P/N AN5785	\$265.95

UMA OPTIONAL INTERNAL LIGHTING

Optional internal lighting for all UMA 2-1/4", 3-1/8" instruments (except altimeter). This is just a lighted option. Order the instrument in addition

MINI OIL PRESSURE GAUGE

Miniature mechanical instrument, only 1-1/4" dia., as used in many production aircraft. New manufacture. 0-125 PSI Oil Press.P/N 10-12400 \$244.95

MINI FUEL PRESSURE GAUGES

1-1/4" Dia. New manufacture by UMA. 0-10 PSI Fuel Press......P/N 10-12100 \$243.95 0-35 PSI Fuel Press......P/N 10-12200\$244.95 0-50 PSI Fuel Press......P/N 10-12300\$244.95

UMA 3 IN 1 ELECTRONIC INSTRUMENT



Combine any three electronic instruments into a 3-1/8" case. Standard product is with black and white dials, but custom range markings are available to meet customer demand for specific design.

Note - Senders are required and sold separately. P/N 10-03452 \$563.00

UMA Range Markings P/N 10-02792 \$125.00

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

IN





IA ENGINE GAUGES



UMA 2-1/4" ELECTRONIC OIL PRESSURE 270°GAUGE

Electronic Oil Pressure Gauges connect to a pressure transducer and connects to the gauge with wires. Standard dial markings are black and white.

2-1/4 inch UMA Electronic Oil Pressure Gauge Case: Valox 420 Plastic Weight: 4.7 oz.

2-1/4", 0-60 PSI, TSO'd ... P/N 10-02415 \$256.95 2-1/4", 150 PSI......P/N 10-02761.....\$184.75 SENDER NOT INCLUDED

SEE NEXT PAGE FOR SENDERS

DATCON OIL PRESSURE SENDER Thread sizes: 1/8"-27 NPTF, #10-32 terminals, Common

ground through mounting thread, 0-80 psi/0-5 bar range and



2-1/4 inch **UMA Electronic**

Fuel Pressure Gauge

Case: Valox 420

Plastic Weight: 4.7 oz.

60

2-1/4 inch

UMA Electronic

Hydraulic Pressure Gauge

Case: Valox 420 Plastic Weight: 4.7 oz.

STIL1

200 250

2-1/4 inch **UMA Electronic**

Oil Temperature

Gauge Case: Valox 420

Plastic Weight: 4.8 oz.

UMA ELECTRONIC **FUEL PRESSURE 270°GAUGE**

Electronic Fuel Pressure Gauges connect to a pressure transducer and connects to the gauge with

SEE NEXT PAGE FOR SENDERS

UMA ELECTRONIC 2-1/4" HYDRAULIC PRESSURE 270° GAUGE

Electronic Hydraulic Pressure gauge connects to a precision, high pressure transducer which mounts directly to the aircraft's hydraulic system. Standard markings are black and white. 2-1/4", 0-2000 PSI, TSO'd......P/N 10-02459.....\$257.95

> SENDER NOT INCLUDED SEE NEXT PAGE FOR SENDERS

UMA 2-1/4" ELECTRONIC OIL TEMPERATURE 270° GAUGE TSO'D

These rugged aircore gauges work with either thermocouple or thermister probes. Standard markings are black and white.

100-300° F, TSO'd P/N 10-02443 \$257.95

SENDER NOT INCLUDED SEE NEXT PAGE FOR SENDERS

UMA ELECTRONIC 2-1/4" CHT 270° GAUGE

These gauges are available for either thermocouple or thermistor probes. Standard markings are black and white

2-1/4", 100-300 °F - compatable with VDO P/N 10-02426.....\$185.80

2-1/4", 100-600 °F - 90° sweep for use with thermo-

P/N 10-02057 couple powered aircraft ... P/N 10-02429..... \$175.75 2-1/4", 100-600 °F - 270° sweep for use with internal powered aircraft

P/N 10-02057.....\$185.80

ITPE J GHT PRUBES			
10mm Spark Plug Ring	P/N 10-00960 \$85.75		
12mm Spark Plug Ring			
14mm Spark Plug Ring			
18mm Spark Plug Ring			
3/8"-24 Bayonet w/snap			

IIMA TSO'D TEMPERATURE PROBES

T3B1 1/8 NPT TSP Type K with 6' Lead P/N 10-05164\$116.75
T3B2 3/8-24 TSO Type K with 6' Lead P/N 10-05165\$117.75
T3B3 5/8-18 TSO Type Kwith 6' LeadP/N 10-05166\$117.75
T3B3A 5/8-18 TSO Type Kwith 6' Lead P/N 10-05167\$117.75
T3B11 1/4-18 TSO Type Kwith 6' Lead P/N 10-05168\$115.80



UMA ELECTRONIC 2-1/4" WATER TEMPERATURE 270° GAUGE

2-1/4 inch UMA Electronic (UMA P/N T12212U300-F000) Water Temperature Gauge Range: 100-300°F TSO2-1/4", 100-300°F TSO'd.

P/N 10-02428 \$256.95

UMA ELECTRONIC 2-1/4" **CARBURETOR AIR**

TEMPERATURE 270° GAUGE These gauges use either thermistor or electronic sensors. Standard markings are black and white. 2-1/4", -60-120 °F TSO'd... P/N 10-04670... **\$257.95** 2-1/4", -20-120 °F...... P/N 10-02391... **\$185.80**





UMA TSO'D 2-1/4 CARBURATOR AIR TEMPERATURE GAUGE

TSO'd Carburetor Temperature 2 1/4" gauge. Range from -60 - 120°F. **Note:** This is the standard black and white gauge. For color range markings as shown you must add the color range markings part no. to your order......P/N 10-03465\$257.95

UMA Color Range Markings......P/N 10-02792.......\$125.00



UMA 2-1/4" ELECTRONIC MANI-FOLD PRESSURE 270° GAUGE

Electronic Manifold Pressure gauges connect to a pressure transducer which connects to the aircraft's engine and indicates the absolute pressure in the intake manifold of the aircraft. These units are very precise and avoid plumbing issues. Standard markings are black and white.

2-1/4", 5-35 IN. HG......\$185.85P/N 10-02390\$184.99 2-1/4", 5-50 IN/ HG. SENDER NOT INCLUDED SEE NEXT PAGE FOR SENDERS

UMA 2-1/4" ELECTRONIC

OUTSIDE AIR TEMPERATURE The digital Outside Air Temperature (O.A.T.) is available in either Fahrenheit or Celsius. Standard models use a Red LED display.

2-1/4", -40-60 °C, 270° P/N 10-02387.....**\$245.95** 2-1/4", -40-140 °F, 270° P/N 10-02388.....**\$245.95**

SENDER NOT INCLUDED SEE NEXT PAGE FOR SENDERS UMA DUAL AMP/VOLTMETERS



These 2-1/4" dual amp voltmeters are ideal for any aircraft where panel space is limited. Amperage is displayed at all times, and simply push a button to display voltage. Complete with gauge and shunt. Voltage range 0-30 volts. Range:

: 30 amp	P/N	10-14680	\$348.00
60 amp	P/N	10-14685	\$349.00
			\$348.00
100 amp	P/N	10-14695	\$347.00
0-150 amp.	P/N	10-00082	\$348.00
ling	P/N	11-07230	\$58.75

UMA Optional internal lighting......P/N 11-07239\$58.75



These new manufactured ammeters offer accuracy, rugged construction, and contemporary styling. Made in U. S. A. Furnished with shunt. Size: 2-1/4". Range: 0-30 (0 center)....P/N 10-14650.....\$233.95

0-60 (0 center).... P/N 10-14655....\$233.95 0-80 (0 center).... P/N 10-14656.....\$233.95 0-100 (0 center)... P/N 10-02788.....\$233.95

REPLACEMENT UMA AMMETER

SHUNTS 30/60/80/100AMP

UMA Ammeter shunt 30AMP, 60AMP, 80AMP, and 100AMP

100/ 101 .		
Shunt 30AMP 1C1	P/N 10-02072	\$51.75
Shunt 60AMP 1C2	P/N 10-02073	\$51.75
Shunt 80 AMP 1C3	P/N 10-02352	\$51.75
Shunt 100AMP 1C4		
UMA NO	N-CERTIFI	ED

LIGHT INVERTER

UMA 24/28v & 12/14v DC TO 120 VAC/400 hz Light

Inverter large capacity. Non FAA/PMA 12/14 Volt......P/N 10-07131 \$287.95

24/28 Volt......P/N 10-07132\$286.95 **UMA OPTIONAL INTERNAL LIGHTING**

Optional internal lighting for all UMA 2-1/4", 3-1/8" instruments (except altimeter). This is just a lighted option. Order the instrument in addition to the internal lighting.......P/N 11-07239.......\$58.75



WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

G



UMA 2-1/4" FUEL FLOW 270 GAUGE

These affordable indicators display gallons/hour fuel flow in a conventional analog instrument package. Standard markings are black and white. 2-1/4" 08- GPH......P/N 10-02407\$217.95 2-1/4" 0-20 GPH P/N 10-02408 \$217.95 2-1/4" 0-30 GPHP/N 10-02409\$218.95

Fuel Flow Gauge 2-1/4" 0-20 GPHP/N 10-03706\$218.95

P/N 10-00979

UMA 2-1/4" FUEL AIR BOX 270° PRESSURE



Electronic, Fuel/Air-box Differential Pressure gauges and senders are designed for the Rotax 914 engine but have other applications where differential pressures need to be measured. It eliminates having to calculate the fuel/air-box differential pressure by looking at two separate gauges and having two separate senders. 2-1/4" 0-7 diff. PSI (U)

2-1/4 inch UMA **Fuel Airbox** Pressure Case: Valox 420 Plastic Weight: 4.8 oz.

SENDER NOT INCLUDED

UMA OPTIONAL INTERNAL LIGHTING

.....\$219.95

Optional internal lighting for all UMA 2-1/4", 3-1/8" instruments (except altimeter). This is just a lighted option. Order the instrument in addition

UMA 2-1/4" ELECTRONIC FUEL **QUANTITY GAUGE**

SENDER NOT INCLUDED

Description	Part No.	Price
2-1/4 inch UMA Electronic Fuel Quantity Indicator Range/Sweep: E-F/270° Sender: (C) 0-5V	10-02392	\$256.95
2-1/4 inch UMA Electronic Fuel Quantity Indicator Range/Sweep: E-F/180°I Sender: (C) 0-5V	10-02393	\$256.95
2-1/4 inch UMA Electronic Fuel Quantity Indicator Range/Sweep: E-F/270° Sender: (F) 240/30 ohms	10-02394	\$257.95
2-1/4 inch UMA Electronic Fuel Quantity Indicator Range/Sweep: E-F/180° Sender: (F) 240/30 ohms	10-02395	\$256.95
2-1/4 inch UMA Electronic Fuel Quantity Indicator Range/Sweep: E-F/180° Sender: (F) 0-30 ohms	10-02396	\$256.95
2-1/4 inch UMA Electronic Fuel Quantity Indicator Range/Sweep: E-F/270° Sender: (F) 0-90 ohms	10-02397	\$256.95
2-1/4 inch UMA Electronic Fuel Quantity Indicator Range/Sweep: E-F/180° Sender: (F) 0-90 ohms	10-02398	\$256.95
2-1/4 inch UMA Electronic Fuel Quantity Indicator Range/Sweep: E-F/270° Sender: (F) 78-6 ohms	10-02399	\$256.95
2-1/4 inch UMA Electronic Fuel Quantity Indicator Range/Sweep: E-F/180° Sender: (F) 78-6 ohms	10-02401	\$256.95
2-1/4 inch UMA Electronic Fuel Quantity Indicator Range/Sweep: E-F/ Sender: (C) 0-5V	10-02410	\$170.75
2-1/4 inch UMA Electronic Fuel Quantity Indicator Range/Sweep: E-F/ Sender: (F) 240/30 ohms	10-02411	\$166.75

UMA PRESSURE SENDERS

UMA's pressure senders offer high reliability a use in just about any environment.

UMA TEMPERATURE PROBES NON-TSO'D

FRATE	s
C	N

UMA Pressure ender (U)(G)(D) 1/8"-27 NPTF Connection(s) 1' Cable 5/8-18 Nounting Thread

UMA Precision

Sender (A)

and accuracy at an attordable cost. They use precision solid state sensors and are designed for rugged				
Description	PSI	Part No.	Price	
UMA Pressure Sender (U)	0-7 PSI Differential	10-00980	\$160.75	
UMA Pressure Sender (U)	0-7 PSI	10-01057	\$155.75	
UMA Pressure Sender (U)	0-35 PSI	10-01058	\$155.75	
UMA Pressure Sender (U)	0-70 PSI	10-01059	\$155.75	
UMA Pressure Sender (U)	0-100 PSI	10-01060	\$155.75	
UMA Pressure Sender (U)	0-150 PSI	10-01061	\$155.75	
UMA Pressure Sender (U)	0-60 InHg Absolute	10-01062	\$160.75	
UMA Pressure Sender T1EU35(G)(D)	0-35 PSI	10-02646	\$202.95	
UMA Pressure Sender T1EU100(G)(D)	0-100 PSI	10-02647	\$202.95	
UMA Ashcroft Precision Sender	0-2000 PSI	10-02420	\$222.95	
UMA Differential Pressure Sender	0-70 PSI	10-06223	\$160.75	

TSO'D PRESSURE SENDERS

These units are the most economical TSO'd units on the market. They feature precision, solid state sensors and circuitry to give unequalled performance for the money. Available in gauge, differential and absolute types, they are compatible with avgas, jet fuel, engine oil and many other fluids. Compatible with indicating instruments that do not have precision output voltages. Units for fuel and oil pressure are certified under TSO C47. Units for manifold pressure are under TSO C45a.

Manufacturer Number	Range	Max Pressure	Part Number	Price
T1EU35(G)(D)	0-35 PSI	145 PSI	10-02646	\$169.95
T1EU100(G)(D)	0-100 PSI	406 PSI	10-02647	\$170.75
T1EU150(G)(D)	0-150 PSI	580 PSI	10-04312	\$170.75



Temperature Prot contain a thermistor temperatur sensing (J) All 2B1X & 2B





(U) All 1BX	UMA Part No.	Sizes	Our Part No.	Price
Temperature Probes	1B1	Thread:1/8 NPT, 1/2 Hex Head	10-00968	\$86.75
contain a thermistor for	1B2	Thread: 3/8-24, 5/8 Hex Head (Auto)	10-00969	\$86.75
temperatur sensing. 6"	1B3	Thread: 5/8-18, 7/8 Hex Head (Lyc.)	10-00418	\$86.75
Lead Wires.	1B4	Thread: 10mm x 1.5 Pitch (Rotax 912 & 914)	10-00973	\$86.75
	1B5F	Thread: 3/8-24, 2-1/4" OAT F°	10-02374	\$99.75
(J) All 2B1X & 2B0X	1B6	Thread: 16mm x 1.5 Pitch	10-02375	\$85.75
Temperature	1B7	Thread: 12mm x 1.5 Pitch	10-02376	\$86.75
Probes use Type J Thermocouple. 6' Lead Wires.	1B8	Thread: 1/4-20 (Carb. Temp.)	10-01156	\$85.75
	1B10	Thread: 1/4-28	10-02377	\$86.75
		Uma 1/4-28 Carb Temp Probe 100 Ohm Rtd Sensor	10-06269	\$90.75
	1B11	Thread: 1/4-18 NPT	10-02378	\$86.75
	2B10	10mm Spark Plug Ring	10-00960	\$85.75
	2B12	12mm Spark Plug Ring	10-00961	\$85.75
(K) All 2B2X & 2B3X	2B14	14mm Spark Plug Ring	10-00962	\$86.75
Temperature	2B18	18mm Spark Plug Ring	10-00963	\$86.75
Probes use Type K	2B01	Bayonet Type: 1/8 NPT	10-02448	\$109.75
Thermocouple. 6' Lead wires	2B02	Bayonet Type: 3/8"-24, w/snap	10-00795	\$113.75
	2B20	Clamp Size: 1-5/8 - 2-1/2" Length: 1" Tip	10-04791	\$99.95
	2B21	Clamp Size: 1 - 2" Length: 1" Tip	10-00966	\$99.95
	2B30	Clamp Size: 8mm, Bayonet Length: (Rotax)	10-00967	\$99.85

1




Monitor your engine's vitals with a full line of space saving 1-1/4" engine instruments with 240 degree analog sweep. These instruments allow you the opportunity to utilize panel space without compromising readability. No longer do you have to decipher cluster gauges or push buttons for read-ings or try to concentrate on flashing numbers. These premiere UMA instrument are electronic and can be powered from 14 or 28 volts. Signals are acquired from remote mounted sensors, processed and displayed on analog dials with easy to read markings. Each gauge uses rugged aircore meter movement for vibration resistance and repeatability. Each gauge can be placed in a 1-1/4" diameter hole and mounted behind the panel with (4) 6-32 screws. They can be cluster mounted as close as 11/2" centers. Senders are sold separately. UMA Technical Support: 800-842-5578.

STREAMLINE · STACKABLE · EASY TO READ · RUGGED DESIGN

CYLINDER HEAD TEMP. (CHT)			EXHAUST GAS TEMPERATURE (EGT)			
Description	Part No.	Price	Description	Part No.	Price	
CHT Gauge 100-300°F	10-00035	\$207.95		10-00046		
CHT Gauge 100-600°F	10-00036	\$207.95		10-05696		For Experimental aircraft o
CHT Thermocouple 14mm Plug		000 TE		10-05697	\$207.95	next page for TSO'd Ga
(Rotax)	10-00962	\$80.75	EGT Thermocouple Clamp	10-04791	\$99.95	Mount individually or as a
CHT Thermocouple 18mm Plug			style (Lyc.)	10-04791	\$33.33	
(Lyc.)	10-00963	\$86.75	EGT Thermocouple 8mm,	10-00967	\$99.85	
CHT Thermocouple 3/8-24			Bayonet (Rotax)	10-00307	\$99.05	
Bayonet (Lyc.)	10-00795	\$113.75	FUEL AIRBOX PRESSURE			MOUNTING
OIL PRESSURE		· · · · · ·	Fuel Airbox Pressure	10-02401	6056 OF	INFORMATIO
Description	Part No.	Price	Range: 0-7 Diff.	10-02401	⊅ ∠50.95	
Oil Pressure Gauge 0-80 PSI	10-00037		FUEL FLOW			weigh
Oil Pressure Gauge 0-30 PSI	10-00037		Description	Part No.	Price	- 1.50" square
Oil Pressure Gauge 0-130 PSI				10-02403	\$217.95	
Rotax 912/914	10-05509	\$207.95		10-02404		
FUEL QUANTITY	L	L		10-02405		
Description	Part No.	Price	OIL TEMPERATURE			
Fuel Qty. Ind. (Float 240-30)	10-00039		Description	Part No.	Price	
Fuel Qty. Ind. (Cap. 5v)	10-00040			10-00047	\$207.95	1.10"
Sender (Float type 240-30 ohms)			1-1/4 inch VDO - TSO'd		4-01100	square
Sender (Capacitance 0-5V)	10-00030	\$150 75		10-02779	\$207.95	
Sender (Capacitance 0-5V) 10-00797 \$159.75 AMMETER			Gauges 100-300 deg F			
Description	Part No.	Price	Oil Temp. Probe 3/8-24	10-00969	\$86.75	
Ammeter ±30 Shunt incl.	10-00041		(Automotive)			
Ammeter ±100 Shunt incl.	10-00041	\$257.95	Oil Temp. Probe 5/8-18 (Lyc./Cont.)	10-00418	\$86.75	
Ammeter +60	10-00581		Oil Temp. Probe 10mm (Rotax	10-00973	\$86.75	
Ammeter +80	10-00582		912/914)	10-00973	\$80.75	
WATER PRESSURE	10 00002	\$201.00	FUEL PRESSURE			1.50" —
Description	Part No.	Price	Description	Part No.	Price	
Water Press. Gauge 0-15 PSI	10-00044		Fuel Pressure Gauge 15 PSI	10-00048	\$207.95	1.245"
Water Press. Gauge 0-30 PSI	10-00044		Fuel Pressure Gauge 30 PSI	10-00049	\$207.95	
WATER TEMPERATURE	10-00040	φ <u>201.3</u> 3	Fuel Pressure Gauge	10-00050	\$207.05	
Description	Part No.	Drice	0-80 psi	10-00050	φ201.95	0.35"
Water Temp. Gauge 100-300°F	10-02457		VOLTMETER			0.35
CARB. TEMPERATURE	10-02437	\$207.95	Description	Part No.	Price	
• • • • • • • • • • • • • • • • • • • •	Dent Ma	Duine		10-00052		The second state of the second states of
Description	Part No.			10-00578	\$207.95	Section of the sectio
Carb. Temp -60-120°F	10-05769	⊅ 207.95	FLAP INDICATOR			A start of the start of the
OUTSIDE AIR TEMPERATURE			Description	Part No.	Price	and the second second second
Description	Part No.			10-00053		
OAT (-25) -40°C	10-02385			10-00054		
OAT (-10) -110°F	10-02386	\$278.95		10-00055		
TACHOMETERS			Flap Indicator Transducer	AN5785	\$265.95	
Description	Part No.	Price	MANIFOLD PRESSURE			the second s
0-7000 RPM for Rotax	10-05507	\$235.95	Description	Part No.	Price	
447/503/582				10-02438		
0-7000 RPM for Rotax 912/914	10-05506	\$235.95	5-50"	10-02439	\$207.95	1

only. See auges. a cluster.

)N

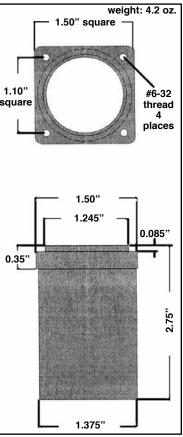

UMA 1-1/4" TSO'd ENGINE INSTRUMENTS

These 1 1/4" instruments are identical to the 1 1/4" UMA Gauges on previous page, except these are TSO'd for certified aircraft. (Except Ammeters)



UMA No.	Size & Type	Range / Sender - Sender Range	Markings & Sweep	Part No.	Price
OIL PRESSURE			,		I
TO4 113V 080P 000	1 1/4" Oil Pressure	0-80 PSI (Vdo)	B & W	10-00037	\$207.95
TO4 113V 130P 000	1 1/4" Oil Pressure	0-130 PSI (Vdo)	B & W	10-00533	\$256.95
TO4 1135 060P 000	1 1/4" Oil Pressure	0-60 PSI (Ashcroft)	B & W	10-00534	\$256.95
FUEL PRESSURE	L				I
TO4 112V 015P 000	1 1/4" Fuel Pressure	0-15 PSI (Vdo)	B & W	10-00538	\$257.95
TO4 112V 030P 000	1 1/4" Fuel Pressure	0-30 PSI (Vdo)	B & W	10-00539	\$257.95
TO4 112V 080P 000	1 1/4" Fuel Pressure	0-80 PSI (Vdo)	B & W	10-00540	\$256.95
TO4 1125 150B 000	1 1/4" Fuel Pressure	0-150 PSI (Ashcroft)	GA 59-115, RR@ 59-115	10-00545	\$256.95
WATER PRESSURE	•				
TO4 115V 015P 000	1 1/4" Water Pressure	0-15 PSI (Vdo)	B & W	10-00546	\$256.95
HYDRAULIC PRESSU	RE		1		
TO4 1145 2K0P 000	1 1/4" Hydraulic Pressure	0-2000 PSI (Ashcroft)	B & W	10-00550	\$257.95
OIL TEMPERATURE			1		
T12 113U 150C 000	1 1/4" Oil Temp	40-150 °C	B & W	10-00555	\$256.95
T12 113U 300F 000	1 1/4" Oil Temp	100-300 °F	B & W	10-00556	\$256.95
WATER TEMPERATU	RE	I			
T12 115U 150C 000	1 1/4" Water Temp	40-150 °C	B & W	10-00557	\$256.95
T12 115U 300F 000	1 1/4" Water Temp	100-300 °F	B & W	10-00558	\$256.95
CYLINDER HEAD TEM	AP. (CHT)	I.			
T12 116J 530C 000	1 1/4" CHT	50-300 °C	B & W (Thermocouple)	10-00561	\$256.95
EXHAUST GAS TEMP		L	,		I
T12 117K 1K7F 000	1-1/4" EGT	400-1700 °F	B & W (Thermocouple)	10-04945	\$256.95
T12 117K 1K7F 000	1 1/4" EGT	100-900 °C	B & W (Thermocouple)	10-00562	\$256.95
MANIFOLD PRESSUR	E				
T07 11MU A35H 000	1-1/4" Manifold Pressure	5-35 ln.	B & W	10-05523	\$256.95
FUEL QUANTITY	•				
T18 1125 1C10 000	1 1/4" Fuel Qty. Ind.	Empty To Full (Cap 5v)	B & W (2700)	10-00566	\$256.95
T18 1125 2C10 000	1 1/4" Fuel Qty. Ind.	Empty To Full (Cap 5v)	B & W (1800)	10-00567	\$256.95
T18 112F 1F10 000	1 1/4" Fuel Qty. Ind.	Empty To Full (Float 240-30 Ohms)	B & W (2700)	10-00568	\$256.95
T18 112F 1F20 000	1 1/4" Fuel Qty. Ind.	Empty To Full (Float 0-30 Ohms)	B & W (2700)	10-00569	\$256.95
T18 112F 1F30 000	1 1/4" Fuel Qty. Ind.	Empty To Full (Float 0-90 Ohms)	B & W (2700)	10-00570	\$256.95
T18 112F 1F40 000	1 1/4" Fuel Qty. Ind.	Empty To Full (Float 78-6 Ohms)	B & W (2700)	10-00571	\$256.95
T18 112F 1F50 000	1 1/4" Fuel Qty. Ind.	Empty To Full (Float 10-180 Ohms)	B & W (2700)	10-00572	\$256.95
T18 112F 2F10 000	1 1/4" Fuel Qty. Ind.	Empty To Full (Float 240-30 Ohms)	B & W (1800)	10-00573	\$256.95
T18 112F 2F20 000	1 1/4" Fuel Qty. Ind.	Empty To Full (Float 0-30 Ohms)	B & W (1800)	10-00574	\$256.95
T18 112F 2F30 000	1 1/4" Fuel Qty. Ind.	Empty To Full (Float 0-90 Ohms)	B & W (1800)	10-00575	\$256.95
T18 112F 2F40 000	1 1/4" Fuel Qty. Ind.	Empty To Full (Float 78-6 Ohms)	B & W (1800)	10-00576	\$256.95
T18 112F 2F50 000	1 1/4" Fuel Qty. Ind.	Empty To Full (Float 10-180 Ohms)	B & W (1800)	10-00577	\$256.95
(AMMETERS) not TS	O'd	· · · · · · · · · · · · · · · · · · ·			
15 11S0 P30A 000	1 1/4" Ammeter (2700) (w/shunt)	-30 to 30 A	B & W	10-00041	\$258.95
15 11S0 P60A 000	1 1/4" Ammeter (2700) (w/shunt)	-60 to 60 A	B & W	10-00581	\$257.95
15 11S0 P80A 000	1 1/4" Ammeter (2700) (w/shunt)	-80 to 80 A	B & W	10-00582	\$257.95
15 11S0 P1CA 000	1 1/4" Ammeter (2700) (w/shunt)	-100 to 100A	B & W	10-00043	\$257.95

Senders sold separately, optional internal lighting available, Range Markings available at additional cost.

Prices Subject to Change Without Notice - Valid as of June 3, 2022.

R METERS – ENGINE GAUG



HONEYWELL HOUR METERS

The LM series has been designed as a sealed, digital hour meter suitable for monitoring and recording elapsed running time. This is displayed on a digital LCD and normally shows hours and tenths of hours. They are ideally suited for applications where maintenance needs to be carried out on expensive manufacturing or

transportation equipment after a desired time frame of operation.



PRESSURE SWITCH FOR HONEYWELL **HOBBS HOUR METERS**

Normally open. Closes at 4 PSI. Single circuit with 2 insulated terminals. Switch has silver contacts enclosed in weatherproof case. 1/8" male pipe thread connectionP/N 10-00813\$48.75 Water Compatible Pressure Switch for Rotax engines. P/N 10-00326 \$68.95

For pressure switches with 1/8" male pipe threads. For 1/4" O.D 🖡 oil pressure lines P/N 10-04846 \$11.50



871 3-Hole Flange Mounting 2.54" Bolt Circle 1.45" Dia. Holes





Mounts in Standard 2-1/4" Instrument Hole

876 Bracket Mount in 2-1/32" - 2-1/8" Panel Hole

DATCON HOUR METERS

Standard equipment in most production aircraft. Operate on any DC voltage from 4-40V. Recommended for use on aircraft because they start or stop instantly when power is applied or removed. Furnished with mounting hardware. If meter is connected improperly it will not operate but meter will not be damaged. The running indicator indexes every 6 seconds.

Model 871	 P/N 56456-3	\$74.75
Model 873	 P/N 56457-3	\$74.75
Model 876	 P/N 56458-4	\$79.75

TINY TACH TACHOMETER/HOUR METERS



RPM reading adjustable from 1 spark per 2 revolutions to 8 sparks per revolution. One TINY-TACH™ now works for most gas engines. RPM display from 1 to 19,000. RPM update time 1/2 second. Hour meter

records total actual running time on your engine. Job timer can be reset to record run time for record keeping. Coax cable transmits signal without EMF interference. 1 Antenna cable winds around your spark plug

For Diesel Engines - 1/4 inch transducer .. P/N 10-04017 \$105.85





Swift Gauge Voltmetersand ammeters are 6-16V and are availble in 2-1/4" and 2" Round. MADE IN CHINA.

Size	Model No.	Description	Part No.	Price
2 1/4"	VM16-ZQ	Voltmeter, 6-16V	10-02271	\$77.75
2 1/4" round	VM16-ZQ	Voltmeter, 6-16V	10-02272	\$64.90
2-1/4"	VM30-2Q	Voltmeter, 0-30V	10-04040	\$120.75
2 1/4" round	A30-001R	Ammeter, +/-30A	10-03411	\$64.85
2 1/4"	AV60-001	Ammeter, +/-60A	10-04041	\$59.75
2 1/4" round	AV60-001R	Ammeter, +/-60A	10-03415	\$120.75
2 1/4"	AV3016-002	Amp/Voltmeter +/-30A, 6-16V	10-03412	\$99.95
2 1/4" round	AV3016-001R	Amp/Voltmeter +/-30A, 6-16V	10-03413	\$120.75
2-1/4"	AV3030-002	Amp/Voltmeter +/-30A, 30V	10-04043	\$134.75
2-1/4"	AV2-6616	Amp/Voltmeter 30-0-60, 6-10V	10-03414	\$173.90
30A	SHT-030	Shunt for Amp/Voltmeter, 50mV/30A	10-03416	\$47.70
60A	SHT-060	Shunt for Amp/Voltmeter, 50mV/60A	10-03417	\$36.65

ENM HOUR METERS



Features 6-digits with an hour glass as a running indicator - operates only when engine is vibrating. Install anywhere with no wired connection or power source to operate. Internal battery supplies all the necessary power for the gauge to operate

for years of service. Total operating hours are always shown on the LCD display. Compact tamper-proof meter is sealed against the environment to provide years of service.

- Voltage: 10-80 V DC Total dimensions: 1.43"W x 0.92"H x 2.13"D
- Face dimensions: 2.12"W x 1.25"H
- Weight: 2oz
- Power: 0.03W
- 6 Digit display
- Analog
- No reset
- Back of panel mounting

ENM Hourmeter DC Power Analog	P/N 10-05278	\$52.75
ENINA Hourmotor AC Dowor Apolog		¢00 70

ENM Hourmeter AC Power Analog	P/N 10-05279 \$88.78
ENM Hourmeter Digital Vibration Activated	P/N 10-05277 \$54.75

UNIVERSAL DIGITAL TACH/HOURMETER



Now both a digital tachometer and an hourmeter in the same low cost and small size package! No power required yet there is a large 7 segment LCD display. Solid state electronics with quartz crystal technology make this instrument highly reliable. Easy to install - just wrap the attached

wire around your spark plug cable. The case is completely sealed, it operates in a wide temperature range and the service interval is programmable......P/N TLPT14......\$61.75



BISHOP AIR SWITCH FOR HOURMETERS

Externally mounted air switch.

P/N 11-02378\$55.75

TASKEM DIGITAL TACH / HOURMETER 4000



The Model 4000 Tachometer/Timer displays RPM The Model 4000 Tachometer/Timer displays HPM in both digital and analog formats. The digital format uses a liquid crystal display (LCD)showing up to 19,990 RPM in 10 RPM steps. The LCD is backlighted for night viewing and since it uses "direct drive" it does not washout in sunlight or when viewed from an angle. The analog format is presented as a ring of light emitting diodes (LEDE) presented as a ring of light emitting diodes (LEDs) around the perimeter of the front panel. The user can easily set the range of RPM that the LEDs representP/N 15-05211 \$285.95



VOLTMETERS

These new manufacture voltmeters offer accuracy, rugged construction, and contemporary styling. Made in USA. 2 1/4" Range: 20-32VP/N 10-02064 \$185.80



DIGITAL FLAP INDICATOR The Visual Instruments Flap Indicator system

provides a means for owners of older aircraft to upgrade their troublesome indicators to a modern, more reliable design. The system includes a new transmitter, a modern digital display, and all parts necessary to perform the upgrade. The new display incorporates a color LED bar graph. The

appearance is similar to flap indications shown on modern glass cockpits. Positions of more than 10° flap are indicated in a different color. This allows for easy identification during an emergency viewable from a wide angle. This is particularly useful since the indicator on many Cessna models is located on the right side of the panel. The display automatically adjusts to the ambient light for IFR or night operation. The Flap Indicator system includes all necessary parts and typically takes a mechanic approximately 2 hours to install. 2 year factory warranty. STCd for installation on early model Cessna 172s, 182s, 205s, 206a, 8, 210a

STRUMEN

INSTRUMENT MOUNTING PODS



An economical, high-quality, easy-to-install solution to your instrument mounting problems. Made of vacuum-molded white and black ABS plastic with attractive black matte ABS faces. The white pod may be easily spray-painted with acrylic enamel to match your aircraft. Twopiece mounting brackets fit snugly around 1" tubing, secured with screws provided. Available for 2, 3, 4 or 5 instruments with the face precut and mounting holes drilled for either 2-1/4" or 2" instruments. Blank face plates also available. May be used horizontal or vertically. When you order, specify either 2-1/4" or 2" instruments holes or blank face plate. Instruments not included.

- 2 Instrument Pods: 7-1/2" Wide x 3-3/4" Tall x 3-3/4" Deep 3 Instrument Pods: 10-3/8" Wide x 3-3/4" Tall x 3-3/4" Deep 4 Instrument Pods: 13-1/8" Wide x 3-3/4" Tall x 3-3/4" Deep
- 5 Instrument Pods: 16" Wide x 3-3/4" Tall x 3-3/4" Deep

Part No.	Instr 2-1/4" Hole	Color	Price	Part No.	Instr. 2" Hole	Color	Price
10-01513	2	White	\$73.00	10-01538	2	Black	\$77.75
10-01517	3	White	\$85.50	10-01539	3	Black	\$83.00
10-01521	4	White	\$88.50	10-01540	4	Black	\$89.50
10-01525	5	White	\$85.75	10-01541	5	Black	\$92.00
10-01529	2	Black	\$78.00		Blank		
10-01530	3	Black	\$82.75	10-01542	2	White	\$73.00
10-01531	4	Black	\$89.50	10-01543	3	White	\$88.75
10-01533	5	Black	\$92.00	10-01544	4	White	\$89.50
	2" Hole			10-01545	5	White	\$85.75
10-01534	2	White	\$73.00	10-01546	2	Black	\$78.00
10-01535	3	White	\$88.75	10-01547	3	Black	\$83.00
10-01536	4	White	\$89.50	10-01548	4	Black	\$89.50
10-01537	5	White	\$79.25	10-01549	5	Black	\$92.00

SHOCK MOUNTS

For vibration and shock proofing on instruments and radios.

SQUARE PLATE MOUNT

1" Square Plate Type Lord Mounts, 6 lb. rating. Monel mounting plate. Base holes .141" dia. for 6-32 screws. Center hole .166" dia. for 8-32 screw. New surplus item - like new mfg....... P/N 10-02183.........\$12.50



n

ROUND MOUNT

As used in Cessna aircraft. Overall length 1.25". Rubber molded on 8-32 threaded projections. New manufacture. Similar to Cessna P/N J6984-8. P/N 10-14700 \$15.60



ROUND INSTRUMENT PANEL SHOCK MOUNT

Replacement Instrument Panel Shock Mount.



LORD J-14290-4 INSTRUMENT SHOCK MOUNT 5 lb rating · Metal mounting plate · .144 dia. base hole (screw size: #6) . 195 dia. center hole (screw size #10) • Aircraft: Cessna 182, 182A-182N

P/N 08-00381\$53.75



Not FAA PMA Approved. A direct reading gauge with both Fahrenheit and Centigrade graduations on the dial. It can be installed through plexiglas windshields, sheet metal cowling, or through the center strip of the windshield. Mounting Hole - Drill a .375" (3/8") + .010"/-.000" hole through the part of

the window or wall section desired. For use with a 7/16" torque wrench.

RC ALLEN 3 INCH ENGINE GAUGES 18-1000 & 18-1002 SERIES



Consists of three independent gages contained within a standard 3" diameter case. Oil temperature and cylinder head temperature gages are moving coil meter move-ment operated by MS28034-1 and AN5546-1 resistance bulbs respectively. Connection for the temperature gage is by cannon type connector: P/N MS3106A-14S-2S. FAA TSO Approved C47.

Model No.	Description	Part No.	Price
18-1000-1	28 VDC Oil Temp. 50°-250°F, Oil Press. 0-200 PSI, Cylinder head temperature 100 to 500°F		\$1,035.00
18-1000-2	28 VDC Oil Temp. 20° to 120°F, Oil Press. 0 to 200 PSI, Cylinder head temp. 50 to 250°F	10-03436	\$1,035.00
18-1000-3	14 VDC Oil Temp 50°-250°F, Oil Press. 0-200 PSI, Cylinder head temp. 100-500°F.	10-03437	\$1,035.00
18-1000-4	14VDC Oil Temp 20° to 120°F, Oil Press 0 - 200 PSI, Cylinder head temp. 50 to 250°F	10-03438	\$1,035.00



18-1002 SERIES - This gage consists of three moving coil meter movements within a 3" diame-ter case. Oil temperature is sensed by an MS28034-1 resistance bulb and cylinder head temperature is sensed by an AN5546-1 resistance bulb. Oil pres-sure is sensed by a VDO Transducer. Connection is made by a single cannon type connector: Part Number MS3106A-14S-6S.

Model No.	Description	Part No.	Price
18-1002-1	Oil Temp 50° - 250°F, Oil Press. 0 - 120 PSI, Cylinder temp. 0 - 500°F	10-03439	\$1,035.00
18-1002-5	Oil Temp 50° - 250°F, Green Arc 100° - 200°F, Red line at 249°F, Oil Press. 0 - 120 PSI, Red line 10 PSI & 100 PSI, Yellow Arc 10 PSI - 30 PSI, Green Arc 30psi - 60 PSI, Yellow arc 60 PSI - 100 PSI, Cylinder Temp 0°- 500°F, Green Arc 220° - 420°F, Red Line 460°F	10-03440	\$1,035.00

ACCESSORIES FOR 18-1000 & 18-1002 SERIES

Description	Part No.	Price
Resistance Bulb MS3106A-12S-3S	10-00958	\$24.50
Resistance Bulb MS28034-1	10-00953	\$789.00
MS3106A-14S-2S Cannon Plug	10-00790	\$20.95

Note: Use MS3106A-14S-2S Cannon Plug for instruments and MS3106A-12S-3S for Resistance Bulb MS28034-1.



HYDRAULIC PRESSURE GAUGE

AN5771-4A Military style gauge with steel case. Mounts in 2-1/4" dia. panel open-ing. Range: 0-2000 PSI. Overhauled and Certified. With fresh Matte-white dial. P/N AN5771-4A\$264.95

OCKS – TIMERS



ASTROTECH QUARTZ **CHRONOMETERS**

A fine quality 2-1/4" instrument to satisfy all cockpit clock/timer needs. 12 or 24 hour clock, 24 hour elapsed timer with time-out or hold feature, month and date. Will operate on internal battery for 2 years or can be connected to electrical system. 12 or 28V DC operation. **Does** not include internal battery.

Part No.	Model	Description	Price
10-05855	LC-2	Panel Mount Two AAA Battery Powered	\$680.00
10-06811	LC-2	Panel Mount Aircraft Powered	\$765.00

NOTE: For Aircraft Application Information on Astrotech Chronometers visit www.aircraftspruce.com

FLIGHT DATA SYSTEM ELECTRIC TACHOMETER



Tachometer: Monitors both left and right ignition systems. Works with magnetos and electronic ignition. Warns when an ignition system has failed. Engine Hour Meter: Saves engine hours in "tach time" or actual time. Flight Timer: Automatically records flight Time. Features: Large and easy to read digits. Extreme operating temperature display. Soft orange backlight with automatic brightness. 2-1/4" panel mounted. Weighs 2.6oz. Includes pre-wired connector. 12-28 volt compatible. P/N 10-03898\$174.95

AEROSPACE LOGIC 200 - CLOCK, **OUTSIDE TEMPERATURE KIT**



IN

The CA200 is an advanced, next generation airborne timepiece plus a seven input annuciator. It can scan seven 200 Series instruments and report any out-of-limit conditions the moment they occur; all on one instrument. Once identified, simply glance over the panel to view the exact cause for concern.

With the CA200 mounted either in or close to your primary panel scan you will reduce the need for consistent full panel scans and be automatically made aware of any condition

requiring attention. The CO200 is identical to the CA200 with the exception of the annuncia-tor function. Using one of the world's most accurate digital timebases they will provide precise time for years to come.

Outside air temperature functionality is TSO'd and meets the temperature accuracy requirements of SAE AS8005 for a Class IIa (+/- 1%) instrument. Functional displays include:

• UTC Time • Local Time • Chronograph • Flight Time and Interval Timer Seven annunciator sense inputs (CA200 only)

P/N 10-04348\$586.00

WESTBEND DIGITAL QUARTZ TIMER



This timer from Westbend is the perfect size for cockpit use. It times up and down, and has a large, easily readable display. With a clip on the back for mounting on a kneeboard, and includes battery. The hang card makes it easy to display, too. Counts up to and from 100 hours Includes clip, stand, magnet and hanging hole for ease in use. LCD readout. Electronic alarm. AAA battery included. 2.5" x 2.5" x .5"......P/N 13-31380......\$13.60

XREXS® DIGITAL TIMER



This timer is the perfect size for cockpit use. It times up and down, and has a large, easily readable display. With a clip on the back for mounting on a kneeboard, and includes battery. The hang card makes it easy to display, too. Specifications:
• Timer size: 2.95x 0.75x 2.56 inches • LCD display: 2.44 x 1.06 inches • Color: White • Weight: 95g • Material: ABS plastic Power: 2 AAA batteries (included)

P/N 13-23273\$28.85

SUPERCLOCK FROM **ELECTRONICS INTERNATIONAL**



Displays local and Zulu time. May be set to display in a 12 or 24-hr format. A 10-year lithium battery keeps the clock running even if the aircraft battery is removed. Displays an Up Timer, that will start running when the engine is started. Acts as an automatic Flight Timer. The Up Timer may be started, stopped or reset. A Recurring Alarm may

started, stopped of reset. A necturning Alarm may be set to alert you at appropriate time intervals. Displays a Down Timer. Displays an Engine Timer. Acts as a Hobbs Meter. When the engine starts, the Engine Timer will run. **Specifications**: 2-1/4" mount. 3.65" Depth. 10 Oz. Unit. Viewable in direct sunlight. Backlit for night operation. Operates from 7.5 to 35 volts at .3 amps P/N 10-01612 \$359.00 MID-CONTINENT CHRONOS DIGITAL CLOCK

/ MAX POWER USB CHARGERS The CH93 series, part numbers 6420093-(),



is a multi-function digital clock / chronometer / voltmeter / temperature unit with multiple options for USB Charging Ports. The unit fits into a standard, rear-mounted, 2-1/4" avionics panel cutout. Power is drawn from the aircraft main bus to light a white, six digit, seven segment LED clock. The clock can display several different modes: local time, universal time, flight timers, elapsed and countdown timers and optionally, bus

voltage and up to two temperature inputs. The CH93 display is daylight readable with two methods of brightness control. It can be controlled automatically using the internal photocell or manually with an external dimming bus voltage. The CH93 clock has an internal battery to maintain clock time and flight timer memory when the aircraft is not in use.

The USB Charging Ports are designed as DCPs (Dedicated Charging Ports) to industry-standard protocol per the USB Battery Charging 1.2 Compliance Plan. Some models also comply with the higher power requirements of USB Power Delivery 2.0 and 3.0. Early-generation or smaller consumer electronics typically accept one (1.0) amp during charging. However, newer electronics, such as tablets and larger devices can accept, and in some cases, require up to 3 amps to charge and operate.

Description	Model No.	Part No.	Price
Digital Clock Only	6420093-0	10-07369	\$449.00
Dual USB-A/USB-C PD 75 W/6A	6420093-5	10-07292	\$799.00
Single USB-A Charger 15W/3A Out	6420093-3	10-07294	\$599.00
Dual USB-A 30W/6A Out	6420093-4	10-07295	\$695.00
Dual USB-A Charger 30W/6A Out	6420093-2	10-06963	\$635.00

PRECISION QUARTZ AIRCRAFT CLOCKS



Designed for accuracy, this precision clock is manufactured to meet rugged aircraft environmental standards. High-quality, solid state quartz movement.

Comes with a factory one year limited warranty. Features: FAA/PMA approved. Precision quartz movement. Transient and reverse polarity pro-tected. One year limited warranty. Continuously

powered by aircraft battery. Low power consump-tion (3mA). Fits standard 2-1/4" panel hole **Specifications**: Dimensions: 2.5 x 2.5 x 3.2 inches max. Weight: 0.5 lbs.. Altitude: -1,000 to +55,000 feet. Mounting: Front or rear panel.

Lighted Quartz Electric Clock (14V)P/N 10-00460\$357.00 QUARTZ ELECTRIC AIRCRAFT CLOCKS



These clocks are constructed for easy installation in a wide variety of aircraft. The rugged guartz movement is accurate within 2 seconds in 24 hours under normal operations and runs accurately in temperatures from -30°-180°F. The clock kit includes a power harness, mounting screws and installation instructions. The clock features adjustable red elapsed time hands.

24VP/N 10-22824\$153.75

MID-CONTINENT INSTRUMENTS AND AVIONICS QUARTZ ANALOG ELECTRIC CLOCK



FAA PMA approved. Precision quartz move-ment. Compact 2 1/4-inch size - fits standard panel cutout. Transient and reverse polarity protected. Original equipment for many major aircraft manufacturers Low power consumption (3 mA). Continuously powered by aircraft battery One year limited warranty. Lighted.

MD-90L 14VP/N 10-00460 \$357.00 MD-90L 28VP/N 10-04615\$357.00

WWW.AIRCRAFTSPRUCE.COM

<u>.0CKS – T</u>

FLIGHT TIME CONTROL

P Model: Controlled by programmable Airspeed with solid state pressure sensor

G Model: Gets TAS from GPS source

Solid state speed sensor for internal take off and landing speed Speed level is adjustable for different aircraft from the protected set up menu Stores up to 4,000 flights with date, departing and landing time Daily totals with number of landings like a trip meter in cars; this is very helpful if you have a lot of short flights a day. (Example: Glider Towing or Parachuting) Adjustable plain total as reference for maintenance and log book MFG in Switzerland to precise standard.

FLISYS 57 - FLIGHT TIME INFORMATION SYSTEM



Features:

- Internal Real Time Clock

- Records Departing Landing time and date Records Aircrafts Total Flight Time Programmable "On Air" output for Transponders
- Controlled by programmable Airspeed with solid state pressure sensor
- Power Supply 12 to 24 V DC
- 2-1/4" TAS From GPS FLISYS57G.....P/N 10-05103.......\$499.95

FTC 57 - FLIGHT TIME INFORMATION SYSTEM



Easy Flight Time Controlling for Basic Training, Glider Towing, Parachuting. FTC 57:

- · Counts Time Hours and Minutes
- 57mm (2-1/4") round
- FTC with same front size as Hobbs time counter
- Easy initial time set with 2 push buttons on back side

FLIGHT TIME INFORMATION SYSTEM FTC (RECTANGULAR)



- Easy Flight Time Controlling for Basic Training, Glider Towing, Parachuting. FTC:
- **Counts Time Hours and Minutes**
- 37x24 mm rectangular
- FTC with same front size as Hobbs time counter Easy initial time set with 2 push
- buttons on back side

· Input for On/Air from external switch or GPS system with output · Power supply is 12 V to 24 V DC37x24 mm Rectangular P/N 10-05107 \$298.00



ASA FLIGHT TIMER

Ergonomically designed and engi-neered for reliability, ease and conve-nience, the ASA Flight Timer should be considered essential equipment for all aviatiors. Features: Large LCD backlit display, multi-function clock and three simultaneous timer options. Exclusive digital notepad for squawk codes or frequencies, stores up to 12 approach times, audible and visual alarms.

P/N 13-02357 \$39.95



WESTBEND **ELECTRONIC TIMER**

The jumbo LCD display on this electronic timer displays time in hours, minutes and seconds. Includes clock feature, electronic alarm, clip, stand, magnet and hanging hole for versatile use. AAA Battery included.

P/N 17-00240\$16.75



WESTBEND ELECTRONIC TRIPLE TIMER/CLOCK

Features of this electronic timer include a continuous running clock that displays hours, minutes, seconds, and AM/PM mode, three timing channels that count to and from 100 hours, and three distinctive alarms.

Additional Features: Memory recalls previous time setting. Times three activities at once. Alarm beeps for one minute and counts up to show elapsed time. Easy-to-read large LCD display. Clip, stand, magnet and hanging hole for versatile use. Specifications: One AAA battery included. 2.5" x 3" x 1". P/N 17-00239\$18.95

MID-CONTINENT CHRONOS DIGITAL CLOCK / MAX POWER USB CHARGERS



The CH93 series, part numbers 6420093-(), is a multi-function digital clock / chronometer / voltmeter / temperature unit with multiple options for USB Charging Ports. The unit fits into a standard, rear-mounted, 2-1/4" avionics panel cutout. Power is drawn from the aircraft main bus to drawn from the alrorant main bus to light a white, six digit, seven segment LED clock. The clock can display several different modes: local time, universal time, flight timers, elapsed and countdown timers and optionally, bus voltage and up to two temperature

inputs. The CH93 display is daylight readable with two methods of brightness control. It can be controlled automatically using the internal photocell or manually with an external dimming bus voltage. The CH93 clock has an internal battery to maintain clock time and flight timer memory when the aircraft is not in use.

Description	Model No.	Part No.	Price
Dual USB-A/USB-C PD 75 W/6A	6420093-5	10-07292	\$799.00
Single USB-A Charger 15W/3A Out	6420093-3	10-07294	\$599.00
Dual USB-A 30W/6A Out	6420093-4	10-07295	\$695.00
Dual USB-A Charger 30W/6A Out	6420093-2	10-06963	\$635.00

Prices Subject to Change Without Notice - Valid as of June 3, 2022.

WWW.AIRCRAFTSPRUCE.COM

INSTRI

DIGITAL CHRONOMETERS AND **CLOCKS**

MODEL 803

4.38

UT, LT, FT, & ET FT & ET Visual Alarm External Output for Optional Audio Alarm(FT/ET) 0 • . Aircraft Voltage OAT F & C (12Ft. Temperature Probe) Internal Lighting C 3:4 3 AA Memory Battery Input Voltage 11 to 28 Volts NVIS (NVG) Option Green A

Description	Part No.	Price
UT, LT, FT, & ET Digital Clock 5V Lighting, Voltmeter, OAT (F & C)	10-03304	\$480.00
UT, LT, FT, & ET Digital Clock 14V Lighting, Voltmeter, OAT (F & C)	10-25520-14	\$446.00
UT, LT, FT, & ET Digital Clock 28V Lighting, Voltmeter, OAT (F & C)	10-25520-28	\$494.00
803-5V With Night Vision Lighting Green A	10-03342	\$609.00
803-14V With Night Vision Lighting Green A	10-03343	\$605.00
803-28V With Night Vision Lighting Green A	10-03344	\$677.00
C307PSTemperatureProbe12Ft.Coax(Analog)	11-04603	\$148.75
Audio Alarm Son-Alert	11-04610	\$46.65

MODEL 800



20:15

External Output for Optional Audio Alarm (ET)

NVIS (NVG) Option Green A

Available for Beechcraft yoke

Internal Lighting

MODEL 800 Illuminated Buttons

- GMT, LT & ET ET Counter (UP/DOWN),
- Visual Alarm Model 800 AA Memory Battery (Optional)
- Input Voltage 11 to 28 Volts

 • 5 volt and 28 volt lighting units need at least 20 volts on main power input for clock to operate. For 14 volt systems, order a clock with 14 volt lighting.

٠

Description	Part No.	Price
GMT, LT, & ET Digital Clock 5 Volt Lighting (800)	10-03323	\$203.95
800-5V With Battery Holder (AA)	10-03305	\$223.95
800-5V With Night Vision Lighting Green A	10-03324	\$291.95
800-5V NVG With Memory Battery Holder (AA)	10-03325	\$315.00
GMT, LT, & ET Digital Clock 14V Lighting (800)	10-04508	\$204.95
800-14V With Memory Battery Holder (AA)	10-02050	\$222.95
800-14V With Night Vision Lighting Green A	10-03330	\$339.00
800-14V NVG With Memory Battery Holder (AA)	10-03331	\$365.00
GMT, LT, & ET Digital Clock 28V Lighting(800)	10-24535-28	\$209.95
800-28V With Memory Battery Holder (AA)	10-02051	\$227.95
800-28V With Night Vision Lighting Green A	10-03335	\$376.00
800-28V NVG With Memory Battery Holder (AA)	10-03336	\$398.00
800-5V, Illuminated Buttons, Battery Holder	10-04730	\$309.00
800-14V, Illuminated Buttons, Battery Holder	10-04574	\$312.00
800-5V NVG, Illuminated Buttons, Battery Holder	10-04576	\$400.00
800-14V NVG, Illuminated Buttons, Battery Holder	10-04577	\$495.00
800-28V NVG, Illuminated Buttons, Battery Holder	10-04578	\$564.00

MODEL 811



- Six-digit Display on all 3 Functions.
- . Time Function (12 OR 24HR Selectable) FT & ET •
- Bright Sunlight Readable Displays •
- Memory Battery Included
- Input Voltage11 to 28 Volts •
- . NVIS (NVG) Option Green A

Description	Part No.	Price
LT, FT, & ET Clock	10-24550-14	\$640.00
811B With Gray Faceplate	11-09414	\$645.00
Model 811 With Night Vision	10-03346	\$720.00

Accessories / Replacement Parts	Part No.	Price
811 Dropping Resistor	11-04607	\$8.55
811 Memory Battery Pack	10-24560	\$32.50
811 Inverting Cable	11-04608	\$41.80
811B Female Connector (Standard Cable)	11-04609	\$38.50
KW-505FDigital Display for Model 811B	11-04613	\$47.95

DIGITAL CHRONOMETERS AND CLOCKS MB800 Illuminated Buttons

MB800 (Beechcraft Yoke)



- GMT, LT & ET
- ET Counter (UP/DOWN), Visual Alarm
- Input Voltage 11 to 28 Volts
- NVIS (NVG) Option Green A Available for Beechcraft yoke

External Output for Optional

20:12

Internal Lighting

Audio Alarm (ET)

	Description	Part No.	Price
MB800-5V	(Black)	10-03341	\$187.75
MB800-14V	(Black)	10-02649	\$199.75
MB800-28V	(Black)	10-02651	\$202.95
MB800-5V	(Cream)	10-04581	\$196.75
MB800-14V	(Cream)	10-02906	\$207.95
MB800-28V	(Cream)	10-03340	\$212.95
MB800-5V	(Black) NVG Green A	10-04582	\$300.95
MB800-14V	(Black) NVG Green A	10-04583	\$334.00
MB800-28V	(Black) NVG Green A	10-04584	\$399.00
MB800-5V	(Cream) NVG Green A	10-04585	\$326.00
MB800-14V	(Cream) NVG Green A	10-04586	\$346.00
MB800-28V	(Cream) NVG Green A	10-04587	\$381.00
MB800-5V	(Black) Illuminated Buttons	10-04588	\$292.95
MB800-14V	(Black) Illuminated Buttons	10-04589	\$292.95
MB800-28V	(Black) Illuminated Buttons	10-04590	\$289.95
MB800-5V	(Black) NVG Green A, Illuminated Buttons	10-04591	\$315.00
MB800-14V	(Black) NVG Green A, Illuminated Buttons	10-04592	\$484.00
MB800-28V	(Black) NVG Green A, Illuminated Buttons	10-04593	\$549.00

Model 850 NVG

Front Mount

Model 877 Rear Mount

Model 850 Front Mount



- GMT, LT, FT, & ET
- FT & ET Visual Alarm • External Output for Optional
- Audio Alarm(FT/ET) Bright Sunlight Readable displays.
- Illuminated Displays



- Battery Model 877 AA Memory Battery
- Input Voltage 11 TO 28 Volts • NVIS (NVG) Optional Green A (850 & 850-2)

Description	Part No.	Price
GMT, LT, FT, & ET Clock 5V Lighting (850)	10-03310	\$484.00
850A-5V-With Gray Faceplate	10-03311	\$490.00
850-5V With Night Vision Compatibility (Green A)	10-03306	\$650.00
850A-5V-NVG With Gray Faceplate	10-03347	\$658.00
850-2-5V Rear Mount Night Vision (Green A)	10-04725	\$658.00
GMT, LT, FT, & ET Clock 14V Lighting (850)	10-03312	\$485.00
850A-14V With Gray Faceplate	10-03348	\$489.00
850-14V With Night Vision Compatibility (Green A)	10-03349	\$696.00
850-2-14V Rear Mount Night Vision(Green A)	10-04726	\$615.00
850A-14V-NVG With Gray Faceplate	10-03350	\$696.00
GMT, LT, FT, & ET Clock 28V Lighting (850)	10-03313	\$515.00
850A-28V With Gray Faceplate	10-03314	\$494.00
850-28V With Night Vision Compatibility (Green A)	10-03351	\$699.00
850-2-28V Rear Mount Night Vision(Green A)	10-04727	\$636.00
850A-28V-NVG With Gray Faceplate	10-03352	\$708.00
GMT, LT, FT, & ET Clock 5V Lighting (877)	10-03308	\$519.00
877A-5V With Gray Faceplate	10-03309	\$522.00
GMT, LT, FT, & ET Clock 14V Lighting (877)	10-24545-14	\$471.00
877A-14V With Gray Faceplate	11-05879	\$477.00
GMT, LT, FT, & ET Clock 28V Lighting (877)	10-24545-28	\$519.00
877A-28V With Gray Faceplate	11-05880	\$532.00
Audio Alarm Son-Alert	11-04610	\$46.65

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

RON INSTRUM



AGGEGGONIEG / NEFLAGEMENT FANTS									
Description	Part No.	Price							
KW-105G Display for Model 303, 307, 655, 880, & 903	11-04611	\$47.65							
KW-115G Display for Model 303, 655, 850, 877, & 880	11-04612	\$54.75							
KW-505F Digital Display for model 811B	11-04613	\$47.95							
800 Series Alarm Son-Alert	11-04610	\$46.65							
Temp Probe - 7Ft Red/Black Twisted (Analog)	10-00653	\$136.75							
Temp Probe - 12Ft COAX C307PS (Analog)	11-04603	\$148.75							
Temp Probe for 307CD/307FD (Analog)	11-04602	\$139.95							
Temp Probe 12Ft COAX D307PS (Digital)	11-10717	\$88.50							

See our website for additional sizes.

WWW.AIRCRAFTSPRUCE.COM

IN







rm · Aircraft Voltage (451)

ay • Bright Sunlight Readable Display

• OAT (F)

•

OAT (C)

Bright Sunlight Readable Displays

Complete with 12 FT. Digital Probe

Part No.

10-03316 \$187.75

10-08512 \$195.75

10-03317 \$189.75

10-04544 \$191.75

10-04546 \$191.75

10-04547 \$190.75

M307FCE

Amber LED 10-08312 \$182.75

Green LED 10-04543 \$190.75

Green LED 10-04545 \$194.75

10-04548

10-04549

10-04551

· Input Voltage 11 TO 28 Volts.

Part No.

10-08513

11-05881

10-04552

Part No.

10-03318 \$286.95

11-05882 \$391.00

10-04558 **\$145.90**

Price

\$190.95

\$196.75

\$194.75

Price

\$230.95

\$212.95

\$239.00

Price

Input Voltage 11 TO 28 Volts.

Color

Amber LED

Amber LED

Amber LED

White LED

White LED

Green LED

White LED

Green LED

White LED

M307FCI

Input Voltage 11 TO 28 Volts.						
Description	Part No.	Price				
Voltmeter (450), Amber LED	10-24505	\$152.75				
Voltmeter (450), Amber LED, Remote Sensing	10-04555	\$176.75				
Voltmeter (450), Green LED	10-04553	\$154.80				
Voltmeter (450), Green LED, Remote Sensing	10-04556	\$183.75				
Voltmeter (450), White LED	10-04554	\$153.75				
Voltmeter (450), White LED, Remote Sensing	10-04557	\$179.75				
Voltmeter (451), Red LED	10-02819	\$146.75				

· Minimum panel Space

h.	MODEL 450
	 Aircraft Voltage with Flashing Alau Bright Sunlight Readable Displa Input Voltage 11 TO 28 Volts.
	input voltage in re ze volte:

Description	Part No.	Price
Volt/Amm Meter 14V Lighting (Single Shunt)	10-03319	\$277.95
Volt/Amm Meter 28V Lighting (Single Shunt)	10-03320	\$278.95
Volt/Amm Meter 14V Lighting (Double Shunt)	10-03321	\$310.00
Volt/Amm Meter 28V Lighting (Double Shunt)	10-03322	\$299.95
Volt/Amm Meter 14V Lighting (Single Shunt) With Night Vision Compatibility Green A	10-04562	\$394.00
Volt/Amm Meter 28V Lighting (Single Shunt) With Night Vision Compatibility Green A	10-04564	\$394.00
Volt/Amm Meter 14V Lighting (Double Shunt) With Night Vision Compatibility Green A	10-04566	\$394.00
Volt/Amm Meter 28V Lighting (Double Shunt) With Night Vision Compatibility Green A	10-04567	\$395.00



CHELL MECHANICAL TACHOMETERS

In 1985 AC discontinued production of the popular "RT" series of mechanical tachometers. Mitchell immediately entered the market to fill the void. These tachs feature exceptional accuracy and reliability. Mitchell tachs come with a factory-direct 2 year warranty. The range on all models is 500 to 3500 RPM. Accuracy is +/- 25 RPM from 1000 to 3000 RPM. Determine the correct part number from the chart below. All Mitchell tachs are FAA approved to TSO-C49b for certified aircraft. 2-1/4" tachs are direct replacements for the 3-1/8" tachs to save panel space. \$30.00 for custom range marks (specify ranges). \$12.50 to set hours (specify hours).



Mitchell P/N Our P/N Mitchell P/N Our P/N Mitchell P/N Our P/N Price Price Price D1-112-5023 10-24623 \$315.00 D1-112-5025 10-24625 \$315.00 D1-112-5034 10-24634 \$307.00 D1-112-5122 10-24622 \$315.00 D1-112-5032 10-24632 \$325.00 D1-112-5029 10-24629 \$325.00 \$325.00 D1-112-5030 10-24630 D1-112-5028 10-24628 \$305.00 D1-112-5024 10-24644 \$315.00 D1-112-5124 10-24624 \$325.00 2566 Cruise RPM Clockwise P/N 98480-2.... .2-1/4" TACH (98480-2) \$322.00

2-1/4" Tach

IFR P/N	Mitchell P/N	Stewart Warner No.	АС Туре	Direction of Rotation	Average Cruise RPM	APPLICATION (REPLACEMENT FOR ORIGINAL EQUIPMENT INSTALLATIONS)
55-35-7	D1-112-5023	P-551-AZ	RT-7	Clockwise	2300	Aero Commander: A9, A9A, A9B Aeronca: 15AC Sedan Alon: F1, F1A, A-2, A-4 & 415C. D, E, F, G (Including Ercoupe and Forney) Grumman/American: AA-1, AA1A, AA-5 Beech: C35, D35, E35, F35 Bellanca/Champion: 7EC, 7FC, 7GC, 7HC,7GCB, 7K, 7ECA, 7GCAA, 7GCBC, KCAB, 8KCAB, 260, 14-19, Viking 300, TurboViking Call: A , 114 Taylorcraft: 19,15A, 20, 20AG, Zephyr Temco: (Swift; GC-1, GA-1B)
55-35-8	D1-112-5122	P-551-AYZ	RT-8	Clockwise	2050	Beech: 35, A3S, B35, 35R
55-35-9	D1-112-5030	P-551-AZH	RT-9	Counter- clockwise	2300	Aeronca: Champion, Chief (early models) Piper: PA15, PA18, (W/TCM eng)
55-35-10	D1-112-5124	P-551-AZJ	RT-10	Counter- clockwise	2050	Aeronca: Champion, Chief (late models) Champion: 7AC, 11AC, 7CCM Beech
55-35-11	D1-112-5025	P-551-TA	RT-11	Clockwise	2566	Bonanza Models: G35 thru V35, V35TC, 36, A36, 95, B95, B95A, D95A- All Musketeer Models. All Debonair Models Cessna: 150, 152, 172, 177, 185 & 188 (with IO-520 eng), 206, 207, 210, 310, 320 Helio: H250, H391, H392, H395 Navion: E, F, G Stits: SA9A, SA9B Bellanca/Champion: 7AC
55-35-12	D1-112-5032	P-551-AZK	RT-12	Counter- clockwise	2566	Stinson: 105,108
55-35-14	D1-112-5028	P-551-AZA	RT-14	Clockwise	1800	Aero Commander: (Ayres Corp.) B1A, S2B, S2C, S2D, S2R Stearman: A75 (P & W eng.)
55-35-15	D1-112-5034	P-551-AZB	RT-15	Clockwise	3000	Cessna: 175
55-35-16	D1-112-5029	P-551-AZL	RT-16	Counter- clockwise	1800	Grumman: G164
55-35-17	D1-112-5024	N/A	RT-17	Clockwise	2400	Maule: M5/6/MX7-180, M5/6/7/MX7-235

Cub Face Dial 3" CW......P/N 10-05450......\$66.75

Cub Face Dial 3" CCW......P/N 10-05451......\$67.75

*The specific tachometer listed is best suited if the installation has this approximate cruise rpm. Direction of rotation must be compatible with the previous tachometer that was used. Direction of rotation is defined as when viewing the front of the tachometer.



SLI AIRCRAFT TACHOMETERS

For three decades, Superior Labs, Inc. (SLI) has supplied the aircraft OEM's with the finest quality and most reliable mechanical tachometers in the industry for new production aircraft and can be customized for a variety of aircraft applications. These are now available to the public as aftermarket tachometers Specifications:

Accuracy to within ± 25 RPM • Range 0-3500 RPM • Diameter 3-1/8" • Length 3-1/2" • Weight: 13 Oz. • Two Years Warranty

Most Models							
Accessories	Part No.	Price		Accessories	Part No.	Price	
SLI Custom Range Markings	10-03685	\$150.00		SLI Tach Hours Set	10-03673	\$150.00	
Sli Tach Lighting	10-03672	\$150.75					

SEE WWW.AIRCRAFTSPRUCE.COM FOR APPLICATION CHART, PART NUMBERS, AND PRICES.

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

TACHOMETERS



RIGHT ANGLE TACH DRIVE

Instrument right angle tach drive. All connections and case are Aluminum and connects from gauge to tach cable. Reversible: Can be configured clockwise & counter clockwise rotations.

P/N 10-05504 \$165.75



DUAL TACHOMETER DRIVE

Adapter screws to the male thread on the back of the tachometer. The two tachometer cables screw onto the opposite sides of the dual adapter. 1:1 Ratio. P/N 10-01445\$179.95



ENGINE RIGHT ANGLE DRIVE Female end attaches to engine tach drive outlet.

Male output end accepts standard tach cable female nut (7/8-18 thread). Eliminates bending of tach cable at the engine in cramped installations. Designed for heavy-duty service. Gears and shafts are of heattreated alloy steel. Oil impregnated sintered bronze shaft bearings. Cast iron case and fittings. With lubricator fitting for greasing. 1:1 ratio.

P/N 10-00814 \$111.75



TACHOMETER CAP

This Tach Cap can be used to close off the tachometer drive of a Lycoming or Continental engine when an electronic tach drive is being used off the magneto or electronic ignition. 7/8" thread and Viton (R) O-ring to seal. P/N 10-06754\$32.50 ea.



FALCON 2-1/4" MECHANICAL TACH

Falcon T2-001U Tachometer - For both point and Ducati Ignitions. Standard pointer type. Universal, 0-8000rpm, Point and CDI. Compatible with rotax point and CDI ignition, not compatible with 912, 914. P/N 10-00816.......\$128.75



WESTACH TACHOMETERS

CLamps to ultralite tubing or motorcycle handle bar. Swivels 360° at any angle. Furnished with chrome plated installation hardware. SINGLE TACH (Tachometer requires no sender.)

PWR By	Application	RPM	Head Type	MFR PN	Part No.	Price
CDI	2 or 6 imp alt (Rotax, 2Si, Hirth, Arcticat)	0-8000	Round	2CT8A-2/6	10-01302	\$147.75
Mag	2/4 cyl. dist/mag & 1/2 VW	0-3500	Square	2AT3-2	10-01275	\$164.75
Mag	2/4 Cyl. uist/11/ag & 1/2 V W	0-5000	Square	2AT5-2	10-01294	\$169.50
CDI	2 or 6 imp alt. (Rotax, 2Si, Hirth, Arcticat)	0-8000	Square	2AT8A-2/6	2AT8A- 2/6	\$164.75
CDI	Jabiru 5 imp alt.	0-3500	Square	2AT3A-5	10-00478	\$164.75
CDI	Jabiru 6 imp alt.	0-3500	Square	2AT3A-6	10-00479	\$164.75

WESTACH 2-1/4" TACH/HOUR METERS



SQUARE				ROUND		
PWR By	Application	RPM	MFR PN	Part No.	Head Type	Price
Mag	2/4 cyl. dist/mag	3500	Y2AT3-2	10-01305	Square	\$289.95
Mag	& 1/2 VW	8000	Y2AT8-2	10-01690	Square	\$289.95
CDI	2 or 6 imp alt (Rotax, 2Si, Hirth, Arcticat)	8000	Y2CT8A-2/6	10-01694	Round	\$318.00

Made in the U.S.A

TACHOMETER CABLES



Select the proper length from the listing, but measure old tach cable to verify length in chart is correct for your aircraft, as tach cables can vary from aircraft to aircraft. Over-length cables can cause problems - order one that fits the installation. Select the proper length from the listing, but measure old tach cable to verify length in chart is correct for your aircraft, as tach cables can vary from aircraft to aircraft. Measure original cable from end of Ferrule to end of Ferrule when fully extended. Inner tach cables are measured and the other is keyed. Tach cable save male ends only. One end is squared and the other is keyed. Tach cable assemblies have 7/8-18 on one end and 5/8-18 on the other, female nuts only.

Custom length tach and inner cables are available. Please contact sales for price and lead time of custom cable. You will be required to provide length and rotation. Additional information of aircraft, engine, make, model & dash number may be required.

Note: General rule for installation: Tach cable should be installed as straight as possible - the inner cable length will decrease 11/16" per 360 degrees of bends.

Available in left and right lay rotation. Add -R to the part number for Right Lay.

See our website for additional lengths.

Part No.	Length	Price	Part No.	Length	Price
10-02675	22"	\$69.90	10-00012	46"	\$78.75
10-15700	29-1/2"	\$73.75	10-16400	42"	\$78.75
10-15800	26"	\$73.75	10-16500	34"	\$73.75
10-15900	29"	\$73.75	10-16600	32"	\$73.75
10-16000	25"	\$73.75	10-16700	35"	\$74.75
10-16100	37"	\$78.75	10-16900	48"	\$78.75
10-16200	36"	\$73.75	10-16910	52"	\$83.75

UNIVAIR TACHOMETER CABLES



Description	Part No.	Price
Recording Tachometer Cable U1713-R325	05-21949	\$157.75
Non-Recording Tachometer Cable U1713-N340	05-21950	\$147.75

BELITE RADIANT TACHOMETER



ACHOMETERS



UMA ELECTRONIC **EXPERIMENTAL TACHOMETERS**

These electronic tachometers use a 250° sweep meter movement to withstand high levels of vibration and register flight time accurately. The hour meter counts flight hours at RPM settings of 1800 & higher. Power: 12-28VDC. 2-year warranty.

UMA Model#	Range	Description	Part No.	Price
19-819- 201	0-7000 RPM	3-1/8" For Rotax 912 Engine B & W Markings, built-in hour- meter	10-00119	\$298.95
19-819- 211	0-7000 RPM	3-1/8" For Rotax 912 Engine Color Markings	10-04223	\$329.00
19-519- 211	0-7000 RPM	2-1/4" For Rotax 912 Engine Color Markings	10-01852	\$211.95
19-519- 213	0-7000 RPM	2-1/4" 3 Pulse Rev Rotax 982	10-05602	\$211.95
19-519- 216	0-7000 RPM	2-1/4" 6 Pulse Rev Rotax 447 / 503 / 582	10-05603	\$211.95
19-811- 10C	0-3500 RPM	3-1/8" Electric Lick 6C Sender	10-02116	\$373.00
19-801- 102	0-3500 RPM	3-1/8" *To replace Mechanical Tachometer (reads CW or CCW; B&W Dial Only) Furnished w/ mechanical sender	10-00120	\$411.00
19-801- 112	0-3500 RPM	3-1/8" *To replace Mechanical Tachometer (Green Arc 500- 2700 - Red 2700) Furnished w/mechanical sender	10-00121	\$432.00

UMA 2-1/4" ELECTRONIC TACHOMETERS

These tachs have high resolution and easy to read displays. The analog model has a 250° sweep which provides great resolution in both the 3500 & 7000 ranges. The digital model has a bright LED display. Separate power source required. All tachs require power from a 14 or 28V system. Installations are simple with instructions included.



IN

3500 ANALOG TACH

Lycoming/Continental (to replace mechanical tachs) Current: 37 milliamps Size: 2.25"rnd. X 2.75"deep. Magnetic pickup (6 ft. cable length) included with P/N's 10-02141 and 10-02140 (T1A9). 6 ft. harness, sending unit, and .156 diameter tang adapter included with P/N 10-00083 (143-4)

0-3500 RPM, 4 cyl., Pulses:1	P/N 10-02140	\$352.00
0-3500 RPM, 4 cyl., Pulses:2		
0-3500 RPM, 6 cyl		



7000 ANALOG TACH - Current: 37 milliamps; Size: 2.25" round X 2.75" deep

	9-519-206			\$182.80
Rotax 9)12	P/N	10-01853	\$182.80
Rotax 9	912/914 Lit	P/N	10-02053	\$173.80

* P/N 10-00120, 10-00121, 10-24870, & 10-24885 tachs eliminate the problems associated with mechanical tach cables, and the sending unit is a direct replacement for the tach cable. All models are analog style tachs with hour meters and can read RPM for either clockwise or counter-clockwise revolutions. Sender included. **Slick Mags Only



EM8000 TACH GENERATOR EM8000 Quality Tach Generator (4-pole).

Aircraft tach generators measure an airplane's engine speed electrically. By using the rotation of a magnet to emit voltage, the frequency of the voltage is measured into revolutions per minute. This rpm is then reported to the tachometer for a visual readout to the pilot.

P/N 08-15987 \$620.00

UMA ELECTRONIC TSO'D TACHS



Owners of Lycoming &d Continental powered airplanes now have an electronic, analog alternative to the old cable driven tachometer. The new UMA tach is certified to FAA TSO C49b standards for fixed wing aircraft. The system uses a tach sender mounted on the engine in place of the mechanical cable and is connected to the indicator with a single, 3-conductor cable. The 3 1/8"

indicator utilizes a high torque pivot and jewel movement. The hour meter can be factory set to start at any desired RPM point. This unit gives the pilot the analog display that is easiest to scan and provides electronic accuracy and ease of installation. Custom dial markings in Color & internal Electro-Luminescent lighting are available at extra cost. UMA manufactures a complete line of TSO'd & non-TSO'd gauges & instruments in the USA.

UMA Model#	Range	Dial Marking	Part No.	Price
T19-801-10	0-3500 RPM	Black & White	10-01221	•
T19-801-11	0-3500 RPM	Green Arc 500-2700 & Red Line 2700RPM(Lyc.)	10-01222	\$564.00
T19-801- 112N	0-3500 RPM	TSO w/o Hourmeter	10-07143	\$515.00



UMA ELECTRONIC TACHOMETER WITH HOURMETER

3 1/8" Analog Tachometer with hourmeter. 4 Cylinder. 0-3500 RPM. Records engine time above a set RPM point. Standard set point is 1800 RPM. Engine Type: Continental/Lycoming. TSO'd Magnetic pickup for Slick or Bendix Magnetos (6 ft. cable length), alternative to p-lead connections P/N 10-04868\$377.00

TRU-TACH II DIGITAL TACHOMETER



Mechanical tachometers are notoriously inaccurate. The TruTach II Optical Digital Tachometer measures the true speed of your propeller from inside or outside the aircraft. Just point it at the propeller or rotor blades and TruTach II will directly display the rotational speed

with a resolution of 1 RPM. No connection to aircraft systems is required and measurements may be made at any speed setting from 240 to 70000 RPM. Direct display is available for 2, 3, 4, and 5 blade propellers. Digital Signall Processing assures rock-solid display in single and multi-engine aircraft as well as helicopters. The compact 4-inch instrument weighs just 4 ounces and may be used with fast turning ultra-lights and kit plane propellers. Automatic shut-off turns the unit off if you forget. Includes 9 volt battery providing 150 hours of operation. P/N 10-01021 \$209.95


2-1/4" REMOTE HEAD TACHOMETER



This tachometer is	driven with power s	supplied by a
transducer on the	engine tach drive. F	Range 0-3500
RPM. Wt. 6 oz. Inc	ludes Gauge, sender,	and tang.
Sender only	P/N 10-02084.	\$218.95
Tang only	P/N 444-2	\$8.50



WESTACH TACHOMETERS





K3GA3-1/2A - Tachomter 500-3,500 RPM kit, 3-1/8" square, 1/2 to 1 ratio. adjustable with 303DGT sender, 444-2 tang, 208-SS-SS cable. Does not come with a Made in the U.S.A

UMA SENDING UNITS FOR TACHOMETERS



Sending Unit 1A3-4 onlyP/N 10-01706 \$149.75

Magnetic pickup for Slick or Bendix Magnetos (6 ft. cable lengths) Slick P/N 10-02432 \$127.80 Bendix......P/N 10-02433......\$127.80



WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

`& CHT SYSTEM 36

BASIC EGT & CHT SYSTEMS FAA and PMA approved for all reciprocating-powered aircraft! 2-1/4" GAUGES A46125 A46150 A46126 A46151 A46127 A46164 3-1/8" GAUGES A46155

A46124

A46156

A46157

Instruments: Provide a quick and easy way to troubleshoot and determine an engine's efficiency. Alcor's instruments are known for their quick response time, easy-to-read design and long life. All Alcor instruments are FAA/PMA approved for anything piston-powered that flies! Available in 2 1/4" and 3 1/8" diameters, these instruments can be purchased in single or dual configurations with or without internal lighting. Special order options are also available. All Alcor instruments carry a 3 Year Warranty!

Sensors: Recommended by the most popular manufacturers of digital engine monitoring systems because Alcor sensors are: • Made from the highestquality materials · FAA approved · Provide fast response time · Built to last · Covered by a 5 Year warranty for grounded probes · Manufactured in the USA!

Basic Systems: Kit includes the 2 ¼" or 3 1/8" instrument, one lead and one sensor for single cylinder EGT or CHT monitoring. Multi-Cylinder Systems: Kit Includes 2 ¼" or 3 1/8" instrument, all leads, switches and sensors for EGT and CHT monitoring of every cylinder. Alcor's 2 ¼" instrument uses Alcor's Universal Cylinder Selector (UCS) (p/n 80825 or 80827) switch to convert the basic system into an affordable Alcor analyzer!

BASIC SYSTEMS				
System	Part No.	Price		
EGT	10-08700	\$381.95		
CHT	10-08800	\$444.95		
EGT/CHT 2-1/4"	10-08900	\$915.00		
EGT/CHT 3-1/8"	10-20700	\$818.00		

ANALYZER SYSTEMS				
System	Part No.	Price		
EGT (4Cyl.)	10-09000	\$985.00		
CHT (4 Cyl.)	10-09100	\$1,114.00		
EGT/CHT (4 Cyl.)	10-09200	\$2,086.00		
EGT (6 Cyl.)	10-09300	\$1,332.00		

ALCOR PROBES

Alcor's probe (thermocouples) reliability is legendary in the aviation community, designed to give years of dependable and accurate service.

GROUNDED THERMOCOUPLES

ALCOR	Description	0
86255	EGT Clamp Type Probe min/ max dia1.5"to 3.25") (Yellow/ Red, Chrome/Alumel)	EGT Clamp
86240	EGT Screw-In Probe, fit- ting dims: 7/16" x 20 threads (Yellow/Red) less boss	EGT Screw-In
86245	EGT Screw-In Probe, fitting dims- 7/16" x 20 threads (Yellow/Red, reverse stagger leads) less boss	W/ Weld Bo EGT Screw-Ir (Reverse St
28113	Weld Boss	w /Weld Bo
86251	CHT Bayonet Probe (Black/Yellow,	Weld Bos
28202	Iron/Constantan) AN5541-1 CHT Bayonet Probe Adapter	6
86202	CHT Gasket Style Thermocouple. Type: J - Black and Yellow. Grounded Style: Gasket. Size: 18 mm. Resistance: .13 + .16 Ω 05 Ω . Weight: 0.12 lbs.	CHT Bayonet w/ Adaptr CHT Bayonet Pro



ALCOR 98214 TYPE K THERMOCOUPLE WIRE

Alcor 98214 K Type Thermocouple Wire. 22 awg, 7/30 stranded insulated with FEP. Sold in 50 ft packs. P/N 05-22849 \$123.75

IMPORTANT! EGT systems & components with red/brown color codes are not compatible with systems & components using red/yellow codes.

ALCOR ALCAL 2000+ SYSTEM TESTER

ALCAL 2000+ EGT/CHT TESTER: The Alcal 2000+ provides everything needed for accurate calibration and troubleshooting of EGT/CHT/TIT, Type K, J, and E systems. The tester will simulate thermocouple output millivolts so that instruments can be calibrated on the ramp or in the shop. The Alcal 2000+ will also receive a millivolt input while testing Alcor and other thermocouples installed in its special heater for accurate analysis at operating temperatures.

The Alcal 2000+ is also designed to check the accuracy of an entire system or the individual

components. While the thermocouple is in the heater, the instrument can be read in the panel and recalibrated as necessary while simulating temperatures up to 1750 F. An easy-to-read LCD display makes accurate settings a snap. With its rugged Pelican case, the Alcal 2000+ is ready to use anywhere! Certification of the Alcal 2000+ is traceable to National Institute of Standards and Technology (NIST). Features:

- Redesigned Pelican case with removable lid for stress-free use in any environment
- Internal carrying handle for tranquil transport and handling with or without the lid
- Additional EGT/TIT Heater that accepts competitors' larger probes and tests both digital and analog systems Easy access to the fuse and 9V Lithium battery for quick replacement
- if necessary

Plus, all the great features of the Alcal 2000 (FAA/PMA not required) Specifications:

- 9V Lithium Battery-powered
- 12lbs
- Alcor P/N: 85337 2000+ System TesterP/N 10-04981\$3,325.00

Accessories					
		¢70.00			
28187 Gasket Thermocouple Adapter					
35291 EGT Heater 1.28 Hole	P/N 10-04956	\$358.00			
35309 EGT Heater	P/N 10-04953	\$357.00			
35311 CHT Heater	P/N 10-04957	\$348.00			
86188 EGT Reference Thermocouple	P/N 10-04954	\$98.75			
86261 CHT Reference Thermocouple	P/N 10-04958	\$125.99			

ALCOR EGT & CHT COMPONENTS

ALCOR COMPONENT PRICE LIST

Alera	Alcor Our P/N Description Price					
Alcor	Alcor Our P/N Description					
		EGT Leads, Type K				
42525	42525	EGT Leads, Type K (90")	\$43.85			
42526	42526	EGT Leads, Type K (144")	\$60.85			
42527	10-00131	EGT Leads, Type K (240")	\$83.80			
42528	42528	EGT Leads, Type K (216")	\$82.85			
		CHT Leads, Type J				
42535	42535	CHT Leads, Type J (90" 8 ohm)	\$51.80			
42536	42536	CHT Leads, Type J (144" 8 ohm)	\$64.85			
42537	42537	CHT Leads, Type J (240" 8 ohm)	\$82.85			
42543	42543	CHT Leads, Type J (216" 8 ohm)	\$80.75			
		Meters, Single 2-1/4"				
46149	10-03859	EGT Internal light 24V Type K	\$319.00			
46150	46150	EGT Type K Fahrenheit red and yellow	\$258.95			
46151	46151	CHT Type J, Fahrenheit black & yellow	\$257.95			
46162	10-00992	EGT Type K, Fahrenheit (Green Arc)	\$315.00			
46164	10-00993	EGT Type K,Fahrenheit (No Green Arc)	\$299.95			
46171	10-00996	CHT Type J, Celsius Black & Yellow	\$294.95			
46244	10-00997	EGT 240" Lead Type K, Fahrenheit (Green Arc)	\$344.00			
		Meters, Dual 2-1/4"				
46124	10-00994	TIT/TIT Type K, Fahrenheit Red & Yellow	\$627.00			
46125	10-00126	EGT/EGT Type K Red & Yellow Unlit	\$610.00			
46188	10-06035	EGT/EGT Type K Lit	\$665.00			
46126	46126	EGT/CHT Type K & J, Fahrenheit	\$643.00			
46127	10-00127	CHT/CHT Type J, Fahrenheit	\$603.00			
	Meters, Dual 3-1/8"					
45993	10-00998	EGT Type E Fahrenheit Red and Brown. Designed for twin engine aircraft.	\$990.00			
46115	10-03861	EGT/EGT 24V Type K. Designed for twin engine aircraft.	\$619.00			
46155	10-00128	EGT/EGT Type K	\$520.00			
46156	46156	CHT/EGT Type J & K, Fahrenheit	\$509.00			
46157	10-03860	CHT/CHT Type J Farenheit	\$505.00			
46224	10-00999	TIT/TIT Type K, Fahrenheit	\$579.00			
		EGT Probes, Type K	<u>.</u>			
86143	10-01005	Model N, Screw-In (1/4" NPT)	\$167.95			
86159	10-01006	Model H, Screw-In (1/4" NPT)	\$170.90			
86160	10-01007	Model J1, Screw-In (7/16"-20)	\$169.95			
86161	10-01008	Model K, Screw-In (1/4" NPT)	\$169.95			
86226	10-01009	Model A, Clamp, 11.56" length (Reverse Stagger)	\$134.75			
86230	10-01011	Model N2, Screw-In (1/4" NPT)	\$165.75			
86240	10-00129	Model B, Screw-In (7/16-20)	\$118.75			
86245	86245	Model B,Screw-In(7/16"-20) (Reverse Stagger)	\$115.75			

Alcor	Our P/N	Description	Price			
	EGT Probes, Type K					
86255 86255 Model A, Clamp (Normal Stagger)						
86275	10-01012	Model A, Clamp, 13.6" (Rev. Stagger)	\$119.95			
86281	10-01013	Model A, Clamp C/A Extended Lead	\$215.95			
		CHT Probes				
86202	86202	Gasket Style Type J 18mm	\$139.75			
86251	86251	Bayonet Style Type J	\$103.75			
86252	10-04949	Bayonet Style, Type K, Red/Yellow, reverse stagger	\$103.75			
86253	10-04951	Bayonet Style Probe CHT 3/8-24, Type K, screw-in probe and supersedes 86252-3. This unit is also a replacement for Garmin probe 86252	\$129.95			
		Parts and Accessories				
35309	10-04953	EGT Heater (1004-6)	\$357.00			
86188	10-04954	EGT Reference Thermocouple (1004-7)	\$98.75			
35291	10-04956	EGT Heater .128 Hole	\$358.00			
35311	10-04957	CHT Heater (1004-26)	\$348.00			
86261	10-04958	CHT Reference Thermocouple	\$125.99			
28187	10-04959	Gasket Thermocouple Adapter (1004-72)	\$76.80			
		Ungrounded EGT Probes				
86307	10-86307	Screw-In (1/4 NPT)	\$541.00			
86341	10-04952	Red/Yellow, Screw-in (1/8 NPT)	\$549.00			
86308	10-86308	Screw-In (7/16-20)	\$545.00			
86309	10-86309	Screw-In (7/16-20), Extended Lead	\$540.00			
86310	10-86310	Clamp - 2.35" max	\$540.00			
86343	10-86339	Clamp (with Plug, Short) 3.25"max	\$416.00			
		Accessories				
28113	10-01017	Weld Boss 7/16 UNF (for B Probe)	\$31.50			
28202	28202	CHT Adapter for Bayonet Probe (AN4076-1)	\$31.55			
28204	10-01018	Plug for 28113 Weld Boss.	\$31.50			
42523	10-01019	EGT Lead Stagger Adapter. Type K	\$12.50			
80825	80825	Universal Selector Switch - 7 inputs	\$208.95			
80827	80827	Universal Selector Switch - 4 section	\$254.95			
		Vernier				
93882	10-01020	Vernier Control Assembly 112"	\$181.75			
		Alcor, CHT Parts				
28202	28202	Bayonet Thermocouple Adapter (1004-4)	\$31.55			
38091	05-22271	Alcor 38091 Hardware Kit designed to provide the essentials while install- ing probes 86245, 86252, 86253, and 86255.	\$13.55			

ACH INSTRUM

2-1/4" ENGINE INSTRUMENTS

Guaranteed accurate within 2% with a 1-yr. warranty. Weight - an unbelievable 4oz. These instruments are self powered by the thermocouple, except for the lighting.

0 0	CYLINDER	HEAD TE	MPER	ATURE
Adding	100-700°F	P/N	2A1	\$96.75
. 107	25°–375°C	P/N	2A1-2	\$96.75
Sec. and	SENDERS: CHT	Senders have	4 ft. leads.	
	14mm gasket type	9		
	(VW, Rotax)	P/N	712-4W	\$39.95
· ·	18mm gasket type	(Cont, Lyc.) . P/N	712-5W	\$39.95
	8" x 24 thread			
	8" NPT thread			
(All Rotax)		P/N	712-912K	\$86.75



EXHAUST GAS TEMPERATURE

SENDERS - Clamp type senders with 3/16" diameter probe. EGT Senders have 4 ft leads.

1" long tip	P/N 712-2DWK\$59.95
1/2" long tip	
Long tip 1/4" threads	P/N 712-4D\$73.75
3/8-24 for Lycomings	P/N 712-4D1 \$73.75
Long tip for VW (1/12" OD tailpipe)	P/N 712-24DWK\$59.95
(All Rotax)	P/N 712-32DWK\$59.95
Bayonet K type, EGT probe for Rotax	P/N 712-4D6K \$83.75
Exposed Tip, model 712-20DWKE - Hose	clamp style 1/2" probe.
	P/N 10-01300\$73.75

Note: Westberg 712 Series Thermocouples are for Non-TSO'd CHT & EGT Gauges only. They have two small pins which are the same size.



OIL TEMPERATURE

*Use Sender #399S9-7/8 for Cont & Lyc Engines (5/8-18 Thread)P/N 399S9\$63.75



OIL PRESSURE

Guaranteed accurate within 2% with a 1-year warranty. Weight an unbelievable 4oz. K2A8MM. 0-80 PSI (w/sender)

P/N 10-01292 \$415.00



FUEL PRESSURE

This specially constructed instrument offers accuracy and durability in a lightweight (3.5oz) package. Perfect



WESTACH 387-15KV PRESSURE SENDER

Electronic Pressure Sender, 15 psi, 0.5-4.5 vdc, 1/8" npt......P/N 10-05273.......\$339.00



MANIFOLD PRESSURE GAUGE

2-1/4" Size 0-30 PSI & 0-50 PSI. Not Altitude Compensated (square)

2A6-6 - 0-30 IN HGP/N 10-04797\$88.75

WESTACH VOLTMETERS

Westach voltmeters, 2" round. Made in USA					
Pat No.	Price				
10-04184	\$96.75				
10-04185	\$87.75				
	Pat No. 10-04184				

FUEL LEVEL GAUGES (SQUARE)

2-1/4 Non-TSO'd fuel quantity indicators available for single or dual tanks. Require 0-5V capacitance senders (not included) Instrument (Single)......P/N 2A7V \$89.95

P/N 11-01210...\$89.95

2AHT7V, Full Sweep Meter......P/N 10-04121 .\$129.85 Sender (6"-12"Depth)P/N 10-00797.\$159.75 AP-24-D120-5V Sender (12"- 24" Depth) P/N 10-03875.\$159.75 395-5-5 6" Capacitance, non-bend sender P/N 10-04344 \$159.75 395-5SB-5 Sender (6"-12" Depth-Bend.) P/N 10-00798 \$159.75 395-5S-1B-5 Sender (12"-24" Depth-Bend) P/N 10-01262 .\$179.75 AP24B5-D120-SV Sender (24", 5" bend. section) . P/N 10-04412.\$199.75 Capacitance sender 12" long, 3" bend section ... P/N 10-05725.\$182.75 Capacitance sender 24" long, 3" bend section ... P/N 10-05738.\$176.90



FUEL LEVEL GAUGES (ROUND)

2C7V, 2" RoundP/N 10-04119...\$76.95 22C7, 240-30 OHM,


OUTSIDE AIR TEMPERATURE Square Gauge P/N 2A3-3...... \$89.75

CARBURETOR AIR TEMP

WESTACH WATER TEMPERATURE GAUGE 9-1 Water Temperature Gauge 100-260f, 2 1/4"

TEOTAO		
	2A9-1 Water Temperature Gauge 100-260f, 2	-
And an and a second	square, 8-30 VDC.	
ALT THE ALL	2-1/4" Westach Water Temp. Gauge Only	
Sermice Str.	P/N 2A9-1\$	8
	Westach Sender #399S1 Only	
No marchie	P/Ň 10-01288\$	
0 0	Westach 2-1/4" Water Temp. Gauge with Sender	
		0











P/N 10-01243	\$96.75	
o 50°C		
P/N 10-03949	\$83.75	
3 Thread		
P/N 399W	\$59.95	

P/N 2A9-1.....**\$89.75**

P/N 10-01288 \$43.50

P/N 10-04948 \$132.95

COOLANT TEMPERATURE

100° to 260°F, for aircraft and helicopters using coolants other than oilP/N 10-01301\$89.75 Sending Unit......P/N 10-01249......\$45.65

WESTACH EGT/CHT COMBINATION KITS HOMEBUILDERS ENGINE ANALYZER KITS



Complete kits include CHT or EGT gauge, selector switch and probes for each cylinder of 4 or 6 cylinder engine. EGT kits furnished with long-life #712-2DWK probes.

Kit	4 Cy		6Cyl.			
KI	Part No.	Price	Part No.	Price		
14MM CHT Kit	10-17114	\$311.95				
18MM CHT Kit			10-17218	\$405.95		
EGT Kit	10-17300	\$387.95	10-17400	\$521.00		



tion system already installed. Consists of selector switch & 3 or 5 probes for CHT or EGT to provide analyzer for 4 or 6 cylinder engines.

EGT kits furnished with long-life #712-2DWK probes.

1	Kit	4-C	yl.	6-Cyl.		Type "k" probe	
	KI L	Part No.	Price	Part No.	Price	Part No.	Price
[CHT Kit	10-01064	\$163.95	10-01066	\$246.95	10-03892	\$46.95
[EGT Kit	10-01065	\$217.95	10-01067	\$343.95		1

MADE IN THE U.S.A

* These instruments may be powered by connection to 12V battery, magneto, distributor or alternator. If installation is to be made using other than 12V electric power, order one Magneto Adapter, P/N 103-18 (\$6.30) and one Fuse Adapter, P/N 10-17000 (\$6.30) for each instrument. For 24V operation, order one Adapter, P/N 329-24 (\$2.30) for each instrument.

WWW.AIRCRAFTSPRUCE.COM

ESTACH INSTRUMEI



MADE IN THE U.S.A

AMMETERS (SQUARE)

Westach Ammeter, amp -30-0-+30A adc, 2 1/4" square, 50 mv f/s. Model with or without shunt. With Shunt......P/N10-01267\$145.75

P/N K2A6-15 Set \$145.75



WESTACH AMMETER 2A6-15 (SQUARE)

Westach Ammeter, amp -60-0-+60 adc, 2 1/4"square, 50 mv f/s. With Shunt.P/N 10-01277\$145.75

Without Shunt......P/N 10-04114 \$88.75



WESTACH AMMETER 2C6-22 (ROUND)

Westach Ammeter, amp -30-0-30 adc, 2" round, 50 mv f/s. Note: Gauge does not include shunt. Range: -60-0-30 adc. Size: 2" round. Shunt: Model 237-30 Ammeter 2C6-22.....P/N 10-04108......\$76.85 Shunt #237-30......P/N 10-01306\$57.75



WESTACH AMMETER 2C6-15 (ROUND)

Westach Ammeter, amp -60-0-60 adc, 2"round, 50 mv f/s. Note: Gauge does not include shunt. Range: -60-0-60 adc. Size: 2" Round. Shunt (Not Included): Model 237-60 Ammeter 2C6-15......P/N 10-04104......\$76.85

Shunt #237-60......P/N 10-01298\$57.75



HOURMETER

Power Range, 5V-40V, Record running time of engine. P/N 2A10-2.....\$151.75 No sender required.



VOLTMETERS

Check generator & alternator charging 0-35 VDCP/N 2A5-2.....\$88.75 No sender required.



WESTACH 2C4-7 GAUGE

Boost 0-30 psi, 2-Inch round, with 220-9, 203-17, 203-21

P/N 10-04155 \$75.50



SELECTOR SWITCHES

These switches are used with the Westach CHT, EGT, or CHT/EGT gauges to allow multiple cylinder engine analyzing. Switches included with Engine Analyzer kits Add-On kits on following pages, or can order sepa-rately below. Non-TSO'd. These switches have two small connectors of same size

	2-Position	.P/N	254-2F	\$44.90
í	4-Position	.P/N	254-4F	\$55.75
à	4-Position (Dual)	.P/N	254-4DF*	\$89.75
	6-Position			

*To convert dual EGT/CHT to Engine Analyzer. FAA APPROVED SWITCHES

These switches are furnished with 96" leads.

WESTACH INSTRUMENT LIGHTING

An internal lighting fixture may be added to all 2" & 3" instruments. Comes with clear bulb and red & green boots P/N 10-01229 \$8.50ea

WESTACH BULLET CONNECTORS

Bullets are used to connect sockets and sleeves together on the back of

WESTACH INSTRUMENTS FOR ULTRALIGHTS

()
Single CHT	P/N	10-00419	\$85.85
Single EGT			
Thermocouple for CHT (14MM			
Probe for EGT	P/N	10-01225	\$59.95

SINGLE TACH (Tachometer requires no sender.)

Model	RPM	Powered By	Part No.	Price
2CT8A-2/6	0-8000	CDI	10-01302	\$147.75

DUAL TACH/CHT (All CHT's are 0-600° F)

Model	RPM	Powered By	Part No.	Price
2DC9-8A-2/6	0-8000	CDI	10-02911	\$221.95



WESTACH 2DC8 **DUAL CHT**

Cylinder Head Temp. Range: 100-700°F. Use 48" Type J thermocouples. Input 9.81 mv @ 400F, Weight: 2.7 oz. P/N 10-01791**\$154.00**



BULLET SHELL MOUNTING CASE FOR 2" ROUND WESTACH GAUGES

Molded plastic housing clamps to ultralite tubing or motorcycle handle bar. Swivels 360° at any angle. Furnished with chrome plated installation hardware P/N 10-01290 \$23.50



WESTACH TACHOMETERS FOR DUAL IGNITION

.....P/N 10-01302.\$147.75 2" SquareP/N 2AT8A-2/6 \$164.75 3" Square\$187.75



WESTACH SENDER 720-14RB

Proximity sensor, Hall effect sender for Bendix mag. 9/16 - 24 thd. 5-12 VDC. Weight: 7 ounces P/N 10-00863 \$296.95

WESTACH EXTENSION LEADS



Complete extension leads, with connector terminals, for extending CHT or EGT leads up to Complete extension leads, with connector terminals, for extend-ing CHT or EGT leads up to 10 ft. without affecting accuracy. Longer lengths give low reading, requiring

recalibration of instrument. 18" Lead ... P/N 10-17900 .. \$22.50 4 Ft. Lead P/N 10-18000 . \$30.90 6ft Lead ... P/N 10-18100.. \$28.85 8 Ft. Lead P/N 10-18200 . \$31.50 10ft Lead . P/N 10-18300 .. \$34.50 12 Ft. Lead .. P/N 10-18350 . \$38.50

WESTACH GAUGE WIRE **EXTENSION LEADS**



10' and 5', 4 wire and 2 wire "Extension Leads" ideal for quick and easy extending CHT, EGT or Tach leads with simple slide together female ends. Female connectors on both ends mate with male posts on gauge backs and sender ends. Extensions will not effect gauge readings.

10 Foot 4 Wire	P/N 15-05341	\$25.50
5 Foot 4 Wire	P/N 15-06258	\$18.50
5 Foot 2 Wire	P/N 15-06259	\$17.85

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

STACH INSTRUMEI

MADE IN THE U.S.A.

2-1/4-INCH DUAL INSTRUMENTS SAVE PANEL SPACE (SUPREME SPACE SAVERS) TWO INSTRUMENTS IN ONE 2-1/4" SIZE CASE - PERFECT FOR THE HOME BUILDER

All pressure instruments come complete w/pressure senders only (matched to instrument). On all other instruments, order senders at bottom of page.



DUAL EGT-CHT 700-1700°F EGT 100-700°F CHT P/N 2DA1....\$164.75

TWIN CHT

3-1/8" Size; Wt. 10 Oz.,

100-800°F

P/N 3DA8....\$188.75

Order 2 thermocouples



700-1700°F P/N 2DA2....\$169.50

3-1/8"

TWIN EGT

3-1/8" Size, Wt. 10 Oz.

700-1700°F

P/N 3DA2....\$189.95



DUAL OIL PRESSURE **OIL TEMPERATURE** 0-80 PSI/100-260°F P/N 2DA3MM....\$536.00 Complete w/ oil pressure sender.



DUAL CH1 100-700°F P/N 2DA8....\$165.75 Celsius version P/N 2DA8-2....\$165.75



DUAL FUEL LEVEL Uses capacitance type senders. 5V output. P/N 2DA4V....\$165.75 2DA4 (Old Style) E-F 240-30OHM Float....\$165.75







DUAL CARB TEMP-

OUTSIDE AIR TEMP

Senders Separately

COMBINATION EGT & CHT RECORDING TACHOMETER 3-1/8" size, Wt.10oz., 700-1700°F/ 100-800°F. 3-1/8" size Runs directly 0-3500 RPM P/N Y3AT32....\$300.95

EGT – CHT GAUGES 3-1/8" Square EGT off magneto. 12V power P/N 3A2-1....\$116.75 required to run Hour Meter Square CHT P/N 3A1....\$114.75 3-1/8" Round CHT P/N 3C1....\$96.75

& 1 thermocuople. All Pressure Instruments come complete with Pressure Senders only (matched to Instrument). On all other instruments order senders at bottom of page.

P/N 3DA1....**\$189.95**

Order 1 EGT probe

SPACE SAVING GAUGES - THE WESLACH QUADS

Four electric instruments in one standard size 3-1/8" aircraft case. Weight - only 6 oz. Guaranteed for accuracy within 2%. 1 year warranty. Get four "like" readings or four different ones. Order Senders below except for pressure instruments.



OTHER QUAD COMBOS AVAILABLE:

3AQ1-14 CHT/Volts/EGT/Amps \$457.00 Quad Fuel Gauge WS3AQ9 \$457.00 Over 75 Quad Combos available. Request availability of unlisted models. *With Senders

WESTACH SENDERS

712-2DWK (Long Life) 1" Tip P/N 10-01225 \$59.95 712-2DWK (Long Life) 1" Tip P/N 10-01225 \$59.95 712-2DWK (12" Tip P/N 10-01233 \$59.95 712-4D (1/4" Pipe Bayonet) P/N 10-01253 \$73.75 712-4D1 (3/8"-24 for Lycomings) P/N 10-01240 \$83.75 712-4D2 (1/8" NPT P/N 10-01263 \$73.75 712-4D2 (1/8" NPT) P/N 10-01263 \$73.75 712-4D2 (1/8" NPT) P/N 10-01263 \$73.75 CHT P/N 10-01226 \$39.95 712-5W (18 MM Thermocouple) P/N 10-01227 \$39.95 712-7D (3/8-24 Bayonet) P/N 10-01230 \$81.95	EGT		
712-4D2 (1/8" NPT)	712-2DWK (Long Life) 1" TipP/N 10-01225 712-20DWK 1/2" TipP/N 10-01233 712-4D (1/4" Plpe Bayonet)P/N 10-01253 712-4D1 (3/8"-24 for Lycomings)P/N 10-01282	\$59.95 \$73.75 \$73.75	P/N 10-00798\$159.
	712-4D2 (1/8" NPT)	\$73.75 \$39.95 \$39.95 \$81.95	AP-Q24B3-D120-5V Capacitance fuel level sender 24" long P/N 10-01262

VISIT OUR WEBSITE FOR CUSTOM QUAD GAUGES!

WWW.AIRCRAFTSPRUCE.COM

FLIGHT LINE INSTRUMEN



UL FLIGHT LINE 2 INCH CHT GAUGE

Gauge electrical, bezel black dial, black, white, pointer red Indicating instrument electrical, black bezel, black dial, white character, pointers red. · Front: Flat; Black

Glass: Flat

• Pointer: Red, Hub Black, Night Design
 • Dial Face: Background Dull Black, White, Red, Green

- Installation: Fixation Ring
 Operating Temperature: 50°C 150°C / 120°F 300°F
- Voltage: 12
- Dimension: 52 mm
- Engines: 912A, 912F, 912UL, 912S, 912ULS, 914F, 914UL Illumination: LED White, Dimmable
- 2" CHT 50-150C 150-300F......P/N 13-16017\$94.80 2" CHT 50-150C 125-300FP/N 13-16026\$88.85



UL FLIGHT LINE 2 INCH FUEL LEVEL 0-4/4 UL LSA 12V DLT

Gauge electrical, bezel black dial, black, white, pointer red indicating instrument electrical, black, wille, bezel, black dial, white character, pointers red.

2" Fuel Level 0-4/4 UI DLT3-180P/N 13-16019\$86.75 2" Fuel Level 0-4/4 UI DLT5-60/90P/N 13-16020\$73.95



UL FLIGHT LINE 2 INCH GAUGE Gauge electrical, bezel black dial, black, white,

pointer red indicating instrument electrical, black bezel, black dial, white character, pointers red. Front: Flat; Black · Glass: Flat

- · Pointer: Red, Hub Black, Night Design
- · Dial Face: Background Dull Black, White, Red, Green
- Installation: Fixation Ring
 Operating Temperature: 25°C 65°C / 120°F 300°F
- Voltage: 12
- Dimension: 52 mm

- Ingines: 912A, 912F, 912UL, 912S, 912ULS, 914F, 914UL Illumination: LED White, Dimmable



UL FLIGHT LINE 2 INCH TACHOMETER

Gauge electrical, bezel black dial, black, white, pointer red indicating instrument electrical, black bezel, black dial, white character, pointers red.

2" Engine Tach 0-7000 12vP/N 13-16023\$239.95 2" Rotor Tach 0-7000 12vP/N 13-16024\$220.95

UL FLIGHTLINE WING FLAP INDICATOR



Indicating Instrument Electrical. LED Backlight Technology. Stepper Motor. Low Weight. Character White. Wing Flap Sensor. Specifications

Operating voltage: 12 · Installation diameter: 52mm · Resistance range: 3.180 · Special: MF, Option Warn-LED.



UL FLIGHT TEMP GAUGE

Gauge electrical, bezel black dial, black, white, pointer red Indicating instrument electrical, black bezel, black dial, white character, pointers red. P/N 13-19001 \$90.75

P/N 13-16029 \$22.90

UL FLIGHT LINE TEMP SENDER



588

Dull Black, White, Red, Green . Installation: Fixation Ring . Operating Temperature: 8°C - 16°C • Voltage: 12 • Dimension: 52 mm • Engines: 912A, 912F, 912UL, 912S, 912ULS, 914F, 914UL • Illumination: LED

UL FLIGHT LINE FUEL PRESSURE CONNECTOR CABLE

UL Flight Line Fuel Pressure Connector Cable. Connection: 3-wire DLPHI Packard
 Engines: 912A, 912F, 912UL, 912S, 912ULS, 914F, 914UL.....P/N 13-16018......\$29.60

UL FLIGHT LINE 2 INCH

FUEL PRESSURE GAUGE Fuel Pressure Gauge Rotax Flight Line. Gauge

electrical, bezel black dial, black, white, pointer red

indicating instrument electrical, black bezel, black

• Front: Flat; Black • Glass: Flat • Pointer: Red,

Hub Black, Night Design • Dial Face: Background

UL FLIGHT

LINE 2 INCH VOLTMETER Gauge electric, incident-light, black bezel, black

dial, white, pointer red Indicating instrument electri-

cal, floodlight illumination, black bezel, black dial,

· Front: Flat; Black · Glass: Flat · Pointer: Red, Hub Black, Night Design • Dial Face: Background

white character, pointers red. 8-16V UL / LSA.

P/N 13-16022......\$116.75

dial, white character, pointers red.

Dull Black, White, Red, Green • Installation: Fixation Ring • Bar: 0 - 1 Voltage: 12 • Dimension: 52 mm • Engines: 912A, 912F, 912UL, 912S, 912ULS, 914F, 914UL • Illumination: LED White, Dimmable.

UL FLIGHTLINE 2 INCH FUEL LEVEL GAUGE



Fuel level gauge for float-operated sensor UL/LSA. Indicating instrument electrical, LED backlight technology, stepper motor, low weight, character white

Specifications:

- Öperating voltage: 12
- Installation diameter: 52mm
- Volume range: 0.1/2.1
- Resistance range: 3.18 · Special: MF, Option Warn-LED

P/N 10-06471 \$87.75

UL FLIGHTLINE FLOAT OPERATED SENSOR RIGHT WING



Float-operated sensor. Robust passivated metal housing.

Specifications: . Dimensions float-operat. sensor install. lateral: 156 / 148 / 107 • Full resistance: 180 • Empty resistance: 3 • Diameter of pitch circle and angle: 54 / 72°; 68°; 80°; 68°; 72° · Operating voltage: 6.24 • Electrical connection: DIN 6.3x0.8 Right Wing Sensor P/N 10-06468 \$63.75

FUEL LEVEL SENDERS



ISS Fue	l Sender	LH 6-12 Tan	kP/N	N 10-0109	9 \$49.95
ISS Fue	I Sender	RH 6-12 Tar	nkP/N	N 10-0110	1\$52.75
ISS Fue	I Sender	LH 10-15 Ta	nkP/N	V 10-0110	2\$42.95
ISS Fue	I Sender	RH 10-15 Ta	ankP/N	V 10-0110	3\$41.85
ISS Fue	I Sender	LH 155-24.	P/N	N 10-0110	4 \$44.50
ISS Fue	I Sender	RH 27-36" T	ankP/N	N 10-0110	7\$57.25
ISS Fue	I Sender	Gasket	P/N	V 10-0109	7 \$2.64

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

NSTRUMENT

MITCHELL AIRCRAFT INSTRUMENTS 2-1/4" ELECTRIC GAUGES


Mitchell Aircraft Instruments is a high quality, economical line of gauges which is ideal for the homebuilt aircraft market. These electric instruments are lighted, allow easy installation, and feature a 2 year factory warranty. Order gauges and senders separately as shown. 12V operation unless other wise noted. Gauges fit 2-1/4 panel hole. For 24 volt operation, order P/N PE-111-4074 Resistors (\$3.50 each) for each instrument.



OIL	TEMPERATURE	
		A07 75

100-250° F Gauge P/N 10-25000\$87.75		
100-250° F Sender (Rotax) P/N 10-25005 \$33.90		
100-250° F Sender (LYC). P/N 10-25175\$46.65		
120-300° F Gauge P/N 10-25010 \$87.75		
120-300° F Sender (Rotax) P/N 10-25015 \$34.50		
120-300° F Sender (LYC) P/N 10-25180 \$54.75		
Rotax Senders are 1/8-18 NPT, Lycoming		
Senders are 5/8-18 VNF.		

	UIL FREGGURE	
603	0-80 PSI Gauge P/N 10-25030	\$82.75
100	0-80 PSI Sender P/N 10-25035	\$53.75
	0-100 PSI Gauge P/N 10-25040	\$81.75
	0-100 PSI Sender P/N 10-25045	\$53.75
	0-145 PSI Gauge use with Rotax sender.	
	P/N 10-03928	\$90.75
53	0-150 PSI Gauge P/N 10-25050	\$81.75



FUEL PRESSURE

0-30 PSI	Gauge	P/N	10-25060	\$67.75
0-15 PSI	Gauge	P/N	10-25058	\$87.75
0-15 PSI	Sender.	P/N	10-25065	\$53.75



EXHAUST	GAS	TEMP	PERAT	URE

0-1600°F EGT Gauge P/N 10-02746 \$126.99 KIT - Includes Sender, Weld-on adapter and 6 Ft. Lead with/ connector. 0-1600 EGT kit P/N 10-25090\$193.75

CYLINDER HEAD TEMPERATURE

120-300F GaugeP/N 10-02717	\$87.75
18MM Sender (Continental, Lycoming)	
P/N 10-25075	\$33.95
14MM Sender (VW, Rotax)	
P/N 10-25080	\$33.60
10 Ft. CHT Lead w/connector	
P/N 10-25185	\$14.50

OIL TEMPERATURE

P/N 10-02714 \$75.75

MITCHELL 2-1/4" MECHANICAL GAUGES

110 - 270 F. 6 foot capillary supplied



	OIL PRESSURE	
0-100 PSI	P/N 10-02706	\$68.75
0-150 PSI	P/N 10-02712	\$60.75



FUEL	PRESSURE
0-15 PSI	.P/N 10-02702 \$60.75



MITCHELL D1-112-5240 **ROTAX 912 TACHOMETER** Mitchell 2-1/4 Inch Mechanical Recording. FAA-TSO Approved. D1-112-5240 Special-Rotax 912 P/N 10-02744 \$266.75



AMMETER 60-0-60 Ammeter P/N 10-25115 \$82.75



VOLTMETER P/N 10-25105 (8-16V) **\$75.75** P/N 10-02747 (12-31V) .. **\$85.99** No Sender required.



OUTSIDE AIR TEMPERATURE 2-1/4" -10°F to +120°F P/N 10-02715 \$174.95



OUTSIDE AIR TEMPERATURE 2-1/4" Electric -25°C to +45°C P/N 10-03137 \$173.80 Sender P/N 10-02170..... \$33.50



GAUGE WIRING KIT



Fits all 2-1/4" Mitchell GaugesP/N 10-02724\$6.50



FUEL LEVEL

(10-180 ohm). P/N 10-25130..\$87.75 (0-90 ohm) P/N 10-02719..**\$87.75** (0-30 ohm) P/N 10-02721..**\$93.90** (240-33 ohm) .. P/N 10-02722 .. \$88.75 Senders

(10-180 ohm)... P/N 10-25135..**\$81.75** (0-90 ohm) P/N 10-02172..**\$81.75** (240-33 ohm)... P/N 10-02173..**\$80.75**



CYLINDER HEAD TEMP GAUGE For Rotax 120-300° P/N 10-02717\$87.75 Sender: Probe Supplied w/ Rotax Engine.

IN

WWW.AIRCRAFTSPRUCE.COM

MITCHELL MINIATURE MODUL AR GAUGES.

This line of miniature engine gauges from Mitchell is ideal for a wide variety of general aviation applications. They mea-sure nearly 1.5" square and are stackable. The modular design allows them to be plugged from the front of the panel. The units are internally lighted. Complete standard panels are also available as shown in the steps below. All modular gauges after April 03, 2017 feature a new connector configuration. New style gauges will fit into existing frames but require changing the mating connector plate. Previous style connectors are now obsolete and no longer available. Step 1 - Select your gauge(s) from the list below:



Choose 14 volt or 24 volt

Note range marking for gauge(s) (free if information given at time of instrument cluster order) Step 2 - Select your sendor(s) for gauge(s) from the list below:

Any sendor with a * can also use a Rotax Engine Sender

Gauge F	Part Number	Course Description	Price	
Spruce #	Mitchell #	Gauge Description	Price	
Pressure G	auges			
10-03621	D1-211-6060	Fuel Pressure 80 PSI	\$126.75	
10-10150	D1-211-6061	Fuel Pressure 15 PSI (FAA/PMA)	\$126.75	
10-10152	D1-211-6064	Fuel Pressure 30 PSI	\$126.75	
10-04094	D1-211-6065	0 – 2 bar Fuel	\$134.75	
10-04139	D1-211-6097	Oil Pressure 150 PSI 10Bar	\$105.75	
10-02725	D1-211-6092	Oil Pressure 150 PSI (FAA/PMA)	\$112.75	
10-10166	D1-211-6090	Oil Pressure 100 PSI (FAA/PMA)	\$120.75	
10-02726	D1-211-6093	Oil Pressure 80 PSI	\$112.75	
10-10168	D1-211-6091	0 – 9 bar Oil	\$120.75	
10-04095	D1-211-6094	0 – 7 bar Oil	\$105.75	
10-04096	D1-211-6095	0 – 5 bar Oil	\$134.75	
10-02723	D1-211-6089	Liquid Pressure 80 PSI	\$119.75	
Temperature Gauges				
10-02279	D1-211-6068	Oil Temp 100F-250F (FAA/PMA)	\$120.75	
10-10154	D1-211-6066	Oil Temp 120F-300F (FAA/PMA)	\$121.75	
10-10155	D1-211-6067	Oil Temp 40C-120C	\$120.75	
10-02728	D1-211-6069	Oil Temp 50C-150C	\$120.75	
10-10156	D1-211-6088	Liquid Temp 100F-250F	\$120.75	
10-02746	D1-211-6101	EGT 0F-1600F	\$126.99	
10-10170	D1-211-6102	CHT 100F-600F	\$126.95	
10-02745	D1-211-6109	CHT Rotax 120F-300F	\$100.75	
Voltmeter	Gauges			
10-10164	D1-211-6086	Voltmeter 8-16 volts (FAA/PMA	\$107.75	
10-10165	D1-211-6087	Voltmeter 12-31 volts	\$93.75	
Ammeters	Gauges			
10-10174	D1-211-6104	ammeter 45-0-45 amp	\$106.95	
10-10176	D1-211-6106	ammeter 75-0-75 amp (FAA/PMA)	\$122.75	
Fuel Quant	tity Gauges			
10-02730	D1-211-6071	right Fuel 240-30 omh	\$120.90	
10-03610	D1-211-6072	left Fuel 240-33 ohm	\$120.90	
10-03613	D1-211-6073	Fuel gauge 240-33 ohm	\$120.90	
10-10158	D1-211-6074	right Fuel 10-180 omh (FAA/PMA)	\$120.90	
10-10160	D1-211-6075	left Fuel 10-180 ohm (FAA/PMA)	\$120.90	
10-10162	D1-211-6076	Fuel gauge 10-180 ohm (FAA/PMA)	\$120.90	
10-03614	D1-211-6077	right Fuel 0-30 ohm	\$125.85	
10-03615	D1-211-6078	left Fuel 0-30 ohm	\$105.95	
10-03616	D1-211-6079	Fuel gauge 0-30 ohm	\$105.95	
10-03617	D1-211-6080	right Fuel 0-92 ohm	\$120.95	
10-03618	D1-211-6081	left Fuel 0-92 ohm	\$120.90	
10-03620	D1-211-6082	Fuel gauge 0-92 ohm	\$100.75	
Blank				
10-02740	D1-211-6010	blank face gauge (FAA/PMA)	\$80.99	


Step 3 - Select your frame for your gauge(s) from the list below



Select what postion your gauge(s) will go into. Postions are counted left to right (block style), top to bottom (vertical) starting at #1

Spruce #	Mitchell #	Gauge Capacity	Configuration	Price
10-02964	PM-211-9811	1 Gauge	1 Gauge	\$80.75
10-04084	PM-211-6826	2 Gauges	1 Wide 2 High	\$87.75
10-02739	PM-211-6808	2 Gauges	2 Wide 1 High	\$72.75
10-04083	PM-211-6824	3 Gauges	1 Wide 3 High	\$94.75
10-04079	PM-211-6809	3 Gauges	3 Wide 1 High	\$94.75
10-04020	PM-211-6825	4 Gauges	2 Wide 2 High	\$101.75
10-04082	PM-211-6823	4 Gauges	1 Wide 4 High	\$101.75
10-01710	PM-211-6805	4 Gauges	4 Wide 1 High	\$101.75
10-04080	PM-211-6810	5 Gauges	1 Wide 5 High	\$93.75
10-01711	PM-211-6806	5 Gauges	5 Wide 1 High	\$93.75
10-02738	PM-211-6807	6 Gauges	1 Wide 6 High	\$100.75
10-01712	PM-211-6804	6 Gauges	6 Wide 1 High	\$122.75
10-01708	PM-211-6803	6 Gauges	3 Wide 2 High	\$122.75

Sender F	Part Number	Sender Description	Price	
Spruce #	Mitchell #	Sender Description	Frice	
Pressure S	Senders			
10-25035	PS-211-9002	Pressure Sender 80 PSI		
10-25065	PS-211-9000	Pressure Sender 15/30 PSI (FAA/PMA)	\$53.75	
10-25065	PS-211-9000	Pressure Sender 15/30 PSI	\$53.75	
10-25065	PS-211-9000	Pressure Sender 15/30 PSI	\$53.75	
Rotax en	gine Sender			
10-25055	PS-211-9040	Pressure Sender 150 PSI (FAA/PMA)	\$54.75	
10-25045	PS-211-9039	Pressure Sender 100 PSI (FAA/PMA)	\$53.75	
10-25035	PS-211-9002	Pressure Sender 80 PSI	\$53.75	
10-25055	PS-211-9040	Pressure Sender 150 PSI	\$54.75	
10-25045	PS-211-9039	Pressure Sender 100 PSI	\$53.75	
10-25035	PS-211-9002	Pressure Sender 80 PSI	\$53.75	
10-25035	PS-211-9002	Pressure Sender 80 PSI	\$53.75	
Temperature Sendors				
10-25005	PS-211-8044	Temp Sender 1/8 250F (FAA/PMA)	\$33.90	
10-25175	PS-211-8045	Temp Sender 5/8 250F (FAA/PMA)	\$46.65	
10-25015*	PS-211-8090	Temp Sender 1/8 300F (FAA/PMA)*	\$34.50	
10-25180*	PS-211-8112	Temp Sender 5/8 300F (FAA/PMA)*	\$54.75	
10-25005	PS-211-8044	Temp Sender 1/8 250F	\$33.90	
10-25175	PS-211-8045	Temp Sender 5/8 250F	\$46.65	
10-25015*	PS-211-8090	Temp Sender 1/8 300F*	\$34.50	
10-25180*	PS-211-8112	Temp Sender 5/8 300F*	\$54.75	
10-25005	PS-211-8044	Temp Sender 1/8 250F	\$33.90	
10-25175	PS-211-8045	Temp Sender 5/8 250F	\$46.65	
10-02177	PS-211-8163	EGT Sender clamp - type K	\$39.95	
10-25080	PS-211-8152	CHT Sender 14mm - type J	\$33.60	
10-02171	PS-211-8154	CHT Sender 12mm - type J	\$33.60	
10-25075	PS-211-8168	CHT Sender 18mm - type J	\$33.95	
10-25076	PS-211-8156	CHT Sender probe	\$115.75	
External S	hunts			
10-10184	PS-211-9100	45 amp shunt	\$53.75	
10-10185	PS-211-9101	75 amp shunt (FAA/PMA)	\$60.75	
Sender Re	sistance (E- F)			
10-25135	PS-211-8038	Fuel Sender 10-180 ohm (FAA/PMA)	\$81.75	
10-25135	PS-211-8038	Fuel Sender 10-180 ohm (FAA/PMA)	\$81.75	
10-25135	PS-211-8038	Fuel Sender 10-180 ohm (FAA/PMA)	\$81.75	





		Block Style		
Spruce #	Mitchell #	Gauge Capacity	Configuration	Price
10-04097	PM-211-6802	6 Gauges	2 Wide 3 High	\$122.75
10-04081	PM-211-6822	7 Gauges	1 Wide 7 high	\$122.75
10-04091	PM-211-6833	7 Gauges	7 Wide 1 High	\$114.75
10-04090	PM-211-6832	8 Gauges	8 Wide 1 High	\$121.75
10-01709	PM-211-6801	8 Gauges	1 Wide 8 High	\$135.75
10-03915	PM-211-6800	8 Gauges	2 Wide 4 High	\$135.75
10-04089	PM-211-6831	9 Gauges	9 Wide 1 High	\$128.85
10-04085	PM-211-6827	9 Gauges	3 Wide 3 High	\$128.85
10-04087	PM-211-6829	10 Gauges	2 Wide 5 High	\$151.75
10-04086	PM-211-6828	10 Gauges	5 Wide 2 High	\$136.75
10-04088	PM-211-6830	12 Gauges	2 Wide 6 High	\$150.75
10-04092	PM-211-6835	15 Gauges	5 Wide 3 High	\$194.75

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

G



SWIFT TACHOMETERS

Swift Gauge Tachometers feature both clockwise and standard pointer type configurations. Swift Gauge Universal Tachometers can be used for both point and Ducati ignitions.

Size"	Description	Model	Banga	Part No.	Price
Size	Description	wouer	Range	Fart NO.	Frice
2	Standard Pointer Type Tach.	TR-001D	0-8000 RPM CDI	10-00831	\$120.75
2	Standard Pointer Type Tach."	TR-003	"0-8000 RPM Univer- sal Point and CDI"	10-01615	\$124.75
2-1/4	Standard Pointer Type Tach.	T2-001U	0-8000 RPM Univer- sal Point and CDI	10-00816*	\$128.75
2-1/4	Standard Pointer Type Tach.	T2-004	"0-8000 RPM For MZ 202 Engine"	10-04039	\$90.95
3-1/8	Standard Pointer Type Tach.	T3-001U	"0-8000 RPM Univer- sal Point and CDI"	10-00817*	\$164.85
2-1/4	Standard Pointer Type Tach.	R280D	0-8000 RPM Ducatti Ignition	10-00818	\$128.75

*Works with Rotax-point & CDI Ignition, but not 912/914 engines.

SWIFT CHT GAUGES Swift Gauge Cylinder Temperature Gauges



Size"	Description	Model	Range	Part No.	Price
3 1/8		C3-002	100-700°F / 100-700°F	10-02280	\$132.85
3 1/8	Caura	C3-002C	0-340°C / 0-340°C	10-02281	\$123.75
2 1/4	Gauge CHT / CHT	C2-002	100-700°F / 100-700°F	11-03960	\$124.75
2 1/4	Dual	C2-002C	0-340°C / 0-340°C	10-01421	\$134.90
2 Round	Duai	CR-002	100-700°F / 100-700°F	10-00486	\$159.75
2 Round	1	CR-002C	0-340°C / 0-340°C	10-01416	\$123.75
3 1/8		C3-001	100-700°F	10-02283	\$105.75
3 1/8	1	C3-001C	0-340°C	10-02284	\$83.75
2 1/4		C2-001	100-700°F	11-03958	\$56.85
2 1/4	Gauge CHT	C2-001C	0-340°C	11-03959	\$69.95
2 1/4	Single		120-300°F	10-06457	\$64.95
2 Round]	CR-001	100-700°F	10-01412	\$64.85
2 Round	1	CR-001C	0-340°C	10-01413	\$49.85
10 x 1.5 mm		CP-001	Screw-in type, 4 feet metal shield wire	10-04051	\$49.50
10mm		CP-010	10mm dia. ring, 4 ft metal shield wire	10-01438	\$30.60
12mm	CHT Sender	CP-012	12mm dia. ring, 4 ft metal shield wire	10-02286	\$29.85
14mm		CP-014	14mm dia. ring, 4 ft metal shield wire	10-02287	\$29.85
18mm		CP-018	18mm dia. ring, 4 ft metal shield wire	10-02288	\$37.55



SWIFT EGT GAUGES

Size"	Description	Range	Part No.	Price	
3 1/8		700-1700°F / 700-1700°F	10-02290	\$163.75	
3 1/8]	200-900°C / 200-900°C	10-02291	\$135.75	
2 1/4	EGT / EGT	700-1700°F / 700-1700°F	10-00487	\$129.75	
2 1/4	Dual"	200-900°C / 200-900°C	10-02292	\$136.75	
2	1	700-1700°F / 700-1700°F	10-01453	\$123.75	
2	1	200-900°C / 200-900°C	10-01454	\$92.75	
3 1/8		700-1700°F	10-02289	\$83.75	
3 1/8	1	200-900°C	10-02293	\$83.75	
2 1/4	EGT	700-1700°F	10-01457	\$79.75	
2 1/4	Single"	200-900°C	10-01450	\$51.75	
2	1 -	700-1700°F	10-01449	\$64.75	
2]	200-900°C	10-01458	\$68.75	
8X1.0mm		"8X1.0mm Screw-in Style 4 Feet Metal Shield Wire"	10-00489	\$84.75	
Clamp	EGT Sender"	"1" - 1-3/4" Clamp Style 4 Feet Metal Shield Wire"	10-02294	\$56.75	
Clamp	Sender"	"1-1/4" - 2" Clamp Style 4 Feet Metal Shield Wire"	10-00488	\$43.95	

SWIFT GAUGE 2 1/4 INCH VOLTMETER 8-16V Swift Gauge 2 1/4" Voltmeter. Colored dial markings with illuminated pointer. The graduation spacings of the scale

at both ends have been reduced, making it easier to read in the range of 10 to 14 volts. Size: 2 1/4". Range: 8-16V.



SWIFT COMBINATION GAUGES

Swift Gauge Temperature Gauges work with most 2 cycle 2 cylinder engines.

Size"	Description Range		Part No.	Price	
3 1/8	CHT / EGT	0-340°C/ 400-900°C	10-02296	\$135.75	
3 1/8	EGT / TACH	700-1700°F / 0-8000 RPM	10-02297	\$184.75	
2 1/4		100-700°F / 700-1700°F Square	10-01404	\$129.75	
2 1/4	CHT / EGT	0-340°C/400-900°C Square	10-01405	\$129.75	
2 1/4		100-700°F / 0-8000 RPM	10-02317	\$139.75	
2 1/4	CHT / TACH	0-340°C / 0-8000 RPM	10-02318	\$157.75	
2	CHT / EGT	100-700°F / 700-1700°F	10-01400	\$123.75	
2	CHI/EGI	0-340°C/ 400-900°C	10-01401	\$94.85	
2	CHT / TACH	0-8000 RPM/ 340°C	10-04034	\$152.75	
2	EGT / TACH	0-8000 RPM/ 400-900°C	10-04036	\$152.75	
2-1/4	EGT / TACH	0-8000 RPM/ 700-1700°F	10-04049	\$104.75	
2-1/4	EGT / TACH	0-8000 RPM/ 375-925°C	10-04050	\$104.75	



SWIFT WATER TEMPERATURE / **PRESSURE & OIL TEMPERATURE/ PRESSURE GAUGES**

Size"	Description	Model	Range	Part No.	Price
2-1/4	Water	WT-001	100-260°F / 40-120°C	10-02320	\$77.75
2 Rnd.	Temp.	WT-001R	100-260°F / 40-120°C	10-02321	\$49.85
2 Rnd.		OT-001R	120-300°F / 50-150°C	10-03404	\$86.75
2-1/4	Oil Temp.	OT-001	120-300°F / 50-150°C	10-03403	\$77.75
2 Rnd.	Oil Pressure	OP-060-001R	60 PSI	10-04063	\$27.50
2-1/4	Oli Flessule	OP-100-001	100 PSI	10-04058	\$43.55
2 Rnd.		OPT080-001R	120-300°F / 80 PSI	10-04052	\$92.75
2-1/4	Oil Press /	OPT080-002	120-300°F / 80 PSI	10-04054	\$129.75
2 Rnd.	Oil Temp.	OPT100-001R	120-300°F / 100 PSI	10-04053	\$92.75
2-1/4	Dual	OPT100-002	120-300°F / 100 PSI	10-04055	\$129.90
2-1/4		OPT06-002C	50-150°C/6kg/cm2	10-04066	\$111.75
-	Oil Pressure	SP-150PV	0-150 PSI, 10 Bar 5V	10-04056	\$73.80
-	Transducer	SP-100PV	0-100 PSI, 7 Bar 5V	10-04057	\$73.80
2-1/4		PT2-7K15C	50-150C, 7kg	10-04064	\$88.95
2	Dual Oil	PT1-7K15C	50-150C, 6kg	10-04065	\$52.75
2-1/4	Temp	PT2-6K15C	50-150C, 6kg	10-04066	\$111.75
2		PT1-6K15C	50-150C, 6kg	10-04068	\$154.75
"1/8" NPT"	"1/8"" NPT Oil Temp.	OTS-001	"1/8" NPT Oil Temp. Sender"	10-03406	\$38.50
10X 1.5mm	Oil Temp. Sender	OTS-002	"Oil Temp. Sender For Rotax 914, 912"	10-03407	\$27.50
5/8"	Lyc. Oil Temp. Sender	OTS-03	For Gauges 10- 03403/10-03404	10-05840	\$43.95



SWIFT FUEL QUANTITY INDICATOR The Swift Gauge Fuel quantity indicator's resistance Empty R=240 Ohms Full R=40 Ohms. The Swift Gauge Fuel quantity sender is electronic capacitance type. 12" can be cut down to 9.5" 24" can be cut down to 12.5"

Size"	Description	Model	Part No.	Price
2-1/4	Single Gauge, 5V Input	F2-001-5	10-02264	\$59.75
2-1/4	Dual Gauge, 5V Input	F2-002-5	10-02265	\$129.75
2 Round	Single Gauge, 5V Input	FR-001-5	10-03873	\$64.85
2 Round	Dual Gauge, 5V Input	FR-002-5	10-03874	\$89.75
2"	Dual Fuel level 5V w/Alarm	DF1-VA	10-04034	\$152.75
2-1/4"	Dual Fuel level 5V w/Alarm	DF2-VA	10-04036	\$152.75

SWIFT ENGINE GAUGE EXTENSION CABLES

Swift Gauge extension wire is used to lengthen the existing wire that comes with engine gauges. It is temperature compensated wire. Available in lengths of 4-10 ft, 2 or 4 conductors. Pins must be crimped onto wire.

Size	Model No.	Description	Part No.	Price
4'	Wire-042	2 Conductor, 4 Feet	10-02339	\$6.80
4'	Wire-044	4 Conductor, 4 Feet	10-02340	\$10.60
6'	Wire-062	2 Conductor, 6 Feet	10-02341	\$9.95
6'	Wire-064	4 Conductor, 6 Feet	10-02342	\$13.95
8'	Wire-082	2 Conductor, 8 Feet	10-02344	\$13.99
8'	Wire-084	4 Conductor, 8 Feet	10-02345	\$16.50
10'	Wire-102	2 Conductor, 10 Feet	10-02346	\$16.50
10'	Wire-104	4 Conductor, 10 Feet	10-02347	\$21.50

Swift Gauges are made in China.

WWW.AIRCRAFTSPRUCE.COM

FT ENGINE GAUGES

SWIFT TACHOMETER





2-1/4"

2-1/4		•	5-1/0	
Size	Description	Range	Part No.	Price
2-1/4"	Tach Ducati Engine	0-8000 RPM	10-00818	\$128.75
2-1/4"	Engine Tach	0-3500 RPM	10-06336	\$149.95
2-1/4"	Engine Tach w/ Hourmeter	0-3500 RPM	10-06337	\$176.75
2-1/4"	Rotor Tach	700 RPM	10-06338	\$106.95
2-1/4"	Rotax 912/914 Tach	0-7000 RPM	10-06339	\$128.80
2-1/4"	Rotax 912/914 Tach w/ Hourmeter	0-7000 RPM	10-06340	\$176.75
2-1/4"	Rotax 582 Hirth Tach	0-8000 RPM	10-06341	\$168.95
2-1/4"	Rotax 582 Hirth Tach w/ Hourmeter	0-8000 RPM	10-06342	\$176.75
3-1/8"	Engine Tach	0-3500 RPM	10-06343	\$153.75
3-1/8"	Engine Tach w/ Hourmeter	0-3500 RPM	10-06344	\$199.90
3-1/8"	Rotax 912/914 Tach	0-7000 RPM	10-06345	\$198.75
3-1/8"	Rotax 912/914 Tach w/ Hourmeter	0-7000 RPM	10-06346	\$200.75

SWIFT DUAL FUEL LEVEL GAUGES



Size	Description	Range	Part No.	Price
2"	Dual Fuel Level w/ Alarm	0-5V	10-04044	\$96.95
2-1/4"	Dual Fuel Level w/ Alarm	0-5V	10-03418	\$107.75

SWIFT AMMETERS



Size	Description	Range	Part No.	Price
2"	Ammeter	60A-0-60A	10-05843	\$42.50
2-1/4"	Round Ammeter	+/- 60A	10-05842	\$76.75
2-1/4"	Round Ammeter	60A-0-60A 6-16V	10-03414	\$173.90



SWIFT MANIFOLD

PRESSURE GAUGE Swift MAP2-50 Integrates the Highly Reliable MEMS Sensor: Precise, Durable Wide Voltage Supply Range 9-30 VDC. 10-50 inch Hg ABS. Colored Dial Markings. Size: 2 1/4"......P/N 10-06454**\$227.95**

SWIFT TACH/CHT/EGT GAUGES





2-1/4"

Size	Description	Range	Part No.	Price
2-1/4"	Round Tach CHT	0-8000 RPM/340°C	10-04034	\$152.75
2-1/4"	Round Tach CHT	0-8000 RPM/100-700°F	10-01626	\$135.75
2-1/4"	Round Tach CHT/EGT	0-8000 RPM/400-900°F	10-04036	\$152.75
2-1/4"	Tach /EGT	0-8000 RPM/700-1700°F	10-04049	\$104.75
2-1/4"	Tach /EGT	0-8000 RPM/ 375-925°C	10-04050	\$104.75
2-1/4"	CHT Compatable with J Type Probes	50-150°C/120-300°F	10-06333	\$82.75
2-1/4"	CHT Compatable w/Rotax Sensors	50-150°C/120-300°F	10-06334	\$82.75
2-1/4"	Oil Pressure	0-10 BAR/145 PSI	10-06335	\$91.75

SWIFT OIL TEMP GAUGES



	2-1/4″				
Size	Description	Range	Part No.	Price	
2-1/4"	Oil Temp	50-150°C/120-300°F	10-06347	\$80.85	
2"	Dual Oil Temp	50-150°C / 6KG	10-04068	\$154.75	
2"	Dual Oil Temp	50-150°C / 7KG	10-04065	\$52.75	
2-1/4"	Dual Oil Temp	50-150°C / 7KG	10-04064	\$88.95	

SWIFT OIL PRESSURE GAUGES



Size	Description	Range	Part No.	Price
2-1/4"	Oil Pressure	0-10 BAR / 145 PSI	10-06335	\$91.75
-	Oil Pressure Sensor	0-100 PSI / 7 Bar / 0.5-4.5V	10-04057	\$73.80
-	Oil Pressure Sensor	0-150 PSI / 10 Bar / 0.5-4.5V	10-04056	\$73.80

SWIFT SPEED SENSORS



	10-00TV9 10-0	0217 30-99278		
Model No.	Dimensions	Description	Part No.	Price
SS1-12P	12×60	Proximity, -500Hz, NPN, N.O.	10-06275	\$20.65
SS1-12H	12×26	Hall effect, -1000Hz, NPN, N.O.	10-06277	\$28.50
SS1-18P	18×68	Proximity, -500Hz, NPN, N.O.	10-06278	\$37.50
ST-4128-4	1/4"-28 Thread, 1/4" Tip, 58" Leads	Temp probe - Screw in PT100 Thermistor -400-180°F/-40-80°C	10-06276	\$27.55

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

GL VEGA 2 1/4" COLOR INSTRUMENTS

MGL VEGA AIRSPEED INDICATOR



Measures airspeed from 16mph to 250mph and is well suited to slow aircraft due to very good sensitivity and linearity at low air speeds. Includes a flight timer since takeoff. Airspeed units can be set to miles per hour (mph), kilometer per hour (km/h) or knots (kts). Analog tape with programmable ranges for Vs0, Vs1, Vfe, Vno and Vne. Contains a programmable Vs and Vne airspeed alarm output. Records maximum airspeed reached in permanent memoryP/N 11-15989\$395.00

MGL VEGA AIRSPEED INDICATOR / VSI



Meet the World's most lightweight and compact, fully integrated inertial measurement instruments

(IMU's) and digital compasses. The AHRS-1 is a 2 1/4" sunlight readable color display instrument providing a display for an artificial horizon reference system (AHRS), an advanced digital compass, or both depending on which sensor packages are connected.

P/N 11-16721 \$395.00

MGL VEGA ALT-5 ALTIMETER / VSI



An internal high accuracy 24 bit digital altitude sensor calculates altitude from -1000 ft up to a maximum of 35000 ft (-304m to 10668m). The ALT-5 outputs various formatted RS232 serial data protocols compatible with serial input transponders such as that from Garmin, Magellan, Northstar, Trimble, Microair etc. Provides a parallel Gillham code interface for transponders when used in combination with the MGL Avionics CNV-ALT. Built in encoder test function. The altimeter can display altitude

in feet or meters. Local pressure can be set in millibars or inches of mercury. Contains a wide range VSI indicator from +/-20 ft/min to as high as +/-10000 ft/min. VSI units can be in feet/minute (ft/min) or in meters/second (m/s)......P/N 11-15988\$375.00

MGL VEGA ASV-1 ALTIMETER / ASI / VS



An internal high accuracy 24 bit digital altitude sensor calculates altitude from -1000 ft up to a maximum of 35000 ft (-304m to 10668m). The ASV-1 outputs various formatted RS232 serial data protocols compatible with serial input transponders such as that from Garmin, Magellan, Northstar, Trimble, Microair etc.. Provides a parallel Gillham code interface for transponders when used in combination with the MGL Avionics CNV-ALT. Built in encoder test function. The altimeter can display altitude

in feet or meters. Local pressure can be set in millibars or inches of mercury. Contains a wide range VSI indicator from +/-20 ft/min to as high as +/-10000 ft/min. VSI units can be in feet/minute (ft/min) or in meters/second (m/s). Measures airspeed from 16mph to 250mph and is well suited to slow aircraft due to very good sensitivity and linearity at low air speeds. Includes a flight timer since takeoff. Airspeed units can be set to miles per hour (mph), kilometer per hour (km/h) or knots (kts). Contains a programmable Vs and Vne airspeed alarm output. Records maximum airspeed reached in permanent memory.

P/N 11-15990\$425.00

MGL VEGA AHRS-1 COLOR AHRS COMPASS DISPLAY



Compass with slip indicator (requires MGL Avionics SP-6 sensor package). Horizon with optional slip, turn indicator & G-Force (requires MGL Avionics SP-7/9 sensor package). Turn and bank indicator (requires MGL Avionics SP-7/9 sensor package). Combined compass and horizon display with bank indicator, slip indicator & G-Force (requires MGL Avionics SP6 & SP-7/9 sensor package). Can be setup as an individual compass display, artificial horizon or both. The AHRS-1 / MAG-1 is connected to the

AHRS / Compass sensor packages by a simple CAN bus interface. This allows for the optimum placement of the sensor packages in the aircraft. More then one AHRS-1 unit can be connected onto the CAN bus. This allows the compass, artificial horizon and the turn and bank indicator to be displayed on different units. G-Force indicator (MGL Avionics SP7

MGL VEGA MAP-3 MANIFOLD PRESSURE / RPM TEMP



Advanced fuel computer with various modes of operation. Supports single or dual fuel tanks. The FF-4 can connect to one or two fuel flow senders, fuel level senders or fuel injectors. The FF-4 can connect to a single fuel pressure sender. Differential fuel flow calculations are also supported for fuel return systems. The FF-4 has the ability to connect to a NMEA enabled RS232 GPS receiver for range based calculations. It can also accept a manually entered estimate cruising speed if a GPS is not available. Standard

automotive fuel level senders can be used, even with odd shaped tanks due to a comprehensive, multi-point calibration system. External RDAC interfacing via the CAN bus. An external output activates when an alarm condition has been reached.P/N 11-15992\$365.00

MGL VEGA TEMPERATURE / PRESSURE / VOLTS The TP-3 is a 2 1/4" sunlight readable 4 channel universal analog input color display instrument.



Each channel can be individually programmed to display either pressure, temperature, current or volts from a universal analog input that can interface to many sensors such as oil temperature, coolant temperature, oil pressure, fuel pressure, manifold pressure, boost pressure and many more.

The TP-3 can display any combination of 1 to 4 analog channels in a horizontal / vertical bargraph or a numeric display format. P/N 11-16579 **\$295.00**

MGL VEGA FF-4 FUEL COMPUTER



Advanced fuel computer with various modes of operation. Supports single or dual fuel tanks. The FF-4 can connect to one or two fuel flow senders, fuel level senders or fuel injectors. The FF-4 can connect to a single fuel pressure sender. Differential fuel flow calculations are also supported for fuel return systems. The FF-4 has the ability to connect to a NMEA enabled RS232 GPS receiver for range based calculations. It can also accept a manually entered estimate cruising speed if a GPS is not available. Standard automotive fuel level senders can be used, even with odd shaped tanks

MGL VEGA RPM-1 UNIVERSAL ENGINE / **ROTOR RPM INDICATOR**



Single or dual RPM display screens. Dedicated

dual rotor / engine tachometer. Includes a settable Hobbs meter which is password protected. Includes an engine running and flight timer. Includes a programmable maintenance timer for scheduled routine engine maintenance. Includes a magneto check function. Records maximum RPM reached for each channel. External RDAC interfacing via the CAN bus. An external output activates when a high alarm condition has been reached. P/N 11-15993 \$295.00



MGL VEGA TC-4 THERMO-COUPLEEGT/CHTINDICATOR

5 different temperature display screens. Supports J, K and E type thermocouple probes. Temperatures can be displayed in °C or °F from -100°C to 1200°C (-148°F to 2192°F). High accuracy: Built in thermocouple linearization curves and cold junction compensation. Records maximum temperatures reached for each channel. Includes a trend graph display of production according to peak

each thermocouple channel. Includes a trend graph display of each thermocouple channel. Engine leaning function according to peak EGT temperatures. Engine cruise mode to instantly identify changing EGT/CHT trends. External RDAC interfacing via the CAN bus. An external output activates when a high alarm condition has been reached. P/N 11-15994 \$305.00

MGL VEGA COLOR G-FORCE AND INFO The INFO-1 is a 2 1/4" sunlight readable multi-

function color display instrument.

The INFO-1 has the following features: • G-force meter • UTC and Local Time display

• Slip indicator • Battery Voltage, Current and Charge display • OAT display

P/N 11-16578 \$305.00

/8" COLOR INSTRUM B 3

MGL BLAZE G-FORCE AND INFO The INFO-2 is capable of measuring g-forces exerted in an aircraft up to +-16g. The INFO-2 also has the facility to record the maximum positive and negative g-forces encountered (typically during a flight) in permanent memory, with a password protected reset facility. It also features two independent cycle counters to capture the amount of times a preset force has been exceeded. The INFO-2 is able to measure g-forces even if the

instrument is not mounted exactly on the vertical axis of the aircraft. Also Displays: • UTC and Local Time display • Slip indicator • Battery Voltage, Current and Charge display • OAT display • Flight Timer & Flight log.

MGL BLAZE MANIFOLD PRESSURE / RPM

The MAP-4 is a 3 1/8" sunlight readable Manifold pressure indicator which can simultaneously display RPM and temperature from a universal RPM and temperature input. The manifold pressure display is also available in the form of a scalable analog bar graph if the RPM input is not displayed. The MAP-4 also has a Hobbs meter (can be set to the current engine time) which is password protected, an engine running timer/



flight timer and a programmable maintenance timer to schedule routine engine maintenance. The MAP-4 also features a programmable low/high alarm for manifold pressure, RPM and temperature, a handy magneto check function to easy diagnose magneto problems as well as it records the maximum manifold pressure, RPM and temperature reached in

MGL BLAZE RPM INDICATOR The RPM-2 is a 3 1/8" sunlight readable color display instrument providing two universal RPM inputs that is primarily intended to measure engine and/or rotor RPM. The display can be configured to display single or dual RPM or it can be configured to display engine and rotor RPM as used in helicopters and gyroplanes. The RPM-2 also has a maximum values display screen as well as a

handy magneto check function. The RPM-2 includes a number of timers such as a Hobbs meter which can be set to the current engine time and is also password protected, an engine running and flight timer as well as a programmable maintenance timer to schedule routine engineP/N 11-16591\$325.00 maintenance.

MGL BLAZE 4-CHANNEL TEMP DISPLA



4-channel Thermocouple (EGT/CHT) Monitor. The TC-5 is a 3 1/8" Sunlight readable 4 channel thermocouple color display instrument. Instrument can be configured for 5 different temperature display screens. The display can be configured to group EGTs and CHTs to common settings or each thermocouple channel can be independently displayed with individual programmable high alarm and probe type. The TC-5 also has a trend graph and maximum values displayP/N 11-16593\$345.00 screen

MGL BLAZE 12-CHANNEL TEMP DISPLAY

2-channel Thermocouple (EGT/CHT) Monitor The TC-6 is a 3 1/8" sunlight readable 12 channel thermocouple color display instrument that contains all the features necessary to monitor EGT's and CHT's. The TC-6 can be configured to display up to 12 thermocouples in an easy to read bargraph format. In addition the TC-6 has an individual programmable EGT and CHT alarm with an external output that can switch an external visual alarm indicator such as a lamp. The TC-6 also has a EGT and CHT trend graph and maximum values display screen.

P/N 11-16594......\$385.00

MGL BLAZE COLOR **UNIVERSAL ENGINE MONITOR**

The Blaze EMS-2 is a 3 1/8" universal engine monitor color display instrument. The EMS-2 contains all the color display instrument. The EMS-2 contains all the necessary functionality to replace several engine monitoring instruments. The EMS-2 light weight, small size and high level of functionality makes it an excellent choice for all types of engines. The EMS-2 can also be interfaced via the CAN bus to an optional external RDAC unit (Remote Data Acquisition Computer).

This allows for easier installation as the RDAC unit is normally mounted in the engine compartment......P/N 11-16722\$455.00

MGL BLAZE AIRSPEED INDICATOR



The ASI-5 is a 3 1/8" sunlight readable instrument that provides a wide range airspeed indication in both digital and analog tape formats. Airspeed is based on the pressure generated by a pitot tube system and a static port is provided as well for use in high speed aircraft. In addition, the ASI-5 provides a flight timer since takeoff and records the maximum airspeed reached. Airspeed can be indicated in statute miles per hour (mph), kilometers per hour (km/h) or knots (kts).

The analog airspeed tape can be scaled according to the aircraft's flying speed range and ranges for Vs0, Vs1, Vfe, Vno and Vne can be set. The ASI-4 also provides a programmable Vs and Vne airspeed

MGL BLAZE AIRSPEED / VSI The ASV-2 is a 3 1/8" sunlight readable encoding altimeter, airspeed and wide range vertical speed



indicator. The altimeter contains an internal high accuracy 24 bit digital altitude sensor which calculates altitude from -1000 ft up to a maximum of 35000 ft. The ASV-2 outputs various formatted RS232 serial data protocols compatible with serial input transponders such as that from Garmin, Magellan, Northstar, Trimble, Microair etc. The altimeter can display altitude in feet or meters and local pressure can be set in millibars or inches of mercury......P/N 11-16586\$455.00



MGL BLAZE ALTIMETER / VSI The ALT-6 is a 3 1/8" sunlight readable encoding

altimeter and a wide range vertical speed indicator The altimeter contains an internal high accuracy 24 bit digital altitude sensor which calculates altitude from -1000 ft up to a maximum of 35000 ft. The ALT-6 outputs various formatted RS232 serial data protocols compatible with serial input transponders such as that from Garmin, Magellan, Northstar,

Trimble, Microair etc. The altimeter can display altitude in feet or meters and local pressure can be set in millibars or inches of mercury. The VSI indicator can be displayed in either feet/minute (ft/min) or meters/second (m/s). The VSI can be calibrated by the user once the instrument has been installed in the aircraft......\$395.00



MGL BLAZE ENCODING

ALTIMETER / VSI The ALT-7 is a 3 1/8" sunlight readable encoding altimeter and a wide range vertical speed indicator The altimeter contains an internal high accuracy 24 bit digital altitude sensor which calculates altitude from -1000 ft up to a maximum of 35000 ft. The ALT-7 outputs various formatted RS232 serial data protocols

compatible with serial input transponders such as that from Garmin, Magellan, Northstar, Trimble, Microair etc. The altimeter can display altitude in feet or meters and local pressure can be set in millibars or inches of mercury. The VSI indicator can be displayed in either feet/minute (ft/min) or meters/second (m/s). The VSI can be calibrated by the user once the instrument has been installed in the aircraft.



MGL BLAZE AHRS / COMPASS The AHRS-2 / MAG-2 is a 3 1/8" sunlight readable

color display instrument providing a display for an artificial horizon reference system (AHRS), an advanced digital compass, or both depending on which sensor packages is connected.

P/N 11-16581 \$335.00 **MGL BLAZE TEMPERATURE / PRESSURE / VOLTS**

The TP-4 is a 3 1/8" sunlight readable 4-channel universal analog input color display instrument. Each channel can be individually programmed to display either pressure, temperature, current or volts from a universal analog input that can interface to many sensors such as oil temperature, coolant temperature, oil pressure, fuel pressure, manifold pressure, boost pressure and many more. The TP-4 can display any combination of 1 to 4 analog channels in a horizontal / vertical bargraph or a



594

MGL BLAZE FUEL COMPUTER

The FF-5 is a 3 1/8" sunlight readable color display instrument intended for efficient monitoring of fuel related information for single or dual fuel tanks. The FF-5 has many display configurations based on single/dual flow senders, single/dual level senders and a fuel pressure sender. Full functionality is available with a fuel flow and level sender or only with a fuel flow sender using calculated fuel levels based on fuel usage. Differential fuel

flow calculations are also supported for fuel return systems. Fuel injector systems are also supported. Standard automotive fuel level senders can be used, even with odd shaped tanks due to a comprehensive, multi-point calibration system. Most fuel flow senders can be used as the K-factor of the sender can be entered into the system for simple calibration......P/N 11-16587\$395.00

IN

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.



ENI RS



CIES MAGNETIC FUEL LEVEL SENDER KITS A better way to measure fuel. This Magnetic Field Sensor technology is patented by CiES Inc. for fuel level senders. These sensors use the basic premise that the electrical properties of certain ferromagnetic alloys, such as permalloy, are influenced by external magnetic fields. Like a compass that always points to magnetic North, no matter how you move the fuel - these fuel level senders always point to the float sitting on the surface. **The initial STC allows the CiES to replace the existing fuel quantity senders in:** • Britten Norman BN2 • Beech 33, 35, 36, 55, 58 • Cessna 170, 172, 177, 177RG, 180, 182, 185, 206, 207 • Cirrus SR20 SR22 • Fairchild 24 • Gippsland GA8 • Maule • Mooney • Piper PA 23, PA 24, PA 28, PA 30, PA 31, PA 32, PA 39, PA 44 • Vulcanair P68 • Fairchild 24 **Specifications:** • CiES CC-Series fuel senders are TSO certified to C55a and associated SAE AS405C. • They have met all the DO-160(F) and DO-254 DAL (Design Assurance Level) Level D requirements for the TSO.

Vendor Part Number	Description	Part No.	Price
CC284022-C170-105	Analog Sender Kit For Cessna C170	10-06510	\$990.00
CC284022-C210-105	Analog Sender Kit For Cessna C210	10-06514	\$990.00
CC284022-0608-101	Digital Sender Kit For Cessna C210 Strut Wing Tip	10-06532	\$870.00
CC284022-C150-101	Digital Sender Kit For Cessna C150/152	10-06533	\$870.00
CC284022-C170-101	Digital Sender Kit For Cessna C170	10-06534	\$870.00
CC284022-C177-101	Digital Sender Kit For Cessna C177	10-06535	\$870.00
CC284022-C210-101	Digital Sender Kit For Cantilener Wing C210	10-06536	\$870.00
CC284022-C172-101	Digital Sender Kit For Cessna 172/175	10-06537	\$870.00
CC284022-BTIP-101	Digital Sender Kit For Osborne Tip Tank	10-06538	\$870.00
CC284022-CESSNA-101	Digital Sender Kit For Cessna C210, 182, 185, 206 Strut Wing	10-06539	\$870.00
CC284022-B55A-101	Digital Sender Kit For Aux Tank B95	10-06540	\$3,480.00
CC284022-B58-101	Digital Sender Kit For B58	10-06541	\$2,610.00
CC284022-T34-101	Digital Sender Kit For Beechcraft 45/T-34	10-06542	\$870.00
CC284022-GA8-101	Digital Sender Kit For Gippsland Airvan GA8	10-06544	\$870.00
CC284022-M20CDE-101	Digital Sender Kit For Mooney M20CDE	10-06545	\$885.00
CC284022-M20FGJK-101	Digital Sender Kit For Mooney M20FGJK	10-06546	\$1,740.00
CC284022-M20LMS-101	Digital Sender Kit For Mooney M20LMS	10-06547	\$1,740.00
CC284022-ARROW-101	Digital Sender Kit For Piper Arrow	10-06548	\$1,740.00
CC284022-P24-101	Digital Sender Kit For Piper PA22/24	10-06549	\$870.00
CC284022-P23-101	Digital Sender Kit For Piper PA28	10-06550	\$1,740.00
CC284022-CHEROKEE-101	Digital Sender Kit For Piper PA28	10-06551	\$1,740.00
CC284022-P30-101	Digital Sender Kit For Piper PA30/40	10-06552	\$1,740.00
CC284022-P31-101	Digital Sender Kit For Piper PA31	10-06553	\$3,960.00
CC284022-P44-101	Digital Sender Kit For Piper PA44	10-06556	\$870.00
CC284022-P68-101	Digital Sender Kit For Vulcanair P.68	10-06557	\$870.00
CC284022-MAULE-101	Digital Sender Kit For Maule	10-06560	\$870.00
CC284022-C195-101	Digital Sender For Cessna 190 / 195	10-06821	\$870.00
CC284022-C208-101	Digital Sender For Cessna 208 / 208B	10-06822	\$2,610.00
CC284022-B20-101	Digital Sender 20 Gallon Main For Beech 33 / 35 / 36	10-06823	\$870.00
CC284022-B25-101	Digital Sender 25 Gallon Main For Beech 33 / 35 / 36	10-06824	\$870.00
CC284022-B10-101	Digital Sender 10 Gallon Aux For Beech 33 / 35 / 36	10-06825	\$870.00
CC284022-B36TC-101	Digital Sender 40 Gallon Main For Beech 33 / 35 / 36	10-06827	\$2,610.00
CC284022-B40-101	Digital Sender 40 Gallon Main For Beech 33 / 35 / 36	10-06828	\$1,740.00
CC284022-NN MAIN-101	Digital Sender BN Main 101 for B-N Group	10-06829	\$870.00
CC284022-BN TIP AFT-101	Digital Sender BN TIP AFT 101 for B-N Group	10-06830	\$1,195.00
CC284022-BN TIP FWD-101	Digital Sender BN TIP FWD 101 for B-N Group	10-06830	\$870.00
CC284022-BN TIP PWD-101 CC284022-ACA8-101	Digital Sender For American Champion 8KCAB / 8GCBC	10-06832	\$870.00
CC284022-ACA8-101 CC284022-ACA7-101	Digital Sender For American Champion 7ECA / 7GCAA / 7KCAB	10-06832	\$870.00
CC284022-ACA7-101 CC284022-114-101	Digital Sender For Rockwell Commander 112 / 114	10-06836	\$870.00
		-	
CC284022-TB10-101	Digital Sender For Socata TB9 / 10	10-06837	\$986.00
CC284022-TB20-101	Digital Sender For Socata TB20 / 21	10-06838	\$1,972.00
CC284022-108-101	Digital Sender For stinson 108-1 Thru 180-5	10-06839	\$870.00
CC284022-AA5-101	Digital Sender For Grumman AA-5 / AG-5	10-06840	\$870.00



SWIFT FUEL CAPACITY SENDERS

Model Number	Size	Description	Part Number	Price
SF-F-12	12"	Bendable Alarm Sender, 5V Output	10-06660	\$132.75
SF-F-18	18"	Bendable Alarm Sender, 5V Output	10-06661	\$93.75
SF-F-24	24"	Bendable Alarm Sender, 5V Output	10-06662	\$89.75
SF-Z-12	12"	Alarm Sender, 5V Output	10-06663	\$94.75
SF-Z-24	24"	Alarm Sender, 5V Output	10-06664	\$103.99
SF-Z-48	48"	Alarm Sender, 5V Output	10-06665	\$149.95
301-KV-000		Sender, Connecting Cable	10-06666	\$18.80

WWW.AIRCRAFTSPRUCE.COM

INSTRUMENT TECH CORP FUEL SENDERS

OEM P/N	ITC Mfg Part Number	Eligibility Chart	Our Part Number	Price
PS50149-2	9812-0001-101	 Drop-In Fuel Sender Replacement for the Following Models: PA-31/PA-31-300/-325 Navajo 31-1 through 31-861; 31-7300901 through 31-8312019 PA-31-350 Chieftain/T-1020 31-5001 through 31-5004; 31-7305005 through 31-8553002 PA-31P Pressurized Navajo 31P-1 through 31P-80; 31P-7300110 through 31P-7730012 	10-06976	\$445.00
PS50149-3	9812-0002-101	 Drop-In Fuel Sender Replacement for the Following Models: PA-31/PA-31-300/-325 Navajo 31-1 through 31-861; 31-7300901 through 31-8312019 PA-31-350 Chieftain/T-1020 31-5001 through 31-5004; 31-7305005 through 31-8553002 PA-31P Pressurized Navajo 31P-1 through 31P-80; 31P-7300110 through 31P-7730012 	10-06977	\$445.00
PS50149-4	9812-0003-101	 Drop-In Fuel Sender Replacement for the Following Models: PA-31/PA-31-300/-325 Navajo 31-1 through 31-861; 31-7300901 through 31-8312019 PA-31-350 Chieftain/T-1020 31-5001 through 31-5004; 31-7305005 through 31-8553002 PA-31P Pressurized Navajo 31P-1 through 31P-80; 31P-7300110 through 31P-7730012 	10-06978	\$457.00
PS50149-5	9812-0004-101	 Drop-In Fuel Sender Replacement for the Following Models: PA-31/PA-31-300/-325 Navajo 31-1 through 31-861; 31-7300901 through 31-8312019 PA-31-350 Chieftain/T-1020 31-5001 through 31-5004; 31-7305005 through 31-8553002 PA-31P Pressurized Navajo 31P-1 through 31P-80; 31P-7300110 through 31P-7730012 	10-06979	\$457.00
7740-0304	9812-0028-101	Drop-In Fuel Sender Replacement for the Following Maule Aircraft Models: Bee Dee M-4, M-4, M-4C, M-4S, M-4T, M-4-180C, M-4-180S, M-4-180T, M-4-210, M-4-210C, M-4-210S, M-4-210T, M-4-220, M-4-220C, M-4-220S, M-4-220T, M-5-180C, M-5-220, M-5-210C, M-5-210TC, M-5-220C, M-5-235C, M-6-180, M-6-235, M-7-235, MX-7-235, MX-7-180, MX-7-420, MXT-7-180, MT-7-235, M-8-235, MX-7-160, MXT-7-160, MX-7-180A, MXT-7-180A, MX-7- 180B, M-7-235B. M-7-235A, M-7-235C, MX-7-180C, M-7-260, MT-7-260, M-7- 260C, M-7-420AC, MX-7-160C, MX-7-180AC, M-7-420A, MT-7-420, M-4-180V and M-9-235.	10-06980	\$437.00
		INSTALLATION WARNING: BE SURE TO CHECK THE TYPE OF FUEL SENDER YOU HAVE. P/N 9812-0028-101 WILL NOT REPLACE THE OLD STEWART WARNER TYPE SENDERS; ONLY ROCHESTER TYPE SENDERS.		
38789-800	9812-0023-101	PA-28R, PA200T, PA28R-201, PA-28R-201T, PA28RT-201T, PA-34, PA-34-200T, PA-34-220T. INSTALLATION WARNING: BE SURE TO CHECK THE TYPE OF FUEL SENDER YOU HAVE. P/N 9812-0023-101 WILL NOT REPLACE THE OLD STEWART WARNER OR A.C. TYPE SENDERS. IT ONLY REPLACES THE ROCHESTER TYPE SENDERS.	10-06981	\$552.00
38789-801	9812-0024-101	Drop-In Fuel Sender Replacement for the following aircraft: PA-28R, PA28R-201, PA-28RT, PA28RT-201, PA28RT-201T, PA-34, PA-34- 200. INSTALLATION WARNING: BE SURE TO CHECK THE TYPE OF FUEL SENDER YOU HAVE. P/N 9812-0024-101 WILL NOT REPLACE THE OLD STEWART WARNER OR A.C. TYPE SENDERS. IT ONLY REPLACES THE ROCHESTER TYPE SENDERS.	10-06982	\$698.00
42470-000	13-10017-501	This Gasket is used with the 9812-0001-101, 9812-0002-101, 9812-0003-101 & 9812-0004-101 Fuel Senders Only.	10-06983	\$12.95

SKYSPORT PROBES

SKYSPORTS CAPACITIVE FUEL SYSTEMS



The Skysports fuel monitoring system is a capacitance system which has no float and no moving parts except the needle on the gauge. Used in hundreds of various ultralight, homebuilt, and military aircraft, these fuel systems have been very popular due to their accuracy and durability. The Skysports fuel probe electronically measures the level of fuel in the tank, and sends the signal through the wire harness to the gauge. Available for single or dual tank use and for 12 or 24 volt operation. The system includes the gauge, probe, 8 ft. wire harness, mounting hardware, & instructions.

The SkySports 240-33ohm fuel systems are no longer available. They have been replaced with a new 0-5V system. These new systems, (listed below) can be used on both 12 or 24 volt aircraft. The older 240-33ohm gauge and probes are not interchangeable with the new 0-5V gauge or probes. However the installation of the systems are the same.

Note: The Skysports 240-33ohm older style probes are only available as special order upon request. Made in USA

ROUND GAUGE SYSTEMS

Description	Part No.	Price
Fuel System 2" Round 6" Straight Probe	10-04509	\$279.66
Fuel System 2" Round 12" Straight Probe	10-04495	\$265.56
Fuel System 2" Round 24" Straight Probe	10-04496	\$273.66
Fuel System 2" Round 12" with 3" Bendable Probe	10-04497	\$269.46
Fuel System 2" Round 24" with 3" Bendable Probe	10-04498	\$269.46
Fuel System 2" Round 12" with 5" Bendable Probe	10-04499	\$269.46
Fuel System 2" Round 24" with 5" Bendable Probe	10-04501	\$283.46

SQUARE GAUGE SYSTEMS

Description	Part No.	Price
Fuel System 2-1/4" Square 6" Straight Probe	10-04511	\$292.66
Fuel System 2-1/4" Square 12" Straight Probe	10-04502	\$278.56
Fuel System 2-1/4" Square 24" Straight Probe	10-04503	\$286.66
Fuel System 2-1/4" Square 12" with 3" Bendable Probe	10-04504	\$282.46
Fuel System 2-1/4" Square 24" with 3" Bendable Probe	10-04505	\$282.46
Fuel System 2-1/4" Square 12" with 5" Bendable Probe	10-04506	\$282.46
2-1/4" Square 24" with 5" Bendable Probe	10-04507	\$296.46

INDIVIDUAL COMPONENTS

Description	Part No.	Price
2" Gauge Only	10-04119	\$76.95
2-1/4" Gauge Only	10-01246	\$89.95
12" Straight Probe	10-03758	\$149.85
6" Straight Probe	10-03753	\$163.95
24" Straight Probe	10-03773	\$157.95
12" with 3" bend probe	10-03746	\$153.75
24" with 3" bend probe	10-03774	\$153.75
12" with 5" bend probe	10-03761	\$153.75
24" with 5" bend probe	10-03776	\$167.75
Installation Kit	10-03731	\$38.75



MGL CAPACITANCE FUEL LEVEL SENDERS

58A			
п.	24 inch Sender.	P/N 11-14307	\$136.00

RUM

BELITE RADIANT FUEL GAUGE



The RADIANT Single or Dual Tank Fuel Gauge from Belite shows current contents of one or two tanks and the system voltage. Optional Fuel Flow. Works with: float probes, capacitive probes, also Belite fuel probes. Shows fuel consumption trend from two tanks over the last 30 minutes. The picture shows a full left tank and a right tank that has steadily been draining over the last 30 minutes. Voltage is 10.8 volts. Direct sunlight readable (this display is *bright*.) Display is friendly with sunglasses,

even polarized sunglasses. Single or dual fuel tank display, featuring a visual history of the last 30 minutes of fuel level in each tank. Optional is a digital fuel flow sensor, which adds real time fuel flow information. All instruments are designed for a standard 2.25" cutout, and use approximately 100milliamps of power from a supply of 8 to 14 volts. All instruments are dimmable.

For Capacitive Fuel Senders Or 0-5 Volt Input.... P/N 10-06067.\$249.95 For Resistive Or Float Based Fuel Senders P/N 10-06068 \$249.95



RADIANT UNIVERSAL AIR SPEED INDICATOR

Huge digits; speed trend; three speed ranges; knots or MPH. RADIANT Technology's new Universal Airspeed Indicator works across 3 different speed ranges and Knots / MPH. It has a number of features which are important to pilots, with features that are not available in expensive glass panels or in older steam gauges.

P/N 10-06964\$249.95



BELITE RADIANT TURN COORDINATOR

The RADIANT Turn Coordinator provides a visual indication of turn rate along with a visual indication of slip / skid, utilizing an ultra bright, daylight readable color LCD display. In comparison to all other Turn Coordinators, this unit also provides a digital indication of degrees per second in the turn. P/N 10-06082 \$264.00



BELITE RADIANT MFI (ASI / VSI / ALTITUDE)

This instrument shows simultaneous ASI, Altitude and VSI information in a single glance, easy to read format. All of this graphically on a single vivid LCD screen. The MFI is part of the RADIANT instrument line that combines many functions into simple, small, lightweight units. They have sunlight readable full color high contrast LCD screens which are also friendly with sunglasses.

P/N 10-07141\$359.00

BELITE RADIANT TACHOMETER



Radiant Tachometer is designed to work with any engine and provides a brilliant, crisp LCD screen with a soft green back light, for easy visibility. The Digital Tachometer / Hour Meter is a general purpose, ignition spark lead based instrument. Mount it anywhere using the included Velcro patch.

Works with two or four stroke engines; also includes a job (oil change) interval countdown timer......P/N 10-06872\$43.75

FUEL PROBE SYSTEM 1/8" PROBES



The Belite liquid level / fuel probe is designed to sense fuel or liquid level of any type and provide an electrical indication to instrumentation along a range of 0 to 5 volts. The unit is not TSO'd or PMA'd. Use only in appropriate aircraft as a

backup to certified instruments and pilot calculations. Ideal for monitoring level of liquid in many other applications, such as agricultural spraying.



BELITE PERFECT LIQUID PROBE FOR RFG A-D GAUGE

Radiant Instruments the Perfect Liquid Probe (PLP), a novel level sensor which mounts on the top of a tank. It uses ultrasonic technology to determine the distance between the sensor and

the liquid within the tank. It is compatible with almost all liquid types, including gasoline, jet fuel, diesel and water. Other than two small holes in the top of the tank, no probes, rods, floats or wires enter the tank. The ultrasonic probe heads are metal, not plastic......P/N 10-07157\$249.95

HEADER TANK AUTOMATIC FILL CONTROLLER

The HTAF2 is a "Smart" Header Tank Automatic Fill Control Relay. This device automatically keeps the aircraft header tank full without over stressing any fuel pumps. It can be operated manually (without any fuel sensors mounted in the header tank), or automatically, with one or two optical fuel sensors mounted in the side of the header tank or the your sight tube



plumbing. The fuel sensor used for the HTAF2 is a very reliable optical fuel level sensor (optional) that can be easily installed in the header fuel tank. If the user is not able to install a fuel sensor in the header fuel tank, the HTAF2 can be wired to a normally open push button switch to activate the timed pumping. The unit also has a relay output that can be used for a light to indicate when the fuel in the header tank is low. The light will flash indicating when there are any system malfunctions detected. This detection of low fuel is also damped so that it does not falsely indicate low fuel in the case of sloshing fuel. The system can be powered by +12V or +24V electrical systems.

Without Sensors	P/N 10-07107\$89.00
1 Sensor	P/N 10-07108 \$169.00
2 Sensors	

BELITE RADIANT - ANGLE OF ATTACK SENSOR

The Radiant Angle of Attack Sensor & Display System includes vane, sensor, LCD RADIANT color Display, and aural alert output, which sounds when angle is in the red. The vane is mounted on the leading edge of



your wing (for tractor airplanes) or on the forward side of your fuselage (for pusher airplanes). The Radiant AOA comes complete with fittings for either mount. The actual angle of attack is shown in continuous digital format as well. This is a differential angle from the base (cruise) setting. The bar graph and the numerical value fall rapidly as the elevator is shoved forward. All instruments are designed for a standard 2.25" cutout, and use approximately 100 milliamps of power from a supply of 11 to 14 volts. All instruments are dimmable. FOR USE IN AIRCRAFT AND VEHICLES ONLY. Non-TSO/PMA Experimental status and use only.

P/N 10-07283\$599.95

BELITE BINGO 4 LIQUID DETECTOR



With fuel management issues continuing to plague pilot decision making, Radiant Technology introduces Bingo4, a small sender device that fits on the outside of the tank and easily shows the presence of absence of liquid in a tank.

Bingo4 mounts on the outside of many different kinds of tanks. It uses ultrasonic technology to

indicate the presence of liquid at the point of attachment. It's the perfect instrument to indicate critical level information of the fluid inside a tank. The sender includes a flashing status LED, best for pilots who can see the tank and sender installation.


With USB Port Only	P/N 10-07156 \$129.95
With USB Port + Panel Display	P/N 10-07155 \$179.95

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

CROFLIGHT GAUGES

MICRO-1000 ENGINE GAUGES

Senders and probes are not included umless specifically noted. See lower half of the page for senders, probes, and other accessories. 2" gauges are round. 2 1/4" gauges are square.



OIL TEMPERATURE ELECTRIC Includes 1/8 NPT Sender

2" OT030......P/N 10-01586......\$71.75









P/N 10-01640\$72.75



100# PRESSURE SENDER

HAS A 1/8" NPTF fitting. OP030.2P/N 10-01573\$49.50

TEMPERATURE SENDERS Single-station senders for water and oil tempera-



OIL PRESSURE FITTING **ADAPTER FOR ROTAX**

Oil pressure fitting adapter for Rotax. Straight Angle Adapter 1/8 NPT 10MM x 1.5. P/N 15-08691\$37.95



TUBING KIT FOR OIL PRESSURE

Tubing Kit for Oil Pressure Includes 16' tubing and assorted adapters to fit most any application. Includes 1/8-27 NPT and 1/4-18 NPT adapters. P/N 15-04762 \$19.50

APPLICATION NOTE: Most current production Rotax® engines require 1/8NPT temperature and pressure senders.



THERMOCOUPLES

BAYONET TYPE Threaded Fitting with 1/8" P/N AN4076\$31.55 Pipe thread to mate with bayonet type thermocouple.

UNIVERSAL REPLACEMENT PROBES CHT Probe, Type J, Style AN 5541-1



P/N AN5541-1\$76.75 EGT Probe, Type K MM-111

P/N 11-01022 \$73.75 CHT Probe, Type K (Hose clamps not required) P/N 11-01023\$71.75

Cessna CHT Probe S2334-3 - Must be used with the new Rochester Gauges. Cannot be used with the old Stewart Warner Gauges P/N 06-00703 \$478.00

Note: These probes will only work with a grounded system.



AMMETER ±30 AMPS

2 1/4" AG031......P/N 10-01319......\$78.75 2" AG030.......P/N 10-01317.......\$64.25



MICROFLIGHT DUAL TACH/EGT

2" Round Gauge Tachometer - Universal for single or dual ignition. EGT range: 700-1700°F EGT probe (clamp type) Sender not included P/N 10-01628 \$159.99



MICROFLIGHT DUAL TACH/EGT

Dual: CHT/Tachometer. Size: 2" inch round. Range: 700-1700°F/0-8000rpm for single and dual ignition Similar to Falcon Gauge. Made in China P/N 10-01626 \$135.75

MICROFLIGHT SENDERS & ACCESSORIES



FLOAT-TYPE FUEL PROBES

6-23" Probe. Adjustable, 6-23"; 240-33 ohms standard: 5-hole ASME pattern. Requires mounting kit.

FGP031......P/N 10-01489......\$46.50



UNIVERSAL PROBE MOUNT

Works well with plastic and other tank. Includes threaded attachment ring, gasket, and hardware. Standard 5-hole SAE pattern.



COLOR TINT LAMPS

Color tint lamp boots. Set of Boots. Changes your instrument backlighting to red for night flying.



ROCHESTER 3080-38 TEMPERATURE PROBE

3/8-24 NF3. 250°-550° Aircraft Temperature

ROCHESTER 3080-37 OIL TEMPERATURE PROBE

3080-37 for cluster-type instrument. 5/8"-18,

THERMOCOUPLE LEADS



HEAVY-WEIGHT AN SPEC. WIRE LEADS 8 Ohm Resistance, Iron-Constantan, 90" P/N 42535\$51.80 8 Ohm Resistance, Iron-Constantan, 144" P/N 42536\$64.85 8 Ohm Resistance, Iron-Constantan, 216" P/N 42537 \$82.85

Prices Subject to Change Without Notice - Valid as of June 3, 2022.

WWW.AIRCRAFTSPRUCE.COM

CROFLIGHT GAUGES / V DO GAUGES

MICRO-1000 PYROMETERS



Superior to any other type of pyrometer, MICRO-1000 pyrometers still read the same. And we guarantee that, when properly installed, these pyrometers will be accurate within 2%. Like other MICRO-1000 gauges, these units come with our standard 2-year warranty. Order gauges, probes, and extension leads separately.

Note: MICRO-1000 pyrometers are not compatible with other thermocouple probes. Order Micro-1000 Probes • 2% Accuracy • Easy-to-Read Dial • Backlighting • Standard • Temperature Compen-

sated · Shock & Vibration Resistant · Designed & Built for Aircraft

Range Description		Part No.	Price
0-600F/0-300C	CH131 2-1/4" Square CHT	10-01426	\$149.95
0-600F/32-315C	CH130 2" Round CHT	10-01425	\$136.75
0-600F/0-1600F	CH141 2-1/4" Square CHT EGT Combo	10-01409	\$233.95
0-600F/600-1600F	CH140 2" Round CHT EGT Combo	10-01408	\$227.95
800-1800F/450-950C	CH131 2-1/4" Square EGT	10-01464	\$133.95
800-1800F/430-980C	CH130 2" Round EGT	10-01463	\$136.75
800-1800F	CH141 2-1/4" Square Dual EGT	10-01467	\$258.95
800-1800F	CH140 2" Round Dual EGT	10-02093	\$236.95

MICROFLIGHT PROBES



A more expensive material than that of the more commonly found "J" type, the "E" type probe produces much greater accuracy at lower temperatures (less than 600°F). Extension wire is of the same material as the thermocouple to preserve the accuracy and temperature compensation qualities. Note: The 15 extension leads may be shortened up to seven feet. The EGT probes

are high-quality Chrome/Alumel "K" types. Choose the weld-on boss type (below) for new engine installations. Choose the clamp-on type (below) to replace the existing probe. Order gauges, Micro-1000 probes and extensions separately.

Note: These are "K" type grounded probes, not for use on digital gauges. For use with Micro-1000 gauges.

Туре	Part No.	Description	Price
EGT	10-01471	EP130 Type K Clamp Type Probe	\$99.75
EGT	10-01475	EP130R Adjustable Rotax M8-1 Probe	\$97.25
EGT	10-01477	EP131 Type K Weld on Boss Probe	\$74.80
EGT	10-01478	EP132 Type K 1/8" NPT Adjustable Adapter Probe	\$93.25
EGT	10-01479	EP133 Type K 1/4" NPT Adjustable Adapter Probe	\$92.25
CHT	10-01441	CP132 Type K 10mm Probe	\$68.85
CHT	10-05122	CP129 Type K 12mm Probe	\$67.80
CHT	10-00823	CP130 Type K 14mm Probe	\$72.75
CHT	10-01440	CP131 Type K 18mm Probe	\$66.85

MICROFLIGHT LEADS

Part No.	Description	Price
10-01442	CHT 18G Thermocouple Lead 7 Ft	\$27.00
10-01443	CHT 18G Thermocouple Lead 15 Ft	\$55.50
10-01480	EGT 18G Thermocouple Lead 7 Ft	\$49.00
10-01481	EGT 18G Thermocouple Lead 15 Ft	\$102.95

Note: For a complete CHT ot EGT set, order gauge, probe, and lead.

VDO GAUGES & PROBES



EXHAUST GAS TEMP 2-1/4" P/N 10-01462 ... \$229.95 2" P/N 10-01461 ... \$215.95 250 -1650°F

With weld-on Boss type probe



OIL PRESSURE 2-1/4" ... P/N 10-01570 .. \$106.95 2 P/N 10-01567 \$92.50 Includes 1/8NPT sender 2" round(Gauge Only)



AMMETER - 12 VDC 2-1/4" P/N 10-02335 **\$78.50** 2" P/N 10-02334 **\$63.95** No shunt required



FUEL LEVEL-10-180 OHM 2-1/4" P/N 10-01485\$46.00 2" P/N 10-00825\$31.90 Order only P/N 10-04788 probes for this instrument.



HOUR METER-12VDC

1

2-1/4" ... P/N 10-01505 \$66.00 2" P/N 10-01504**\$51.80** With minute hand

FLUID TEMPERATURE GAUGE 2" P/N VDO180902D ...\$65.75 Includes 96" capillary tubing and adapter kit.

OIL TEMP

2-1/4" P/N 10-01583\$68.50

2" P/N 10-01579\$54.00

Includes 1/8NPT probe

VOLTMETER-12 VDC

2-1/4" P/N 10-01638\$56.25

2" P/N 10-01637\$41.99

With color arc

WATER TEMP.

2-1/4" P/N 10-01649 ... \$77.75

2" P/N 10-01646\$63.50

Includes 1/8NPT probe

2" round(Gauge Only)

VDO PROBES

	VDO Float Probe 10-180ohms	. P/N	10-04788\$62.5	0
1000	VDO Float Probes - 240 ohms	. P/N	10-00826\$49.8	5
1000	Fuel Probe Mounting Ring	. P/N	10-01502\$39.5	0
	VDO Temperature Probes - 1/8NPT			
-	Water Probe 1/8" NPT	. P/N	10-01648\$21.7	5
	Oil Probe 1/8" NPT	. P/N	10-01580\$15.8	5
	VDO CHT Probe - Type "J"			
	14mm ring type	. P/N	10-01439\$82.7	5
VDO E	GT Probe - Type "K" Weld-on Boss	. P/N	10-01461\$215.9	5
Oil Pre	essure Sender 1/8"-27 NPT (30PSI)	. P/N	10-05471\$71.7	5
Oil Pre	essure Sender 1/8" NPT (80 PSI)	. P/N	10-01568\$52.9	5
	essure Sender 1/8-27 NPT (150 PSI)			
VDO F	Pressure Sender 1/8"-27 NPTF 80 PSI.	. P/N	10-06581\$72.7	5
VDO C	Dil Temp Sender 10MM	. P/N	15-06252\$28.9	5

WARNING NOTICE:

*VDO pressure senders are not to be used with any type of fuel application. *VDO pressure senders may not be used in automotive braking systems. *VDO pressure senders are not suitable for use in aircraft.

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

IASPORT ROTAX INSTRUMENTS



ROTAX 912 2-1/4" CHT GAUGE FARENHEIT

Rotax 912 CHT Temp – F. For use with VDO sensor only. Red: 270-300. Yellow: 100-150, 220-270. Green: 130-220 Diameter: 57mm (2.25 in.). Motor:

ROTAX 912UL 2-1/4" CHT GAUGE

IM-549 - Water Temperature Indicator (CHT) Rotax 912 engine (80HP) and 914.57 mm - Scale in °F. Designed specifically for Rotax 912 (80HP) and 914 with silkscreen red areas green and yellow. Diameter 57mm, 100-300° F range, distance between 2° F indications in central area. Supply voltage 8-35V DC. It works with sensors that come from the factory with Rotax engines......P/N 15-08392 \$125.75



ROTAX 912 2-1/4" EGT **GAUGE FAHRENHEIT**

A540 Rotax 912 EGT Temp – F. For use with Aviasport Sender only. Red: 1500-2000. Yellow: 600-1100. Green: 1100-1450. Diameter: 57mm(2.25 in)

P/N 15-05922 \$182 75 **OTHER ROTAX EGT GAUGES**

IM-774 2" EGT 300-1000 C Rotax 914 P/N 15-08550\$109.99 IM-775 2-1/4 EGT 300-1000 C Rotax 914...... P/N 15-08551\$119.75 IM-776 2 Dual EGT 300-1000 C Rotax 912 P/N 15-08552\$118.75 IM-777 2-1/4 Dual EGT 300-1000 C Rotax 912 . P/N 15-08553\$121.75 IM-777 2 Dual EGT 300-1000 C Rotax 914 ... P/N 15-08554\$118.75 IM-779 2-1/4 Dual EGT 300-1000 C Rotax 914 ... P/N 15-08555\$121.75 IM-780 2 EGT 600-1800 F Rotax 912 P/N 15-08556\$112.95 IM-781 2-1/4 EGT 600-1800 F Rotax 912...... P/N 15-08557\$113.80 IM-782 2 1/4 Dual EGT 500-1300 F Rotax 503 .. P/N 15-08558\$129.99 IM-783 2.25 Dual EGT 500-1300 F Rotax 582 . P/N 15-08559\$129.95



ROTAX 912 2-1/4" OIL **PRESSURE GAUGE PSI**

A572 Rotax 912 Oil Pressure - PSI. For VDO Sender only. Red: 0-12, 90-150 psi. Yellow: 75-90 psi. Green: 30-75 psi. Diameter: 57mm(2.25 in) P/N 15-05924\$119.85



ROTAX 912/914 OIL PRESSURE GAUGE

· 2 Oil Pressure · Ideal for use on Rotax 912/914 · Ranges from O-8Opsi · Includes 1/8 male NPT sender · Fits 2 1/16 cutout · Completely electrical Requires 12 volts D/C...P/N 15-06319\$122.75



ROTAX 912 2-1/4" OIL TEMPERATURE GAUGE FARENHEIT

A558 Rotax 912 Oil Temp. For use with VDO Sender only. Red: 90-120, 280-320. Yellow: 120-190, 230-270. Green: 190-230. Note: Not for 912iS and 914 engines. See "Alternate Items" part number 15-08399. Diameter: 57mm (2.25 in.) Motor: 912S/914. P/N 15-05926 \$119.85



ROTAX 912 2-1/4" TACHOMETER

A105 Rotax 912 Tachometer. 0-7000 rpm. Electronic Connection only. Red: 0-1200, 5800-7000. Yellow: 1200-1800, 5500-5800. Green: 1800-5500. P/N 15-05932\$158.75



Prices Subject to Change Without Notice - Valid as of June 3, 2022.

ROTAX 912 3-1/8" TACHOMETER

A149 Rotax 912 Tachometer - 3-1/8". 0-7000 range. Electronic connection only. Red: 0-1200, 5800-7000. Yellow: 1200-1800, 5500-5800. Green: 1800-5500......P/N 15-05930......\$167.75

















AVIASPORT

Yellow: 10-11, 13-14 volts. Green: 11-13 volts. P/N 15-06650**\$115.75**

ROTAX 912 2-1/4" VOLTMETER

A562 Rotax 912 Voltmeter. Red: 8-10, 14-16 volts.

ROTAX 912 2-1/4" FUEL PRESSURE GAUGE BAR

A564 ROTAX 912 Fuel Pressure Bar. Requires Sender below. Red: 0-1.5 , 4-6 bar. Green: 1.5 – 4.0 bar. Diameter: 57mm (2.25 in.). Sensor: 7 PSI. P/N 15-06647**\$132.75**

FUEL PRESSURE SENDER - 1/8 NPT A603 Aviasport Fuel Pressure Sender. 1/8" NPT threads......P/N 15-06648\$154.95

The IM-553 instruments have been designed especially to measure the EGT in Rotax® engines 912. Includes the IM-580 EGT Connection Box. 300-1000°C.....P/N 15-08617\$184.99







ROTAX 912UL 912 ULS 2-1/4" EGT KIT

ROTAX 912 EGT 4 READING KIT

The IM-540 instruments have been designed especially to measure the EGT in Rotax® engines 912. Includes the IM-580 EGT Connection Box. 800-1800°FP/N 15-08620\$155.75

ROTAX 912 2" INCH FUEL PRESSURE KIT

The IM-584 have been designed especially to measure the FUEL Pressure in Rotax[®] engines 912 (Series). Includes the IM-604 Sensor. The display areas are divided into red, green and yellow zones in line with Rotax limits. 0-6 Bar.

P/N 15-08624\$316.95

ROTAX 912 2-1/4" INCH FUEL PRESSURE KIT Unlike mechanical instruments fuel pressure,

electronic instruments use a high precision sensor to be installed close to the engine, avoiding cabin carry fuel lines. Includes the IM-604 Sensor. 0-8 PSI. P/N 15-08629\$276.95

ROTAX 914 3 EGT 4 READING KIT

The IM-576 instruments have been designed especially to measure the EGT in Rotax® engines 914. Includes the IM-580 EGT Connection Box. The instruments use a pointer thats turns 240°, witch gives them great resolution. Their display areas are divided into red, green and yellow zones in line with the ROTAX limits. 600-1800 °F.



AVIASPORT ROTAX EGT TYPE K SENSORS



Probe for the measurement of the temperature of exhaust (EGT) for all ROTAX engines. It has a thread metric 8 and it can be installed directly on the M8 nuts that come from manufactures some 912 and 914 engines. On the outlets that do not have these nuts, it is necessary to weld a nut M8. Stainless steel jacket.

6 ft	P/N	15-09438	\$56.75
9 ft	P/N	15-09439	\$63.75

AVIASPORT ROTAX EGT TYPE **K SENSOR WITH CLAMP**

Probe type clamp "K". Designed for engines ROTAX 447/503/582, you don't need welding. Simply drill the holes and tighten the clamp. Protected with stainless steel mesh. 2 meters cable length.

P/N 15-09440\$55.65

VISIT WWW.AIRCRAFTSPRUCE.COM FOR A COMPLETE LIST OF INSTRUMENTS AND SENDERS.

WWW.AIRCRAFTSPRUCE.COM

E FUEL GUARDIA

AE FUEL GUARDIAN LOW FUEL ANNUNCIATION SYSTEM



This system gets your attention before you have to switch tanks. When the annunciator light flashes, you will know your precise fuel quantity and also the time to engine shut-down for that tank. HOW DOES IT WORK? - The optical fuel sensor is a non-contact sensor mounted in a single hole in the fuel tank. It operates by bouncing a beam of light into the sensors lens. If it is reflected back into the sensor, there is

no liquid present. If it is not reflected back, it is dissipated into the liquid media. The sensor output is pulled down, or activated. The electronics constantly monitors the sensor outputs of both tanks. When a low fuel level is detected, the appropriate light starts to blink, getting the pilot's attention immediately. After the pilot sees the alarm, he can press the acknowledge button. This action turns the light on solid (continuous) denoting a low fuel quantity. This function of the annunciator eliminates the distracting flashing action of the lights for the pilot, yet he can still see that he has a low fuel indication. The AE Fuel Guardian also has an audio output that can be wired into the aircraft intercom or audio system if desired. The audio beep is only present when the annunciator lights are flashing. The AE Fuel Guardian annunciator lights can also be wired into the aircraft dimmer bus if desired for night flight. This system is 100% solid state and is compatible with 12VDC or 24VDC electrical systems. The installer sets the sensors to provide low fuel warning at whatever level is desired. System includes (2) annunciator panel lights, (2) optical sensors, (1) push button, Sensor drive and annunciator electronics enclosure, wiring, and lettering decals. For Experimental aircraft only. Kit With One Sensor......P/N 10-01811\$209.00



AE Relay Boards - Better than the Competition. These relay contacts are protected against inductive sparking generated from relays switching inductive loads such as motors and solenoids. The relay coils are also protected. This prohibits the relays from early failure. This also protects the switch contacts that drive the relay coils from failure.

10A/20A Relays - (available in 12V to 14V or 24V to 28V operation) and available in in 1 Axis, 2 Axis or 3 Axis control. Stack up to 3 relay boards to save panel space. Terminals are easily

accessible. Each board contains two, SPDT relays (Form C). Each relay has one normally closed contact and one normally open contact). Each relay board is 3" wide by 1-3/8" deep by 3/4" high. The fastening standoffs measure 3/8" high. This makes the single board overall height 1-1/8".

The relay coils are actuated by pulling them down to common or ground. If you desire to operate them pulled up to + bus voltage, special order requests can be accommodated at no additional charge.

Number of Axis	Voltage	Part Number	Price	
1 Axis Relay	12V/14V	10-01814	\$39.00	
2 Axis Relay	12V/14V	10-01815	\$66.00	
3 Axis Relay	12V/14V	10-01816	\$89.00	
1 Axis Relay	24V/28V	10-07090	\$39.50	
2 Axis Relay	24V/28V	10-07091	\$66.00	
3 Axis Relay	24V/28V	10-07092	\$89.00	
20 AMP				

20 AMF					
Number of Axis	Voltage	Part Number	Price		
1 Axis Relay	12V/14V	10-07093	\$59.00		
2 Axis Relay	12V/14V	10-07094	\$115.00		
3 Axis Relay	12V/14V	10-07095	\$165.00		
1 Axis Relay	24V/28V	10-07096	\$59.00		
2 Axis Relay	24V/28V	10-07097	\$115.00		
3 Axis Relay	24V/28V	10-07098	\$165.00		

& Current Meter (with low & high warnings and caution zones) A full

service Aircraft Annunciator, Fuel Gauge, Oil Level Gauge, Volt Meter

& Current Meter. Will display many

different aircraft warnings. All devices

feature user programmable alarms.

Utilizes a push-button LCD display

that is backlight with a 3 color LED.

All functions are fully programmable

by the user. The push-button/display can be used for programming,

acknowledging the alarms, and paging thru up to 16 different screens or "annunciator points". Can

automatically scan thru each screen or it can be done manually using the


push-button. The pilot has the ability

to mask or unmask annoyance alarms.

NOTE: Input devices not included. It is

up to the user to provide input devices

such as fuel senders, shunts, oil level

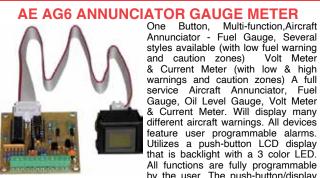



A full Aircraft Annunciator. Fuel Gauge, Oil Level Gauge, Volt & Amp Meter

Model AG6 will monitor up to 6 inputs. Weighs only 2.0 oz. (55 grams)

sensors and input switches to drive the Features: • Full service annunciator (more than 70 alarm to choose from) Volt & current meter with alarms • 10 types of fuel gauges with alarms • Low oil level gauge • Up to 6 inputs (5 if sound output is selected) • Set-

Low oil level gauge • Up to 6 inputs (5 if sound output is selected) • Set-up is fully user programmable • One button programming • Alarm time delays up to 409 seconds • Input signal filtering • Manual or auto scan for screens • Special shunt input • Audio output during alarm **Specifications:** • Power in: 10 to 15Vdc • Current draw: 0.6mA max. (AG6 without LED back light) 65.6mA max. (AG6 with LED back light) • Inputs: 6 inputs (0 to 16.383 volts) (5 inputs available if sound output is utilized) • Input impedance: 36.6K Ohms (terminals 1 to 6) • Input terminals: Accepts 16 to 26AWG • Shunt input: 1 input, 0.05V to 0.25V full scale (If utilized input #5 cannot be used) • Display: I CD with I ED back scale (If utilized, input #5 cannot be used.) • Display: LCD with LED back light (Green, Yellow, Red) . Interconnecting cable: 10 conductor ribbon, 18" [457mm] long • Panel cutout for display: 1.142in. x 0.933in. [.9mm x 23.7mm] • Panel thickness for display: 0.059in. to 0.157in. [1.5mm to 3.98mm] • Motherboard: 2.25" x 2.5" [57.2mm x 63.5mm] , Hole Pattern #6-32 screws, 2.0" x 2.25"[50.8mm x 57.15mm] • Alarms: All screens are programmable with alarms. Ability for pilot to mask annoyance alarms. Adjustments: Volume & display contrast • Programmable items: Input source, input filtering, input inverted, auto scan screen dwell times, alarm thresholds, time in alarm zone before alarming (409 seconds max.), alarm self reset, scan or auto scan, number of alarm zones, screen colors, sound output, calibration gain & zero for gauges • Programmable screens: Many - many annunciator type screens, fuel gauges (several types), low oil level gauge, volt meter, current meter · AG6 Display & Push Button 12\

V	
V	P/N 10-07415\$199.00

AUXILIARY FUEL PUMP RELAY



The AFPR is a "Smart" Auxiliary Fuel Pump Relay. This device allows the pilot to flip oneswitch and quickly drain the contents of the auxiliary fuel tank without over stressing the auxiliary fuel pump. The AFPR will pump down the auxiliary fuel tank, and then automatically shut the fuel pump off when no fuel is detected. The AFPR includes a very reliable optical fuel sensor that can be easily installed in the auxiliary fuel tank or in the fuel line. The AFPR can be operated in and one of four modes of operation. The AFPR also has an output that can be used for a light to indicate when the fuel pump-down has been completed. Input Power: 12Vdc or 24Vdc, 0.1A max. Enclosure: 3.5" x 2.25 x 1.25" (89mm x 57 x 32mm) Fuel Sensor Mounting Hole: 0.475" (12mm)

With Sensor	P/N 10-04343 \$159.95
Without Sensor	P/N 10-07416 \$97.95

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

24

EROSPACE LOGIC

AEROSPACE LOGIC FOUR CYLINDER EGT/CHT



The ECT204 is a full color EGT and CHT combination instrument that provides simultaneous, real-time display of all four cylinders. This kit includes four Type-K ungrounded, EGT thermocouple probes of your choice, four Type-J ungrounded, CHT thermocouple probes of your choice, and all connectors and installation hardware. Both Cylinder head and Exhaust

gas temperature functionality is TSO'd and meets the temperature accuracy requirements of SAE AS8005 for a Class Ila (+/- 1%) instrument. Functional displays include: Real-time four cylinder temperature display: Menu select option for fast selection of display type, Automated rich-of-peak (ROP) leaning function for EGT, Automated lean-of-peak (LOP) leaning function for EGT, Automated shock cooling

AEROSPACE LOGIC FUEL FLOW SINGLE ENGINE



This kit includes both instrument and fuel flow transducer. Fuel flow functionality is TSO'd and meets the repeatable accuracy requirements of SAE AS407B, +/- 0.1US Gallon per hour. Functional displays include: Graphical indication of fuel flow, Digital display of instantaneous fuel flow, Digital display of fuel used since flight commencement, and Fully programmable color indication to meet all aircraft

marking requirements. The FF200K30 instrument kit is TSO'd and STC'd as a primary replacement instrument under all flight conditions (day/night VFR and IFR). The FF200K instrument kit includes the full installation wiring harness, fuel flow transducer for a maximum fuel flow of 30gph and all necessary install hardware for the instrument. Installer supplied couplings are needed to be supplied by the installer to mate to the fuel flow transducer, as required.P/N 10-05172\$1,100.00

AEROSPACE LOGIC FUEL FLOW TWIN ENGINE



This kit includes both instrument and two fuel flow transducers Fuel flow functionality is TSO'd and meets the repeatable accuracy requirements of SAE AS407B, +/- 0.1US Gallon per hour. Functional displays include: Graphical indication of fuel flow, Digital display of instantaneous fuel flow, Digital display of fuel used since flight commencement, and Fully programmable color indication to meet all aircraft marking requirements. The FF202K30 instrument kit is TSO'd and STC'd

as a primary replacement instrument under all flight conditions (day) night VFR and IFR). Includes the full installation wiring harness, fuel flow transducers for a maximum fuel flow of 30gph and all necessary install hardware for the instrument...... P/N 10-05173 \$1,977.00

AEROSPACE LOGIC SINGLE TANK FUEL LEV



The FL201 instrument is an advanced, next generation airborne fuel level reporting instrument that supports two fuel tanks. Fuel level functionality is TSO'd and meets the repeatable accuracy requirements of SAE AS405C, +/- 1US Gallon. Functional displays include: Graphical indication of fuel level in the tank, Digital fuel quantity for the tank, Fully programmable color indication to meet all aircraft marking requirements,

and Graphical fuel level indication, starting at power on. The FL201 instrument is TSO'd and STC'd as a primary replacement instrument under all flight conditions (day/night VFR and IFR). It is a requirement of the STC that this be the only fuel level indicator, when installed. The FL201 instrument utilizes the existing fuel senders.



P/N 10-05174 \$632.00 **AEROSPACE LOGIC 2-1/4 ELECTRONIC ALTIMETER 35K** The ALT200 is the most accurate altimeter available

for your aircraft. It exceeds all the requirements of TSO C10b, AS392C and AS8009B while providing the following functionality: • -1,000' to 35,000' • Digital altitude display • Graphical altitude trend display User selectable for inHg and mb pressure settings . One press toggle

between selected altitude and Standard Pressure Altitude. P/N 10-06270 \$1,592.00

AEROSPACE LOGIC 2-1/4 ELECTRONIC VERTICAL SPEED INDICATOR 0-6000 FPM



The VSI200 is the most accurate Vertical Speed Indicator available for your aircraft. It exceeds all the requirements of TSO C8e and AS8016A while providing the following functionality: • Installer selectable for 0-2,000fpm, 0-3,000fpm, 0-4,000fpm or 0-6,000fpm rates of change • Graphic bar indication of rate of change • Precision digital rate of change indication. • Fits standard 2-1/4" mounting hole. • wt: 4.3 oz

VSI......P/N 10-006271\$758.00

AEROSPACE LOGIC MANIFOLD PRESSURE & FUEL FLOW



The MF200 is an advanced, next generation manifold pressure and fuel flow combination instrument for flow rates up to 30gph. Manifold pressure functionality is TSO'd and meets the pressure accuracy requirements of SAE AS8042. Fuel flow functionality is TSO'd and meets the accuracy requirements of TSO C44c. Functional displays include: Primary - Real-Time analog

data depiction and digital value display for both manifold pressure and fuel flow, Secondary - Real-Time analog data depiction and digital value display for both manifold pressure and fuel flow as well as fuel used, and Graphical trend display of manifold pressure and how as well as their deed. MF200K30 is TSO'd and STC'd as a primary replacement instrument under all flight conditions (day/night VFR and IFR). This kit includes both an A200-PMP manifold pressure sensor and a A200-201A-6 fuel flow

AEROSPACE LOGIC SINGLE



MANIFOLD PRESSURE The MP200 is an advanced, next generation single manifold pressure instrument. Manifold pressure functionality is TSO'd and meets the pressure accuracy requirements of SAE AS8042. Functional displays include: Real-Time analog data depiction and digital value display of manifold pressure, Graphical trend display of manifold pressure data, and The MP200K

is TSO'd and STC'd as a primary replacement instrument under all flight conditions (day/night VFR and IFR). This kit includes a A200-PMP manifold pressure sensor and all installation hardware.

P/N 10-05177 \$803.00

AEROSPACE LOGIC MANIFOLD PRESSURE & TACHOMETER - BENDIX The MT200 is an advanced, next generation manifold



pressure and tachometer combination instrument. . Manifold pressure functionality is TSO'd and meets Tachometer functionality is TSO'd to C49b and accuracy requirements of AS404C. Functional displays

include: Simultaneous, real-time analog data depiction and digital value display for both manifold pressure and tachometer, Graphical trend display of both manifold pressure and tachometer data. Display and tracking of engine time. The MT200 is TSO'd and STC'd as a primary replacement instrument under all flight conditions (day/night VFR and IFR) This kit includes a A200-PMP manifold pressure sensor, and a Hall Effect sensor for Bendix type single magnetos. The sensor is mounted in the vent hole (closest to the engine) of the magneto. The instrument will work on all 4, 6 and 8 cylinder aircraft engines. Includes all installation hardware......P/N 10-05178\$1.318.00

AEROSPACE LOGIC TM202 DUAL TACHOMETERKIT-BENDIXSINGLEMAGNETO



The TM202 is a precision dual tachometer that provides RPM data accurate to +/- 1RPM. It meets all the requirements of TSOC49b and provides the following functionality: RPM indication in both analog and digital format for both engines, including support for engines that require a limited RPM range, Independent engine

vs. Time for both engines a initiat range, independent engine time recording, Trend graph function representing RPM vs. Time for both engines simultaneously. This instrument kit includes two Hall Effect sensors for Bendix type single magnetos. The sensors are mounted in the identity of the sensors are mounted in the vent hole (closest to the engine) of the magneto. The instrument will work on all 4, 6 and 8 cylinder aircraft engines.

P/N 10-05179 \$1,542.00

AEROSPACE LOGIC MANIFOLD **PRESSURE & TACHOMETER - SLICK**



The MT200 is an advanced, next generation manifold pressure and tachometer combination instrument. Manifold pressure functionality is TSO'd and meets the pressure accuracy requirements of SAE AS8042. Tachometer functionality is TSO'd to C49b and accuracy requirements of AS404C. Functional displays include: Simultaneous, real-time analog data depiction

and digital value display for both manifold pressure and tachometer, Graphical trend display for both manifold pressure and tachometer data., and Display and tracking of engine time. The MT200 is TSO'd and STC'd as a primary replacement instrument under all flight conditions (day/night VFR and IFR) This kit includes a A200-PMP manifold pressure sensor, and a Hall Effect sensor for Slick/Unison type magnetos. The sensor is mounted in the vent hole (closest to the engine) of the magneto. The instrument will work on all 4, 6 and 8 cylinder aircraft engines. Includes all installation hardware......P/N 10-05223\$1,318.00

ROSPACE LOGIC

AEROSPACE LOGIC CHT INDICATORS



Full color CHT instrument that provides simultaneous, real-time display of all cylinders. This kit includes thermocouple probes, all connectors and installation hardware. Functionality TSO'd and meets the temperature accuracy requirements of SAE AS8005 for a Class IIa (+/- 1%) instrument. Functional displays include: Real-time cylinder temperature display Single cylinder temperature monitoring while retaining graphic indications Graphic trend analysis and viewing of all cylinders simultaneously Programmable shock cooling monitor and indication TSO C43c

Part No.	Model No.	Description	Cyl.	Price
10-04485	CT204R2	CHT Instrument With 12mm Ring Probes	4	\$990.00
10-04486	CT204R4	CHT Instrument With 14mm Ring Probes	4	\$989.00
10-04487	CT204R8	CHT Instrument With 18mm Ring Probes	4	\$989.00
10-04484	CT204B	CHT Instrument With Bayonet Probes	4	\$944.00
10-04362	CT206R2	CHT Instrument With 12mm Ring Probes	6	\$1,144.00
10-04365	CT206R4	CHT Instrument With 14mm Ring Probes	6	\$1,144.00
10-04367	CT206RB	CHT Instrument With 18mm Ring Probes	6	\$1,144.00
10-04358	CT206B	CHT Instrument With Bayonet Probes	6	\$1,093.00
10-05171	ECT204	CHT And EGT Combo Kit without probes		\$1,695.00

AEROSPACE LOGIC EGT INDICATORS Full color EGT instrument that provides simulta-



neous, real-time display of all six cylinders. This kit includes six Type-K ungrounded, 1 1/2" EGT clamp type thermocouple probes, all connectors and installation hardware Exhaust gas temperature functionality is TSO'd and meets the temperature accuracy requirements of SAE AS8005 for a Class IIa (+/- 1%) instrument

Functional displays include: Real-time cylinder temperature display, Menu select option for fast

selection of display type, Automated rich-of-peak (ROP) leaning function, Automated lean-of-peak (LOP) leaning function, Single cylinder temperature monitoring while retaining graphic indications for all cylinders, and Graphic trend analysis and viewing of all cylinders simultaneously TSO C43.

Part No.	Model No.	Description	Cyl.	Price
10-04402	ET204P1	EGT Instrument with 1-1/2" Clamp Probes	4	\$997.00
10-04403	ET204P2	EGT Instrument with 2" Clamp Probes	4	\$997.00
10-04404	ET204P3	EGT Instrument with 2-1/2" Clamp Probes	4	\$997.00
10-04405	ET204PB	EGT Instrument with Bayonet Probes	4	\$1,040.00
10-04413	ET206P1	EGT Instrument with 1-1/2" Clamp Probes	6	\$1,150.00
10-04414	ET206P2	EGT Instrument with 2" Clamp Probes	6	\$1,075.00
10-04415	ET206P3	EGT Instrument with 2-1/2" Clamp Probes	6	\$1,150.00
10-04416	ET206PB	EGT Instrument with Bayonet Probes	6	\$1,233.00

AEROSPACE LOGIC FUEL PRESSURE/ AMMETER/VOLTMETER



The FA200 is an advanced, next generation fuel pressure and ammeter combinational instrument This kit includes an A200-PSF fuel pressure sensor, an A200-HAS Hall Effect current shunt and all installation hardware. meets requirements of SAE AS408C. Functional displays include Real-Time analog data depiction and digital value display Graphical trend display of fuel pressure and ammeter data TSO C47a

Part no.	Model No.	Description	Price
10-04449	FA200K	Fuel Pressure and Ammeter Kit	\$956.00
10-04451	FA200VK	Fuel Pressure and Ammeter Kit With Voltmeter	\$1,030.00

AEROSPACE LOGIC TACHOMETER KIT



The TM200 is a precision tachometer that provides RPM data accurate to +/- 1RPM. RPM indication in both analog and digital format, including support for engines that require a lim-ited RPM range,Engine time Trend graph function representing RPM vs. Time This instrument kit includes the Hall Effect sensor for single magnetos. The sensor is mounted in the vent hole (closest to the engine) of the magneto. The instrument will work on all 4, 6 and 8 cylinder aircraft engines, TSOC49b

Part no.	Model No.	Description	Price
10-04478	TM200B	Tachometer Kit for Bendix Mag	\$856.00
10-04477	TM200S	Tachometer Kit for Slick Mag	\$856.00
10-05179	TM202B	Tachometer Kit for Dual Bendix Mag	\$1,542.00
10-05513	TM202S	Tachometer Kit for Dual Slick Mag	\$1,554.00

AEROSPACE LOGIC FL-100 DUAL FUEL LEVEL INDICATORS



Fuel level functionality is TSO'd and meets the repeatable accuracy requirements of SAE AS405C, +/- 1US Gallon. Functional displays include: Graphical indication of fuel level in each tankSelectable digital fuel quantity for each tank Fully programmable color indication to meet all aircraft marking requirementsGraphical fuel level indication, starting at power on The FL202 instru-ment is TSO'd and STC'd as a primary replace-

ment instrument under all flight conditions. It is a requirement of the STC that this be the only fuel level indicator, when installed. The FL202 instrument utilizes the existing fuel senders

Part No.	Model No.	Description	Price
10-05174	F1201	Single Tank Resistive 300 Ohm Fuel Level	\$632.00
10-04432	FL202	Dual Tank Resistive 300 Ohm Fuel Level	\$752.00
10-05515	FL251	Single Tank 0-5v Fuel Level	\$636.00
10-04443	FL252	Dual Tank 0-5v Fuel Level	\$761.00

AEROSPACE LOGIC OIL **PRESSURE & TEMPERATURE**



The OPT200 is an advanced, next generation oil pressure and temperature combinational instrument. Oil temperature is TSO'd and meets the temperature accuracy requirements of SAE AS8005, while oil pressure meets the requirements of AS408C.Functional displays include:Real-Time analog data depiction and digital value display for both pressure and temperature Graphical trend display of both oil pressure and temperature dataThe OPT200 is TSO'd and

STC'd as a primary replacement instrument under all flight conditions. This kit includes an A200-TSO oil temperature sensor and an A200-PSO oil pressure sensor plus all installation hardware

Part No.	Model No.	Description	Price
10-04465	OPT200K	Oil Pressure and Temperature Kit	\$1,095.00
10-04467	PT200VK	Oil Pressure and Temperature Kit with Voltmeter	\$1,153.00
10-04469	OP202K	Dual Oil Pressure Kit	\$1,225.00
10-04471	OP202VK	Dual Oil Pressure Kit with Voltmeter	\$1,276.00
		Dual Oil Temperature Kit	\$955.00
10-04475	OT202VK	Dual Oil Temperature Kit with Voltmeter	\$1,040.00

AEROSPACE LOGIC VOLMETER / AMMETER



The VA200 is an advanced, next generation voltmeter and ammeter combinational instrumentThe ammeter portion of this instrument may be used as either a normal ammeter, indicating both charge and discharge current or a loadmeter, displaying the total load on the alternator/generator.STC'd as a primary replacement. Model No.

AEROSPACE LOGIC CLOCK & OUTSIDE AIR TEMPERATURE



The CA200 is an advanced, next generation airborne timepiece plus a seven input annuciator. It can scan seven 200 Series instruments and report any out-of-limit conditions the moment they occur; all on one instrument. The CO200 is identical to the CA200 with the exception of the annunciator function. Outside air temperature functionality is TSO'd and meets the temperature accuracy requirements of SAE AS8005 for a Class IIa (+/- 1%) instrument. Functional displays

include: • UTC Time • Local Time • Chronograph • Flight Time and Interval Timer • Seven annunciator sense inputs (CA200 only). P/N 10-04348......\$586.00

AEROSPACE LOGIC SENSORS AND PROBES

Description	Part No.	Price
A200-TEC5 EGT Probe Kit	10-04813	\$173.00
A200-TEC20 EGT Probe Kit	10-04812	\$163.00
A200-TEC25 EGT Probe Kit	10-04800	\$185.75
A200-HAS Hall Effect Current Shunt	10-04808	\$198.00
A200-PSF Fuel Pressure Sensor	10-04804	\$328.00
A200-HMB Bendix Rotational Speed Sensor	10-04806	\$216.00
A200-HMS Slick Rotational Speed Sensor	10-04807	\$245.95
A200-PSO Oil Pressure Sensor	10-04805	\$328.00
A200-TSO Oil Temperature Sensor	10-04801	\$224.95
A200-TCB Bayonet CHT Probe Kit	10-04799	\$172.75
A200-PMP Manifold Pressure Sensor	10-04803	\$335.00
A200-TSA Air Temperature Sensor	10-04802	\$204.95

PLEASE SEE OUR WEBSITE FOR ADDITIONAL MODELS, INCLUDING STC'D MODELS

IN

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

ENGINE SCANNERS



J.P. INSTRUMENTS **EDM-700 DIGITAL AND ANALOG EGT/CHT** SCANNERS The EDM-700 includes: Computer

assisted diagnostics for troubleshooting the entire system, 2-1/4" panel mount, Normalize mode, Graphics resolution,

Normalize mode, Graphics resolution, Automatically finds the first EGT to peak, display of OIL, OAT, IAT, CDT, voltage, shock cooling of two TIT's, one degree temperature resolution, selectable °C or °F, all functions have Hi/Lo pilot programmable limits, supplied with JPI's well known, grounded, fast response probes, TSO quality, FAA TSO/STC approved, 3 year warranty. All probes harges and hardware included warranty. All probes, harness, and hardware included.

Systems include EGT & CHT probes, harness, memory module, leads, and hardware

EDM-700 SINGLE ENGINE SYSTEMS

Description	Part No.	Price
EDM-700-4C 3-1/8" (No Fuel Flow)	10-02008	\$2,028.00
EDM-700-6C 2-1/4" (No Fuel Flow)	10-00264	\$2,157.00
EDM-700-6C 2-1/4" (No Fuel Flow) All CHT Bayonet	10-06938	\$2,155.00
EDM 700-6C with Fuel Flow 231 3-1/8" (Gravity Fed)	10-02846	\$2,874.00
EDM-700-9C 2-1/4" (No Fuel Flow)	10-28100	\$3,163.00
EDM 700-9C with Fuel Flow 231 2-1/4" (Gravity Fed)	10-02862	\$3,604.00

Accessories				
Description	Part No.	Price		
EDM 700 Transducer (Fuel Pump)	10-27089	\$295.00		
EDM 700 Transducer (Gravity)	10-27094	\$325.00		
JPI EDM RPM Option	10-01720	\$269.00		
Fuel Flow Without Transducer	10-05199	\$175.00		
Fuel Flow With Transducer	10-05201	\$472.00		
JPI Replacement Rpm Sensor For Pressurized Slick Mag	10-05458	\$359.00		
JPI Replacement Rpm Sensor For Pressurized Bendix 1200 S	10-05459	\$359.00		
JPI Replacement Rpm Sensor For Pressurized Bendix 20 Series	10-05460	\$359.00		
JPI Replacement Rpm Sensor For Pressurized Dual Bendix Mag	10-05461	\$359.00		
JPI Standard RPM Vent Plug Sensor for Bendix Mag.	10-05651	\$269.00		
JPI Standard RPM Vent Plug Sensor For Slick	10-05652	\$269.00		
TIT, Turbine Inlet Temperature Probe and Sensor	10-27090	\$175.00		
EDM Carb Temp Probe 1/4-24 Thread 400128	10-27103	\$175.00		
USB Integrated Option	11-06769	\$235.00		
USB Download Box	10-03149	\$179.95		
EDM-700/800/900 OAT Probe	10-27095	\$175.00		
700/760/800 Oil Temperature Probe & Sender	10-27100	\$175.00		
EDM 700 Induction Air Temperature Probe	10-02277	\$169.95		
EDM 700 Compressor Discharge Temperature Probe	10-03451	\$175.00		
EDM 700 IAT/CDT Induction Air & Compressor Temp.	10-27105	\$375.00		
5050-T CHT Bayonet Probe	10-18500	\$106.95		
M-113 CHT Gasket Probe	10-27093	\$106.95		
JPI Probe M113-3/8	10-03689	\$106.95		
M-111 Replacement EGT Probe	10-00830	\$104.85		
5/8" Oil Temp Probe Adapter for Lyc./Cont.*	11-09614	\$175.00		
Oil Temp Probe 400509 (5/8-18)	11-09614	\$175.00		
EDM Option CHT Gasket 14mm Probe	10-04157	\$104.85		
VDO Oil Press Sensor 1/4 NPT 0-150 PSI This oil pressure sender will not fit Rochester gauges.	10-04183	\$269.00		
EDM PC Interface Cable	10-27112	\$34.95		

All Systems which include Fuel Flow come with Transducers. 201 Transducer is for Aircraft with Fuel Pumps. 231 Transducer is for Gravity Fed Aircraft. *Oil Temperature Probe Collar Adapter, 5/8-18 port to 1/8 NPT Continental engines may require a "brass" oil probe adapter.



JPI EDM-730/830

The EDM-730/830 revolutionizes engine monitoring by the integration of brilliant full color graphical LCD display with the extremely popular EDM 700/800 series functionally and yet reduces the package size to the smallest on the market! Mounting is a breeze due to its standard 3-1/8" format.

	0	
Model	Part No.	Price
EDM-730-4Cyl	10-03701	\$1,715.00
EDM-730-4Cyl - All CHT Bayonet	10-06946	\$1,725.00
EDM-730-4C W/ FF 201	10-03717	\$2,155.00
EDM-730-4C W/ FF 201 - All CHT Bayonet	10-06947	\$2,173.00
EDM-730-4C W/ FF 231	10-03718	\$2,155.00
EDM-730-4C W/ FF 231 - All CHT Bayonet	10-06948	\$2,155.00
EDM-730-6C	10-03703	\$2,404.00
EDM-730-6C - All CHT Bayonet	10-06949	\$2,398.00
EDM-730-6C W/ FF 201	10-03719	\$2,855.00
EDM-730-6C W/ FF 201 - All CHT Bayonet	10-06951	\$2,855.00
EDM-730-6C W/ FF 231	10-03720	\$2,855.00
EDM-730-6C W/ FF 231 - All CHT Bayonet	10-06952	\$2,855.00
EDM-730-7C	10-05180	\$2,536.00
EDM-730-7C W/ FF 231	10-05182	\$2,993.00
EDM-730-8C	10-05183	\$2,625.00
EDM-730-8C W/ FF 231	10-05198	\$3,082.00
EDM-730-9C	10-05187	\$2,805.00
EDM-730-9C W/ FF 231	10-05186	\$4,363.00
Fuel Flow Without Transducer	10-05199	\$175.00
Fuel Flow With Transducer	10-05201	\$472.00

UPGRADE YOUR EDM 700 TO THE EDM 730, OR YOUR EDM 800 TO THE EDM 830 This upgrade program will allow you to swap out your 700 to the new 730 or 800 to the new 830 as the new 730 and 830 use a standard 3-1/8" mounting hole. The 730/830 will use the same JPI probes and will better display engine parameters with this plug and play upgrade. Core must be sent back to JPI

Description	Part No.	Price
EDM 800 to EDM 830	10-03864	\$1,495.00

JPI EDM 711 SYSTEMS



4 or 6 Cylinder. Configured like the EDM-700 or EDM-800, this is STC'd as the Primary Replacement for certified aircraft. Includes one primary function; CHT, Oil Temp, or T.I.T. To add a function, select P/N 10-00647, 10-00648, or 10-00649. Fuel Flow may also be added (P/N 10-00650), but the Transducer is sold separately. Use P/N 10-27089 or 10-27094 for Transducer. When ordering, please provide Aircraft Make & Model, Engine Make & Model, Mag Type, and

Redline for each function.

Description	Part No.	Price
EDM711-4C (configured as 700)	10-00641	\$2,058.00
EDM711-6C (configured as 700)	10-00642	\$2,408.00
EDM711-4C (configured as 800)	10-00643	\$3,450.00
EDM711-6C (configured as 800)	10-03858	\$3,959.00
Add Primary Functions to EDM711	10-00647	\$329.00
Add Oil Temp Function to EDM711	10-00648	\$329.00
Add Fuel Flow to EDM711	10-00650	\$425.00
Fuel Flo Harness	10-04650	\$187.75
EDM 4 Cylinder Harness	10-04661	\$179.00
EDM 6 Cylinder Harness	10-04663	\$259.95

ENGINE SCANNERS

JPI EDM-350 EXPERIMENTAL ENGINE MONITORING SYSTEM



If all you want is EGT/CHT then the basic kits gives you everything you could want in a compact size with full customization features and the could want in a compact size with full customization features and the legendary JPI quality and accuracy. The Engine Data Management 350 system is the most cost effective, reliable piston engine experimental EDM instrument on the market. The basic kit includes: • EGT - Exhaust Gas Temperature • CHT - Cylinder Head Temperature • Included - Probes and Harness • VDC - Voltage • CLD - Shock Cooling on "All" Cylinders • ROP/LOP - Lean Find • DIFF - Engine Health • USB - Data Graphing software, including Google Earth Location The compact Engine Data Management 350 system (3.5" square) is

the most advanced and accurate piston experimental engine-monitoring instrument on the market. The EDM 350 is not just another black box along for the ride. It is a Flight Engineer, Maintenance Manager, and Backup Instrument. For the price there is nothing that gets close to it. Customize with 17 options, including FF. You can think of the EDM 350 as your personal flight engineer. It's always there, working in the background, constantly watching over your engine while you concentrate on flying the aircraft. You can make an entire flight without ever pushing a button, if you so choose. Yet your EDM will be monitoring your engine parameters three times a second and will warn you instantly if any parameter exceeds the programmed limit.

Description	Part No.	Price		
4 Cylnder Basic Package	10-06582	\$1,049.00		
6 Cylinder Basic Package	10-06583	\$1,275.00		
Full Package adds Amps, Volts, Fuel Pressure, and Fuel Level.				
Description	Part No.	Price		
4 Cylnder Full Package	10-06845	\$1,195.00		

J.P. INSTRUMENTS EDM-790 ENGINE MONITORING SYSTEM

10-06846 **\$1,395.00**

6 Cylinder Full Package



The EDM 790 system is the most advanced and accurate twin piston engine-monitoring instrument on the market. TSO'd for quality, the EDM 790 is not just another black box along for the ride. It is a Flight Engineer ... a Maintenance Manager ... For the price there is nothing that gets close to it. You can almost think of the EDM 790 as your personal flight engineer. It's always there, working in the background, constantly watching over your engine while you concentrate on flying the aircraft. You can make an entire flight without ever pushing a button, if you so choose. Yet your EDM will be monitoring your engine parameters three times a second and will warn you instantly if any parameter exceeds the programmed limit.

Features: • EGT 4 or 6 probes • CHT 4 or 6 probes • Volts • Shock cooling • Span (highest to lowest EGT) • EGT Normalize mode • LOP/ GOP function • Power connector • All required Harness 20 ft • EZTrends Graphing Software free • Serial Data recording -25 hours • 3 year Warranty

Specifications: • FAA Approved under TSO-C43B, DO-160C, DO-178B Level C & STC, SA 2586 NM • Size 3-1/8 in panel mount 7.5 deep. Weight: 1 LB. • Standard Functions LeanFind, EGT/CHT, Shock Cooling, Voltage, Differential EGT, Normalize, Long term data module for Data Logging and TIT (if applicable for Engine). • Optional Functions Fuel Flow, Oil Temperature 1 & 2, Turbine Inlet 2 (TIT-2), Outside Air (OAT) and Carburetor Temperature (CRB).



EDM 930 & 930T PRIMARY True TFT Transflective Custom Display

 Display brightness increases with ambi-- Display brightness increases with ambi-ent brightness, always sunlight read-able. All gages have a Variable Scale and alarm limit to fit your engine. New form factor, panel size: 6"w X 4"h X 2.9"d. Records all engine parameters at 2 to 255 second intervals. Plot the data with EZplot. All probes and transducer ers supplied. High Flow transducer (120 GPH) included in EDM930T Compatible GPH) included in EDM930T Compatible with and transmits RS-232 data to most

MFD's, also sold less the display. PISTON FUNCTIONS: • Tachometer/Hobbs • Manifold Air Press
• 6 EGT/CHT • Oil Temp • Oil Press • Fuel Quantity • Fuel Press
• OAT • Carb • Temp • TIT, TIT-2 • CDT • GMT • Votls/Amps 1-2
• Differential EGT • Shock cooling • GPH • Fuel remaining • Fuel Endurance • Fuel required to GPS waypoint • Fuel used • Percent of horse power · Receives data from any GPS and transmits data to any GPS.

Features: • Hands-free, automatic scanning • All programming done from the Front Panel • LeanFind™ finds the first and last cylinder to peak with true peak detect eliminates false peaks . Displays both leaned temperature below peak and peak • Battery voltage with alarm • Amperes (load or charge/discharge meter) • Programmable alarm limits • Normalize view • Exhaust Gas Temperatures (EGTs) to stable 1°F resolution • DIF low to high EGT with alarm • EGTs to stable 1°F resolution $\,\cdot\,$ Shock cooling monitored on every cylinder $\,\cdot\,$ Shock cooling monitored on every cylinder $\,\cdot\,$ User selectable index rate • Fast response probes • Non-volatile long term memory • Records and stores data up to 30 hours • Post-flight data retrieval • Download to Palm[™] Computer • Data retrieval software • Oil pressure • Oil temperature • Outside air temperature • Fuel level • Fuel Flow • Solid-state rotor fuel flow transducer • Fuel quantity in gallons, kilograms, liters, or pounds • Low fuel quantity alarm • Low fuel time alarm • GPS interface Instantaneous fuel flow rate • Total amount of fuel consumed • Total fuel remaining • Time to empty at the curent fuel flow rate • RPM and manifold pressure • Automatically calculates percent horsepower • History of extreme values during previous flight • Hobbs® timer

IF NECESSARY PAPERWORK IS NOT PROVIDED & ANY CHANGES ARE REQUIRED. THERE WILL BE A \$200 FEE

EV V	DOT	PRIMARY
ГАА	130	PRIMART

Description Part No. Price				
Description	Part NO.	Price		
EDM-930 (4)Cylinder Primary STC No Tank System	10-04909	\$5,925.00		
EDM-930 (4) Cylinder Primary STC 2 Tank System	10-02111	\$6,125.00		
EDM-930 (4) Cylinder Primary STC 4 Tank System	10-04731	\$6,325.00		
EDM-930 (6) Cylinder Primary STC No Tank System	10-04911	\$6,195.00		
EDM-930 (6) Cylinder Primary STC 2 Tank System	10-02112	\$6,425.00		
EDM-930 (6) Cylinder Primary STC 4 Tank System	10-04732	\$6,610.00		
EDM-930 (7) Cylinder Primary STC	10-02632	\$6,196.00		
EDM-930 (8) Cylinder Primary STC	10-02633	\$6,310.00		
EDM-930 (9) Cylinder Primary STC	10-02634	\$6,765.00		
EVDEDIMENTAL				

EXPERIMENTAL PRIMARY

Description	Part No.	Price
EDM-930-4CP-0 (4 Cyl) for NO Tanks	10-05236	\$5,112.00
EDM-930-4CP-2 (4 Cyl) for 2 Tanks	10-05237	\$5,326.00
EDM-930-4CP-4 (4 Cyl) for 4 Tanks	10-05238	\$5,497.00
EDM-930-6CP-0 (6 Cyl) for NO Tanks	10-05239	\$5,426.00
EDM-930-6CP-2 (6 Cyl) for 2 Tanks	10-05240	\$5,642.00
EDM-930-6CP-4 (6 Cyl) for 4 Tanks	10-05241	\$5,839.00
EDM-930-7CP (7 Cyl) for 4 Tanks	10-05242	\$5,365.00
EDM-930-8CP (8 Cyl) for 4 Tanks	10-05243	\$5,482.00
EDM-930-9CP (9 Cyl) High Flow Transducer	10-05244	\$6,010.00

ULTRAFLEX BRAIDED FIBERGLASS PROBE SLEEVES

Replacement 1/2 IN X 5 IN braided fiberglass sleeves like those furnished with JPI probes. P/N 10-06282\$5.95

JPI ENGINE SCANNERS

J.P. INSTRUMENTS EDM-960



The EDM-960 is the latest graphic engine analyzer for Piston Engine Twins from JP Instruments. The EDM-960, STC'd as Primary engine instrument, takes the best from their EDM-760 and adds total engine display monitoring including Tach, % Horsepower, Hobbs, Manifold Pressure, EGT, CHT, Oil Pressure, Oil Temp, Fuel Flow, Outside Air Temp, Volts, and Amps plus optional Fuel Pressure, Fuel Quantity, and Turbine Inlet Temp. Each

alarm limit to fit your particular airplane. As with the popular EDM-760, the EDM-960 has internal memory that records all engine parameters that can be recalled and displayed on your computer to keep track of the health of your engine. Plus: warnings for shock cooling and excess temperatures, leaning assist for both "lean of peak, and "rich of peak".

IF NECESSARY PAPERWORK IS NOT PROVIDED & ANY CHANGES ARE REQUIRED, THERE WILL BE A \$200 FEE

Description	Part No.	Price
JPI EDM-960-6C Twin	10-03726	\$14,698.00
JPI EDM 960-6C Twin 4 Tank System	10-04734	\$15,484.00
JPI EDM 960 6C No Tanks	10-04914	\$14,625.00
JPI EDM-960-4C Twin	10-03727	\$13,527.00
JPI EDM 960-4C Twin 4 Tank System	10-04733	\$14,450.00
JPI EDM 960 4C No Tanks	10-04913	\$13,145.00
JPI EDM-960-7C Twin	10-05202	\$15,069.00
JPI EDM-960-8C Twin	10-05196	\$15,239.00
JPI EDM-960-9C Twin	10-05197	\$15,648.00
JPI Type K Thermocouple Wire	10-18600	\$1.25

J.P. INSTRUMENTS SLIM LINE DIGITAL ENGINE INSTRUMENTS



These compact engine instruments from have a bright red display and feature central remote and individual alarms on all gauges. The gauges are easily stackable in a homebuilt aircraft panel, and come complete with sensors. Specify voltage. NOT FAA APPROVED. This is a secondary unit only. You must keep your original engine instrument Tachometer - Features quartz crystal and accuracy of 1 RPM. Resolution is 10RPM and includes red line alarm. Specify engine and magneto models, number of cylinders, voltage, and red line.

P/N 10-24900\$429.00
Manifold Pressure - Features resolution of 0.1 inches mercury, accu-
racy of 0.1" Hg, solid state sensor, and over boost alarm. Range: 0-50".
P/N 10-24910 \$329.00
Outside Air Temperature (O.A.T.) - Features resolution of 1° and has
range of -40 to 195° F P/N 10-24940 \$249.95
Oil Temperature - Features resolution of 1° and over temperature alarm
of 235° F P/N 10-24960 \$249.95
Volt/Ammeter - Features resolution of 0.1 volts/amps and discharge
alarm.
Ammeter Shunt - (100 Amp) P/N 10-24925
Volt/100 amp-28V
Oil Pressure - gives readout in PSI and features resolution of 1 PSI and
an under pressure alarm
Turbine Inlet Temperature (T.I.T) - Features resolution of 1° or 10° and
a Hi-temperature alarm at 1650° F P/N 10-24950
CHT Gauge
Boom Pressure For Crop Planes P/N 10-06063\$249.95
Fuel Pressure - Features Resolution of 1 PSI and under pressure alarm.
Slimline Injected 10-32 PSI P/N 10-24970-30A \$249.95
Slimline Carb 1-8 PSI P/N 10-24970-30B \$249.95

JPI EDM-900 SINGLE ENGINE PRIMARY



The EDM-900 has a built in EDM-800, plus many other gauges in combination together. Fits in a standard 3" hole no panel rework. Made in California. **EDM-900 System Includes:** EDM-900 ALL IN ONE Bright VGA Display, Pre-Wired Harness for all functions, All EGT/CHT probes, Oil Pressure Transducer, Oil Temperature Sensor, Fuel Pressure Transducer, Oat Sensor, RPM Sensor, One required, Manifold Pressure Transducer, 100 amp Shunt (2) (for

Amps), Volts pick-up V-1 and V-2, 2 GB memory Download/upload stick, FloScan Fuel Flow Transducer w/firesleeve, Demo DVD, and 3 year warranty.

FAA STC APPROVED

Description	Part No.	Price
900-4CP-0 (4 Cyl) for NO tanks Primary	10-04857	\$4,295.00
900-4CP-2 (4 Cyl) for L/R 2 tanks setup complete Primary	10-04858	\$4,527.00
900-4CP-4 (4 Cyl) for L/R and Aux 4 tanks setup complete Primary	10-04859	\$4,850.00
900-6CP-0 (6 Cyl) for NO tanks Primary	10-04860	\$4,685.00
900-6CP-2 (6 Cyl) for L/R 2 tanks setup complete Primary	10-04861	\$4,895.00
900-6CP-4 (6 Cyl) for L/R and Aux 4 tanks setup complete Primary	10-04862	\$5,095.00
900-7CP-4 (7 Cyl) for L/R and Aux 4 tanks setup complete Primary	10-04863	\$5,285.00
900-8CP-4 (8 Cyl) for L/R and Aux 4 tanks setup complete Primary	10-04864	\$5,485.00
900-9CP-4 (9 Cyl) for L/R and Aux 4 tanks setup complete Primary	10-04865	\$5,675.00

EXPERIMENTAL

Description	Part No.	Price
EDM-900-4CP-0 (4 Cyl) for NO Tanks	10-05226	\$3,469.00
EDM-900-4CP-2 (4 Cyl) for 2 Tanks	10-05227	\$3,675.00
EDM-900-4CP-4 (4 Cyl) for 4 Tanks	10-05228	\$3,965.00
EDM-900-6CP-0 (6 Cyl) for NO Tanks	10-05229	\$3,875.00
EDM-900-6CP-2 (6 Cyl) for 2 Tanks	10-05231	\$4,075.00
EDM-900-6CP-4 (6 Cyl) for 4 Tanks	10-05232	\$4,350.00
EDM-900-7CP-4 (7 Cyl) for 4 Tanks	10-05233	\$4,515.00
EDM-900-8CP-4 (8 Cyl) for 4 Tanks	10-05234	\$4,725.00
EDM-900-9CP-4 (9 Cyl) for 4 Tanks	10-05235	\$4,950.00

J.P. INSTRUMENTS FUEL SCAN - 450



- · Continuous display of fuel burned,in
- upper display in Gallons per Hour. Liters and Lbs per hr also available.
- An amazingly low price includes Instrument harness and a Flow Scan 201 or 231 transducer.
- Upgrade your old Hoskins, or Shadin System. Will function with any K factors; connector is pin to pin compatible.
- Automatically calculates the K factor.
 - All programming done from the front panel.
 - Size 2.25" diameter (small hole)
 - Light Weight 5 oz with Super Thin 1.5" depth
 - Three year warranty. (yes, the only three year warranty around!)
 Serial port sends and receives data from all GPS units, even handhelds.
 - Calculates fuel to next wavpoint

· Calculates fuel to next waypoint.		
FS 450 Scanner Fuel Pump	P/N 10-00135	\$529.00
Fuel Scan 450 Gravity Fed+	P/N 10-00134	\$529.00
FS-450R Fuel Scan Rotax (2 Transduce	rs for aircraft with re	eturn fuel
line)	P/N 10-00266	\$1,029.00
FS-450M-3 3-1/8" Twin Engine	P/N 10-03692	\$1,095.00
FS 450 H High Flow up to 120GPH	P/N 11-13931	\$1,050.00

ERNA 11



UBG-16 ULTIMATE BAR GRAPH ENGINE ANALYZER

UBG-16 features include: Sixteen input channel capa-

UBG-16 features include: Sixteen input channel capa-bility. Any channel may be set to display EGTs and CHTs, TIT, and Oil Temp in either digital or bar graph display, O.A.T, Carb. Temp, Cowl Temp, Other Temp, Oil Pressure, Fuel Pressure, Manifold Pressure, Gyro Pressure, R.P.M.,Fuel flow, Bus Voltage or Amps. Engine Analysis is performed automatically with sixteen pilot programmable Over-Temp limits and sixteen Under-Temp limits, a differential limit and a shock-cooling limit. Note: Unit is STC'd/PMA'd. Can only be used as a secondary engine monitor. For primary see the MVP-50.

Model Description Part No. Price UBG-16- 4M 4-Cylinder Package. Includes 4 EGT probes, 4 CHT probes, 8 ea 6' 10-00593 \$1,515.00 UBG-16- 6M 6-Cylinder Package. Includes 6 EGT probes, 6 CHT probes, 12 ea 6' 10-00763 \$123.75 UBG-16 Electronics International UBG-16 Engine 4G-MEM 10-02763 \$123.75 UBG-16 Electronics International UBG-16 Engine 6G-MEM 10-02763 \$123.75 UBG-16 Electronics International UBG-16 Engine 6G-MEM 10-02763 \$123.75 UBG-16 Electronics International UBG-16 Engine 6G-MEM 10-02763 \$123.75 The UBG-16 Unit Only 10-02763 \$123.75 The UBG-16 input channels. Any of the following options can be added at any time. Each option uses 1 input channels onterwise noted. 10-02764 \$497.00 THOUR FT-180: Fuel Flow Transducer (for very high flow rates). Stainless Steel, 3/4 - 16 (1/2". AN Male wi 3'7 fiar). 3.6 to 180 GPH, 1.78 PSI drop @ 40 GPH 10-02764 \$497.00 FM-FLOW Flow Transducer Use w/ engine-driven tert. 48,000.96 OZ. 10-02268 \$348.90 FM-FLOW Flow Transducer GPH, 6 PSI drop @ 20 GPH, .2P Gr or gavity-feed engines, 1/4" NPT, 2 to 125+ GPH, 0.59 Gr or @ 20 GPH, .2P Gr		i primary see the wive -50.		
Observed Probes, 4 CHT probes, 8 ea 6' 10-00593 \$1,515.00 UBG-16 6-Qvinder Package, Includes 6 EGT probes, 6 CHT probes, 12 ea 6' 10-00594 \$1,885.00 Remote UBG-16 Remote Head option. Must be purchased at the same time as the UBG-16 10-002763 \$123.75 UBG-16- Electronics International UBG-16 Engine G-MEM 10-01049 \$2,016.00 UBG-16 Electronics International UBG-16 Engine G-MEM 10-002737 \$959.00 UBG-16 UBG-16 Unit Only 10-02763 \$123.75 UBG-16 EGT & CHT Remote Head Option 2-14" TSO'D. Must be purchased with unit. Cannot be purchased alone. 10-02763 \$123.75 The UBG-16 input channels. Any of the following options can be added at any time. Each option uses 1 input channel unless otherwise noted. Model Options Part No. Price FM-FLOW FT-180: Fuel Flow Transducer (for very high flow rates), Stainless Steel, 3/4 - 16 (12" AN Male W'37' flare) 36 to 180 10-02764 \$497.00 GPH, 2-3 PSI drop @ 30 GPH, X Factor approx. 48,000, 9.6 Oz. 10-02208 \$349.00 FM-FLOW Flow Transducer For 350 to 50 FD Pengines or gravity-feed engines, 1/4" NPT, 2 to 125-4 GPH, 0.5 PSI drop @ 20 GPH 10-02208 \$349.0	Model		Part No.	Price
Observed BM probes, 6 CHT probes, 12 ea 6' mamesses, and Data Recorder (MUX-8A) 10-00594 \$1,885.00 Remote UBG-16 Remote Head option. Must be purchased at the same time as the UBG-16 10-02763 \$123.75 UBG-16- Electronics International UBG-16 Engine Analyzer 4 Cylinder CHT Prime 10-01048 \$1,534.00 UBG-16- Electronics International UBG-16 Engine Analyzer 6 Cylinder CHT Prime 10-02763 \$123.75 UBG-16- Electronics International UBG-16 Engine Analyzer 6 Cylinder CHT Prime 10-02763 \$123.75 The UBG-16 Input channels. Any of the following options can be added at any time. Each option uses 1 input channel unless otherwise noted. \$123.75 The UBG-16 Input channels. Any of the following options can be added (12" AN Male W 37" faire) 3.6 to 180 GPH 1.78 PSI drop at 100 GPH. Price FM-FLOW FT-180: Fuel Flow Transducer (for very high flow rates), Stainless Steel, 3/4 - 16 (12" AN Male W 37" faire) 3.6 to 180 GPH 1.78 PSI drop at 0.0 GPH 10-02208 \$330.00 FM-FLOW Fore approx. 48,000, 9.6 02. 10-02208 \$349.00 10-02208 \$349.00 10-02208 \$349.00 10-02208 \$349.00 10-02208 \$349.00 10-02208 \$349.00 10-02208 \$349.00 10-02208		probes, 4 CHT probes, 8 ea 6'	10-00593	\$1,515.00
Refinition purchased at the same time as the UBG-16 ID-02763 \$123,73 UBG-16- 4G-MEM Electronics International UBG-16 Engine 6G-MEM In-01048 \$1,534.00 UBG-16- 6G-MEM International UBG-16 Engine 6G-MEM In-01049 \$2,016.00 UBG-16- UBG-16- Cannot be purchased onto uncess In-02737 \$959.00 UBG-16- at any time. EGT & CHT Remote Head Option 2-14" TSOD. Must be purchased with unit. Cannot be purchased one. In-02763 \$123.75 The UBG-16 input channels. Any of the following options can be added at any time. Each option uses 1 input channel unless otherwise noted. Model Options Part No. Price FM-FLOW FT-180: Fuel Flow Transducer (for very high flow rates). Stainless Steel, 34 - 16 (12" AN Male wi 37" flars) 46 to 90 an GPH, 2.3 PSI drop @ 30 GPH 10-02764 \$497.00 FM-FLOW Flow Transducer Use w/ engine-driven fuel pumps up to 350 HP. 1/4" female PT. 6-70.4 GPH, 6 DSI drop @ 30 GPH, 2.3 PSI drop @ 30 GPH 10-02208 \$349.00 FM-FLOW FM-FLOW FM-FLOW-P 10-03206 \$348.95 FM-FLOW FM-FLOW-P 10-02208 \$349.00 -2 PSI drop @ 40 GPH 10-22337 \$214.95		6-Cylinder Package. Includes 6 EGT probes, 6 CHT probes, 12 ea 6' harnesses, and Data Recorder (MUX-8A)	10-00594	\$1,885.00
4G-MEM Analyzer 4 Cylinder CHT Prime 1000000 \$1,33,00 UBG-16- GG-MEM Electronics International UBG-16 Engine GG-MEM 10-01049 \$2,016.00 UBG-16- MEMOTE EGT & CHT Remote Head Option 2-14" TSO'D. Muss be purchased with unit. Cannot be purchased alone. 10-02763 \$123,75 The UBG-16 input channels. Any of the following options can be added at any time. Each option uses 1 input channel unless otherwise noted. 910-02764 \$497.00 FM-FLOW FT-180: Fuel Flow Transducer (for very high flow transducer Use w/ engine-driven feator approx. 48,000, 9.6 Oz. 10-02764 \$497.00 FM-FLOW Flow Transducer Use w/ engine-driven fuel pumps up to 350 HP 1.4" female NPT6-70+ GPH, 6 PSI drop @ 30 GPH, 1.2 SPI drop @ 60 GPH 10-02208 \$349.00 FM-FLOW Transducer For 350 to 550 HP engines or gravity-feed engines, 1/4" NPT, 2 to 125+ GPH, 0.5 PSI drop @ 20 GPH, .2 PSI drop @ 40 GPH 10-02208 \$348.95 FM-FLOW FM-FLOW-P 10-02208 \$348.95 FM-FLOW FM-FLOW-P 10-02208 \$224.95 FM-MP Secondary Manifold Pressure Includes PT-30GA Pressure Transducer 10-25338 \$224.95 FM-MP Secondary Manifold Pressure Includes Pressure Transducer 10-25338 \$224.95 FM-MP Secondary NPM Connects direc	Remote		10-02763	\$123.75
6G-MEMAnalyzer 6 Cylinder CHT Prime10-01049\$2,016.00UBG-16UBG-16 Unit Only10-02737\$959.00UBG-16EGT & CHT Remote Head Option 2-14" TSO'D. Must be purchased with unit. Cannot be purchased alone.10-02763\$123.75The UBG-16 input channels. Any of the following options can be added at any time. Each option uses 1 input channel unless otherwise noted.10-02764\$123.75ModelOptionsPart No.PriceFM-FLOWFT-180: Fuel Flow Transducer (for very high flow rates). Stainless Steel, 3/4 - 16 (1/2" AN Male w/ 37' flare) 3.6 to 180 GPH, 1.78 PSI drop at 120 GPH, K Factor approx. 48,000, 9.6 Oz.10-02764\$497.00FM-FLOWFlow Transducer Use w/ engine-driven fuel pumps up to 350 HP. 1/4" female or gravity-feed engines, 1/4" NPT, 2 to 125+ GPH, .05 PSI drop @ 20 GPH, .P10-02208\$349.00FM-FLOWFM-FLOW-P10-03206\$348.95FM-FLOWFM-FLOW-P10-03206\$348.95FM-GYROSecondary Fuel Pressure Includes PT-30GA Pressure Transducer. (Can be used with The UBC-16 and also with the FPA.5L (Fuel Flow/Pressure W GPS Interface instrument)10-25338\$224.95FM-MPSecondary Oil Pressure Transducer. (Can be used with The UBC-16 or FP-5(L)10-25338\$224.95FM-MPSecondary Oil Pressure Transducer. (For use with UBG-16 or FP-5(L)10-04818\$224.95FM-RPM- directly to the Mag Switch. (For use with UBG-16 or FP-5(L)10-01786\$221.95FM-RPM- ACGT Clamp Probe, 1/8 Npt, With Function Module10-02767\$249.00			10-01048	\$1,534.00
UBG-16 REMOTEEGT & CHT Remote Head Option 2-14" TSO'D. Must be purchased alone.10-02763\$123.75The UBG-16 input channels. Any of the following options can be added at any time. Each option uses 1 input channel unless otherwise noted.0ModelOptionsPart No.PriceFM-FLOW -180FT-180: Fuel Flow Transducer (for very high flow rates). Stainless Steel, 3/4 - 16 (1/2" AN Male w/ 37" flare) 3.6 to 180 GPH, 1.78 PSI drop at 120 GPH, K10-02764\$497.00FM-FLOW -180Flow Transducer Use w/ engine-driven fuel pumps up to 350 HP. 1/4" female NPH, 6.70+ GPH, 6.PSI drop @ 30 GPH, 2.3 PSI drop @ 60 GPH10-25343\$330.00FM-FLOW -90Transducer For 350 to 550 HP engines or gravity-feed engines, 1/4" NPT, 2 to 125+ GPH, 0.5 PSI drop @ 20 GPH, .2 PSI drop @ 40 GPH10-02208\$349.00FM-FLOW -9FM-FLOW-P10-03206\$348.95Secondary Fuel Pressure Includes PT-30GA Pressure Transducer. (Can be used with The UBG-16 and also with the FP-5L (Fuel Flow/Pressure Includes Pressure Transducer10-25338\$224.95FM-MPSecondary Manifold Pressure Includes Pressure Transducer. (For use with UBG-16 or FP-5(L)10-04818\$224.95FM-RPM- 4C (For use with UBG-16 or FP-5(L)10-01786\$221.95FM-RPM- 4C (For use with UBG-16 or FP-5(L)10-01786\$221.95FM-RPM- 4C (For use with UBG-16 or FP-5(L)10-01786\$221.95FM-TEMP- P-110Secondary RPM Connects (For use with UBG-16 or FP-5(L)10-02763\$223.95FM-TEMP- P-110Call Temp Probe, 1/8 Np			10-01049	\$2,016.00
DBG-16- REMOTETSO'D. Must be purchased alone.10-02763\$123.75The UBG-16 input channels. Any of the following options can be added at any time. Each option uses 1 input channel unless otherwise noted.ModelOptionsPart No.PriceFM-BLOWFT-180: Fuel Flow Transducer (for very high flow rates). Stainless Steel, 3/4 - 16 (1/2" AN Male w/ 37" flare) 3.6 to 180 GPH, 1.78 PSI drop at 120 GPH, K Factor approx. 48,000, 9.6 Oz.Part No.PriceFM-FLOWFlow Transducer Use w/ engine-driven fuel pumps up 030 GPH, 2.3 PSI drop @ 00 GPH 0.9010-02764\$497.00FM-FLOWFlow Transducer For 350 to 550 HP engines or gravity-feed engines, 1/4" NPT, 2 to 1254 GPH, 05 PSI drop @ 20 GPH, 2. PSI drop @ 40 GPH10-02208\$349.00FM-FLOW -90FM-FLOW-PI0-03206\$348.95FM-FLOW -90Secondary Fuel Pressure Includes Pr-30CA Pressure Transducer. (Can be used with The UBG-16 and also with the FP-5L (Fuel Flow/Pressure w/ GPS Interface instrument)10-25338\$224.95FM-MPSecondary Manifold Pressure Includes Pressure Transducer. (For use with UBG-16 or FP-5(L)10-04818\$224.95FM-MPM- dericity to the Mag Switch. (For use with UBG-16 or FP-5(L)10-01786\$221.95FM-RPM- dericity to the Mag Switch. (For use with UBG-16 or FP-5(L)10-02765\$223.95FM-TEMP- P-110EGT Clamp Probe, 1/8 Npt, (For use with UBG-16 or FP-5(L)10-02765\$223.95FM-TEMP- P-110EGT Clamp Probe, 1/8 Npt, (For use with UBG-16 or FP-5(L)10-02765\$223.95FM-TEMP- P-110Tit	UBG-16	UBG-16 Unit Only	10-02737	\$959.00
at any time.Each option uses 1 input channel unless otherwise noted.ModelOptionsPart No.PriceFM-FLOWFT-180: Fuel Flow Transducer (for very high flow rates), Stainless Steel, 3/4 - 16 (1/2" AN Male w/ 37" flare) 3.6 to 180 GPH, 1.78 PSI drop at 120 GPH, K Factor approx. 48,000, 9.6 Oz.10-02764\$497.00FM-FLOWFlow Transducer Use w/ engine-driven tel pumps up to 350 HP. 1/4" female NPT, 6-70+ GPH, 6 PSI drop @ 30 GPH, 2.3 PSI drop @ 60 GPH10-25343\$330.00FM-FLOWFor Transducer For 350 to 550 HP engines or gravity-feed engines, 1/4" NPT, 2 to 12.5+ GPH, .05 PSI drop @ 20 GPH, .2 PSI drop @ 40 GPH10-02208\$349.00FM-FLOW -90Escondary Fuel Pressure Includes PT-30GA Pressure Transducer. (Can be used with The UBG-16 and also with the FP-5L (Fuel Flow/Pressure w/ GPS Interface instrument)10-25338\$224.95FM-MPSecondary Manifold Pressure Includes Pressure Transducer. (For use with UBG-16 or FP-5(L)10-25338\$224.95FM-MPMSecondary RPM Connects directly to the Mag Switch. (For use with UBG-16 or FP-5(L)10-01786\$221.95FM-RPM- ACSecondary RPM Connects directly to the Mag Switch. (For use with UBG-16 or FP-5(L)10-01786\$223.95FM-TEMP- P-111EGT Clamp Probe, 1/8 Npt, UT-0276510-02765\$223.95FM-TEMP- P-111Tit or Oil Temp Probe, 1/8 Npt, UT-0276510-02765\$224.90FM-TEMP- P-112Tit or Oil Temp Probe, 1/8 Npt, UT-0276510-02765\$224.90FM-TEMP- P-112Tit or Oil Temp Probe, 1/8 Npt, UT-02765<		TSO'D. Must be purchased with unit.	10-02763	\$123.75
FM-FLOW -180FT-180: Fuel Flow Transducer (for very high flow rates), Stainless Steel, 3/4 - 16 (1/2" AN Male w/ 37' flare) 3.6 to 180 GPH, 1.78 PSI drop at 120 GPH, K Factor approx. 48,000, 9.6 Oz.10-02764\$497.00FM-FLOW -60Flow Transducer Use w/ engine-driven fuel pumps up to 350 HP. 1/4" female NPT, 6-70+ GPH, 6 PSI drop @ 30 GPH, 2.3 PSI drop @ 60 GPH10-25343\$330.00FM-FLOW -90Transducer For 350 to 550 HP engines or gravity-feed engines, 1/4" NPT, 2 to 12.5+ GPH, .05 PSI drop @ 20 GPH, 2 PSI drop @ 40 GPH10-02208\$349.00FM-FLOW -PFM-FLOW-P10-03206\$348.95Secondary Fuel Pressure Includes PT-30GA Pressure Transducer. (Can be used with the UBG-16 and also with the FP-5L (Fuel Flow/Pressure w/ GPS Interface instrument)10-25337\$214.95FM-GYROGyro Vacuum Includes Pressure Transducer Includes Pressure Transducer. (For use with UBG-16 or FP-5(L)10-25336\$224.95FM-OPSecondary Manifold Pressure Includes Pressure Transducer. (For use with UBG-16 or FP-5(L)10-04818\$224.95FM-RPM- directly to the Mag Switch. (For use with UBG-16 or FP-5(L)10-01786\$221.95FM-RPM- fire Clicamp Probe, 6 Cable10-02765\$223.95FM-TEIMP- P-111FIG Clamp Probe, 1/8 Npt, With Function Module10-02766\$249.00FM-TEIMP- P-112Tit or Oil Temp Probe, 1/4" NPT 6 Cable10-02766\$249.00FM-TEIMP- P-112Tit or Oil Temp Probe, 1/4" NPT 6 Cable10-02769\$249.00FM-TEIMP- P-112Tit or Oil Temp Probe, 1/4" NPT 6 Cable10-02766	The UBG- at any tim	16 input channels. Any of the following op e. Each option uses 1 input channel unles	otions can ss otherwi	be added se noted.
FM-FLOW -180 high flow rates), Stainless Steel, 3/4 - 16 (1/2" AN Male w/ 37' flare) 3.6 to 180 GPH, 1.78 PSI drop at 120 GPH, K Factor approx. 48,000, 9.6 Oz. 10-02764 \$497.00 FM-FLOW -60 Flow Transducer Use w/ engine-driven fluel pumps up to 350 HP. 1/4" female NPT, 6-70+ GPH, 6 PSI drop @ 30 GPH, 2.3 PSI drop @ 60 GPH 10-02208 \$330.00 FM-FLOW -90 Transducer For 350 to 550 HP engines or gravity-feed engines, 1/4" NPT, 2 to 12.5+ GPH, 0.5 PSI drop @ 20 GPH, -2 PSI drop @ 40 GPH 10-02208 \$349.00 FM-FLOW -90 Secondary Fuel Pressure Includes PT-30GA Pressure Transducer. Includes PT-30GA Pressure Transducer. Includes PT-30GA Pressure 10-25337 \$214.95 FM-GYRO Gyro Vacuum Includes Pressure Includes Pressure Transducer. Includes Pressure Transducer. Includes Pressure Transducer. 10-25338 \$224.95 FM-MP Secondary Manifold Pressure Includes Pressure Transducer. (For use with UBG-16 or FP-5(L) 10-04818 \$224.95 FM-OP Secondary RPM Connects directly to the Mag Switch. (For use with UBG-16 or FP-5(L) 10-01786 \$221.95 FM-RPM- P-110 Secondary RPM Connects directly to the Mag Switch. (For use with UBG-16 or FP-5(L) 10-01786 \$221.95 FM-RPM- P-112 FGT Clamp Probe, 1/8 Npt, P-114 10-02765 \$223.95 FM-TEMP- P-112 Tit or Oil	Model	Options	Part No.	Price
FM-FLOW -60fuel pumps up to 350 HP. 1/4" female NPT, .6-70+ GPH, .6 PSI drop @ 30 GPH, 2.3 PSI drop @ 60 GPH10-25343\$330.00FM-FLOW -90Transducer For 350 to 550 HP engines or gravity-feed engines, 1/4" NPT, 2 to 12.5+ GPH, .05 PSI drop @ 20 GPH, .2 PSI drop @ 40 GPH10-02208\$349.00FM-FLOW -PFM-FLOW-P10-03206\$348.95FM-FLOW -PSecondary Fuel Pressure Includes PT-30GA Pressure Transducer. (Can be used with The UBG-16 and also with the FP-5L (Fuel Flow/Pressure w/ GPS Interface instrument)10-25337\$214.95FM-GYROGyro Vacuum Includes Pressure Transducer10-25338\$224.95FM-MPSecondary Manifold Pressure Includes PT-100GA Pressure Transducer. (For use with UBG-16 or FP-5(L))10-04818\$224.95FM-RPM- directly to the Mag Switch. (For use with UBG-16 or FP-5(L))10-04818\$224.95FM-RPM- directly to the Mag Switch. (For use with UBG-16 or FP-5(L))10-04818\$224.95FM-RPM- directly to the Mag Switch. (For use with UBG-16 or FP-5(L))10-01786\$221.95FM-TEMP- P-111EGT Clamp Probe, 1/8 Npt, With Function Module10-02765\$223.95FM-TEMP- P-114Tit or Oil Temp Probe, 1/8 Npt, With Function Module10-02766\$249.00FM-TEMP- P-120Oil Temp Probe, 5/8-18 Thread 6 Cable10-02767\$249.00FM-TEMP- P-128OAT or Carb Temp Probe 1/4-28 Thread 6 Cable10-02769\$249.00FM-TEMP- P-128OAT or Carb Temp Probe 1/4-28 Thread 6 Cable10-02769\$249.00FM-TEMP		high flow rates), Stainless Steel, 3/4 - 16 (1/2" AN Male w/ 37' flare) 3.6 to 180 GPH, 1.78 PSI drop at 120 GPH, K	10-02764	\$497.00
FM-FLOW -90or gravity-feed engines, 1/4" NPT,2 to 125+ GPH, .05 PSI drop @ 20 GPH, .2 PSI drop @ 40 GPH10-02208\$349.00FM-FLOW -PFM-FLOW-P10-03206\$348.95FM-FLOW -PSecondary Fuel Pressure Includes PT-30GA Pressure Transducer. (Can be used with The UBG-16 and also with the FP-5L (Fuel Flow/Pressure w/ GPS Interface instrument)10-25337\$214.95FM-GYROGyro Vacuum Includes Pressure Transducer10-25338\$224.95FM-MPSecondary Manifold Pressure Includes Pressure Transducer10-25338\$224.95FM-OPSecondary Oil Pressure Includes PT-100GA Pressure Transducer. (For use with UBG-16 or FP-5(L)10-25336\$224.95FM-RPM- 4CSecondary RPM Connects directly to the Mag Switch. (For use with UBG-16 or FP-5(L)10-04818\$224.95FM-RPM- 		fuel pumps up to 350 HP. 1/4" female NPT, .6-70+ GPH, .6 PSI drop @ 30	10-25343	\$330.00
_PFM-FLUW-P10-03206\$348.95_PSecondary Fuel Pressure Includes PT-30GA Pressure Transducer. (Can be used with The UBG-16 and also with the FP-5L (Fuel Flow/Pressure 		or gravity-feed engines, 1/4" NPT, 2 to 125+ GPH, .05 PSI drop @ 20 GPH,	10-02208	\$349.00
Includes PT-30GA Pressure Transducer. (Can be used with The UBG-16 and also with the FP-5L (Fuel Flow/Pressure w/ GPS Interface instrument)10-25337\$214.95FM-GYROGyro Vacuum Includes Pressure Transducer10-25339\$224.95FM-MPSecondary Manifold Pressure 		FM-FLOW-P	10-03206	\$348.95
FM-GYROGyro Vacuum Includes Pressure Transducer10-25339\$224.95FM-MPSecondary Manifold Pressure Includes Pressure Transducer10-25338\$224.95FM-OPSecondary Oil Pressure Includes PT-100GA Pressure Transducer. (For use with UBG-16 or FP-5(L)10-25336\$224.95FM-RPM- 4CSecondary RPM Connects directly to the Mag Switch. (For use with UBG-16 or FP-5(L)10-04818\$224.95FM-RPM- 6CSecondary RPM Connects directly to the Mag Switch. (For use with UBG-16 or FP-5(L)10-01786\$221.95FM-TEMP- P-110Secondary RPM Connects directly to the Mag Switch. (For use with UBG-16 or FP-5(L)10-01786\$221.95FM-TEMP- P-110EGT Clamp Probe, 6 Cable10-02188\$218.95FM-TEMP- P-111Tit or Oil Temp Probe, 1/8 Npt, With Function Module10-02766\$223.95FM-TEMP- P-112Tit or Oil Temp Probe, 1/4" NPT 6 Cable10-02767\$249.00FM-TEMP- P-120Oil Temp Probe, 5/8-18 Thread 6 Cable10-02770\$249.00FM-TEMP- P-128Oil Temp Probe, 5/8-18 Thread 6 Cable10-02770\$249.00FM-TEMP- P-128Secondary Volts/Amps w/S-50 Shunt Volts uses 1 input channel and Amps uses 1 input channel S.\$10-02784\$214.95FM-VA-3MVP and UBG Option 3 Input Volt Monitor10-04841\$178.99	10-0FM-FP	Includes PT-30GA Pressure Transducer. (Can be used with The UBG-16 and also with the FP-5L (Fuel Flow/Pressure	10-25337	\$214.95
FM-IMIncludes Pressure Transducer10 200001214.30FM-OPSecondary Oil Pressure Includes PT-100GA Pressure Transducer. (For use with UBG-16 or FP-5(L)10-25336\$224.95FM-RPM- 4CSecondary RPM Connects directly to the Mag Switch. (For use with UBG-16 or FP-5(L)10-04818\$224.95FM-RPM- 6CSecondary RPM Connects 	FM-GYRO	•	10-25339	\$224.95
FM-OP (For use with UBG-16 or FP-5(L)10-25336\$224.95FM-RPM- 4CSecondary RPM Connects directly to the Mag Switch. (For use with UBG-16 or FP-5(L)10-04818\$224.95FM-RPM- 6CSecondary RPM Connects directly to the Mag Switch. (For use with UBG-16 or FP-5(L)10-01786\$221.95FM-RPM- 6CSecondary RPM Connects directly to the Mag Switch. (For use with UBG-16 or FP-5(L)10-01786\$221.95FM-TEMP- P-110EGT Clamp Probe, 6 Cable10-02188\$218.95FM-TEMP- P-111Tit or Oil Temp Probe, 1/8 Npt, With Function Module10-02766\$223.95FM-TEMP- P-112Tit or Oil Temp Probe, 1/4" NPT 6 Cable10-02766\$249.00FM-TEMP- P-112Oil Temp Probe, 5/8-18 Thread 6 Cable10-02770\$249.00FM-TEMP- P-120OI Tor Carb Temp Probe 1/4-28 Thread 6 Cable10-02770\$249.00FM-TEMP- P-128Secondary Volts/Amps w/S-50 Shunt Volts uses 1 input channel and Amps uses 1 input channel and Amps uses 1 input channel and Amps uses 1 input channel (i.e., monitoring volts and amps require the use of two of the UBG-16's input channels.10-02841\$178.99FM-VA-3MVP and UBG Option 3 Input Volt Monitor10-04841\$178.99	FM-MP	Secondary Manifold Pressure Includes Pressure Transducer	10-25338	\$224.95
FM-PAPM- 4Cdirectly to the Mag Switch. (For use with UBG-16 or FP-5(L)10-04818\$224.95FM-RPM- 6CSecondary RPM Connects 	FM-OP	PT-100GÁ Pressure Transducer.	10-25336	\$224.95
FM-TEMP- 6C directly to the Mag Switch. (For use with UBG-16 or FP-5(L) 10-01786 \$221.95 FM-TEMP- P-110 EGT Clamp Probe, 6 Cable 10-02188 \$218.95 FM-TEMP- P-110 EGT Clamp Probe, 6 Cable 10-02785 \$223.95 FM-TEMP- P-111 Tit or Oil Temp Probe, 1/8 Npt, With Function Module 10-02766 \$249.00 FM-TEMP- P-112 Tit or Oil Temp Probe, 1/4" NPT 6 Cable 10-02767 \$249.00 FM-TEMP- P-120 Tit or Oil Temp Probe, 1/4" NPT 6 Cable 10-02770 \$249.00 FM-TEMP- P-120 Oil Temp Probe, 5/8-18 Thread 6 Cable 10-02770 \$249.00 FM-TEMP- P-128 Oil Temp Probe, 5/8-18 Thread 6 Cable 10-02770 \$249.00 FM-TEMP- P-128 Oil Temp Probe, 5/8-18 Thread 6 Cable 10-02770 \$249.00 FM-TEMP- P-128 Oil Temp Probe, 5/8-18 Thread 6 Cable 10-02769 \$249.00 FM-VA Secondary Volts/Amps w/S-50 Shunt Volts uses 1 input channel and Amps uses 1 input channel (i.e., monitoring volts and amps require the use of two of the UBG-16's input channels. 10-25342 \$214.95 FM-VA-3 MVP and UBG Option 3 Input Volt Monitor 10-04841 \$178.99		directly to the Mag Switch.	10-04818	\$224.95
P-110 EG1 Clamp Probe, 6 Cable 10-02788 \$218.95 FM-TEMP- P-111 Tit or Oil Temp Probe, 1/8 Npt, With Function Module 10-02765 \$223.95 FM-TEMP- P-112 Tit or Oil Temp Probe, 7/16-20 Thread 6 Cable 10-02766 \$249.00 FM-TEMP- P-114 Tit or Oil Temp Probe, 1/4" NPT 6 Cable 10-02767 \$249.00 FM-TEMP- P-120 Oil Temp Probe, 5/8-18 Thread 6 Cable 10-02770 \$249.00 FM-TEMP- P-128 Oil Temp Probe, 5/8-18 Thread 6 Cable 10-02770 \$249.00 FM-TEMP- P-128 Oil Temp Probe, 5/8-18 Thread 6 Cable 10-02770 \$249.00 FM-TEMP- P-128 Oil Temp Probe, 5/8-18 Thread 6 Cable 10-02770 \$249.00 FM-VA Secondary Volts/Amps w/S-50 Shunt Volts uses 1 input channel and Amps uses 1 input channel (i.e., monitoring volts and amps require the use of two of the UBG-16's input channels. 10-25342 \$214.95 FM-VA-3 MVP and UBG Option 3 Input Volt Monitor 10-04841 \$178.99	6C	directly to the Mag Switch.	10-01786	\$221.95
P-111With Function Module10-02763\$223.95FM-TEMP- P-112Tit or Oil Temp Probe, 7/16-20 Thread 6 Cable10-02766\$249.00FM-TEMP- P-114Tit or Oil Temp Probe, 1/4" NPT 6 Cable10-02767\$249.00FM-TEMP- P-120Oil Temp Probe, 5/8-18 Thread 6 Cable10-02770\$249.00FM-TEMP- P-128OAT or Carb Temp Probe 1/4-28 Thread 6 Cable10-02769\$249.00FM-TEMP- P-128OAT or Carb Temp Probe 1/4-28 Thread 6 Cable10-02769\$249.00FM-VASecondary Volts/Amps w/S-50 Shunt Volts uses 1 input channel and Amps uses 1 input channel and Amps volts and amps require the use of two of the UBG-16's input channels.10-25342\$214.95FM-VA-3MVP and UBG Option 3 Input Volt Monitor10-04841\$178.99	P-110		10-02188	\$218.95
P-1127/16-20 Thread 6 Cable10-02760\$249.00FM-TEMP- P-114Tit or Oil Temp Probe, 1/4" NPT 6 Cable10-02767\$249.00FM-TEMP- P-120Oil Temp Probe, 5/8-18 Thread 6 Cable10-02770\$249.00FM-TEMP- P-128OAT or Carb Temp Probe 1/4-28 Thread 6 Cable10-02770\$249.00FM-TABOAT or Carb Temp Probe 1/4-28 Thread 6 Cable10-02769\$249.00FM-VASecondary Volts/Amps w/S-50 Shunt Volts uses 1 input channel and Amps uses 1 input channel (i.e., monitoring volts and amps require the use of two of the UBG-16's input channels.10-02842\$214.95FM-VA-3MVP and UBG Option 3 Input Volt Monitor10-04841\$178.99	P-111	With Function Module	10-02765	\$223.95
P-114Int or Oil Temp Probe, 1/4 NPT 8 Cable10-02/67\$249.00FM-TEMP- P-128Oil Temp Probe, 5/8-18 Thread 6 Cable10-02770\$249.00FM-TEMP- P-128OAT or Carb Temp Probe 1/4-28 Thread 6 Cable10-02769\$249.00FM-VASecondary Volts/Amps w/S-50 Shunt Volts uses 1 input channel and Amps uses 1 input channel (i.e., monitoring volts and amps require the use of two of the UBG-16's input channels.10-25342\$214.95FM-VA-3MVP and UBG Option 3 Input Volt Monitor10-04841\$178.99	P-112	7/16-20 Thread 6 Cable		
P-120 Oil Termp Probe, 5/8-18 Thread 6 Cable 10-02770 \$249.00 FM-TEMP- OAT or Carb Temp Probe 10-02769 \$249.00 P-128 1/4-28 Thread 6 Cable 10-02769 \$249.00 FM-VA Secondary Volts/Amps w/S-50 Shunt Volts uses 1 input channel and Amps uses 1 input channel (i.e., monitoring volts and amps require the use of two of the UBG-16's input channels. 10-25342 \$214.95 FM-VA-3 MVP and UBG Option 3 Input Volt Monitor 10-04841 \$178.99	P-114	Tit or Oil Temp Probe, 1/4" NPT 6 Cable	10-02767	\$249.00
P-128 1/4-28 Thread 6 Cable 10-02769 \$243.00 FM-VA Secondary Volts/Amps w/S-50 Shunt Volts uses 1 input channel and Amps uses 1 input channel (i.e., monitoring volts and amps require the use of two of the UBG-16's input channels. 10-25342 \$214.95 FM-VA-3 MVP and UBG Option 3 Input Volt Monitor 10-04841 \$178.99	P-120		10-02770	
FM-VAVolts uses 1 input channel and Amps uses 1 input channel (i.e., monitoring volts and amps require the use of two of the UBG-16's input channels.10-25342\$214.95FM-VA-3MVP and UBG Option 3 Input Volt Monitor10-04841\$178.99			10-02769	\$249.00
	FM-VA	Volts uses 1 input channel and Amps uses 1 input channel (i.e., monitoring volts and amps require the use of two	10-25342	\$214.95
KEYSPAN Keyspan Serial To USB Adapter 10-04978 \$43.75	FM-VA-3	•	10-04841	\$178.99
	KEYSPAN	Keyspan Serial To USB Adapter	10-04978	\$43.75

E.I. INSTRUMENTS







10-01355

10-01339

The entire line of Electronics International digital instruments offers precise readings at exceptional prices. All gauges are accurate to 1%. They are FAA-approved under STC No. 1626NM. Furnished complete with all probes & leads.

0:			
Single Engine	Description	Part No.	Price
E-1	Single-Channel EGT or CHT, STCd, TSOd, PMA'd 2 1/4" Mount, 2.5" Depth,	10-01355	\$450.00
C-1	12 oz. Kit	10-01338	\$349.00
T-1P	EGT, CHT or TIT, PRIMARY REPLACE-	10-01373	\$374.00
E-1P	MENTS STCd, TSO'd, PMA'd w/ Over- Temp Warning Light, 2 1/4" Mount, 2.5"	10-02762	\$395.00
C-1P	Depth, 12 oz.	10-01339	\$389.00
EC-1	Switchable from EGT to CHT (1 of ea), STCd, TSOd & PMAd. 2 1/4" Mount, 2.5" Depth, 16 oz	10-01358	\$466.00
EAC-1	STCd, TSOd, PMAd EGT/OAT/CHT lce Zone Warning Light (from 10 to 39 degrees Celsius)	10-00806	\$526.00
CA-1	STCd, TSOd, PMAd - CARB TEMP/OAT w/Ice Zone Warning Light. (from 10 to 39 degrees Celsius)	10-01351	\$429.00
A-1	OAT w/ Ice Zone Warning Light, STCd, PMAd, TSOd (light comes on between 10 and 39 degrees F).	10-01307	\$337.00
E-4	EGT and CHT instruments, STCd, TSOd	10-01356	\$676.00
C-4	and PMAd. Four Channels (EGT or CHT)	10-01348	\$695.00
E-6	EGT and CHT instruments, STCd, TSOd	10-01357	\$774.00
C-6	and PMAd Six Channels	10-01350	\$825.00
EC-1P	3-1/8" EC-1P One Channel EGT/CHT Primary	10-00807	\$664.00
TC-1P	TC-1P Single Channel TIT/CHT Primary	10-02736	\$628.00
FOR type	TWINS - Orders for following instruments of probes: EGT hose clamp, TIT (hose clar 1/4" NPT or 7/16 x 20). CHT, and OverTem	MUST spe np, 1/8" Ni np Limits.	cify PT,
EE-1P	Dual Display EGT (1 L & 1 R), Over-Temp Lights, 3-1/8" mount	10-01447	\$748.00
CC-1P	Dual Display CHT (1 L & 1 R), OverTemp Lights, 3-1/8" mount	10-02735	\$750.00
TT-1P	Dual Display TIT (1 L & 1 R), OverTemp Lights, 3-1/8" mount	10-02733	\$728.00
EC-1PT	Dual Display 1 EGT & 1 CHT w/ OverTemp Lights, 3-1/8" mount	10-02731	\$769.00
TC-1PT	Dual Display 1 TIT & 1 CHT w/ OverTemp Lights, 3-1/8" mount	10-02732	\$751.00
	WINS - Not Primary Replacement Instrume SOd. Same order requirements and specifi		
E-2	(one display, switchable from left to	10-00098	\$630.00
C-2	right engine, either EGT or CHT)	10-01661	\$766.00
EC-2	(one display, switchable from EGT, L/R and CHT L/R).	10-01359	\$785.00
FL-1M	SIngle Fuel Level Instrument is NON STC Experimental Aircraft Only. Designed to work with E.I.'s Magnetic Float Sensor P-300M.	10-05084	\$424.95
FL-2M	Dual Fuel Level Instrument is NON STC Experimental Aircraft Only.	10.05095	* • • • • • • •
	Designed to work with E.I.'s Magnetic Float Sensor P-300M.	10-05085	\$424.95

ELECTRONICS INTERNATIONAL INSTRUMENTS

FP-5L FUEL FLOW, PRESSURE, HORSEPOWER AND GPS PMAd & STCd PRIMARY REPLACEMENT INSTRUMENT



Positively the best Fuel Flow/Horsepower Instrument there is! Nothing else even comes close. The FP-5L's High-Powered Features Include: • HORSEPOWER, to 1 percent hp. No other fuel gauge provides this! • FLOW, displayed in Gallons, Pounds, Liters or British Gallons. • AUTOMATIC K-Factor Calibration for UNSURPASSED ACCURACY. • FUEL DISPLAYS: "Ilsed for Flight" "Ilsed Since Fill

for UNSURPASSED ACCURACY. • FUEL DISPLAYS: "Used for Flight", "Used Since Fill Up", "MPG", "Fuel Required to. • Destination", "Fuel Remaining", "Time to Empty." • SCAN MODES: Manual and Automatic. • RECURRING FUEL USED ALARM Pilot Programmable. • 2 LOW FUEL ALARMS Pilot Programmable w/ Red Warning LED. • FUEL REMAINING displayed to 1/10 Gal. • AUTOMATICALLY CALCULATES AND DISPLAYS "Time to Empty", "Fuel Req to Dest," and "Fuel Reserve.". Displays Nautical and Statute Miles per Gallon. Multiple Data Outputs & Inputs, Handhelds & Panel Mounts. One-of-a-kind AUXILIARY Channel can be used to monitor an additional function (choose one):EGT, TIT, CHT, OAT, Carb Temp, Oil Temp, Cowl Temp, Fuel Pressure, Gyro Vaccum, Manifold Pressure, Volts or Amps. Specs: 2-1/4" mount, 3.65" deep, 28 oz. pkg, Backlit for Night Operation, Superior Sunlight Viewability, External Warning Line. Operates from 7.5 to 30 volts @ . 3 amps.

Models	Description	Part No.	Price
FP-5L	Fuel Flow w/ Horsepower & GPS input/output (instrument only; no transducers)	10-01217	\$415.00
FP-5L/FT-60	Fuel Flow w/ Horsepower & GPS input/output with FT-60 - PRIMARY	10-05017	\$779.00
FP-5L/FT-60/P	Fuel Flow w/ Horsepower & Pressure GPS input/output with FT-60	10-25310	\$947.00
FP-5L/FT-90	Fuel Flow w/ Horsepower & GPS input/output with FT-90	10-05019	\$775.00
FP-5L/FT-90/P	Fuel Flow w/ Horsepower & Pressure GPS input/output with FT-90	10-05018	\$958.00
FP-5L-60	Fuel Flow w/ Horsepower & GPS input/ output, includes FT-60 Flow Transducer	10-01045	\$598.00
FP-5L-90	Fuel Flow w/ Horsepower & GPS input/ output, includes FT-90 Flow Transducer	10-01050	\$598.00

FP-5 & FP-5L AUXILLARY OPTIONS

The FP-5 & FP-5L feature an Auxiliary Channel. Any one of the following choices can be added to at any time.			
FFDM-1 w/ FT-60	FUEL FLOW Differential Module, for aircraft with a Pressure Carburetor. Includes FT-60 or FT-90 Flow Transducer to measure the returned fuel. Please specify FT-60 or FT-90. DOES NOT use up the FP-5's Auxiliary channel.	10-25325	\$393.00
FM-Temp- P-110	EGT hose clamp probe & 6' cable. Compensates HP reading when leaning.	10-02188	\$218.95
FM-Temp- P-128	OAT or CARB Temp probe (1/4"-28 thread) and 6' cable	10-02769	\$249.00
FM-Temp- P-120	Secondary OIL Temp probe (5/8"-18 thread) and 6' cable	10-02770	\$249.00
FM-Temp- P-111	Secondary TIT or OIL Temp probe (1/8: NPT adjustable depth) and 6' cable	10-02765	\$223.95
FM-Temp- P-112	Secondary TIT or OIL Temp probe (7/16-20 thread adjust. depth) and 6' cable	10-02766	\$249.00
FM-Temp- P-114	Secondary TIT or OIL Temp probe (1/4" NPT adjust. depth) & 6' cable 10-02767		\$249.00
FM-OP	Secondary OIL PRESSURE. Includes PT-100GA Pressure Transducer	10-25336	\$224.95
FM-FP	Secondary Fuel Pressure. Includes PT-30GA Pressure Transducer	10-25337	\$214.95
FM-MP	Secondary Manifold Pressure. Includes Pressure Transducer	10-25338	\$224.95
FM-RPM 6C	Secondary RPM. Connects directly to the Mag Switch	10-01786	\$221.95
FM-Gyro	Gyro Vacuum. Includes Pressure 10-25339 \$2 Transducer		\$224.95
FM-VA	Secondary Volts or Amps (one or the other) w/ S-50 amp shunt.	10-25342	\$214.95
AV-17	Voice Annunciator. Connects through the Audio Panel or Intercom. The 1"x1" control panel mounts on your instrument panel. The 4.1"x 2.6"x 1.7" control box mounts under the instrument panel. See all Annunciator Panels on our "Accessories" page.	10-00181	\$435.00

E.I. DIGITAL/GRAPHIC INSTRUMENTS

These Digital/Graphic Instruments are solid state and hold their accuracy over time and a range of environmental conditions. The colorful Graphic Analog display emits green, yellow, or red lights enabling the pilot to spot problems immediately without interpreting a needle. Gauges mount in 2-1/4" instrument holes.



TACHOMETER - R-1, TACHOMETER: STCd, PMA'd and TSO'd as PRIMARY REPLACE-MENT. Features a 210 degree graphic analog display with green, yellow, and red LEDs. Accurate 10 RPM resolution digital display. Flight Timer. Tach Timer. Peak RPM Recorder. Automatic Mag Drop Calculation. Connects to both "P" leads through isolators (no magnetic pick-ups required). 2 1/4" Mount. 3.65" Depth. 10 Oz. Unit. Superior sunlight viewability.



OIL PRESSURE/TEMPERATURE - OPT-1, OIL TEMP/PRESSURE: STC'd, PMAd and TSO'd as PRIMARY REPLACEMENT. OPT-1 features dual 90 degree graphic analog displays w/ green, yellow, and red LEDs. Accurate to 1 PSI and 1°F Resolution. External Oil Press and Temp Transducers (no oil in the cockpit). 2 1/4" Mount. 3.65" Depth. 22 Oz. Kit. Superior sunlight viewability. Backlit. Operates from 7.5 - 35 volts @ .3 amps. Note: This instrument may facenlate rather than silkscreening. depending



MANIFOLD PRESSURE - M-1, MANIFOLD PRESSURE. STC'd, PMA'd & TSO'd as PRIMARY REPLACEMENT. 210 degree graphic analog display w/ green, yellow, and red LEDs. Accurate 1" Mercury Resolution digital display. Connects to std pressure line through 1/4" male flare union. 2 1/4" Mount. 3.65" Depth. 13 Oz. Unit. Viewable in direct sunlight. Backlit Operates from 7.5 to 30 volts @ .3 amps. Note: This instrument may come



0

VOLTS/AMPS - VA-1A, VOLTS/AMP. STCd, PMAd as PRIMARY REPLACEMENT. Internal Shunt. Discharge @ High Voltage Warning Lights. 100 amp capability. .1 volt & .1 amp 1% Resolution. Accuracy: 2 1/4" Mount. 2.5" Depth. 9 Oz. Unit. Viewable in direct sunlight. Backlit. Operates from 7.0 to 40 volts @ .1 amp. VA-1A (internal shunt)



VA-1A (internal shunt) P/N 10-00809.......\$395.00 VA-1A-XX, VOLTS/AMP - STCd, PMAd as PRIMARY REPLACEMENT. (For use with External Shunt. Discharge and High Voltage Warning Lights. 100 amp capability) or order VA-1A-300 for 300-amp capability). 1 volt and .1 amp Resolution. Accuracy: 1%. 2 1/4" Mount. 2.5" Depth. 9 Oz. Unit. Superior sunlight viewability. Backlit. Operates from 7.0 to 40

VA-1A-50 (S-50 external shunt)......P/N 10-01378\$439.00 VA-1A-300 (S-300 external shunt).....P/N 10-01394\$447.00 RSVA-3 Remote SwitchP/N 10-03207\$89.75

EI 37 DEGREE FLARE FITTING

INTENSITY CONTROL



Controls the intensity of the green LED's on the UBG-16, R-1, M-1, OPT-1, FL-2, FP-5(L), and other El instruments. This unit can be connected increments at the same time. It provides linear

to any one or all of these instruments at the same time. It provides linear control of the intensity of the green LED's for low ambient light or night operation. Mounts in a 1/4" hole. Operates on a 12 or 24 volt system. E.I. products include all documentation and certifications.

Description	Part No.	Price
EI LED Intensity Control - CP1	10-02035	\$381.00
EI LED Intensity Control - CP1A Allows Pilot to run current (to power lighting)	10-06280	\$68.85



MVP-50P GLASS PANEL ENGINE & SYSTEM MONITOR

MVP-50P Non-Certified Engine Monitoring System For Standard System installs or FADEC System installs. FADEC NOTE: If already equipped with "FADEC System" MVP-50P will pull data directly from FADEC, minimal hardware rewuired NOTE:If already equipped with "FADEC System" MVP-50P will pull data directly from FADEC, minimal hardware rewuired but is included. **E.I. products include all documentation and certifications.** The MVP-50P replaces over 15 Engine Instruments and 50 Functions in a single, full color, enhanced TFT glass display instrument. It features excellent view-ability, even in direct sunlight. The MVP-50 is an unrivaled Engine and Aircraft System Monitor with an easy-to-read and easy-to-use format. There are Pilot-Programmable colors, ranges and limits and a voice alarm for each instrument displayed. Its "System Page" displays trims, flaps, wheel status lights, many system parameters and annunciators. This is the most powerful engine and system analyzer on the market, featuring the following displays: Bar Graph (with Scan and Hottest Cylinder modes), Rich-of-Peak, Lean-of-Peak, Full Digital, Normalized and Differential. The MVP-50P's instant red and yellow visual warnings, as well as voice annunciators for all Programmed Limits, eliminate the need to constantly scilble problems. **In-Elipth Date**. The MVP-50P provides many "Elipth Data Screene" to reduce cocknit clutter and pilot

scan an entire panel for possible problems. In-Flight Data: The MVP-50P provides many "Flight Data Screens" to reduce cockpit clutter and pilot workload. Some of these screens are: Fuel Management, Timers, Clocks and Date, Weight and Balance, Data Recording, Custom Checklists (Start, Taxi, Run-up w/ Mag Drop, Take Off, Landing, Emergency, Custom Flight Plans, General Information (Aircraft Performance, Engine Diagnostics, VSI Lights, Airspeed, VFR Minimums, Altitude Table, Light Gun Signals, Transponder Codes, Frequencies, Real-Time Out (providing telemetry for UAV racers, etc.). **Plus Additional Screens:** Flight Log, Max Data Log, Min Data Log and others. And it's easy to create your own Custom Screens and download them to the MVP-50P through its USB port. Compatible with OP Technologies and Chelton. EGView Charting Software is also available for use with the MVP-50P.

Experimental	Description	Part No.	Price		TEMP	ERATURE PROBES FOR MVP-50P & I	MVP-50T	
MVP-50P-4	4-Cylinder Pkg	10-01192	\$4,917.00		Models	Description	Part No.	Price
MVP-50P-6	6-Cylinder Pkg	10-01191	\$6,650.00			CHT probe, screw-in, 3/8"-24	10-00808	
MVP-50P-7	7-Cylinder Pkg	10-03174	\$5,340.00			CHT probe, Military Bayonet.	10-00438	-
MVP-50P-8	8-Cylinder Pkg	10-03175	\$6,007.00			CHT Adaptor for P-101 Probe, 3/8"-24	10-00374	
MVP-50P-8W	8-Cylinder Water-Cooled Pkg	10-03178	\$5,168.00			CHT probe, 18mm gasket.	10-01368	1
	9-Cyl. Radial Pkg	10-03176				CHT probe, 14mm gasket	10-02037	-
MVP-50P-12W	12-Cylinder Water-Cooled Pkg	10-03177	\$5,262.00			CHT probe, 12mm gasket	10-02038	\$110.99
MVP-50P-4-FADEC	4-Cyl. FADEC Pkg	10-03173	· · ·			CHT probe, 3/8" gasket, piggy-backs on a primary CHT probe	10-02039	\$108.75
MVP-50P-6-FADEC	6-Cyl. FADEC Pkg	10-03172			P-110-F-MVP	Fast-Response EGT/TIT probe, Hose Clamp Type, .125"D	10-00376	\$108.75
Certified	Description	Part No.	Price			Std TIT probe, 1/8" NPT, .187" D	10-02040	\$116 75
MVP-50P-4-C	4 Cylinder Certified	10-03867	\$6,250.00			· · · · ·		
MVP-50P-6-C	6 Cylinder Certified	10-03868	\$6,650.00			Std TIT probe, 7/16"-20, .187" D	10-00378	
MVP-50P-8-C	8 Cylinder Certified	10-03869	\$6,830.00			Std TIT probe, ¼" NPT, .187" D	10-00379	-
MVP-50P-4T-C	Twin 4 Cylinder Certified	10-05083	\$12,347.00			Fast Response TIT probe, 1/4" NPT, .125" D	10-02042	-
MVP-50P-9-C	9 Cylinder Certified	10-07088	\$7,749.00			OIL Temp probe, 5/8"-18	10-00302	-
MVP-50P-6T-C	Twin 6 Cylinder Certified	10-05082	\$13,075.00			Universal Temp probe, #6 hole	10-00380	

UPTIUNAL UUTPUT INTERFACES AVAILABLE FUR MVP PKGS LISTED ABUVE			
Models	Description	Part No.	Price
RTDO	Real-Time Data Out. Can be used to provide telemetry for UAV's, racers and other applications.	10-03168	\$570.00
	ACCESSORIES FOR MVP PKGS		
USB-64	USB Memory Stick, 64 MB or larger. Used to upload and download data to the MVP-50P.	10-03186	\$32.95
CP-1-MVP	LED Intensity Control Pot. External pot used to control the display intensity.	10-03211	\$50.50
EDC-33P-4/6	4/6 Cylinder Engine Data Converter. Adding a second EDC to the MVP allows. Additional pressures, annunciators and other functions to be monitored on the MVP (uses the Input Port 3 on the MVP).	10-03184	\$1,322.00
MVP-50P Head Only	Display unit only! May be used to display parameters in a second location Display Only	10-01193	\$2,959.00
PT-30ABS-MVP	Absolute Pressure Transducer, 0 to 40 In Hg (Manifold Press or Cabin Altitude).	10-03238	\$208.95
	Carbon Monoxide Detectors	10-06985	10-06985

PRESSURE TRANSDUCERS AND MODULES

	(Each includes a Cbl-4D-6' harness when ordered w/ the MVP-50 & MVP-50T)		
PT-30GA-MVP	Pressure Transducer. 0 to 40 PSI (see Accessories page for details)	10-03232	\$108.75
PT-300GA-MVP	Pressure Transducer, 0 to 40 r 51 (see Accessories page for details)	10-03232	
PT-3000S-MVP	Pressure Transducer, 0 to 3000 PSI (see Accessories page for details)	10-03236	
PT-30ABS-MVP	Absolute Pressure Transducer, 0 to 36 In Hg (Manifold Press or Cabin Altitude)	10-03238	
PT-30ALT-MVP	Attitude Transducer	10-03239	
PT-60ABS-MVP	Absolute Pressure Transducer, 0 to 70 In Hg (Manifold Pressure)	10-03240	
PT-05Diff-MVP	Differential Pressure Transducer, 0 to 60 In Hg (Vac Pressure or Cabin Diff Pressure)	10-03241	\$208.95
PT-04H20-MVP	Differential Pressure Transducer, 0 to 5 In H20	10-03242	\$227.95
DPIM-1-30-MVP	Differential Pressure Interface Module for aircraft that require fuel pressure to be Measured in reference to the upper deck. Includes a PT-30GA pressure transducer to measure the upper deck pressure.	10-03205	\$403.00
Cbl-4D-6'	One 6' 4-wire cable with crimped D-Sub pins. Used to interface any pressure transducer, fuel flow transducer or fuel level probe to the MVP system. Add \$.95 per foot to the price for anything over the standard 6' length.	10-03183	\$52.75
	FUEL FLOW TRANSDUCERS AND MODULES		
FT-60	Fuel Flow Transducer (Red Cube), .6 to 70+ GPH	10-01196	\$205.95
FT-90	Fuel Flow Transducer (Gold Cube), 3 to 125+ GPH	10-01224	\$231.95
FT-180	Fuel Flow Transducer (Black Cube), 5 to 250+ GPH	10-01197	\$437.00
FFDM-1-		10-03244	\$403.00
MVP-FT60	Fuel Flow Differential Module for aircraft w/ a pressure carburetor. Includes FT-60 or FT-90 transducer to measure	10-03244	\$403.00
FFDM-1-	the returned fuel. Please specify FT-60 or FT-90 at time of your order.	10-03245	\$401.00
MVP-FT90			
FM-Flow-P	Measures Fuel Flow from a pulsed injector signal.	10-03206	\$348.95
	FUEL LEVEL PROBES AND MODULES		
RFLM-4-12	Resistive Fuel Level Module. Must be used w/ El's "EDC" to measure up to 4 Resistive Fuel Level Sensors.	10-02772	\$89.95
RFLM-424	·	10-03231	\$89.75
P-300C	3/4" Capacitive Fuel Level Probe w/ Accessories. (see our Accessories Page for details.) Specify Probe length at time of order.	10-00382	
P-300C-Mini-1/8"	3/16" Capacitive Fuel Level Probe (see our Accessories Page for details)	10-03193	
P-300C-Mini- 1/4"	Si to Capacitive i dei Level Piobe (see oui Accessories Page foi details)	10-03194	\$332.00
VOLTS AND AMPS MODULES AND SHUNTS			
FM-VA-MVP-50	Volts/Amps Module. Allows any temperature or pressure channel on	10-03247	
FM-VA-MVP-300	El's EDC to measure Voltage and Current on a separate bus. Comes w/ an S-50 or S-300 shunt.	10-03248	\$210.00
	MVP SCREEN ANNUNCIATOR INTERFACE UNITS		
VI-221	Voltage Interface Unit. Allows any temperature or fuel level channel on our EDC to measure the output voltage of any device. This voltage measurement can then be used to drive an annunciator (Canopy Latch, Gear Lights, Baggage Door, etc.) that will be displayed on the MVP screen.	10-03187	\$26.50

ELECTRONICS INTERNATIONAL INSTRUMENTS

SUPER CLOCK INSTRUMENTS



ASC-5A - Displays Local & Zulu Time in 12 or 24 hr format, Up & Down Timers w/ alarms, Altitude (as seen by ATC), and OAT. Several programmable alarms, including Assigned Altitude, Level Off, Deviation Alarm and an Approach Alarm + a recurring alarm to alert you at a programmable interval, for checking fuel.

P/N 10-02914 \$641.00

SC-5 - Displays Local (12 or 24-hour format) & Zulu Time. 10-year Lithium battery keeps the clock running even if the

a/c battery is removed. Displays an Up Timer, which starts running when the engine is started, acting as an automatic Flight Timer. The Up Timer may be started, stopped or reset. Recurring Alarm may be set to alert you at appropriate time intervals, e.g., if set for 30 minutes, there will be an alarm at 30 minutes, 60 minutes, 90 minutes, etc. Alarm can be used as a reminder to check fuel level or switch tanks at set time intervals. P/N 10-01612\$359.00

FUEL LEVEL INSTRUMENTS



For TC holders, STC holders or Experimental Aircraft No STCs. FL-1CA Fuel Level Instrument. The FL-1CA is to be used w/ El's P-300C Capacitive Fuel Probe (custom order probe length from 6" to 20'). The FL-1CA features a 210 degree Arc of LEDs for an excellent "field of vision" reference and a Digital Display. Can display in gallons (one or one-half gallon increments), pounds or liters. **Specifications**: 2 1/4" Mount, 3.65" Depth,

Specifications: 2 1/4" Mount, 3.65" Depth, 10 Oz. Unit, Viewable in direct sunlight and Backlit for night operations.

Model	Description	Part No.	Price
FL-1CA	The FL-1CA is to be used w/ El's P-300C capacitive fuel probe (order from 6" to 20' long). 210 degree LED arc + a digital display. Can display in gallons (one or one-half gallon increments), pounds or liters. Specifications : 2 1/4" Mount, 3.65" Depth, 10 Oz. Unit, Viewable in direct sunlight and Backlit for night operations.	10-00386	\$485.00
	The FL-2RA-12 designed to be used on a 12-volt system w/ resis-	12	V
	tive fuel probes. Features a 210 degree LED arc + a digital display.	10-03209	\$485.00
FL-1RA-12/24	Max resistance between 90-270 ohms. Can display in gallons (one	24	V
	or one-half gallon increments), pounds or liters.	10-00388	\$478.00
FL-2CA	The FL-2 is a fuel level instrument featuring dual 90 degree LED arcs + a digital display. The FL-2 can display in gallons (one or one- half gallon increments), pounds or liters. Specifications : 2 1/4" Mount, 3.65" Depth, 10 Oz. Unit, Viewable in direct sunlight, Backlit, Operates from 7.5 to 35 volts at .3 amps.	11-03788	\$478.00
FL-2RA-12/24	The FL-2 is a fuel level instru- ment featuring dual 90 degree LED analog displays and a digital display. The FL-2 can display in	11-03789	\$483.00
FL-2RA-24	gallons (one or one-half gallon increments), pounds or liters. FL-2. Specifications : 2 1/4" Mount, 3.65" Depth, 10 Oz. Unit, Viewable in direct sunlight, Backlit, Operates from 7.5 to 35 volts at .3 amps. Please specify 12/24 volt at the time of order.	11-07104	\$473.00



MVP-50T GLASS PANEL MULTI-FUNCTION DISPLAY

Replaces 15 engine gauges and 50 functions. Remarkable full-color, enhanced TFT Glass Display (excellent viewability, even in direct sunlight) Pilot-Programmable Colors, Range Markings, Limits and Voice Alarms (for each parameter monitored) "System Page" to display

Trims, Flaps, Wheel Status Lights, and many other system parameters and annunciators. 27 Pilot-Customized Annunciators at the top of the "Main Page". Fuel Management, Timers, Clocks, Date, Weight & Balance. Data Recording (.33 - 6 min, 665 hours @ 6 seconds). Pilot-Customized Checklists and Flight Plans. General Info, Flight Log, Start Log, Max & Min Data. Pilot easily can generate Custom Screens and download them to the MVP-50P through the USB port. Help Screen, GPS Interface and Data, Fuel Efficiency, Fuel Used for the Trip, Fuel Used Since Fill Up, Time to Empty, Distance to Empty, Fuel to Way Point, Time to Way Point, Distance to Way Point, Fuel Reserve, Time Reserve, Distance Reserve, Up Timer, Down Timer, Flight Timer, Engine Hours, Cycles, Date, Local and Zulu Time. Other functions, such as Fuel Level, Gyro Vac, Hydraulic Pressure, etc., may be added by purchasing an appropriate probe & harness, or transducer, etc. See our Accessories, "Probes and Transducers" section on previous page. Using your current Resistive Fuel probes require our FFLM-4-XX to interface with the MVP-50T System. Torque, Oil Pressure & Temperature, Fuel Flow & Pressure, OAT, Amps, Volts, Multiple Fuel Screens, Pre-wired Harness, N1 and N2 hookups. Includes EDC (Engine Data Converter), cables and harnesses, transducers, shunt (for amps), USB Download/Upload Memory Stick, and our AV-17CP (Voice Warning Control Panel). Only 5.55"x 5.15"x 2.4" deep

Experimental	Description	Part No.	Price
MVP-50T-PT6	Pratt & Whitney PT-6 Turboprop Pkg	10-03160	\$6,535.00
MVP-50T-W	Walters Engine Turboprop Pkg	10-03161	\$6,533.00
MVP-50T-G	Garrett Turboprop Pkg	10-03162	\$6,533.00
MVP-50T-L	Lycoming Turboprop Pkg	10-03163	\$6,533.00
MVP-50T-A	Allison Turboprop Pkg	10-03164	\$6,533.00
MVP-50T-J85	General Electric J85 Jet Engine Pkg	10-03165	\$6,533.00
MVP-50T-L39	L39 Aircraft Pkg	10-03166	\$6,525.00
Certified	Description	Part No.	Price
MVP-50T- PT6-C	Pratt & Whitney PT-6 Turboprop Pkg	10-05090	\$8,965.00
MVP-50T-W-C	Walters Engine Turboprop Pkg	10-05089	\$8,963.00
MVP-50T-G-C	Garrett Turboprop Pkg	10-05091	\$8,963.00
MVP-50T-L-C	Lycoming Turboprop Pkg	10-05092	\$8,963.00
MVP-50T-A-C	Allison Turboprop Pkg	10-05093	\$8,963.00
MVP-50T- J85-C	General Electric J85 Jet Engine Pkg	10-05094	\$8,963.00
MVP-50T- L39-C	L39 Aircraft Pkg	10-05101	\$8,963.00
OPTIO	NAL INTERFACES AVAILABLE FOR PKGS LI	STED ABOV	E
RTDO	Real-Time Data Out. Can be used to provide Telemetry Data for UAV's, racers and other applications.	10-03168	\$570.00
	ACCESSORIES		
USB-64	USB Memory Stick, 64 MB or larger. Used to upload & download data to the MVP.	10-03186	\$32.95
CP-1-MVP	LED Intensity Control Pot. External pot used to control the display intensity.	10-03211	\$50.50
EDC-33T	Turboprop/Jet Engine Data Converter. Adding this second EDC to the MVP allows monitoring of additional temperatures, pressures, annunciators and other functions.	10-03185	\$2,520.00
MVP-50T Display Head	May be used to display parameters in a second location. (display only)	10-03202	\$4,593.00

EDC-33T SMART ENGINE DATA CONVERTER



The EDC-33T (Engine Data Converter) is sometimes referred to as a Data Acquisition Unit (DAU) and has a broad range of applications. Its main purpose is to monitor the probes, transducers and sensors mounted on the engine and airframe. It then processes this data and outputs it on a serial bus. This allows a Display Unit or MFD to display the data without having to perform the intense processing required in a set timeframe. Also, annunciators and status switches can be monitored. The EDC-33 can be used on piston, turboprop or jet aircraft as well as helicopters. If an EEC or FADC system needs to be monitored, check out our BC-5 (Bus Converter).

RONICS INTERNATIONAL INSTRUMEN

ELECTRONICS INTERNATIONAL CGR-30 PRIMARY ENGINE MONITOR SYSTEM



Easily replace several of your aircraft's primary and non-primary engine instruments with one EI CGR. For example, simply replace your existing tach with a CGR. In addition to replacing our tachometer, the STC'd CGR will replace MANY of your existing primary and non-primary instruments in the same instrument, in the one 3-1/8h hole. The CGR mounts flush with your panel

and doesn't protrude from your panel (as competitor's gauges do). E.I. products include all documentation and certifications. **Available Functions:** The CGR-30P comes standard with a state-of-the-art, full color bar graph which assists with ROP/LOP leaning.

Additionally, the bar graph has both normalized and digital readout screens. No other bar graph in the industry comes close to providing the number of options the CGR-30P offers. In addition to its bar graph, the CGR-30P can be configured to display a combination of the functions listed: • RPM • M.P. • EGT/CHT Bar Graph • Oil Pressure • Oil Temperature • TIT • Hyd Pressure • C.O. • OAT • Vac. • Fuel Pressure • Fuel Level • Fuel Flow • Fuel Remaining • Fuel Used • Fuel -GPS Related Data • Low Fuel Alarm • Recurring Fuel Alarm • Volts • Amps • Flight Timer • Tach Timer • Local Time • Zulu Time • Annunciators • Data Recording • USB Port • External Caution Lights • And More

Model No.	Description	Part No.	Price
CGR- 30P-4-B	4-Cylinder Basic Package with RPM, Fuel Flow, EGT/ CHT Bar Graph, Fuel Remaining, Volts, OAT, Tach Time, Local Time, Zulu Time, Flight Timer, Fuel Used for the Flight, Fuel Used Since Fill-up and all GPS/Fuel Flow Data.	10-05428	\$3,398.00
CGR- 30P-4-P	4-Cylinder Premium Package with RPM, EGT/CHT Bar Graph, Fuel Remaining, Fuel Used, FPS/Fuel Flow Data, Engine Time, Tach Time, 5 Primary Functions of your choice and 5 Non-Primary functions of your choice.	10-05429	\$4,098.00
CGR- 30P-6-B	6-Cylinder Basic Package with RPM, Fuel Flow, EGT/ CHT Bar Graph, Fuel Remaining, Volts, OAT, Tach Time, Local Time, Zulu Time, Flight Timer, Fuel Used for the Flight, Fuel Used Since Fill-up and all GPS/Fuel Flow Data.	10-05430	\$4,098.00
CGR- 30P-6-P	6-Cylinder Premium Package with RPM, EGT/CHT Bar Graph, Fuel Remaining, Fuel Used, FPS/Fuel Flow Data, Engine Time, Tach Time, 5 Primary Functions of your choice and 5 Non-Primary functions of your choice.	10-05431	\$4,448.00
CGR- 30P-7-B	7-Cylinder Basic Package	10-07070	\$4,387.00
CGR- 30P-7-P	7-Cylinder Premium Package	10-07071	\$4,790.00
CGR- 30P-9-B	9-Cylinder Basic Package	10-07072	\$4,554.00
CGR- 30P-9-P	9-Cylinder Premium Package	10-07073	\$5,349.00
CGR- 30C-EDC	Stand alone system or companion to CGR-30P. Provides up to 16 Primary Replacement Engine Instruments with EDC	10-05758	\$2,748.00
CGR- 30C	Stand alone system or companion to CGR-30P. Provides up to 16 Primary Replacement Engine Instruments w/o EDC	10-05759	\$2,196.00
CGR- 30 Combo	Combo Package 4 Cylinder, Single Engine	10-06564	\$5,048.00
Packages	Combo Package 6 Cylinder, Single Engine	10-06565	\$5,398.00
	Carbon Monoxide Detectors	10-06985	\$595.00



TR-1-ITT **TEMPERATURE GAUGE**

The TR-1-ITT Instrument was designed as a replace-ment for existing 2" ITT instruments. Depending on your current installation you may need to wire in aircraft power and ground. The instrument features a 210° analog arc, backlight and a dimmable, digital display. The instrument's faceplate will be custom built to match your aircraft's limits (red/yellow markings). The TR-1-ITT fits

into a 2" standard round hole.



TR-1-NG RPM GAUGE

The TR-1-Ng gas generator instrument was designed as a replacement for existing 2" gas generator RPM instruments. Depending on your current installation you may need to wire in aircraft power and ground. The instrument features a 210° analog arc, backlight with auto dimming and a digital display. The instrument's faceplate will be custom

built to match your aircraft's limits (red/yellow markings). The TR-1-Na fits into a 2" standard round hole

Standard Package	P/N 10-06614 \$1,250.00
	P/N 10-06615 \$1,559.00



TR-1-NP RPM INSTRUMENT The TR-1-Np Prop RPM instrument was designed as a replacement for existing 2" instruments. Depending on your current installation you may need to wire in aircraft power and ground. The instrument features a 210° analog arc, backlight with auto dimming and a digital display. The instrument's faceplate will be custom built to match your aircraft's limits (red/yellow

markings). The TR-1-Np fits into a 2" standard round hole.



TR-1-TQ ENGINE TORQUE GAUGE

The TR-1-TQ Toque Instrument was designed as a replacement for existing 2" engine torque instruments. Depending on your current installation you may need to wire in aircraft power and ground. The instrument features a 210° analog arc, backlight

and a dimmable, digital display. The instrument's faceplate will be custom built to match your aircraft's limits (red/yellow markings)

The TR-1-TQ fits into a 2" standard round hole.



M-1 TURBINE OUTLET TEMPERATURE GAUGE

The M-1-TOT provides pilots with Turbine Outlet Temperature readings in Degrees C on this 2-1/4" gauge. The large LCD display is viewable in direct sunlight and is backlit for night operations. A 270 degree analog arc features bright Red, Yellow and Green LEDs to mark each operating zone for

quick reference. TSOd/PMAd (no STCs). Instrument Weight: 10 oz. Dimensions: 2.5" x 2.5" x 3.65" Depth, 2.25" Bezel. P/N 10-03267 \$790.00



OPT-1-FV VOLT/

FREQUENCY GAUGE AC BUS VOLTAGE & FREQUENCY, TSOd/PMAd (no STCs). The "-60" instrument is for a 60 Hz. bus and the "-400" instrument is for a 400 Hz. bus. Accurate Digital Display can be switched between Voltage and Frequency, displays in Volts and Hz. 2 1/4" Mount, 3.65" Depth, 10 Oz. Instrument.

P/N 10-03268 \$790.00

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.

ONICS INTERNATIONAL ACCESS

AP-7H OR AP-7V LED ANNUNCIATOR PANEL

(H = Horizontal Mount; V = Vertical Nount) When mounted in front of

the pilot, the AV-7 Annunciator Panel's bright red LEDs give a quick warning of any out-of-limit condition. Can be connected to these E.I. instruments: US-8A or SR-8A, FP-5(L) and/or FL-2, R-1, M-1, and OPT-1. A control switch will dim or turn off the warning LEDs. Simple to install (requires only 8 ea. 1/2" holes to mount). Connect to a small 3" x 2" x 1" Control Box tie wrapped to a wire bundle under the instrument panel. Size: 5.3" x .9", 10 Oz. Kit, Operates on a 12 or 24-volt system. Includes: Annunciator Panel, Control Box and all wires and connectors.

Vertical	P/N	10-03288	\$165.00
Horizontal (Pictured)	P/N	10-03289	\$165.75

AL-1 RED CHROME ANNUNCIATOR LIGHT



The AL-1 makes an excellent indicator light for displaying boost pump on, gear status, power on, flags, etc. Also, it can be used as a remote warning light for any E.I. instrument featuring an external warning line. The AL-1 is more attractive, operates on less power and is smaller than the old fashioned indicator lights.

The AL-1 has a service life of over 1000 times that of incandescent bulbs. Mounts in a 5/16" hole. Size: .4" diameter x 1" depth. Operates on a 12 or 24-volt system. Comes with 32" leads

Red	P/N 10-04164	\$27.50
Yellow		
Blue		
Orange		
Green		

AV-17 VOICE ANNUNCIATOR




The AV-17 can provide up to 17 verbal warnings through your headset, ending the need to constantly scan the instrument panel. Eliminate concern about missing an alarm at a critical moment. The instant a monitored alarm occurs, the Voice Annunciator will chime in the headset and a pleasant female voice will announce a phrase, such as: "Check Oil Pressure," or "Check Altitude," etc.

The AV-I7's voice alarm in the headset provides an instant and clear understanding of what's going on in the cockpit without the hassle of having to scan instruments, decipher functions, interpret readings or translate numerous bells, buzzes or beeps. The AV-17 connects to the headset through the Audio Panel or Intercom or may be connected directly to the headset. The AV-17 receives most of its warning signals from any one or more of Electronics International's instruments which feature a warning light. However, other alarm inputs can be received from any warning device that drives a horn or light. It is not necessary to activate all 17 of the AV-17's warnings. A "Check Bus Voltage" warning is built into each AV-17. Further voice alarms can be activated as El instruments are added to the panel. The AV-17 is compact. A 4.1" x 2.6 x 1.7" Control Box tie wraps under the instrument panel. A 1" x 1" Control Panel mounts on the aircraft instrument panel. The Control Panel allows you to turn the VoiceAnnunciator on or off, and allows you to acknowledge, and thereby deactivate, any active alarm for either 1 minute or 10 minutes. The AV-17 voice alarms are activated by pulling the appropriate control line to ground (0 volts).

AVI-1 INVERTER - This inverter allows a positive voltage to activate one AV-17 control line. Use with the AV-17 when utilizing inputs from gauges other than Electronics International's.

AV-17	P/N 10-00181\$435.00
AVI-1 Inverter	

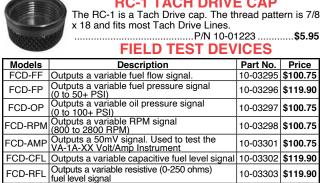

PROBE EXTENSION CABLES

Description	Part No.	Price
	10-05708	
EI XO-6 Extension 6 FT Overlap Connectors	10-05620	\$44.95
El Overlap Connectors OLC-1- Eliminates the need for soldering, crimps, and expensive connectors	10-05470	\$1.55

Prices Subject to Change Without Notice - Valid as of June 3, 2022.

REMOTE SWITCHES

A remote switch may be used to upgrade many single-channel E.I. instruments to multi-channel EGT and/or CHT engine analyzers. This is an excellent way to insure your engine is operating properly. Specifications for all switches: Body - 1"x 1"x 1.5" depth, front panel - 2"x 1.15", STC'd / PMA'd



RS-4-1S - Upgrades any unit to read four channels of EGT or CHT, Package includes: Unit, (3) 6' cables, (3) probes. Specify probe type with order.

P/N 11-01688 \$374.00 RS-4-2S - Upgrades any two channel unit to read four channels of EGT and CHT, Package includes: Unit, (6) 6' cables, (3) EGT probes, (3) CHT probes. P/N 11-01689**\$529.00**



RS-6-1S - Upgrades any unit to read six channels of EGT or CHT, Package includes: Unit, (5) 6' cables, (5) probes. Specify probe type with order.

P/N 11-01690\$502.00 RS-6-2S - Upgrades any 2 channel unit to read six channels of EGT and CHT, Package includes: Unit, (10) 6' cables, (5) EGT probes, (5) CHT probes. P/N 11-01691\$791.00





RS-8-1S - Upgrades any unit to read eight channels of EGT or CHT, Package includes: Unit, (7) 6' cables, (7) probes. Specify probe type with order.

P/N 11-01692......\$656.00 S-12-1S - Upgrades any unit to read 12 channels of

EGT or CHT, Package includes: Unit, (11) 6' cables, (11) probes. Specify probe type with order.

P/N 11-01693 \$831.00

PRIMARY REMOTE SWITCHES

Remote Switches for use w/ EI 1 or 2 channel EGT/CHT instruments. STCd, PMAd. Available for single and twin engine applications.

RS-5-1PS - Upgrades any primary TIT/CHT unit to read 4 channels of EGT or CHT, Package includes: Unit, (4) 6' cables, (4) probes. 15 oz. kit Specify probe type with order..... ..P/N 11-01694\$621.00

RS-5-2PS - Upgrades any primary TIT/CHT unit to read 4 channels of EGT and CHT, Package includes: Unit, (8) 6' cables, (4) EGT probes,

EGT and CHT, Package includes: Unit, (8) 6' cables, (4) EGT probes,
 (4) CHT probes. 2.2 lb. kit......P/N 11-01695......\$831.00
 RS-7-1PS - Upgrades any primary TIT/CHT unit to read
 6 channels of EGT or CHT, Package includes: Unit, (6)
 6' cables, (6) probes. 27 oz. kit. Specify probe type with order......P/N 11-01696......\$621.00
 RS-7-2PS - Upgrades any primary TIT/CHT unit to read
 6 channels of EGT or CHT, Package includes: Unit, (6)

6 channels of EGT and CHT, Package includes: Unit, (12) 6' cables, (6) EGT probes, (6) CHT probes. 3.2 lb. kit P/N 11-01697 \$831.00

ROBES

P-100 CHT Probe; screw-in type, Standard with most kits. Can be used in a pressure environment. 700°F max.

P/N 10-00808 \$108.75 P101 - CHT Probe; Military Bayonet type, 1/4 turn locking for quick removal. To be used with the A-101 adaptor. 700°F max. P/N 10-00438.......**\$108.75**

A101 - CHT Adaptor; 3/8" - 24, to be used with the P-101 CHT probe.

P/N 10-00374 \$15.95 P-102 - CHT Probe; Gasket type, 18mm, 700°F maxP/N 10-01368\$108.75

P-110 - EGT/TIT Probe; Hose clamp type, used with 13/64" hole. Standard with most kits. Weight: 1.6 oz. P/N 10-01591 \$108.75

FAST RESPONSE P-110 - EGT/TIT Probe: Hose clamp type, used with .130" hole. Optional with most kits. Weight: 1.6 oz. Probe only P/N 10-00376 \$108.75 P-110-F-XC0-6 - EGT/TIT Fast Response .130" dia Probe with 6ft. Lead P/N 10-00377 \$139.75



P-111 - TIT Probe; 1/8" NPT with adjustable depth. (with cable).P/N 10-25235.....\$161.70 P-112 - TIT Probe; 7/16"-20, with adjustable depth. (w/o cable)... P/N 10-00378.....\$116.75 P-114 - TIT Probe; 1/4" NPT with adjustable depth. (w/o cable).. P/N 10-00379.....\$116.75 P-104 - Universal Probe: Used to measure surface temperatures, 700°F max.

P/N 10-00380 \$110.90 P-128 - Oat Probe 1/4-28" Thread. 700 Degrees Fahrenheit Max....P/N 10-05858.....\$106.75 P-128 - Carb Temp 1/4-28" Thread. 700 Degrees Fahrenheit Max P/N 10-05859 \$106.75

SIGHT ENGINE MONITO

GRAPHIC ENGINE MONITOR 602/603/610 UPGRADES



Graphic Engine Monitor - STC'd Single Engine -Normally Aspirated 4 or 6 Cylinder. The GEM 602 is designed for use with all 4 or 6 cylinder piston engine aircraft. The instrument graphically displays up to 12 critical engine temperatures in a single instrument in an easy-to-read bar- graph format on a brilliant plasma display.

Model No.	Part No.	Description	Price
610-C262-U	10-04932	Insight 4C or 6C Upgrade GEM to G2	\$1,599.00
610C-363-U	10-05261	Insight 4C or 6C Upgrade GEM to G3	\$2,375.00
610-C-463-U	10-05267	Insight 4C or 6C Upgrade GEM to G4	\$3,295.00
1210C-063-U	10-04699	Insight 4C or 6C Upgrade Gemini 1200 to G4 Twin	\$4,625.00
1210-C-063-2-U	10-05271	Insight 4C or 6C Upgrade to G4 Twin	\$1,975.00

GEM PROBES

GEM 602 Wire Harness	P/N 10-03576	\$199.00
#2870 EGT Probe	P/N 2870	\$99.75 ea.
#2852 CHT Spring Probe	P/N 2852	\$99.75 ea.
#2853CHT Gasket Probe		
#2855 CHT Adapter Probe*	P/N 2855	\$177.95 ea.
#2856 CHT Probe**	P/N 2856	\$177.95 ea.
#1200-015 OAT Cable 10ft	P/N 10-05890	\$27.50
*Use with factory spring probe **U	se with 3/8 x 24 three	eaded factory
probe		



IN

INSIGHT G3 GRAPHIC ENGINE MONITOR

The original GEM was a solitary player. The G3 instrument has two control knobs that operate combination rotary and push button switches. The top knob in general controls screen selection while the bottom knob controls items within the given screen. Each screen assigns its own functional needs to the controls that may change depending on context. A screen may also label the controls with guidance information like "Push to exit". The

G3 is also designed to expand and grow with the times. Less than half of its true potential has been released at this time. The instrument can be updated to acquire new features by loading the SD card via the Another great feature is why not have the G3 instrument internet diagnose itself? Then you don't have to disassemble the airplane or even touch the wiring. The probe diagnosis page indications are in green for normal readings and red for readings that fail the criteria set at the bottom of the screen. System Monitors: EGT, CHT, Fuel Flow, RPM, Manifold Pressure O, il Temp/Pressure, OAT, TIT, Carb Temp, HP%, Prop Balance, Clock/Calendar

Description	Part No.	Price
Insight GEM G3 4C Single Engine	10-03195	\$3,029.00
Insight GEM G3 4C Single Engine Dual Turbo	10-05262	\$3,345.00
Insight GEM G3 4C Single Engine Turbo	10-04685	\$3,196.00
Insight GEM G3 6C Single Engine	10-03196	\$2,995.00
Insight GEM G3 6C Single Engine Dual Turbo	10-05263	\$3,295.00
Insight GEM G3 6C Single Engine Turbo	10-04686	\$3,149.00



INSIGHT G9 GRAPHIC ENGINE MONITOR

Pilot settable lean threshold target. Colored box appears at peak. Lean boxes show temperature of how much lean or rich. Colored boxes show lean or rich. Lean boxes change at lean threshold. Fuel flow guidance for leaning. Fuel flow at each cylinder peak

(GAMI SPREAD). In-flight exhaust valve analysis. EGT temperature bars with numbers. CHT temperature bars with number, yellow warning and redline. TIT temperature bar with number, yellow warning and redline.

INSIGHT G1 SINGLE ENGINE COLOR MONITOR - COMPLETE SYSTEM



Single Engine - 2.25 Bezel. Protect Your Engine By: • Saving Fuel On Every Flight By Leaning Accurately And Safely • Revolutionary New Leaning Process • See Lean Peak In Order And Temperature Spread · Seeing Simultaneous EGT, CHT, TIT Bars And Temperatures • Save Time Trouble-Shooting • Continuous Probe Diagnosis That Confirms System Integrity - Extensive List Of Primary Approved Aircraft Models - SD Card Software Updates - FAA

& TC Primary STC + EGT, CHT, & TIT Also available with Carburetor Temperature and/or for G1 Field Update Kit, see Accessories.

Description	Part No.	Price
Insight G1 4C Single Engine	10-04916	\$1,498.00
Insight G1 4C Single Engine Turbo	10-04918	\$1,595.00
Insight G1 6C Single Engine Turbo	10-04919	\$1,725.00

INSIGHT G2 SERIES SINGLE ENGINE COLOR **MONITOR - COMPLETE SYSTEM**

G2 Series Single Engine Color Monitor - Complete System - 2.25 Bezel Save Fuel, Save Money, Save Your Engine! Affordable Engine Monitoring you can't afford to be without.

Top reasons to install a G2: • Best lean of peak process in the industry • The only nozzle balance analysis, the key to lean of peak • The only probe diagnostic scree • Comprehensive data log - windows files SD card · Over the web software updates - constant improvement · GEM plug compatible - easy install · Best technical support

Description	Part No.	Price	
Insight G2 4C Single Engine	10-04924	\$1,899.00	
Insight G2 4C Single Engine Turbo	10-04927	\$2,223.00	
Insight G 6C Single Engine	10-04926	\$2,059.00	
Insight G 6C Single Engine Turbo	10-04928	\$2,405.00	



G4 GRAPHIC ENGINE MONITOR

The original GEM was a solitary player. The G4 will operate standalone too but will also interface with other data sources and report information to other instruments like MFD's. All of the devices the G4 connects to today didn't exist in '79. The G4 is also designed to expand and grow with the times. Less than half of its true potential has been released at

this time. The instrument can be updated to acquire new features by loading the SD card via the internet. The G4 update takes only a second while the instrument remains mounted in the airplane.

Single Engine			
Description	Part No.	Price	
Insight G4 4C Single Engine	10-04687	\$3,675.00	
Insight G4 4C Single Engine Turbo	10-05264	\$4,111.00	
Insight G4 4C Single Engine Dual Turbo	10-05265	\$4,125.00	
Insight G4 6C Single Engine Dual Turbo	10-05266	\$4,395.00	
Insight G4 6C Single Engine	10-04688	\$3,875.00	
Insight G4 6C Single Engine Turbo	10-04689	\$4,378.00	
Twin Engine			
Description Part No. Price			
Insight G4 4C Twin Engine	10-04690	\$5,753.00	
Insight G4 4C Twin Engine Turbo	10-04692	\$5,995.00	
Insight G4 4C Twin Engine Dual Turbo	10-05268	\$5,895.00	
Insight G4 6C Twin Engine	10-04691	\$6,068.00	
Insight G4 6C Twin Engine Turbo	10-04693	\$6,319.00	
Insight G4 6C Twin Engine Dual Turbo	10-05269	\$6,295.00	

Description	Part No.	Price
Insight 7 Cylinder G9	10-06229	\$5,412.00
Insight 8 Cylinder G9	10-06230	\$7,765.00
Insight 8 Cylinder G9	10-06231	\$5,530.00
Insight 8 Cylinder G9	10-06232	\$7,883.00
Insight 9 Cylinder G9	10-06233	\$5,648.00
Insight 9 Cylinder G9	10-06234	\$7,995.00
Insight 14 Cylinder	10-06235	\$11,245.00

614

WWW.AIRCRAFTSPRUCE.COM Prices Subject to Change Without Notice - Valid as of June 3, 2022.



SHADIN MINIFLO TOTALIZERS

MINIFLO SYSTEMS - Miniflo is the miniature fuel flow meter which constantly displays fuel flow in the lower windows. The fuel used and fuel remaining functions are continuously computed and can be displayed in the upper window by pressing the appropriate but-

ton. Endurance (time remaining) can be displayed in the upper window by using the rotary switch. STC's for most aircraft. Power: 12-28V DC Furnished in gallons readout (pounds also available). Weight: 31 oz. (meter& transducer). Size: 3.25"x 1.25"x 7.5". Miniflo now provides all features of standard Miniflo system plus a Loran interface as described in Digiflo above. This gives the pilot NM/Gal, Gallons to Desti-nation and Gallons of Reserve. Specify aircraft and engine model on all Miniflo orders. Prices vary according to aircraft model.

Single Engine GPS Miniflo P/N 10-24735 CALL FOR PRICE

SHADIN DIGIFLOW TOTALIZERS SHADIN



Digiflo-L is a Digital Fuel Management System designed to provide complete fuel management information under real flight conditions without any manual entry of data (after eztry of the initial fuel on board information).Digiflo-L is connected to the engine fuel flow transducer for fuel flow information and to the Loran-C or GPS receiver serial port for navigation data (ground speed, distance and estimated time en route). This system is also capable of transmitting the fuel information to the Bendix/King KLN-88, KLN-90, and Garmin GPS navigation receivers, for additional calculations and display of fuel management data.

Single Engine GPS DigifloP/N 10-02212 ... Please Call Twin Engine GPS Digiflo.....P/N 10-02213...Please Call



SHADIN F/ADC-200 **FUEL/AIR DATA COMPUTER**

The affordable Shadin F/ADC-200 Fuel/Air data com-puter maximizes aircraft range and fuel economy by providing automatic updating to your GPS for true air speed, winds aloft, wind components, density altitude,

OAT, pressure altitude, fuel flow rate, fuel used, fuel required to destination, fuel endurance, and more. Interfaces with most popular GPS units including Bendix King KLN series, Garmin 150, 155, 165, Trimble 2000/3000 series, and Arnav. Please specify aircraft make/model, engine make/model, serial number of aircraft, and GPS make/model at time of orderP/N 10-24768 ... Please Call

IMPORTANT: For all Shadin orders, please specify engine make and model number; aircraft make and model number; specify gallons, pounds or liters on readout and if Loran or GPS will interface. Specify make and model.

SHADIN SYSTEMS PRICING - Prices for Shadin Microflo, Digiflo, & Miniflo systems vary according to aircraft/engine models. Call Aircraft Spruce for your best pricing on any Shadin system. Aircraft Spruce guarantees to meet or beat any competitor's current advertised prices.

LEVEL SYSTEM BY DATCON



This Datcon fuel gauge and senders are designed for use with 12 volt electrical systems in automotive, marine and homebuilt aircraft applications. The gauges have a round 2" diameter case with chrome bezel. Mounting brackets and instructions are furnished. 240-33 Ohms. Gauge No. 100177 with steel caseP/N 100177\$59.85 Lighting Kit (12V)P/N 06215-00\$8.50

UNIVERSAL SENDER FOR **DATCON GAUGES**

This Fuel Level Sender has removable mounting plate which can rotate 180° to mount on either right hand or left hand posi-tion. For tanks 6"-15" deep.

P/N 05-16710 \$62.75

STEARMAN FUEL GAUGE

The Stearman High-Quality Fuel Gauge is designed so the cork is also held in place mechanically, using an Aluminum washer crimped to the indicator wire. All of the original steel parts are manufactured with stainless steel.

SPIRAL ACTION FUEL GAUGE



A precision magnetic gauge for narrow vertical tanks. Rubber float travels on spiral rod to record fuel level on hermetically sealed side-reading dial marked E, 1/4, 1/2, 3/4, F. All aluminum construc-

tion. Housing has 1-1/2" NPT male threads for connection to threaded bushing (see below). Available in two lengths:



Available in 1" & 2" length. Use with welding ring to provide base for attaching to fuel tank with bolts or rivets. Ring may be welded at any point along bushing to permit depth adjustment. Specify bushing length. For use with Spiral Action

	Gauge.		
2	1"Bushing	P/N 10362-1	.\$14.45
A.	2"Bushing	P/N 10362-2	.\$18.85
8	Welding Ring - 606	1 aluminum, 4-3/8" O.D., 2-1/4"	I.D. to fit
Υ.	above welding bushi	ngs. For use with Spiral Action	Gauge.
	Ũ	P/N 10363	\$6.80

ROCHESTER 8341-R7090 SENDER



These fuel senders are designed for top mounting in unpressurized aluminum, stainless steel, or plastic fuel tanks in all types of marine vessels. They include special features and protection from corrosion problems (internal and external to the fuel tanks) which make them the quality standard for the industry. Standard configuration, with the lead hole at 12:00, has the float arm swinging at 3:00.

The float arm on this sender is 24" [609mm] long measured from the pivot point allowing it to be cut to an appropriate length to gauge any tank depth from 6" [152mm] to 25" [635mm]. The float and the washers are furnished unassembled to the float arm. The cutting and crimping process is to be done prior to the float assembly. The fuel sender is equipped with a thick film resistance card with a range of 0 to 90Ù. The recommended gasket for use under the head is made of nitrile rubber and must be ordered separately P/N 10-02045 \$26.95



٧

(

MECHANICAL FUEL GAUGE

Lever-action gauge measures fuel level from full to empty on fractional dial. Matte-white markings on 2" black dial with red "No Take-off" sector below the 1/4 full mark. Cork float has 4" travel. Wire arm 12" long may be cut off to required length, wire bent to 90° angle to secure cork float. 1-13/16" between mounting hole centers. Hermetically sealed dial assembly has magnetically driven, silicone-damped or position pointer Accessories

	ACCESSUNES	
Replacement Fuel Float	P/N 05-03395	\$3.60
Weld Adapt FLANGE 10361	P/N 10361	\$12.95
	P/N 15-4	

USCOMBE/AERONCA TYPE FUEL GAUGE



This direct reading fuel quantity gauge is usable in tank depths up to 9" such as Luscombe & Aeronca, Not FAA approved, Excellent for homebuilt aircraft. Displays fuel level from full to empty. Size: 1-1/2" diameter face.



It helps prevent damage to chrome inner & outer nuts. Available in standard (economical version) and deluxe (heavy-duty version). The tool used on the standard (outer

nut) has been specifically designed to work on the original or new style nut. The tool used on the deluxe (inner nut) has a tight fitting handle, which you will need to hammer in. This offers you better leverage & sure grip. Heavy-duty version.

tandard......P/N 05-06813......\$10.85

GAS GAUGE FLOAT



Gas Gauge Float (Modern Neoprene Cork). Modern Neoprene Float: This float is alcohol and gas resistent, and will not sink. It is not affected by modern ethanol based fuels. Highly recommended. USA made.

Modern Neoprene Float:.....P/N 05-06815\$10.55 GAS GAUGE NUT

A9330 Gas Gauge Outer Nut. Large - Chrome Plated.

P/N 05-06817 \$13.85

ESSNA S2670-1 FUEL SENDER GASKET



ITC 13-10017-507 gasket used with Rochester fuel senders 7740 series. Cessna P/N S2670-1. Part 15-716 and 0015-00716 has been replaced by S2670-1. Only for used with Rochester type fuel sender P/N 11-18717 \$63.75