Fujitsu recommends Windows 11 Pro.

FUJľ

Data Sheet FUJITSU Notebook LIFEBOOK U7411

Ultra-Mobile Meets Ultra Secure

The FUJITSU Notebook LIFEBOOK U7411 is a slim notebook, based on the 11th generation Intel[®] Core[™] processor, for business professionals seeking optimum mobility for business trips and ergonomics in the office. The 14-inch screen, light weight of 1.2 kg, 2x Intel[®] Thunderbolt[™] 4 ports and an all-day battery runtime enables it to provide excellent mobility and portability.

Elegant design and great mobility

- Maximize your productivity with premium notebooks providing ultimate convenience
- Thanks to the complete magnesium housing, the weight of the remarkably slim 17.9 mm ultramobile notebook starts at 1.2 kg
- The Intel® Evo[™] vPro[®] platform offers a great thin-and-light notebook experience
- Enjoy the Intel[®] Iris[®] Xe Graphics with an FHD or HD display
- The outdoor-friendly anti-glare, FHD touch panel (optional) comes with a narrow bezel design in a warm silver colored chassis

Excellent security

Enhance your security with outstanding features to best protect your notebook and company data

- Integrated PalmSecure[™] or finger print sensor
- Infrared Camera: Allows face recognition with Windows Hello
- ePrivacy Filter: Keep safe from prying eyes
- Built-in Privacy Camera Shutter: Protecting your privacy
- SmartCard reader and TPM 2.0

Premium connectivity

Stay flexible and productive within a modern workplace environment

- Compact and versatile Intel® Thunderbolt™ 4 USB Type-C connector to charge your laptop, transfer files at fasted speeds, connect external monitors and other peripherals
- Full set of interfaces with full-size LAN connector, full-size HDMI, USB Type-C
- Embedded 4G or 5G/LTE

Convenient upgradeability

Direct access to key components reduces upgrade time and costs Battery, memory and internal storage is hidden under a service door

Family concept

Reduce your acquisition cost as well as the complexity of your IT equipment

Shared components such as the same new classic or USB Type-C port replicator, AC Adapter, BIOS and Bit Image across the ultra-mobile LIFEBOOK U7 family









Components

Base unit	LIFEBOOK U7411
Operating system preinstalled	
Operating system pre-installed	Windows 10 Pro. Fujitsu recommends Windows 10 Pro for business. Windows 10 Home
Operating system notes	Windows 10 Support: After the end of the product life FUJITSU will continue to test and support all upcoming Window 10 releases for a period of maximum 5 years – depending on the available extension of hardware services through FUJITSU Warranty top ups. For details please see "FUJITSU Service Statement for Windows 10 Semi-Annua Channel Support" at http://support.ts.fujitsu.com.
Processor	Intel® Core™ i7-1185G7 processor (4 Cores / 8 Threads, up to 4.8 GHz)
	Intel® Core™ i7-1165G7 processor (4 Cores / 8 Threads) *
	Intel® Core™ i5-1145G7 processor (4 Cores / 8 Threads)
	Intel [®] Core [™] i5-1135G7 processor (4 Cores / 8 Threads) *
	Intel [®] Core [™] i3-1125G4 processor (4 Cores / 8 Threads) *
	*Processor only for retail, SMB, education and government
Memory modules	4 GB (1 module(s) 4 GB) DDR4, 3,200 MT/s, SO DIMM
	8 GB (1 module(s) 8 GB) DDR4, 3,200 MT/s, SO DIMM
	16 GB (1 module(s) 16 GB) DDR4, 3,200 MT/s, SO DIMM
	32 GB (1 module(s) 32 GB) DDR4, 3,200 MT/s, SO DIMM
Hard disk drives (internal)	PCIe-SSD, 512 GB M.2 NVMe module, SED
	PCle-SSD, 256 GB M.2 NVMe module, SED
	PCIe-SSD, 256 GB M.2 NVMe module
	PCIe-SSD, 1 TB M.2 NVMe module, SED
Hard disk notes	Accessible capacity may vary, also depending on used software.
Interface add on cards/components (optional)	
3G/4G (optional)	LTE Sierra Wireless EM7421 (Cat.7) (Downlink speed up to 300 Mbit/s, Uplink speed up to 150 Mbit/s)
4G/5G (optional)	LTE Sierra Wireless EM9191 (Downlink speed up to 3 Gbit/s MB/s, Uplink speed up to 660 Mbit/s)
3G/4G (optional)	LTE Fibocom L850-GL (Cat.9) (Downlink speed up to 450 Mbit/s, Uplink speed up to 50 Mbit/s)
Display	35.6 cm (14.0-inch), (HD), Anti-glare display, 1,366 x 768 pixel, 500:1 (HD), 220 cd/m² (HD)
	35.6 cm (14.0-inch), (Full HD), Anti-glare IPS touchscreen, 1,920 x 1,080 pixel, 700:1 (Touch), 300 cd/m ² (Touch)
	35.6 cm (14.0-inch), (Full HD), Anti-glare IPS display, 1,920 x 1,080 pixel, 800:1 (FHD), 300 cd/m ² (FHD)
	35.6 cm (14.0-inch), (Full HD), Anti-glare ePrivacyFilter, 1,920 x 1,080 pixel, 1000:1 (ePF), 400 cd/m ² (ePF)
Multimedia	
Camera	Built-in webcam (HD) with Status LED Built-in Infrared webcam (HD) with Status LED
Camera notes	720p, 1 megapixels, 1280 x 720, with Privacy Camera Shutter
Microphone	dual digital array microphone

Base unit

LIFEBOOK U7411	
Integrated	
4 GB	
64 GB	
	Integrated 4 GB

General system information					
Memory slots	2 SO DIMM (DDR4, 320	0 MHz)			
Memory notes	Dual channel support	,			
LAN	10/100/1,000 MBit/s Intel® I219LM				
Integrated WLAN	Intel WiFi 6 AX201				
BIOS version	UEFI Specification 2.7				
BIOS features	InsydeH2O BIOS				
Audio type	On board				
Audio codec	Realtek ALC255				
Audio features	2x built-in speakers (st	ereo)			
MIL-STD tested	Yes, selected MIL-STD- MIL-STD-810H test rest	810H tests passed. ults are not a guarantee	of future performance dard international limite		nditions.
Color	Warm Silver				
Material	Magnesium				
Display					
Display notes	FHD - Viewing angle L	eft/Right 85° Ton 85° R	ottom 85°; Color Gamut	• 72% NTSC	
Graphics					
Base unit	LIFEBOOK U7411				
TFT resolution (HDMI)	Up to 4,096 x 2,160 @ 6				
Graphics brand name	•	vith Single channel mer	nory), Intel® Iris® Xe Graj	phics (with Dual channe	l memory)
Graphics features	3 Display Support DirectX® 12 OpenGL® 4.5				
Graphics notes	Shared memory deper	nding on main memory	size and operating syste	em	
Interfaces					
Audio: line-in / line-out	1				
Internal microphones	2x digital array microp	hones (optional)			
USB 3.2 Gen1 (5 Gbps) total	2x Type-A (1 with Any		ionality)		
USB 4.0 Gen3 (20 Gbps) total		¥	Power Delivery (15W), D	Pout	
DisplayPort	no interface but via US	· · ·	•		
HDMI	1 v2.0b				
Ethernet (RJ-45)	1 (with status LED)				
Memory card slots	1 SD 3.0 Standard SD/microSD card: 2GB SDHC/microSDHC card SDXC/microSDXC card Speed Class: up to UHS	: 2TB			
SmartCard slot	1 (optional)				
SIM card slot	1 (Micro-SIM, only for r	nodels with integrated	4G/5G LTE module)		
Docking connector for Port Replicator	1				
Kensington Lock support	1				
Port Replicator interfaces (optional)					
· · · · · · · · · · · · · · · · · · ·	Thunderbolt [™] 4 PR	Mechanical PR Model: NPR50	USB Type-C PR	USB Type-C PR	Thunderbolt™ 3 PR Model: NPR48
DC-in	1 (20V/170W required)	1 (19V/90W required)	1 (19V/90W required)	1 (19V/90W required)	1 (20V/170W required)
Power on switch	1	1	1	1	1
Audio: headphone		1			
Audio: microphone		1			
Audio: comments	1 Combo jack for headset usage		1 Combo jack for headset usage	1 Combo jack for headset usage	1 Combo jack for headset usage
USB 3.2 Gen1 (5 Gbps) total		4x Type-A 2x Type-C			

Port Replicator interfaces (optional)					
DisplayPort	2 (up to 2560 x 1600), DP 1.4++	2 (up to 2x 3840x2160 60Hz)	1 (up to 2560 x 1600)	1 (up to 2560 x 1600)	2 (up to 2560 x 1600)
VGA		1 (up to 1920x1200 6Hz)	1 up to 1920×1200 @ 60Hz depending on FJ mobile client	1 up to 1920×1200 @ 60Hz depending on FJ mobile client	
HDMI text	1 x 2.0b	1x HDMI v1.4b	1	1	1 x 2.0b
Interface Notes	2x Type-A - 5V/0.9A, 4.5W 1x Type-A - 5V/2.4A, 12W 2x Type-C - 5V, 1.5A/4.5W charging port 1x Type-C - TBT4 up to 60 W (PD v2.0-1.1), 5-20V/3.0A upstream (PC), Intel AMT support (vPRO) 1x Type-C - TBT4 up to 15 W (PD v2.0-1.1), 5V/3.0A downstream, power output to client		3x Type-A - 5V/0.9A, 4.5W 1x Type-C - 15W 1x Type-C - Up to 60 W (PD v2.0-1.1) power output to client or 4.5W input	3x Type-A - 5V/0.9A, 4.5W 1x Type-C - 15W 1x Type-C - Up to 60 W (PD v2.0-1.1) power output to client or 4.5W input	2x Type-A - 5V/0.9A, 4.5W 1x Type-A - 5V/2.4A, 12W 2x Type-C - 5V/1.5A, 4.5W charging port 1x Type-C - TBT3 up to 60 W (PD v2.0-1.1), 5-20V/3.0A upstream (PC) 1x Type-C - TBT3 up to 15 W (PD v2.0-1.1), 5V/3.0A downstream, power output to client
Kensington Lock support	1		no	no	1
Ethernet (RJ-45)	1			1	
Notes	RJ-45:10/100/1000 MBits/s LAN WoL from S0 to S5 state depending on Fujitsu Mobile Client Intel AMT support (vPRO) PXE launching depending on Fujitsu Mobile Client User MAC address setting MAPT from 10th gen Downwards compatible to Thunderbolt3 and Type C (end device needs to have a Thunderbolt3 or Type C interface)	1 RJ45 (10/100/1000)	1 RJ45 (10/100/1000) WoL from S3 state WOL from S4 / S5 / G3 depending on Fujitsu mobile client Launch of PXE for dedicated FJ mobile clients Set the MAC address by the user MAPT from 9th gen	1 RJ45 (10/100/1000) WoL from S3 state WOL from S4 / S5 / G3 depending on Fujitsu mobile client Launch of PXE for dedicated FJ mobile clients Set the MAC address by the user MAPT from 9th gen	
Keyboard and pointing devices					
	Number of keyboard k	ick (spill-resistant), Back æys: 85, Keyboard pitch: d with two mouse butto	: 19 mm, Keyboard strok		
Antennas	2 Dual band WLAN ant	tennas, 2+2 LTE antenna	is optional		
Bluetooth	v5.1				
Integrated WLAN	Intel WiFi 6 AX201				
WLAN encryption	WPA/WPA2/WPA3 (Wi-	Fi Protected Access)			
WLAN notes		ording to country-specif	ic regulations.		
Integrated LTE or UMTS	LTE Sierra Wireless EM7 LTE Sierra Wireless EM9	9191 (5G)			
LTE/UMTS/GPS notes		nality ording to country-specif ger (if configured with 4			
GPS		nodule if configured wit			


Power supply	
AC Adapter	20 V / 65 W (3.25 A), 100 V - 240 V, 50 Hz - 60 Hz, 3-pin (grounded) Type-C AC-Adapter standard
AC Adapter	20 V / 65 W (3.25 A), 100 V - 240 V, 50 Hz - 60 Hz, 3-pin (grounded) Type-C AC-Adapter slim&light
1st battery	Lithium polymer battery 4-cell, 65 Wh, 4,280 mAh
Battery features	Quick Charge: 80% in 1h
Runtime 1st battery	14 h 10 min
Battery notes	Battery runtime information is based on worldwide acknowledged BAPCo [®] MobileMark [®] 2018. Refer to www.bapco com for additional details. The BAPCo [®] MobileMark [®] Benchmark provides results that enable direct product comparisons between manufacturers. It does not guarantee any specific battery runtime which actually can be lower and may vary depending on product model, configuration, application and power management settings. The battery capacity decreases slightly with every re-charge and over its lifetime.
Noise emission	
Noise emission	Please refer to the Eco Declaration
Dimensions / Weight / Environmental	
Dimensions (W x D x H)	322 x 211 x 17.9 mm
	12.68 x 8.31 x 0.70 inch
Weight	1.2 kg
Weight (lbs)	2.64 lbs
Weight notes	Weight may vary depending on actual configuration
Operating ambient temperature	5 - 35 °C (41 - 95 °F)
Operating relative humidity	20 - 80 %
Product	LIFEBOOK U7411
Model	7U14A2
Germany	GS (Full HD Display only)
Europe	CE CB
USA/Canada	FCC (depending on configuration) (planned)
Global	RoHS (Restriction of hazardous substances) WEEE (Waste electrical and electronic equipment) Microsoft Operating Systems (HCT / HCL entry / WHQL) TCO Certified 8.0 (depending on configuration) EPEAT® Silver (dedicated regions), depending on configuration ENERGY STAR® 8.0 MIL-STD-810H tested
India	BIS
Russia	EAC
China	CCC (planned)
Compliance link	https://sp.ts.fujitsu.com/sites/certificates
Additional Software	
Additional software (preinstalled)	Fujitsu Plugfree Network (network management utility) Fujitsu Anytime USB Charge Utility Fujitsu Battery Utility Fujitsu Function Manager Fujitsu DeskUpdate (driver and utility tool)
Additional software (optional)	Recovery DVD for Windows® Drivers & Utilities DVD (DUDVD) CyberLink YouCam (webcam software) Microsoft® Office Professional 2019 Microsoft® Office Home and Business 2019 (A Microsoft Account is required to activate each copy of these products. For purchase and activation only in the region in which it was acquired.)

DeskUpdate Driver management
PXE 2.1 Boot code
Wake up from S5 (off mode)
WoL (Wake on LAN)
Intel® vPro™ technology
DeskView Client
DeskView Instant BIOS Management
Inventory Management
BIOS Management
Driver Management
Security Management
Alarm Management
WMI (Windows Management Instrumentation)
PXE (Preboot Execution Environment)
DMI (Desktop Management Interface)
SMBIOS (System Management BIOS)
CIM (Common Information Model)
BootP (made4you)
http://www.fujitsu.com/fts/manageability
Access protection via internal SmartCard reader (optional)
Embedded fingerprint sensor (optional)
Embedded PalmSecure [®] sensor (optional)
Hard disk password

Warranty	
Warranty Terms & Conditions Product Support Services - the perfect	http://www.fujitsu.com/warranty extension
Recommended Service	9x5, Onsite Response Time: Next Business Day
Service Weblink	http://www.fujitsu.com/emeia/products/product-support-services/

Recommended Accessories

Port Replicator for LIFEBOOK	Flexibility, expandability, desktop replacement, investment protection – to Order Code:
U7411 and U7511	name just a few benefits of Fujitsu's docking options. FPCPR402BP
USB Type-C Port Replicator 2	Connect to your peripherals. Adapt to the task on demand. The universal USB Type-C connection helps you to get your peripheral devices connected easily. Enhance your USB connection options, connect your displays via HDMI, DisplayPort or VGA and charge your device without an additional charger. Weight: 334 g, Dimensions: 219 x 75 x 22.9 mm (front) – 26.0 mm (back), including 90 W AC adapter and Type-C cable

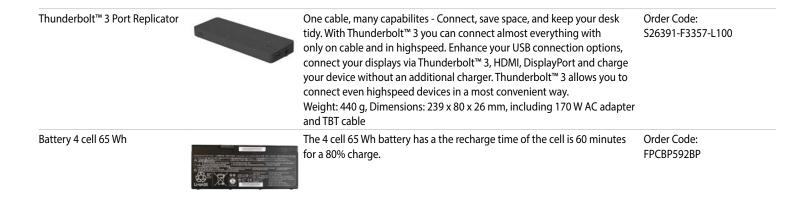

More information

Fujitsu products, solutions & services

In addition to FUJITSU Notebook LIFEBOOK U7411, Fujitsu provides a range of platform solutions. They combine reliable Fujitsu products with the best in services, know-how and worldwide partnerships.

Fujitsu Portfolio

Build on industry standards, Fujitsu offers a full portfolio of IT hardware and software products, services, solutions and cloud offering, ranging from clients to datacenter solutions and includes the broad stack of Business Solutions, as well as the full stack of Cloud offering. This allows customers to leverage from alternative sourcing and delivery models to increase their business agility and to improve their IT operation's reliability.

Computing Products www.fujitsu.com/global/products/ computing/

Software www.fujitsu.com/software/

More information

Learn more about FUJITSU Notebook LIFEBOOK U7411, please contact your Fujitsu sales representative or Fujitsu Business partner, or visit our website. www.fujitsu.com/emeia/products/ computing/pc/notebooks/index.html

Fujitsu green policy innovation

Fujitsu Green Policy Innovation is our worldwide project for reducing burdens on the environment.

Using our global know-how, we aim to contribute to the creation of a sustainable environment for future generations through IT.

Please find further information at http://www. fujitsu.com/global/about/environment



Copyrights

All rights reserved, including intellectual property rights. Designations may be trademarks and/or copyrights of the respective owner, the use of which by third parties for their own purposes may infringe the rights of such owner. For further information see http://www.fujitsu.com/ emeia/resources/navigation/terms-of-use. html

Copyright 2021 Fujitsu Technology Solutions GmbH

Disclaimer

Technical data is subject to modification and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective owner, the use of which by third parties for their own purposes may infringe the rights of such owner.

Contact

Fujitsu Technology Solutions GmbH Website: www.fujitsu.com 2021-11-06 EM-EN All rights reserved, including intellectual property rights. Designations may be trademarks and/or copyrights of the respective owner, the use of which by third parties for their own purposes may infringe the rights of such owner. For further information see http://www.fujitsu.com/emeia/resources/navigation/terms-of-use.html Copyright 2021 Fujitsu Technology Solutions GmbH