


Datera Hardware Compatibility List October 2020



Enterprise software defined block and object storage on industry leading servers

A variety of system node types can be easily configured using different combinations of servers, brands, technology generations and storage media types to deliver any desired blend of performance, capacity and economics. Adding even greater flexibility, these heterogeneous nodes can be intermixed within a Datera cluster to deliver a wide spectrum of price/performance to suit any mix of applications. The Datera policy engine, ensures the optimal performance and efficiency is composed across the various nodes.

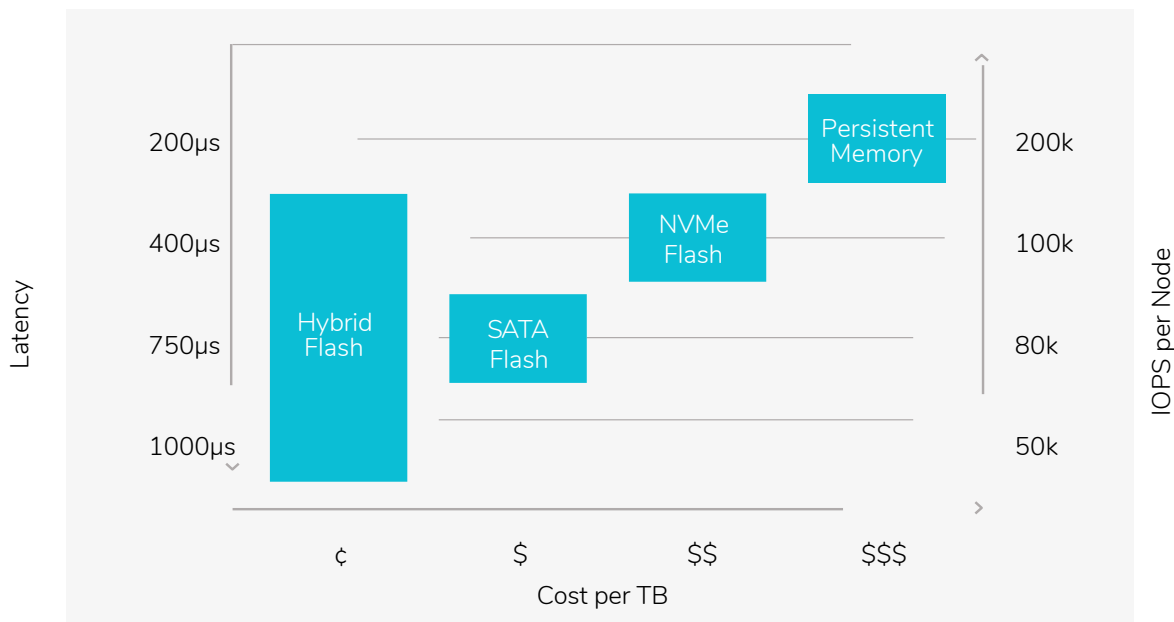

Configurable Datera Node Types by Performance & Capacity



GET A FREE CONSULTATION.

Contact Us | Visit datera.io | Email sales@datera.io | Call +1-844-4-DATERA (+1-844-432-8372)

Heterogeneous and Broad Selection of Server Nodes

The following table shows the very wide range of server nodes, with underlying media, customers can mix and match to build out Datera cluster(s) and provide storage to bare metal, VMs or container workloads.

Given Datera's rapid adoption of new server models and media technology, many of our customers maintain continuously evolving Datera implementations, that sustain the same cluster UUID, over many years. Only the nodes get added or decommissioned, giving customers the agility and flexibility to grow performance and/or capacity, without the need to ever do forklift/manual migration.

Support Table

Manufacturer	Server Model	Form	Media Supported	CPU
Dell	PowerEdge R740xd Gen 14	2U	NVMe/Optane	Intel Cascade Lake
Dell	PowerEdge R640 XL Gen 14	1U	SAS/SATA SSD	Intel Cascade Lake
Fujitsu	PRIMERGY RX2540 M5	2U	NVMe/Optane	Intel Cascade Lake
Fujitsu	PRIMERGY RX2540 M5	2U	SAS/SATA SSD	Intel Cascade Lake
Fujitsu	PRIMERGY RX2540 M5	2U	Hybrid-Flash	Intel Cascade Lake
Fujitsu	PRIMERGY RX2530 M5	1U	SAS/SATA SSD	Intel Cascade Lake
Fujitsu	PRIMERGY RX2540 M4	2U	Hybrid-Flash	Intel Skylake
Fujitsu	PRIMERGY RX2530 M4	1U	SAS/SATA SSD	Intel Skylake
HPE	ProLiant DL380 Gen 10	2U	NVMe/Optane	Intel Cascade Lake & Skylake
HPE	ProLiant DL380 Gen 10	2U	SAS/SATA SSD	Intel Cascade Lake & Skylake
HPE	ProLiant DL380 Gen 10	2U	Hybrid-Flash	Intel Cascade Lake & Skylake
HPE	ProLiant DL360 Gen 10	1U	NVMe/Optane	Intel Cascade Lake & Skylake
HPE	ProLiant DL360 Gen 10	1U	SAS/SATA SSD	Intel Cascade Lake & Skylake
Intel	S2600WF0	2U	NVMe/Optane	Intel Cascade Lake
Intel	S2600WF0	2U	SAS/SATA SSD	Intel Cascade Lake
Quanta	D52BM-2U	2U	Hybrid-Flash	Intel Skylake
Supermicro	SYS-2029U-TN24R4T	2U	NVMe/Optane	Intel Cascade Lake
Supermicro	CSE-826BE1C4-R1K23LPB	2U	Hybrid-Flash	AMD EPYC



GET A FREE CONSULTATION.

[Contact Us](#) | Visit datera.io | Email sales@datera.io | Call +1-844-4-DATERA (+1-844-432-8372)

©2020 Datera, Inc. All Rights Reserved. Datera is a trademark of Datera, Inc. All other trademarks belong to their respective owners.

Dell R740 Gen14 NVMe

Component	Part Number	Description
Base System	210-ALGO	OEM PowerEdge R740xd Server
Motherboard	329-BEIK	PowerEdge R740/R740XD Motherboard
Chassis	321-BDHF	Chassis up to 24 x 2.5 Hard Drives including 24 NVMe Drives 2CPU Configuration
CPU(s)	338-BSHD	Intel Xeon Gold 6242 2.8G 16C/32T 10.4GT/s 22M Cache Turbo HT (150W) DDR4-2933
Drive Kit(s)	403-BCHM	BOSS controller card + with 2 M.2 Sticks 240G (No RAID) FH
Storage SSD(s)	400-BEFC 400-BELT 400-BEMG 400-BELR 400-BEMJ 400-BGUF	Dell 1.6TB NVMe Mixed Use Express Flash 2.5 SFF Drive U.2 PM1725b with Carrier Dell 1.6TB NVMe Mixed Use Express Flash 2.5 SFF Drive U.2 P4610 with Carrier Dell 3.2TB NVMe Mixed Use Express Flash 2.5 SFF Drive U.2 P4610 with Carrier Dell 6.4TB NVMe Mixed Use Express Flash 2.5 SFF Drive U.2 P4610 with Carrier Dell 375GB NVMe Ultra Performance Express Flash 2.5 SFF Drive U.2 Optane with Carrier Dell 750GB NVMe Ultra Performance Express Flash 2.5 SFF Drive U.2 Optane with Carrier
AOC: NIC(s)	540-BBBW 406-BBLE 540-BCNM 540-BCIU	Broadcom 5720 Quad Port 1GbE BASE-T rNDC Mellanox ConnectX-4 LX Dual Port 10/25GbE SFP28 Adapter PCIe Full Height Mellanox ConnectX-5 LX Dual Port 10/25GbE SFP28 Adapter PCIe Full Height Mellanox ConnectX-5 EX Dual Port 40/100GbE QSFP28 Adapter PCIe Full Height
Riser Card(s)	330-BBJY	Riser Config 9 3x8 4 x16 slots
R-DIMM(s)	370-AEQH	32GB RDIMM 2933MT/s Dual Rank
NV-DIMM(s)	370-AFDE	16GB NVDIMM 2933MT/s Single Rank
Batteries	370-ADRG	NV DIMM Battery Back-up and Cable
Power Supplies	450-ADWM	Dual Hot-plug Redundant Power Supply (1+1) 1100W
Power Cable(s)	492-BBDI	C13 to C14 PDU Style 12 AMP 6.5 Feet (2m) Power Cord North America
Fan(s)	384-BBPZ	6 Performance Fans forR740/740XD
Rail(s)	770-BBBR	ReadyRails Sliding Rails With Cable Management Arm
Misc	461-AADZ 325-BCJE 379-BDCO 750-AAXW 370-ADOJ 370-AAIP 780-BCDH 405-AACD 400-ABHL 420-6320 421-5736 385-BBKT 379-BCQY 379-BCRG 470-ACQQ 350-BBJV 384-BBBL 800-BBDM 631-AACK 389-DSTS	No Trusted Platform Module Brand/No-Bezel OEM PowerEdge R740/R740xd Additional Processor Selected HS Install Kit GPU Config No cable RDIMMs + NVDIMM Performance Optimized Diskless Configuration (No RAID No Controller) No Controller No Hard Drive No Operating System No Media Required iDRAC9 Enterprise iDRAC Group Manager Disabled iDRAC Factory Generated Password GPU Ready Configuration Cable Install Kit No Quick Sync Performance BIOS Settings UEFI BIOS Boot Mode with GPT Partition No Systems Documentation No OpenManage DVD Kit OEM PowerEdge R740/R740xd CE CCC BIS Marking

Dell R640 Gen14 SATA/SAS

Component	Part Number	Description
Base System	210-AKWU	OEM PowerEdge R640 XL Server
Motherboard	329-BDMR	OEM PowerEdge R640 XL Motherboard
Chassis	321-BCQL	2.5 Chassis with up to 10 Hard Drives and 3PCIe slots
CPU(s)	338-BSHD	Intel Xeon Gold 6242 2.8G 16C/32T 10.4GT/s 22M Cache Turbo HT (150W) DDR4-2933
Drive Kit(s)	403-BCHQ	BOSS controller card + with 2 M.2 Sticks 240G (No RAID) LP
Storage Controller(s)	405-AAJU	HBA330 12Gbps SAS HBA Controller (NON-RAID) Minicard
Storage SSD(s)	400-BCRN	1.92TB SSD SATA Read Intensive 6Gbps 512e 2.5in Hot-Plug Drive PM883 1 DWPD 3504 TBW
	400-BCOM	1.92TB SSD SAS Mixed use 12Gbps 512e 2.5in Hot-Plug PM5-V Drive 3 DWPD 10512 TBW
	400-BCOV	3.84TB SSD SAS Mixed use 12Gbps 512e 2.5in Hot-Plug PM5-V Drive 3 DWPD 21024 TBW
	400-BDSI	960GB SSD SATA Mixed Use 6Gbps 512e 2.5in Hot Plug S4610 Drive 3 DWPD 5256 TBW
	400-BDSU	1.92TB SSD SATA Mixed Use 6Gbps 512e 2.5in Hot Plug S4610 Drive
	400-BDNJ	960GB SSD SATA Read Intensive 6Gbps 512e 2.5in Hot Plug S4510 Drive 1 DWPD 1752 TBW
	400-BDOE	1.92TB SSD SATA Read Intensive 6Gbps 512e 2.5in Hot-plug S4510 Drive 1 DWPD 3504 TBW
400-BDNK	3.84TB SSD SATA Read Intensive 6Gbps 512e 2.5in Hot Plug S4510 Drive 1 DWPD 7008 TBW	
AOC: NIC(s)	540-BBUK	Broadcom 57416 Dual Port 10GbE BASE-T & 5720 Dual Port 1GbE BASE-T rNDC
	555-BCKO	Intel X710 Dual Port 10GbE SFP+ & i350 Dual Port 1GbE rNDC
	406-BBLD	Mellanox ConnectX-4 LX Dual Port 10/25GbE SFP28 Adapter PCIe Low Profile
	540-BCIW	Mellanox ConnectX-5 EX Dual Port 40/100GbE QSFP28 Adapter PCIe Low Profile
	540-BCMQL	Mellanox ConnectX-5 Dual Port 10/25GbE SFP28 Adapter PCIe Low Profile
Riser Card(s)	330-BBGN	Riser Config 2 3x16 LP
R-DIMM(s)	370-AEQH	32GB RDIMM 2933MT/s Dual Rank
NV-DIMM(s)	370-AFDE	16GB NVDIMM 2933MT/s Single Rank
Batteries	370-ADOL	NV DIMM Battery Back-up and Cable
Power Supplies	450-ADWS	Dual Hot-plug Redundant Power Supply (1+1) 750W
Power Cable(s)	492-BBDI	C13 to C14 PDU Style 12 AMP 6.5 Feet (2m) Power Cord North America
Fan(s)	384-BBQJ	8 Standard Fans for R640
Rail(s)	770-BBBC	ReadyRails Sliding Rails Without Cable Management Arm
Misc	461-AADZ	No Trusted Platform Module
	370-ABWE	Standard Heatsink for 2 CPU
	370-ADOJ	RDIMMs + NVDIMM
	370-AAIP	Performance Optimized
	780-BCDI	No RAID
	420-6320	No Operating System
	421-5736	No Media Required
	385-BBKT	iDRAC9 Enterprise
	379-BCQY	iDRAC Group Manager Disabled
	379-BCRF	iDRAC Legacy Password OEM
	429-AAIQ	No Internal Optical Drive
	350-BBKB	No Quick Sync
	384-BBBL	Performance BIOS Settings
	800-BBDM	UEFI BIOS Boot Mode with GPT Partition
	631-AACK	No Systems Documentation No OpenManage DVD Kit

Fujitsu RX2540 M5 NVMe

Component	Part Number	Description
Base System	S26361-K1655-V824	PY RX2540 M5 24x SFF All Flash
CPU(s)	S26361-F4082-E342	Intel Xeon-Gold 6242 2.8GHz/16-core/150W
Boot Drive(s)	S26361-F5706-E240	SSD SATA 6G 240GB M.2 N H-P
Storage SSD(s)	S26361-F5737-E160 S26361-F5737-E320 S26361-F5737-E640	SSD PCIe3 1.6TB Mixed-Use SFF H-P EP SSD PCIe3 3.2TB Mixed-Use SFF H-P EP SSD PCIe3 6.4TB Mixed-Use SFF H-P EP
AOC: NIC(s)	S26361-F4053-E202 S26361-F4054-E202	Mellanox MCX4-EN 40Gb 2p QSFP PLAN EP LP Mellanox MCX4-LX 25Gb 2p SFP28 PLAN EP
R-DIMM(s)	S26361-F4083-E332	32GB 2Rx4 DDR4 2933 R ECC
NV-DIMM(s)	MTA18ASF2G72PF1Z	DDR4 NVDIMM 16GB NVRDIMM-N
Batteries	AGIGA9824-103JCB AGIGA2CBL-750ACX	SuperCap for NVDIMM-N Battery cable for SuperCap
Power Supplies	S26113-F616-E10	Modular PSU 1200W platinum hp
Rail(s)	S26361-F2735-E175	Rack Mount Kit F2 CMA QRL LV
Misc	S26361-F3849-E100 S26361-F3953-E100 S26361-F2495-E824	Cooler Kit 2nd CPU PLAN EM Blind Panel OCP - LOM Upgrade Kit 12x to 24x PCIe-SSD SFF

Fujitsu RX2540 M5 Hybrid

Component	Part Number	Description
Base System	S26361-K1655-V112	Fujitsu RX2540 M5 12x LFF Drive Server
CPU(s)	S26361-F4082-E342	Intel Xeon-Gold 6242 2.8GHz/16-core/150W
AOC: Drive Kit(s)	S26361-F4048-E201	Retimer for PCIe SSD LP
Storage Controller(s)	S26361-F3842-E2	PSAS CP400i HBA SAS Controller
Boot Drive(s)	S26361-F5706-E240	SSD SATA 6G 240GB M.2 N H-P
Storage HDD(s)	S26361-F5635-E600	HD SAS 12 G 6TB 7.2K 512e HT PL SFF BC
Storage SSD(s)	S26361-F5737-E160	SSD PCIe3 1.6TB Mixed-Use SFF H-P EP
AOC: NIC(s)	S26361-F4053-E202 S26361-F4054-E202	Mellanox MCX4-EN 40Gb 2p QSFP PLAN EP LP Mellanox MCX4-LX 25Gb 2p SFP28 PLAN EP
AOC: Drive Kit(s)	S26361-F4048-E201	Retimer for PCIe SSD LP
R-DIMM(s)	S26361-F4083-E332	32GB 2Rx4 DDR4 2933 R ECC
NV-DIMM(s)	MTA18ASF2G72PF1Z	DDR4 NVDIMM 16GB NVRDIMM-N
Batteries	AGIGA9824-103JCB AGIGA2CBL-750ACX	SuperCap for NVDIMM-N Battery cable for SuperCap
Power Supplies	S26113-F574-E13	Modular PSU 800W platinum hp
Rail(s)	S26361-F2735-E175	Rack Mount Kit F2 CMA QRL LV
Misc	S26361-F3849-E100 S26361-F3953-E100	Cooler Kit 2nd CPU PLAN EM Blind Panel OCP - LOM

Fujitsu RX2540 M5 SATA/SAS

Component	Part Number	Description
Base System	S26361-K1655-V424	Fujitsu RX2540 M5 24x SFF Drive Server
CPU(s)	S26361-F4082-E342	Intel Xeon-Gold 6242 2.8GHz/16-core/150W
Storage Controller(s)	S26361-F3842-E2	PSAS CP400i HBA SAS Controller
Boot Drive(s)	S26361-F5706-E240	SSD SATA 6G 240GB M.2 N H-P
Storage SSD(s)	S26361-F5588-E384 S26361-F5733-E192 S26361-F5733-E960	Samsung SM883 3.84TB SATA SFF SSD Samsung SM883 1.92TB SATA SFF SSD Samsung SM883 960GB SATA SFF SSD
AOC: NIC(s)	S26361-F4053-E202 S26361-F4054-E202	Mellanox MCX4-EN 40Gb 2p QSFP PLAN EP LP Mellanox MCX4-LX 25Gb 2p SFP28 PLAN EP
R-DIMM(s)	S26361-F4083-E332	32GB 2Rx4 DDR4 2933 R ECC
NV-DIMM(s)	MTA18ASF2G72PF1Z	DDR4 NVDIMM 16GB NVRDIMM-N
Batteries	AGIGA9824-103JCB AGIGA2CBL-750ACX	SuperCap for NVDIMM-N Battery cable for SuperCap
Power Supplies	S26113-F616-E10	1200W Platinum PSU
Rail(s)	S26361-F2735-E175	Rack Mount Kit F2 CMA QRL LV
Misc	S26361-F3849-E100 S26361-F3953-E100	Cooler Kit 2nd CPU PLAN EM Blind Panel OCP - LOM

Fujitsu RX2530 M5 SATA/SAS

Component	Part Number	Description
Base System	S26361-K1659-V501	Fujitsu RX2530 M5 10x SFF Drive Server
CPU(s)	S26361-F4082-E342	Intel Xeon-Gold 6242 2.8GHz/16-core/150W
Storage Controller(s)	S26361-F3842-E2	PSAS CP400i HBA SAS Controller
Boot Drive(s)	S26361-F5706-E240	SSD SATA 6G 240GB M.2 N H-P
Storage SSD(s)	S26361-F5588-E384 S26361-F5733-E192 S26361-F5733-E960	Samsung SM883 3.84TB SATA SFF SSD Samsung SM883 1.92TB SATA SFF SSD Samsung SM883 960GB SATA SFF SSD
AOC: NIC(s)	S26361-F4053-E202 S26361-F4054-E202	Mellanox MCX4-EN 40Gb 2p QSFP PLAN EP LP Mellanox MCX4-LX 25Gb 2p SFP28 PLAN EP
R-DIMM(s)	S26361-F4083-E332	32GB 2Rx4 DDR4 2933 R ECC
NV-DIMM(s)	MTA18ASF2G72PF1Z	DDR4 NVDIMM 16GB NVRDIMM-N
Batteries	AGIGA9824-103JCB AGIGA2CBL-750ACX	SuperCap for NVDIMM-N Battery cable for SuperCap
Power Supplies	S26113-F616-E10	1200W Platinum PSU
Misc	S26361-F3849-E100 S26361-F3953-E100	Cooler Kit 2nd CPU PLAN EM Blind Panel OCP - LOM

HPE DL380 Gen10 2U LFF Hybrid

Component	Part Number	Description
Base System	868705-B21	HPE ProLiant DL380 Gen10 12x LFF Drive Server
CPU(s)	826852-B21	HPE DL380 Intel Xeon-Silver 4116 2.1GHz/12-core/85W (CPU 2)
	826852-L21	HPE DL380 Intel Xeon-Silver 4116 2.1GHz/12-core/85W (CPU 1)
	P02498-B21	HPE DL380 Intel Xeon-Gold 5218 2.3GHz/16-core/125W (CPU 2)
	P02498-L21	HPE DL380 Intel Xeon-Gold 5218 2.3GHz/16-core/125W (CPU 1)
	P02509-B21	HPE DL380 Intel Xeon-Gold 6240 2.6GHz/18-core/150W (CPU 2)
	P02509-L21	HPE DL380 Intel Xeon-Gold 6240 2.6GHz/18-core/150W (CPU 1)
	P02510-B21	HPE DL380 Intel Xeon-Gold 6242 2.8GHz/16-core/150W (CPU2)
	P02510-L21	HPE DL380 Intel Xeon-Gold 6242 2.8GHz/16-core/150W (CPU1)
	P24467-B21	HPE DL380 Intel Xeon-Gold 6226R 2.9GHz/16-core/150W (CPU2)
	P24467-L21	HPE DL380 Intel Xeon-Gold 6226R 2.9GHz/16-core/150W (CPU1)
Drive Kit(s)	826687-B21	HPE DL38X Gen10 Premium 2SFF HDD Kit
Storage Controller(s)	804338-B21	HPE Smart Array P816i-a SR Gen10 12G SAS Modular Controller 8 Internal Lanes
Boot Drive(s)	P04556-B21	HPE 240GB SATA RI SFF SSD
Storage HDD(s)	819201-B21	HPE 8TB SAS 12G Midline 7.2K 512e LFF HDD
	872487-B21	HPE 4TB SAS 12G Midline 7.2K LFF HDD
AOC: NVMe(s)	P10264-B21	HPE 1.6TB NVMe MU HDDL SSD
AOC: NIC(s)	615732-B21	HPE Ethernet 1Gb 2-port 332T Adapter (PCIe)
	652497-B21	HPE Ethernet 1Gb 2-port 361T Adapter (PCIe)
	811546-B21	HPE Ethernet 1Gb 4-port 366T Adapter (PCIe)
	817749-B21	HPE Mellanox CX-4 Lx Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter (FlexLOM)
	817753-B21	HPE Mellanox CX-4 Lx Ethernet 10/25Gb 2-port 640SFP28 Adapter (PCIe)
	825111-B21	HPE Mellanox CX-4 InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter (PCIe)
	872726-B21	HPE Mellanox CX-5 InfiniBand EDR/Ethernet 100Gb 2-port 841QSFP28 Adapter (PCIe)
879482-B21	HPE Mellanox CX-5 InfiniBand FDR/Ethernet 40/50Gb 2-port 547FLR-QSFP Adapter (FlexLOM)	
Riser Card(s)	870548-B21	HPE DL Gen10 x8 x16 x8 Riser Kit
R-DIMM(s)	815100-B21	HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit
	P00924-B21	HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit
NV-DIMM(s)	845264-B21	HPE 16GB NVDIMM 1Rx4 DDR4-2666 Kit
Batteries	P01366-B21	HPE 96W Smart Storage Battery 145mm Cable
Power Supplies	865414-B21	HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

HPE DL380 Gen10 SATA/SAS

Component	Part Number	Description
Base System	868704-B21	HPE ProLiant DL380 Gen10 24x SFF Drive Server
CPU(s)	826870-B21	HPE DL380 Intel Xeon-Gold 6132 2.6GHz/14-core/140W (CPU 2)
	826870-L21	HPE DL380 Intel Xeon-Gold 6132 2.6GHz/14-core/140W (CPU 1)
	P02498-B21	HPE DL380 Intel Xeon-Gold 5218 2.3GHz/16-core/125W (CPU 2)
	P02498-L21	HPE DL380 Intel Xeon-Gold 5218 2.3GHz/16-core/125W (CPU 1)
	P02509-B21	HPE DL380 Intel Xeon-Gold 6240 2.6GHz/18-core/150W (CPU 2)
	P02509-L21	HPE DL380 Intel Xeon-Gold 6240 2.6GHz/18-core/150W (CPU 1)
	P02510-B21	HPE DL380 Intel Xeon-Gold 6242 2.8GHz/16-core/150W (CPU2)
	P02510-L21	HPE DL380 Intel Xeon-Gold 6242 2.8GHz/16-core/150W (CPU1)
	P24467-B21	HPE DL380 Intel Xeon-Gold 6226R 2.9GHz/16-core/150W (CPU2)
	P24467-L21	HPE DL380 Intel Xeon-Gold 6226R 2.9GHz/16-core/150W (CPU1)
Drive Kit(s)	826687-B21	HPE DL38X Gen10 Premium 2SFF HDD Kit
	826688-B21	HPE DL38X Gen10 2SFF HDD SAS/SATA Riser Kit
Storage Controller(s)	804326-B21	HPE Smart Array E208i-a SR Gen10 12G SAS Modular Controller 8 Internal Lanes
	804331-B21	HPE Smart Array P408i-a SR Gen10 12G SAS Modular Controller 8 Internal Lanes
	804338-B21	HPE Smart Array P816i-a SR Gen10 12G SAS Modular Controller 8 Internal Lanes
	804394-B21	HPE Smart Array E208i-p SR Gen10 12G SAS PCIe Controller 8 Internal Lanes
	830824-B21	HPE Smart Array P408i-p SR Gen10 12G SAS PCIe Plug-in Controller 8 Internal Lanes
	870658-B21	HPE Smart Array P824i-p MR Gen10 12G SAS PCIe Controller 24 Internal Lanes
Boot Drive(s)	P04556-B21	HPE 240GB SATA RI SFF SSD
Storage SSD(s)	P19913-B21	HPE 800GB SAS MU SFF SSD
	P19915-B21	HPE 1.6TB SAS MU SFF SSD
	P19917-B21	HPE 3.2TB SAS MU SFF SSD
	P19919-B21	HPE 6.4TB SAS MU SFF SSD
	P21131-B21	HPE 800GB SAS MU SFF SSD
	P21133-B21	HPE 1.6TB SAS MU SFF SSD
	P21135-B21	HPE 3.2TB SAS MU SFF SSD
	P21137-B21	HPE 6.4TB SAS MU SFF SSD
	P19903-B21	HPE 960GB SAS RI SFF SSD
	P19905-B21	HPE 1.92TB SAS RI SFF SSD
	P19907-B21	HPE 3.84TB SAS RI SFF SSD
	P19909-B21	HPE 7.68TB SAS RI SFF SSD
	P21139-B21	HPE 960GB SAS RI SFF SSD
	P21141-B21	HPE 1.92TB SAS RI SFF SSD
	P21143-B21	HPE 3.84TB SAS RI SFF SSD
	P21145-B21	HPE 7.68TB SAS RI SFF SSD
	P04533-B21	HPE 1.6TB SAS MU SFF SSD
	P04537-B21	HPE 3.2TB SAS MU SFF SSD
	P04539-B21	HPE 6.4TB SAS MU SFF SSD
	P04545-B21	HPE 1.6TB SAS WI SFF SSD
	P04547-B21	HPE 3.2TB SAS WI SFF SSD
	P09716-B21	HPE 960GB SATA MU SFF SSD
P09722-B21	HPE 1.92TB SATA MU SFF SSD	
P21517-B21	HPE 3.84TB SATA MU SFF SSD	
P04564-B21	HPE 960GB SATA RI SFF SSD	
P04566-B21	HPE 1.92TB SATA RI SFF SSD	
P04570-B21	HPE 3.84TB SATA RI SFF SSD	
AOC: NIC(s)	615732-B21	HPE Ethernet 1Gb 2-port 332T Adapter (PCIe)
	652497-B21	HPE Ethernet 1Gb 2-port 361T Adapter (PCIe)
	811546-B21	HPE Ethernet 1Gb 4-port 366T Adapter (PCIe)
	817749-B21	HPE Mellanox CX-4 Lx Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter (FlexLOM)

	817753-B21	HPE Mellanox CX-4 Lx Ethernet 10/25Gb 2-port 640SFP28 Adapter (PCIe)
	825111-B21	HPE Mellanox CX-4 InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter (PCIe)
	872726-B21	HPE Mellanox CX-5 InfiniBand EDR/Ethernet 100Gb 2-port 841QSFP28 Adapter (PCIe)
	879482-B21	HPE Mellanox CX-5 InfiniBand FDR/Ethernet 40/50Gb 2-port 547FLR-QSFP Adapter (FlexLOM)
AOC: SAS Expander	870549-B21	HPE DL38X Gen10 12Gb SAS Expander Card Kit with Cables
Riser Card(s)	870548-B21	HPE DL Gen10 x8 x16 x8 Riser Kit
R-DIMM(s)	815100-B21	HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit
	P00924-B21	HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit
NV-DIMM(s)	845264-B21	HPE 16GB NVDIMM 1Rx4 DDR4-2666 Kit
Batteries	P01366-B21	HPE 96W Smart Storage Battery 145mm Cable
Power Supplies	865414-B21	HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

HPE DL380 Gen10 NVMe

Component	Part Number	Description
Base System	868703-B21	HPE ProLiant DL380 Gen10 8x SFF Drive Server
CPU(s)	826870-B21	HPE DL380 Intel Xeon-Gold 6132 2.6GHz/14-core/140W (CPU 2)
	826870-L21	HPE DL380 Intel Xeon-Gold 6132 2.6GHz/14-core/140W (CPU 1)
	P02498-B21	HPE DL380 Intel Xeon-Gold 5218 2.3GHz/16-core/125W (CPU 2)
	P02498-L21	HPE DL380 Intel Xeon-Gold 5218 2.3GHz/16-core/125W (CPU 1)
	P02509-B21	HPE DL380 Intel Xeon-Gold 6240 2.6GHz/18-core/150W (CPU 2)
	P02509-L21	HPE DL380 Intel Xeon-Gold 6240 2.6GHz/18-core/150W (CPU 1)
	P02510-B21	HPE DL380 Intel Xeon-Gold 6242 2.8GHz/16-core/150W (CPU2)
	P02510-L21	HPE DL380 Intel Xeon-Gold 6242 2.8GHz/16-core/150W (CPU1)
	P24467-B21	HPE DL380 Intel Xeon-Gold 6226R 2.9GHz/16-core/150W (CPU2)
	P24467-L21	HPE DL380 Intel Xeon-Gold 6226R 2.9GHz/16-core/150W (CPU1)
Drive Kit(s)	826689-B21	HPE DL38X NVMe 8 Solid State Drive (SSD) express bay enablement kit
Storage Controller(s)	804326-B21	HPE Smart Array E208i-a SR Gen10 12G SAS Modular Controller 8 Internal Lanes
	804338-B21	HPE Smart Array P816i-a SR Gen10 12G SAS Modular Controller 8 Internal Lanes
Boot Drive(s)	P04556-B21	HPE 240GB SATA RI SFF SSD
Storage SSD(s)	878014-B21	HPE 375GB NVMe WI SFF SSD
	P06952-B21	HPE 750GB NVMe WI SFF SSD
	P13699-B21	HPE 1.6TB NVMe MU SFF SSD
	P13701-B21	HPE 3.2TB NVMe MU SFF SSD
	P13703-B21	HPE 6.4TB NVMe MU SFF SSD
AOC: NIC(s)	615732-B21	HPE Ethernet 1Gb 2-port 332T Adapter (PCIe)
	652497-B21	HPE Ethernet 1Gb 2-port 361T Adapter (PCIe)
	811546-B21	HPE Ethernet 1Gb 4-port 366T Adapter (PCIe)
	817749-B21	HPE Mellanox CX-4 Lx Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter (FlexLOM)
	817753-B21	HPE Mellanox CX-4 Lx Ethernet 10/25Gb 2-port 640SFP28 Adapter (PCIe)
	825111-B21	HPE Mellanox CX-4 InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter (PCIe)
	872726-B21	HPE Mellanox CX-5 InfiniBand EDR/Ethernet 100Gb 2-port 841QSFP28 Adapter (PCIe)
879482-B21	HPE Mellanox CX-5 InfiniBand FDR/Ethernet 40/50Gb 2-port 547FLR-QSFP Adapter (FlexLOM)	
Riser Card(s)	826700-B21	HPE DL38X Gen10 x16 tertiary riser kit
	867807-B21	HPE DL38X Gen10 4-port 8 NVMe slim SAS riser
	873732-B21	HPE DL38X Gen10 4-port 8 NVMe slim SAS secondary riser
R-DIMM(s)	815100-B21	HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit
	P00924-B21	HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit
NV-DIMM(s)	845264-B21	HPE 16GB NVDIMM 1Rx4 DDR4-2666 Kit
Batteries	P01366-B21	HPE 96W Smart Storage Battery 145mm Cable
Power Supplies	865414-B21	HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Fan(s)	867810-B21	HPE DL38X Gen10 high performance temperature fan kit

HPE DL360 Gen10 SATA/SAS

Component	Part Number	Description
Base System	867959-B21	HPE ProLiant DL360 Gen10 1U 8x SFF Drive Server
CPU(s)	860681-B21	HPE DL360 Intel Xeon-Gold 6132 2.6GHz/14-core/140W (CPU 2)
	860681-L21	HPE DL360 Intel Xeon-Gold 6132 2.6GHz/14-core/140W (CPU 1)
	P02592-B21	HPE DL360 Intel Xeon-Gold 5218 2.3GHz/16-core/125W (CPU 2)
	P02592-L21	HPE DL360 Intel Xeon-Gold 5218 2.3GHz/16-core/125W (CPU 1)
	P02625-B21	HPE DL360 Intel Xeon-Gold 6240 2.6GHz/18-core/150W (CPU2)
	P02625-L21	HPE DL360 Intel Xeon-Gold 6240 2.6GHz/18-core/150W (CPU1)
	P02628-B21	HPE DL360 Intel Xeon-Gold 6242 2.8GHz/16-core/150W (CPU2)
	P02628-L21	HPE DL360 Intel Xeon-Gold 6242 2.8GHz/16-core/150W (CPU1)
	P24481-B21	HPE DL360 Intel Xeon-Gold 6226R 2.9GHz/16-core/150W (CPU2)
	P24481-L21	HPE DL360 Intel Xeon-Gold 6226R 2.9GHz/16-core/150W (CPU1)
Drive Kit(s)	867966-B21	HPE DL360 Gen10 2SFF SAS/SATA Backplane Kit
Storage Controller(s)	804338-B21	HPE Smart Array P816i-a SR Gen10 12G SAS Modular Controller 8 Internal Lanes
Boot Drive(s)	P19888-B21	HPE 240GB SATA RI M.2 2280 SSD
	P19890-B21	HPE 480GB SATA RI M.2 2280 SSD
Storage SSD(s)	P19913-B21	HPE 800GB SAS MU SFF SSD
	P19915-B21	HPE 1.6TB SAS MU SFF SSD
	P19917-B21	HPE 3.2TB SAS MU SFF SSD
	P19919-B21	HPE 6.4TB SAS MU SFF SSD
	P21131-B21	HPE 800GB SAS MU SFF SSD
	P21133-B21	HPE 1.6TB SAS MU SFF SSD
	P21135-B21	HPE 3.2TB SAS MU SFF SSD
	P21137-B21	HPE 6.4TB SAS MU SFF SSD
	P19903-B21	HPE 960GB SAS RI SFF SSD
	P19905-B21	HPE 1.92TB SAS RI SFF SSD
	P19907-B21	HPE 3.84TB SAS RI SFF SSD
	P19909-B21	HPE 7.68TB SAS RI SFF SSD
	P21139-B21	HPE 960GB SAS RI SFF SSD
	P21141-B21	HPE 1.92TB SAS RI SFF SSD
	P21143-B21	HPE 3.84TB SAS RI SFF SSD
	P21145-B21	HPE 7.68TB SAS RI SFF SSD
	P04533-B21	HPE 1.6TB SAS MU SFF SSD
	P04537-B21	HPE 3.2TB SAS MU SFF SSD
	P04539-B21	HPE 6.4TB SAS MU SFF SSD
	P04545-B21	HPE 1.6TB SAS WI SFF SSD
	P04547-B21	HPE 3.2TB SAS WI SFF SSD
	P09716-B21	HPE 960GB SATA MU SFF SSD
	P09722-B21	HPE 1.92TB SATA MU SFF SSD
P21517-B21	HPE 3.84TB SATA MU SFF SSD	
P04564-B21	HPE 960GB SATA RI SFF SSD	
P04566-B21	HPE 1.92TB SATA RI SFF SSD	
P04570-B21	HPE 3.84TB SATA RI SFF SSD	
AOC: NIC(s)	615732-B21	HPE Ethernet 1Gb 2-port 332T Adapter (PCIe)
	652497-B21	HPE Ethernet 1Gb 2-port 361T Adapter (PCIe)
	811546-B21	HPE Ethernet 1Gb 4-port 366T Adapter (PCIe)
	817749-B21	HPE Mellanox CX-4 Lx Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter (FlexLOM)
	817753-B21	HPE Mellanox CX-4 Lx Ethernet 10/25Gb 2-port 640SFP28 Adapter (PCIe)
	825111-B21	HPE Mellanox CX-4 InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter (PCIe)
	872726-B21	HPE Mellanox CX-5 InfiniBand EDR/Ethernet 100Gb 2-port 841QSFP28 Adapter (PCIe)
	879482-B21	HPE Mellanox CX-5 InfiniBand FDR/Ethernet 40/50Gb 2-port 547FLR-QSFP Adapter (FlexLOM)
Riser Card(s)	867978-B21	HPE DL360 Gen10 SATA M.2 2280 Riser Kit

R-DIMM(s)	815100-B21 P00924-B21	HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit
NV-DIMM(s)	845264-B21	HPE 16GB NVDIMM 1Rx4 DDR4-2666 Kit
Batteries	P01366-B21	HPE 96W Smart Storage Battery 145mm Cable
Power Supplies	865414-B21	HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Fan(s)	871244-B21	HPE DL360 Gen10 High Performance Fan Kit

HPE DL360 Gen10 NVMe

Component	Part Number	Description
Base System	P19767-B21	HPE ProLiant DL360 Gen10 NC 1U 10x NVMe SFF Drive Server
CPU(s)	860681-B21 860681-L21 P02592-B21 P02592-L21 P02625-B21 P02625-L21 P02628-B21 P02628-L21 P24481-B21 P24481-L21	HPE DL360 Intel Xeon-Gold 6132 2.6GHz/14-core/140W (CPU 2) HPE DL360 Intel Xeon-Gold 6132 2.6GHz/14-core/140W (CPU 1) HPE DL360 Intel Xeon-Gold 5218 2.3GHz/16-core/125W (CPU 2) HPE DL360 Intel Xeon-Gold 5218 2.3GHz/16-core/125W (CPU 1) HPE DL360 Intel Xeon-Gold 6240 2.6GHz/18-core/150W (CPU2) HPE DL360 Intel Xeon-Gold 6240 2.6GHz/18-core/150W (CPU1) HPE DL360 Intel Xeon-Gold 6242 2.8GHz/16-core/150W (CPU2) HPE DL360 Intel Xeon-Gold 6242 2.8GHz/16-core/150W (CPU1) HPE DL360 Intel Xeon-Gold 6226R 2.9GHz/16-core/150W (CPU2) HPE DL360 Intel Xeon-Gold 6226R 2.9GHz/16-core/150W (CPU1)
Boot Drive(s)	P19888-B21 P19890-B21	HPE 240GB SATA RI M.2 2280 SSD HPE 480GB SATA RI M.2 2280 SSD
Storage SSD(s)	878014-B21 P06952-B21 P13699-B21 P13701-B21 P13703-B21	HPE 375GB NVMe WI SFF SSD HPE 750GB NVMe WI SFF SSD HPE 1.6TB NVMe MU SFF SSD HPE 3.2TB NVMe MU SFF SSD HPE 6.4TB NVMe MU SFF SSD
AOC: NIC(s)	615732-B21 652497-B21 811546-B21 817749-B21 817753-B21 825111-B21 872726-B21 879482-B21	HPE Ethernet 1Gb 2-port 332T Adapter (PCIe) HPE Ethernet 1Gb 2-port 361T Adapter (PCIe) HPE Ethernet 1Gb 4-port 366T Adapter (PCIe) HPE Mellanox CX-4 Lx Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter (FlexLOM) HPE Mellanox CX-4 Lx Ethernet 10/25Gb 2-port 640SFP28 Adapter (PCIe) HPE Mellanox CX-4 InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter (PCIe) HPE Mellanox CX-5 InfiniBand EDR/Ethernet 100Gb 2-port 841QSFP28 Adapter (PCIe) HPE Mellanox CX-5 InfiniBand FDR/Ethernet 40/50Gb 2-port 547FLR-QSFP Adapter (FlexLOM)
Riser Card(s)	867978-B21	HPE DL360 Gen10 SATA M.2 2280 Riser Kit
R-DIMM(s)	815100-B21 P00924-B21	HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit
NV-DIMM(s)	845264-B21	HPE 16GB NVDIMM 1Rx4 DDR4-2666 Kit
Batteries	P01366-B21	HPE 96W Smart Storage Battery 145mm Cable
Power Supplies	865414-B21	HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Fan(s)	871244-B21	HPE DL360 Gen10 High Performance Fan Kit

Intel 2U S2600WF0 NVMe

Component	Part Number	Description
Base System	R2208WF0ZSR	Intel 2U S2600WF0 x24 SFF Drive Server
CPU(s)	CD8069504194001	Intel Xeon Gold 6240
Drive Kit(s)	A2U8X25S3PHS AXXCBL800CVCR AXXCBL530CVCR A2U8PSWCXCXK1 A2U8PSWCXCXK2 AXXP3RTX16040 A2U4PRTCXCXK AXXP3SWX08080	Front Drive Bay 1 Kit- 8 x SFF SAS/NVMe Drive Bay NVMe Cable Drive 102 NVMe Cable Drive 104 NVMe Cable Drive 105 NVMe Cable Drive 201 SSD Retimer AIC 4P (Oculink) Oculink 2U Retimr A2U4PRTCXCXK SB_X8 8 Port Switch_AIC
Boot Drive(s)	SSDSCKKB240G801	S4510 (240GB M.2 SATA)
Storage SSD(s)	SSDPE2KE016T801 SSDPE2KE032T801 SSDPE2KE064T801	P4610 1.6TB NVMe SFF P4610 3.2TB NVMe SFF P4610 6.4TB NVMe SFF
AOC: NIC(s)	X527DA40CPG1P5 MCX512A-ACAT MCX556A-ECAT	Network OCP X527-DA4 Mellanox ConnectX-5 EN NIC 10/25GbE Dual-Port SFP28 PCIe3.0 x8 Mellanox ConnectX-5 VPI EDR IB and 100GbE Dual-Port QSFP28 PCIe3.0 x16
R-DIMM(s)	32GB_RDIMM_2_RANK_2933	32GB RDIMM 2 Rank 2933
NV-DIMM(s)	18ASF2G72PF12G9WP1AB	Micron 16GB 2933MHz NVDIMM
Batteries	AGIGA9824-103JCB AGIGA2CBL-750ACX	Amber4Xe PowerGEM HHHH PCIe card form factor 750mm cable
Power Supplies	AXX1300TCRPS	1300W AC pwr sup AXX1300TCRPS

Intel 2U S2600WF0 SATA/SAS

Component	Part Number	Description
Base System	R2208WF0ZSR	Intel 2U S2600WF0 x24 SFF Drive Server
CPU(s)	CD8069504194001	Intel Xeon Gold 6240
Drive Kit(s)	A2U8X25S3PHS	8 x SFF SAS/NVMe Drive Bay
Storage Controller(s)	RMS3JC080	Intel Integrated RAID Module LSI3008
Boot Drive(s)	SSDSCKKB240G801	S4510 (240GB M.2 SATA)
Storage SSD(s)	WUSTR6416ASS200 WUSTR6432ASS200 WUSTR6464ASS200	WDC SS530 1.6TB SAS WDC SS530 3.2TB SAS WDC SS530 6.4TB SAS
AOC: NIC(s)	X527DA40CPG1P5 MCX512A-ACAT MCX556A-ECAT	Network OCP X527-DA4 Mellanox ConnectX-5 EN NIC 10/25GbE Dual-Port SFP28 PCIe3.0 x8 Mellanox ConnectX-5 VPI EDR IB and 100GbE Dual-Port QSFP28 PCIe3.0 x16
Riser Card(s)	A2UL16RISER2	1x16 1x8 3.0
R-DIMM(s)	32GB_RDIMM_2_RANK_2933	32GB RDIMM 2 Rank 2933
NV-DIMM(s)	18ASF2G72PF12G9WP1AB	Micron 16GB 2933MHz NVDIMM
Batteries	AGIGA9824-103JCB AGIGA2CBL-750ACX	Amber4Xe PowerGEM HHHL PCIe card form factor 750mm cable
Power Supplies	AXX1300TCRPS	1300W AC pwr sup AXX1300TCRPS

Quanta D52BM-2U Hybrid

Component	Part Number	Description
Base System	1S5BZZZ001V	D52BM-2U LFF SATA SAS SKU LBG-1G up to 16x HDD LFF
CPU(s)	AJSR3J3QA00	Intel Xeon Gold 6132 2.6G 14C 140W
Storage Controller(s)	23S5BRA0120	Quanta LSI QS 3216B 16i SAS HBA IT Mezz
Boot Drive(s)	ABS960HA010	Samsung PM883 960GB SATA SFF SSD
Storage HDD(s)	2S5BH DAT400	Toshiba 14TB SATA 7.2K LFF HDD
AOC: NVMe(s)	ABS015T3000	Toshiba CM5-R 15.36TB HHHL NVMe
AOC: NIC(s)	3GS5BMA0000 ADPC0515000 ADPC0516000	25GbE CX4 LX EN Dual-port Mezz cards (ConnectX-4 Lx EN) 100GbE Mellanox ConnectX-5 Single Port PCIe LP card (MCX515A-CCAT) 100GbE Mellanox ConnectX-5 Dual-port HHHL card (MCX516A-CCAT)
R-DIMM(s)	2S5BRM32090	32GB RDIMM DDR4 2666MHz
NV-DIMM(s)	2S5BRM16070	16GB NVDIMM-N DDR4-2666 MTA18ASF2G72PF1Z
Batteries	2HS5BSA0060	AGIGA SUPERCAP MODULE W/CABLE (4PCS)
Power Supplies	2S5BPWR00F0	S5BM PSU 800W Platinum

Supermicro 2U X11 NVMe

Component	Part Number	Description
Base System	SYS-2029U-TN24R4T	Supermicro X11 2U 24x SFF NVMe drive bays Super X11DPU
CPU(s)	CD8069504194101	Intel Xeon-Gold 6242 2.8GHz/16-core/150W
Boot Drive(s)	MZ7LH240HAHQ	Samsung PM883 240GB SATA SFF SSD
Storage SSD(s)	MZWLL1T6HAJQ	Samsung PM1725b 1.6TB NVMe SFF SSD
	MZWLL3T2HAJQ	Samsung PM1725b 3.2TB NVMe SFF SSD
	MZWLL6T4HMLA	Samsung PM1725b 6.4TB NVMe SFF SSD
AOC: NIC(s)	MCX4121A-ACAT	Mellanox ConnectX-4 Lx EN Network Interface Card 25GbE Dual-Port SFP28 PCIe3.0 x8
	MCX416A-CCAT	Mellanox ConnectX-4 EN Network Interface Card 100GbE Dual-Port QSFP28 PCIe3.0 x16
R-DIMM(s)	M393A4K40CB2-CVF	32GB 288-Pin DDR4 2933
NV-DIMM(s)	AGIGA8803-161BCA	16GB 2933 DDR4 JEDEC NVDIMM-N
Batteries	AGIGA9801-105JCA	Agigatech Power Gem PCIe Bracket

Supermicro 2U AMD Hybrid

Component	Part Number	Description
Base System	CSE-826BE1C4-R1K23LPB	Black 2U SC826B LP Chassis w/ 1 SAS3 Redundant 1200W PWS
Motherboard	MBD-H11SSL-I-B	H11 AMD EPYC UP Platform with Socket
Base System	CSE-826BE1C4-R1K23LPB MCP-220-82609-0N	Black 2U SC826B LP Chassis w/ 1 SAS3 Redundant 1200W PWS Rear Window 2 X SFF HDD Module for 826B Series Chassis
CPU(s)	PS735PBEVGPAF	Naples 7351P 1P 16C/32T 2.4G 64M 155/170W 4094
Drive Kit(s)	MCP-220-82609-0N CBL-SAST-0531	Rear Window 2 X SFF HDD Module for 826B Series Chassis Internal MiniSAS HD SFF-8643 50cm Cable
Storage Controller(s)	AOC-S3008L-L8e	Internal HBA 8 internal ports LSI3008L-L8E-0 ROC based
Boot Drive(s)	SSDSC2KB240G701	Intel SSD DC S4500 Series 240GB SATA
Storage HDD(s)	ST4000NM0125	4TB 7200RPM 128MB Cache SAS/12Gb/s
AOC: NVMe(s)	MZPLL1T6HEHP-00003	Samsung PM1725a 1.6TB NVME SSD PCIe (HHHL)
AOC: NIC(s)	MCX4121A-ACAT MCX416A-CCAT	Mellanox CX-4 25GbE dual-port SFP28 Mellanox CX-4 100GbE dual-port QSFP
R-DIMM(s)	MEM-DR432L-SL02-ER26	32GB DDR4-2666 2Rx4 LP ECC REG DIMM
NV-RAM(s)	2285500-R RMS-300	8GB NVRAM PCIe drive and SCM F70 RMS-300



GET A FREE CONSULTATION.

[Contact Us](#) | Visit [datera.io](#) | Email sales@datera.io | Call +1-844-4-DATERA (+1-844-432-8372)

©2020 Datera, Inc. All Rights Reserved. Datera is a trademark of Datera, Inc. All other trademarks belong to their respective owners.